Specifications LV640S (SCA ISDB-T)

		32	43	49	55
	Туре		Direct LED		Edge LED
DISPLAY	Resolution	1,366 x 768	1,366 x 768 1,920 x 1,080 (FHD)		
	Brightness	400cd/m ²			
	Viewing Angle Degree	178°/178°			
	Response Time	9			
BROADCASTING SYSTEM	Analog	PAL-M/N, NTSC-M			
	Digital	ISDB-T			
VIDEO	Picture Engine	XD Engine			
	Real Cinema 24p (3:3 Pull down)				
	Aspect Ratio	• 6 modes (16:9, Just scan, Set by program, 4:3, Zoom, Cinema zoom 1)			
AUDIO	Audio Output / Speaker System	5W + 5W / 2.0 ch 10W + 10W / 2.0 ch			
	Sound Mode	6 modes (Standard, News, Music, Cinema, Sport, Game)			
	Clear Voice				
SMART FEATURES	Smart UX	webOS 3.5, Commercial Smart Home, Web Browser, Pre-loaded YouTube Apps, Magic Remote (Optional)			
	Connectivity	SoftAP, WiFi, ScreenShare (Miracast), DIAL, Bluetooth Sound Sync			
HOSPITALITY FEA	TURES		e, Welcome Screen/Video, Insert up Manager, Crestron Connecte RJP Compatibilir		
GENERAL FEATURES	RF	• (1 Tuner)			
	Installation	USB Cloning			
	Management	WOL (Wake on LAN), SNMP (Simple Network Management Protocol), Self Diagnostics, IR Out, Multi IR Code, HDMI-CEC			
	Setting Option	Auto Off/Sleep Timer, Smart Energy Saving, Motion Eye care			
SUPERSIGN SOFT	WARE		LG Simple Editor	SuperSign™ Link	
	Side	HDMI In, USB (2)			
INTERFACE	Rear	RF, AV In, Component In (RCA5), Digital Optical Audio Out, HDMI Input (2), RGB In, PC Audio Input (Sharing with Component Audio), RS-232C, RJ45 (Ethernet), External Speaker			
DIMENSION (Unit : mm)	Vesa	200 × 200		300 x 300	
	W x H x D / weight (with stand)	739 x 472 x 168 / 4.9kg	974 x 625 x 220 / 9.3kg	1,107 x 701 x 235 / 11.4kg	1,241 × 775 × 216 / 16.6k
	W x H x D / weight (Packing)	812 x 510 x 141 / 6.1kg	1,060 x 660 x 152 / 11.3kg	1,193 x 770 x 158 / 13.5kg	1,360 x 835 x 152 / 21.3kg
POWER (Unit : Watts)	Voltage, Hz	100-240V, 50/60Hz			
	Max	63	97	110	135
	Typical	40	73	85	109
	Energy Saving (Min)	32	58	68	87
	Energy Saving (Med)	22	40	47	60
	Energy Saving (Max)	12	22	26	33
	Stand-by	0.5 ↓			
STANDARD APPROVAL	Safety	СВ			
	ETC	RoHS			

Oownload LG Commercial Display Mobile App





Learn more www.lg.com/b2b



All screen images are simulated. Dimension and weights are approximate. Design, features and specifications subject to change without notice. © Copyright 2018 LG Electronics Inc. All Rights Reserved. Pro:Centric, the "LG" logo, XD Engine are registered trademarks or trademarks of LG Electronics Inc. Pro:Idiom is a registered trademark of Zenith Electronics LLC. All other trademarks or registered trademarks are the property of their respective owners.



Smart TV Signage

LV640S (SCA ISDB-T)

TV Entertainment and Advertisements on One Screen

The LV640S series is a newly launched Smart TV Signage with easier content management possible. The series is especially designed for broadcasting TV programs and delivering advertisements simultaneously via a built-in TV tuner. Furthermore, with its improved content management solutions such as Content Manager, Group Manager, and enriched content via preloaded YouTube App and web browser, users can efficiently and timely deliver messages / promotions.



LV640S

- Built-in Speakers and TV Tuner
- NEW Content Manager
- NEW Group Manager
- NEW Enriched Smart Content
 via Pre-loaded YouTube App and web browser
- NEW Built-in WiFi
- NEW WOL (Wake on LAN) & SNMP

screen size

32", 43", 49", 55"



Embedded Smart Content Management


Content Manager

Without extra PC, content can be easily created using embedded templates and can be played according to its schedule managers set.



Group Manager

A Smart TV Signage itself works as a server, so without any extra device, a master TV can distribute content and set data on a selected group within the same network.

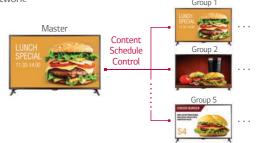

Compatible LG SW for Smart TV Signage

The compatible LG SW for Smart TV Signage includes LG Simple Editor, SuperSign™ Link to provide digital media editing, scheduling, distribution and management capabilities.

Simple Editor Editor Software

- Free Version
- Creation with embedded templates (143 templates, 100 stickers)
- Content scheduling and direct distribution via USB
- Content distribution over the network

LG SuperSign[™] Link Monitor and Control

- Licensed Version
- Web-based control
- Support over 3,000 Clients
- Alert via SNMP and email







Smart Connectivity & Experience

Enriched Smart Content

Customers can easily access to various content via pre-loaded YouTube app, web browser as well as live channel.



ScreenShare

Connect a smartphone or a laptop PC to TV via a Wi-Fi Direct connection. The TV will display the device's screen, and users can share their content and memories together.



Easy Management


WOL

WOL (Wake on LAN) helps you remotely turn on TVs over the internet. Connect TVs and a PC in the same network, and send Magic Packet program to the MAC addresses of registered TVs. Then, it will wake up the TVs via LAN port.



SNMP

SNMP (Simple Network Management Protocol) ensures convenient network management for SI and business managers.



Built-in WiFi

With built-in WiFi, installation and content distribution have been simplified.



Features

Fail Over (Internal Memory only)

The USB fail over function enables content to be displayed without dead spots when no input signal is available. This feature supports files in JPG format with a maximum file size of 10 MB.




RTC

Save time and improve convenience with RTC (Real Time Clock). When the TV's power is off, time information is stored on the RTC module via an internal memory, and a time sync process can be omitted as the TV turns on.




NTP

With NTP (Network Time Protocol), the TV receives real time updates from the network and synchronizes its time accordingly.





Dimensions (With stand - Units : mm / kg)

32"739 x 472 x 168 /
4.9

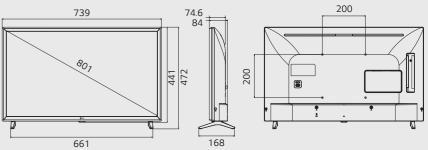


43" 974 x 625 x 221 / 9.3

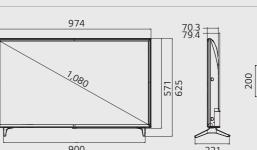





49" 1,106 × 701 × 235 /


11.4

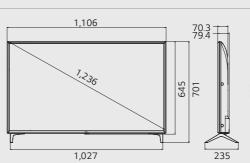



55" 1,240 x 775 x 216 / 16.6





Connectivity

