

# TV entertainment and advertisements on One screen

## SuperSign TV LX530S



The LX530S includes a built-in TV tuner to broadcast TV programs and deliver advertisements simultaneously. This affordable solution allows you to create content and manage displays using the SuperSign™ software. The 74 screen templates included with the display make it easier than ever for anyone to create dazzling content.

- Built-in speakers and TV tuner
- Wi-Fi Dongle Ready
- USB Plug and Play
- Fail Over
- SuperSign Lite/W/M/N/C Compatibility

Screen Sizes  
42"



### Simple Connectivity

With built-in SoC\* and Wi-Fi dongle support, installation has been simplified. By removing the external media player and Ethernet/RS232C cables, the total cost of ownership (TCO) can be reduced.

\* System on Chip



### Fail Over

The USB failover function enables content to be displayed without dead spots when no input signal is available. It supports files in JPG format with a maximum file size of 10 MB.




### Content Management

The SuperSign™ Solution includes SuperSign Lite, W, and C features to provide digital media editing, scheduling, distribution, and management capabilities. By installing SuperSign W on a server, you can manage up to 1000 TVs.

## SuperSign™ Solutions

### SUPERSIGN™ Lite

- Supports a single user and up to 50 clients
- Includes dedicated TV templates
- Features a playlist editor

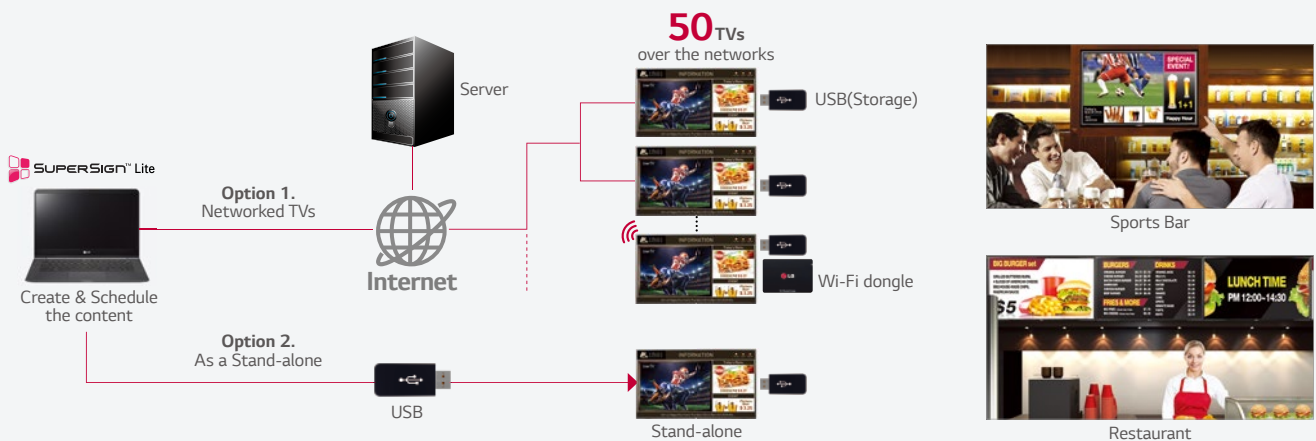

# TV entertainment and advertisements on One screen

## SuperSign TV LX530S

### Specifications

LX530S

DISPLAY	Screen Size	42"
	Type	LED (Direct)
	Resolution	1920 x 1080 (FHD)
	Brightness	300cd/m <sup>2</sup>
BROADCASTING SYSTEM	Analog	PAL/SECAM
	Digital	DVB-T2/C/S2
AUDIO	Audio Output	10W + 10W
HOSPITALITY FEATURES		Welcome Screen (Splash Image, Video), Lock Mode, One Channel Map, Multi IR Code, Hotel Mode, USB Cloning, IR Out (RS-232C), USB Auto Play Back, External Speaker out, Real Time Clock
GENERAL FEATURES	Connectivity Management	MHL
	Interactivity	Remote diagnostics / Self diagnostics
	Auto Off / Auto Sleep	HDMI-CEC (without ARC), HTNG-CEC
	Smart Energy Saving	○
	Intelligent Sensor	○
	Anti-theft System	○
INTERFACE	Side	Kensington Lock
	Rear	HDMI In, USB 2.0 (2), CI Slot, Headphone Out (3.5mm Phone Jack), RF In, Component In (Y, Pb,Pr) + Audio (L/R), Digital Audio Out (Optical), RGB In (D-sub 15pin), PC Audio Input, RS-232C (D-sub 9pin), HDMI In, LAN (RJ45), Ext SPK out (3.5mm Phone Jack), Full Scart
ACCESSORY		L-CON, Power cord, CD title (Simple manual)
POWER	Voltage, Hz	100 ~ 240V, 50/60Hz
	Typical (Watts)	84.9W
	Stand-by	0.3W↓
STANDARD APPROVAL	Safety	CB, CU TR
	Environment	CE
	Etc.	ROHS, ErP
SOFTWARE COMPATIBILITY		SuperSign Lite/W/M/N/C SuperSign Simple Editor (Available from Oct. 2015) *SuperSign W/M/N (Paid)


### Dimension (unit : mm)



	<b>42"</b>
Set Size (With Stand, W x H x D, mm)	961 x 610 x 218
Set Weight (With Stand, Set, kg)	9.5
VESA Compatibility (mm)	400 x 400

### Interface

- ① LAN
- ② EXTERNAL SPEAKER OUT
- ③ OPTICAL DIGITAL AUDIO OUT
- ④ AUDIO IN
- ⑤ COMPONENT IN
- ⑥ HDMI
- ⑦ RS-232C IN
- ⑧ RGB IN
- ⑨ AV
- ⑩ LNB
- ⑪ ANTENNA / CABLE IN
- ⑫ H/P OUT
- ⑬ HDMI IN 2(MHL)
- ⑭ USB IN

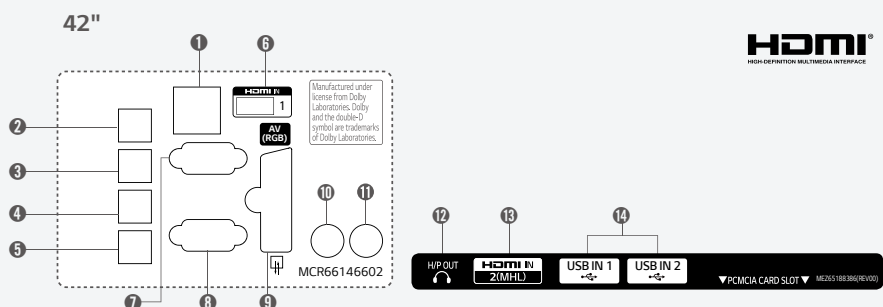

Download LG Commercial Display Mobile App



More info [www.lgcommercial.com](http://www.lgcommercial.com)

YouTube [youtube.com/c/LGCommercialDisplay](https://youtube.com/c/LGCommercialDisplay)

LG may make changes to specifications and product descriptions without notice.  
Copyright © 2015 LG Electronics Inc. All rights reserved. "LG Life's Good" is a registered of LG Corp.  
The names of products and brands mentioned here may be the trademarks of their respective owners.

