

60 cell

LG AC module is a high-efficiency module developed by LG Electronics. Our R&D concentrates on developing a product that is not only efficient, but strives to increase practical value for customers. The end result is a module which uses highly efficient n-type materials, an elaborate process control adopting a semiconductor processing solution and double-sided structure.





Trusted Company

LG AC module has developed from an electronics company with an extensive technical history and has product limited warranty by a financially stable brand.



All-in-one Design

LG AC module combines the module and inverter in a single unit. It provides clean appearance, reduced cable work and increased energy yield.



Max Performer AC Output

LG AC module features the max performer output among the products. It means more power generation per square foot.

* 305W AC output for single phase



Monitoring Anywhere

LG provides advanced Web-based solution. Users can monitor power generation through the internet.

About LG Electronics



Mechanical Properties

156.5 x 156.5 mm / 6 x 6 in	
ım	
3 in	
No fans	
e 6	
45 °F)	
94 °F)	
mpered glass	

Certifications and Warranty


Certifications	UL 1703, UL 1741, IEEE 1547,
	FCC Part 15 Class B, ISO9001
	CAN/CSA-C22.2 NO. 107.1-01
Module Fire Performance (UL1703)	Type 2
Solar Module Product Warranty	10 years
Micro Inverter Warranty	25 years
Output Warranty of Pmax(DC) (measurement Tolerance ± 3%)	Linear warranty*

^{* 1) 1}st year. 98%, 2) After 2nd year. 0.7%p annual degradation, 3) 81.2% for 25 years

Temperature Coefficients(DC)

NOCT	45 ± 2 °C
Pmpp	-0.41 %/°C
Voc	-0.29 %/°C
Isc	0.04 %/°C

Characteristic Curves(DC)



DC Electrical Properties

Power (STC*)	300W
Module Efficiency (%)	18.3
Efficiency Reduction (from 1000 W/m² to 200 W/m²)	< 2.0%

Inverter Electrical Properties

	@240VAC	@208VAC
Rated Continuous Output Power (W)	305	300
CEC Weighted Efficiency (%)	96.5	96.0
Rated Output Current (A)	1.27	1.44
Nominal Voltage Range (V)	211~264	187~229
Nominal Frequency / Range (Hz)	60.0 / 5	7.0~60.5
Power Factor	> 0.95	
Max. Branch Circuit Over Current Protection (Aac)	20	

AC Electrical Properties


	@240VAC	@208VAC
AC Continuous Output Power**	285	5 W
Number of Maximum AC Modules	12 ea	11 ea

^{**} Power(DC) x Weighted Efficiency(%); Figure above accounts for 5W power tolerance.

Features

Communication	Broadband PLC
Monitoring	Web Based

Dimensions (mm/in)

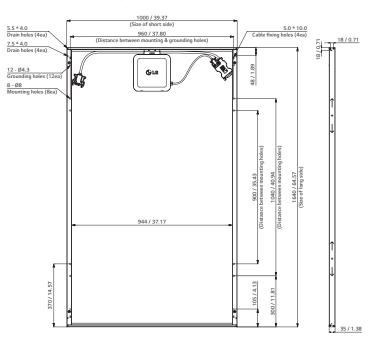



North America Solar Business Team LG Electronics U.S.A. Inc 1000 Sylvan Ave, Englewood Cliffs, NJ 07632

Contact: lg.solar@lge.com www.lgsolarusa.com

Product specifications are subject to change without notice. "LG Life's Good" is a registered trademark of LG Corp.
All other trademarks are the property of their respective owners. DS-A-60-C-US-F-EN-40827



^{*} STC (Standard Test Condition): Irradiance 1000 W/m2, module temperature 25 °C, AM 1.5 *The nameplate power output is measured and determined by LG Electronics at its sole and absolute discretion.