

## The Narrowest Bezel LG Video Wall

# 55" SUPER-NARROW 3.5mm BEZEL PREMIUM DISPLAY LV75A/77A




### The Narrowest Bezel of LG Video Wall Display

Bezel width of 4.9mm in 47" and 3.5mm in 55" Super-Narrow Bezel display creates visually stunning video wall that is easily installed, maintained and managed.




### SuperSign V Content management S/W

Flexible content editing in various layouts including regular matrix and non-formal irregular video-wall is possible to your preference in a timely and cost effective manner without unnecessary expensive video wall console.

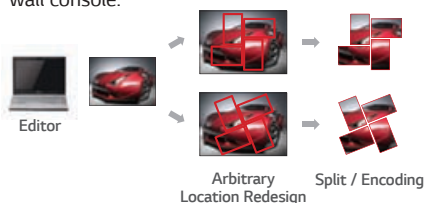


### DisplayPort 1.2 Daisy-Chain

Display of super high resolution UHD content in Video wall through DP 1.2 daisy chain.

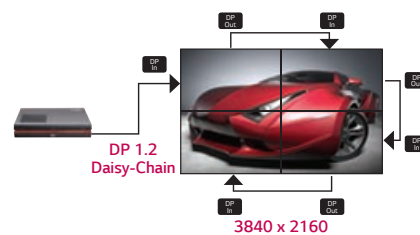


### TruMotion™ 's 60Hz refresh rate

TruMotion's 60Hz refresh rate reduces motion blur and judder, as a result, ensures customer to enjoy clean video content.

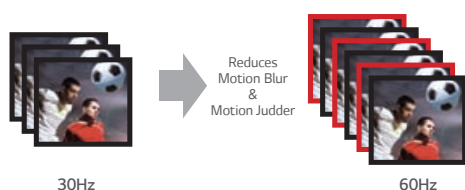

### Shine-Out (55LV77A)

Perfect fit for window display by reflecting away the light for best image visibility and clearer display in bright lightening environment.

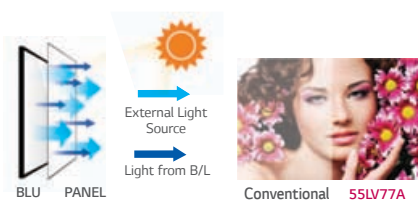

## THE NARROWEST BEZEL LG VIDEO WALL

## LV77A / LV75A 55"



## FEATURES

- Bezel to bezel : 3.5mm
- Brightness : 700nits (LV77A), 500nits (LV75A)
- Shine-Out (available on LV77A)
- Weight : 23kg
- Depth : 89mm
- Higher Brightness Uniformity 90%
- Energy Star 6.0 Compliant

## SPECIFICATIONS

## 55LV75A/55LV77A

|              |                       |                                                                |
|--------------|-----------------------|----------------------------------------------------------------|
| PANEL        | Screen Size           | 55" (54.64" measured diagonal)                                 |
|              | Panel Technology      | IPS                                                            |
|              | Aspect Ratio          | 16 : 9                                                         |
|              | Native Resolution     | 1,920 x 1,080 (FHD)                                            |
|              | Brightness            | 500cd / m <sup>2</sup> (LV75A), 700cd / m <sup>2</sup> (LV77A) |
|              | Contrast Ratio        | 1,400 : 1                                                      |
|              | Dynamic CR            | 500,000 : 1                                                    |
|              | Viewing Angle (H x V) | 178 x 178                                                      |
|              | Response Time         | 12ms (G to G)                                                  |
|              | Input                 |                                                                |
| CONNECTIVITY | Digital               | DVI-D(1), HDMI(1), Display Port(1) with HDCP for all input     |
|              | Analog                | RGB(1), Shared Component(1), AV (1)                            |
|              | Audio                 | PC Audio In (1)                                                |
|              | External Control      | RS232C (1), RJ45 (1), IR Receiver (1)                          |
|              | USB                   | USB (1)                                                        |
|              | Output                |                                                                |
|              | Digital               | Display Port (1)                                               |
|              | Analog                | RGB(1)                                                         |
|              | Audio                 | Audio Out (1)                                                  |
|              | External Control      | RS232C (1)                                                     |
|              | Audio                 |                                                                |
|              | Auto Volume           | No                                                             |
|              | Balance               | No                                                             |
|              | Audio Power           | No                                                             |
|              | Speaker On/off        | No                                                             |
|              | Clear Voice II        | No                                                             |
|              | Sound mode            | No                                                             |

|                            |                                  |                                                                                                   |
|----------------------------|----------------------------------|---------------------------------------------------------------------------------------------------|
| PHYSICAL SPECIFICATION     | Bezel Width                      | 2.25mm (L/T) / 1.25mm (R/B)                                                                       |
|                            | Monitor Dimension (W x H x D)    | 1213.4mm x 684.2mm x 88.5mm                                                                       |
|                            | Weight (head)                    | 23kg                                                                                              |
|                            | Carton Dimensions (W x H x D)    | 1353mm x 850mm x 255mm                                                                            |
|                            | Packed Weight                    | 30kg                                                                                              |
| SPECIAL FEATURES           | VESA™ Standard Mount Interface   | 600mm x 400mm                                                                                     |
|                            | Additional                       | Smart Energy Saving, Temp Sensor, Up to 15x15 Tile Mode, USB Playback                             |
| ENVIRONMENT CONDITIONS     | Operation Temperature            | 0°C ~ 40°C                                                                                        |
|                            | Operation Humidity               | 10% ~ 80%                                                                                         |
| POWER                      | Power Supply                     | 100-240V~, 50/60Hz                                                                                |
|                            | Power Consumption                |                                                                                                   |
|                            | Typical / Smart Energy Saving    | 160W(Typ) / 90W(SES)                                                                              |
|                            | DPMS                             | 0.7W                                                                                              |
|                            | Power Off                        | 0.5W                                                                                              |
| STANDARD (CERTIFICATION)   | Safety                           | UL / cUL / CB / TUV / KC                                                                          |
|                            | EMC                              | FCC Class "B" / CE / KCC                                                                          |
|                            | ErP / Energy Star                | Yes / Yes (Energy Star 6.0)                                                                       |
| MEDIA PLAYER COMPATIBILITY | Slot PC Compatible (optional)    | No                                                                                                |
|                            | External Media player Attachable | Yes                                                                                               |
| SOFTWARE COMPATIBILITY     | SuperSign Elite-w lite / Elite-c | Yes / Yes                                                                                         |
| ACCESSORY                  | Included                         | Remote Controller, Power Cable, DP Cable, Manual, IR Receiver, RS-232C Cable, Tiling Guide, Screw |

\* Image may differ slightly from actual product. Specifications are subject to change without prior notice.

## DIMENSION (unit : mm)

