


Media Player Integrated Solution LCD WIDESCREEN FULL HD DISPLAY VS20

VS20 42" / 47" / 55"

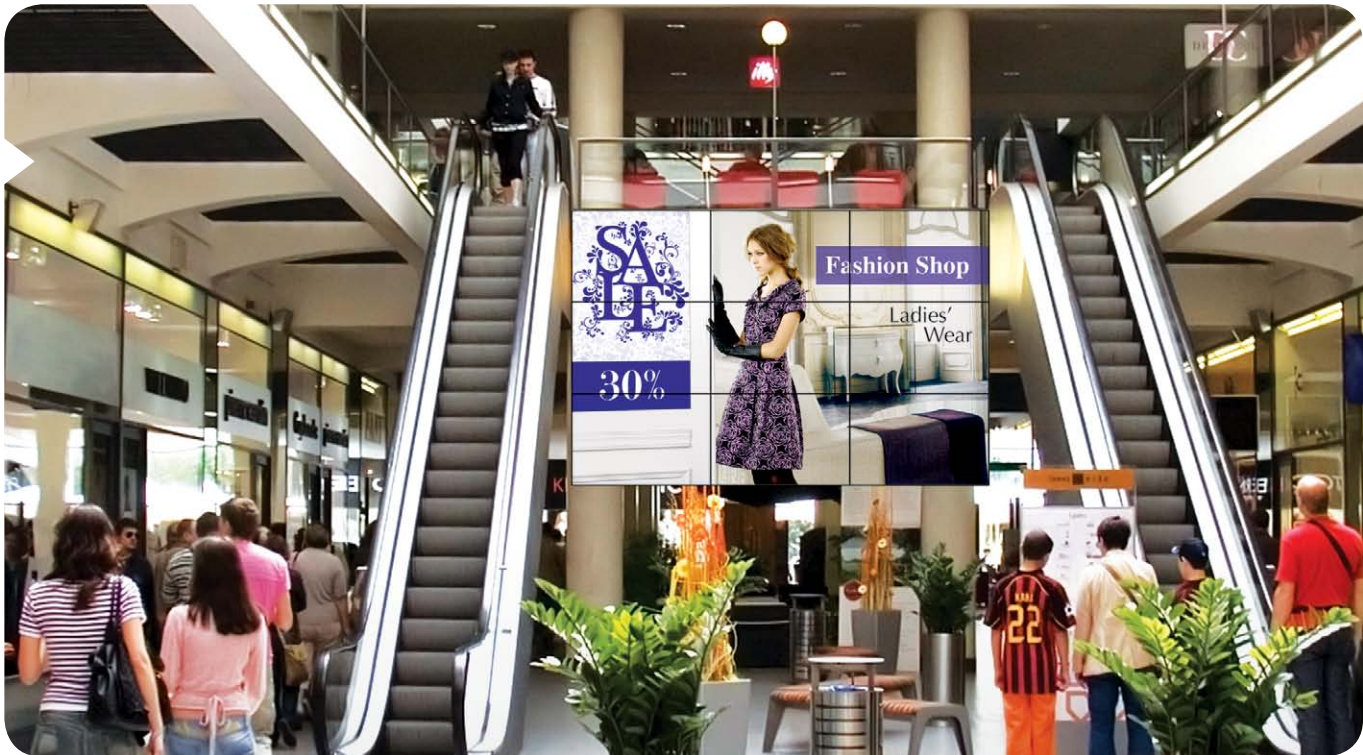

MEDIA PLAYER INTEGRATED SOLUTION

The solution integrated with media player allows you to cut down the extra cost for a media player.



USB MULTI-MEDIA PLAYBACK

USB multi-media playback is simple, easy solution without additional cost.

EASY & FAST DELIVERY OF CONTENTS

Easily edit content with the Web-based management software, SuperSign Elite-w lite. SuperSign Elite-w lite is provided with free templates, which allows easy and fast contents delivery.



VS20 Series



USB Memory
(USB Multi-media playback)



Free Software
(SuperSign Elite-w lite)



SuperSign Elite-w lite




Free Templates

IPS SUPERB PICTURE QUALITY

NO BLACKENING DEFECT

Hardly affected by light or heat, hence no blackening.




IPS

Normal

TRUE WIDE

No color changes or distortion from any viewing angle.



IPS

Normal

STABLE PANEL

When touch the screen, it can also display consistently with leaving no mark.



IPS

Normal



LCD WIDESCREEN FULL HD DISPLAY

VS20 42F", 47F", 55F"



FEATURES

- Media Player Integrated Solution
 - USB Multi-media Playback
- Easy & Fast Contents Delivery
 - SuperSign Elite-w lite bundled
- High Brightness (700nit)
- Narrow Uni Bezel Size
 - 42F" : 16.9mm, 47F" : 17.9mm, 55F" : 18.9mm
- Super IPS & Exclusive PD Panel
- Smart Energy Saving

SPECIFICATIONS

| | | |
|------------------------|------------------------------|---|
| PANEL | Screen Size | 42F", 47F", 55F" |
| | Panel Technology | IPS |
| | Aspect Ratio | 16 : 9 |
| | Native Resolution | 1,920 x 1,080 (FHD) |
| | Brightness | 700nit |
| | Contrast Ratio | 42"/47" : 1,200:1, 55" : 1,300:1 |
| | Dynamic CR | 3,000:1 |
| | Viewing Angle(H x V) | 178 x 178 |
| | Response Time | 8ms (G to G, *WOT) |
| | CONNECTIVITY | Input (Rear) |
| Digital | | HDMI(1), DVI(1), Display Port(1) with HDCP for all input |
| Analog | | Component(1), AV(1), RGB(1) (Shared with D-Sub) |
| Audio | | PC/AV/Component Audio In(1) |
| External Control | | RS232C(1), RJ45(1) |
| USB | | USB(1) |
| Output (Rear) | | |
| Digital | | DVI-D(1) |
| Analog | | Component(1), Composite(1), RGB(1) (Shared with D-Sub) |
| Audio | | External speaker |
| External Control | RS232C(1) | |
| PHYSICAL SPECIFICATION | Bezel Width | 42" : 16.9mm 47" : 17.9mm 55" : 18.9mm |
| | Monitor Dimension(W x H x D) | 42" : 96.7cm x 56.1cm x 12.5cm 47" : 107.95cm x 62.46cm x 12.29cm 55" : 125.1cm x 72.2cm x 10.4cm |
| | Weight(head) | 42" : 17.5kg, 47" : 22.2kg, 55" : 34.5kg |
| | Carton Dimensions(W x H x D) | 42" : 104.5cm x 66.0cm x 25.0cm 47" : 118.2cm x 74.3cm x 26.9cm 55" : 135.6cm x 85.8cm x 27.6cm |
| | Packed Weight | 42" : 21.87kg, 47" : 29.6kg, 55" : 43.4kg |

| | | |
|----------------------------|----------------------------------|--|
| | VESATM Standard Mount | 42" : 600mm x 400mm 47" / 55" : 800mm x 400mm |
| SPECIAL FEATURES | Additional | Smart Energy Saving, Multi-media playback, PIP/PPR, Temp Sensor, Tile mode (Up to 15x15), ISM Method, Key Lock |
| ENVIRONMENT CONDITIONS | Operation Temperature | 0°C ~ 40°C |
| | Operation Humidity | 10% ~ 80% |
| POWER | Power Supply | 100-240V-, 50/60Hz |
| | Power Consumption | |
| | Typical / Smart Energy saving | 42" : 170W(Typ) / 130W(Smart Energy Saving on) 47" : 180W(Typ) / 130W(Smart Energy Saving on) 55" : 260W(Typ) / 160W(Smart Energy Saving on) |
| | DPMS | 1.0W(Set only) |
| | Power Off | 0.5W |
| STANDARD(CERTIFICATION) | Safety | UL / cUL / CB scheme / TUV |
| | EMC | FCC Class "B" / CE / KCC |
| | ErP / Energy Star | Yes / Yes (EPA 5.1) |
| MEDIA PLAYER COMPATIBILITY | Slot PC compatible (optional) | No |
| | External Media player Attachable | Yes |
| SOFTWARE COMPATIBILITY | Supersign Compatibility | Elite-w / Elite-w lite |
| ACCESSORY | Included | Remote Controller, Power Cable, RGB Cable, Manual |
| | Optional | 42" : SP0000K (Speaker), ST0000K (Stand) 47" / 55" : ST1000K (Stand), SP0000K (Speaker) |

* WOT : Within Operation Temperature

※ Image may differ slightly from actual product. Specifications are subject to change without prior notice.

INTERFACE

(42F", 47F", 55F")



DIMENSION (unit : mm)

