

Infinitely Expandable Video Wall SUPER NARROW BEZEL DISPLAY 47WV50/50BR



47WV50BR 47"



SUPER NARROW BEZEL

4.9mm, super narrow bezel creates powerful and eye-catching video walls those can be easily installed, maintained and managed.

Competitor (46")

LG 47WV50/50BR



Bezel to Bezel
5.5mm

Bezel to Bezel
4.9mm

HIGHER RESOLUTION

WV50 Series supports Full HD. Enjoy clear & vivid picture quality with LG video walls.

47WV30/30B

47WV50/50BR



HD

FHD

AUTO CALIBRATION

Auto Calibration software, will help you to get the perfect color and brightness uniformity by adjusting white balance.

Before Auto Calibration

After Auto Calibration



*SuperSign Elite-c supports
Spyder 3/4 Elite by Datacolor

WIDE VIEWING ANGLE

Providing clear image virtually at any angle



VS




VA

IPS

24/7 OPERATION

The strength of PD Module is that it can operate 24 hours a day. It is highly durable and provides continuous performance.

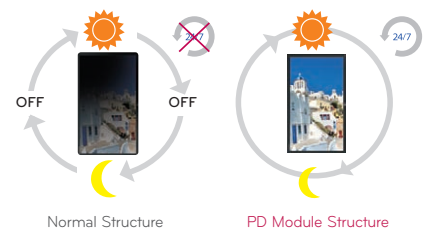

SUPER NARROW BEZEL VIDEO WALL 47WV50/50BR 47F"



FEATURES

- Super Narrow Bezel : 4.9mm (Bezel to Bezel)
- 800nit (47WV50), 500nit (47WV50BR)
- 24 hours / 7 days Operation
- Shine-Out (Semi-Outdoor Usage) (47WV50)
- Auto Calibration Software (SuperSign Elite-c)
- Smart Energy Saving (Low Power Consumption)

SPECIFICATIONS

		WV50	WV50BR				
PANEL	Screen Size	47F"		PHYSICAL SPECIFICATION	Bezel Width	3.2mm(L/T) / 1.7mm(R/B)	
	Panel Technology	IPS			Monitor Dimension (W x H x D)	1044.9mm x 590mm x 89.9mm	
	Aspect Ratio	16 : 9			Weight (head)	18.7kg	18.5kg
	Native Resolution	1920 x 1080 (FHD)			Carton Dimensions (W x H x D)	1180mm x 165mm x 770mm	
	Brightness	800nit	500nit		Packed Weight	23.7kg	23.5kg
	Contrast Ratio	500,000 : 1			VESA™ Standard Mount Interface	600mm x 400mm	
	Viewing Angle (H x V)	178 x 178			SPECIAL FEATURES	Additional	Smart Energy Saving, Temp Sensor, Up to 15x15 Tile Mode, USB Playback
	Response Time	12ms (Typ.)			ENVIRONMENT CONDITIONS	Operation Temperature	0°C - 40°C
CONNECTIVITY	Input	HDMI(1), DVI-D(1) with HDCP for all input, Display Port(1)		POWER	Power Supply	100-240V~, 50/60Hz	
	Digital	HDMI(1), DVI-D(1) with HDCP for all input, Display Port(1)		Power Consumption	Typical / Smart Energy Saving	150W(Typ) / 80W(SES)	
	Analog	RGB(1), Component(RGB Shared), AV(BNC, 1)		DPMS	0.7W		
	Audio	PC Audio In(1), AV/Component Audio In(RCA, 1)		Power Off	0.5W		
	External Control	RS232C(1), RJ45(1), IR Receiver(1)		STANDARD(CERTIFICATION)	Safety	UL / cUL / CB / TUV / KC	
	USB	USB(1)		EMC	FCC Class "B" / CE / KCC		
	Output	DVI-D(1)		ErP / Energy Star	Yes / Yes (Energy Star 6.0)		
	Digital	DVI-D(1)		MEDIA PLAYER COMPATIBILITY	Slot PC Compatible (optional)	No	
	Analog	RGB(1)		External Media player Attachable	Yes		
	Audio	External Speaker(1)		SOFTWARE COMPATIBILITY	SuperSign Elite-w lite / Elite-c	No / Yes	
	External Control	RS232C(1)		ACCESSORY	Included	Remote Controller, Power Cable, DVI Cable, Manual, IR Receiver, RS-232C Cable, Guide Bracket, Screw	
	Audio			Optional	Media Player	MP700, MP500	
	Auto Volume	No					
	Balance	Yes					
	Audio Power	20W (10W x 2)					
Speaker On/off	Yes						
Clear Voice II	Yes						
Sound mode	Standard, Music, Cinema, Sports, Game						

※ Image may differ slightly from actual product. Specifications are subject to change without prior notice.

INTERFACE



DIMENSION (unit : mm)

