


# Convenient & Reasonable THE NEW ENHANCED DISPLAY WL30



## PORTRAIT & LANDSCAPE

Flexible usage with landscape or portrait display according to the display environment.

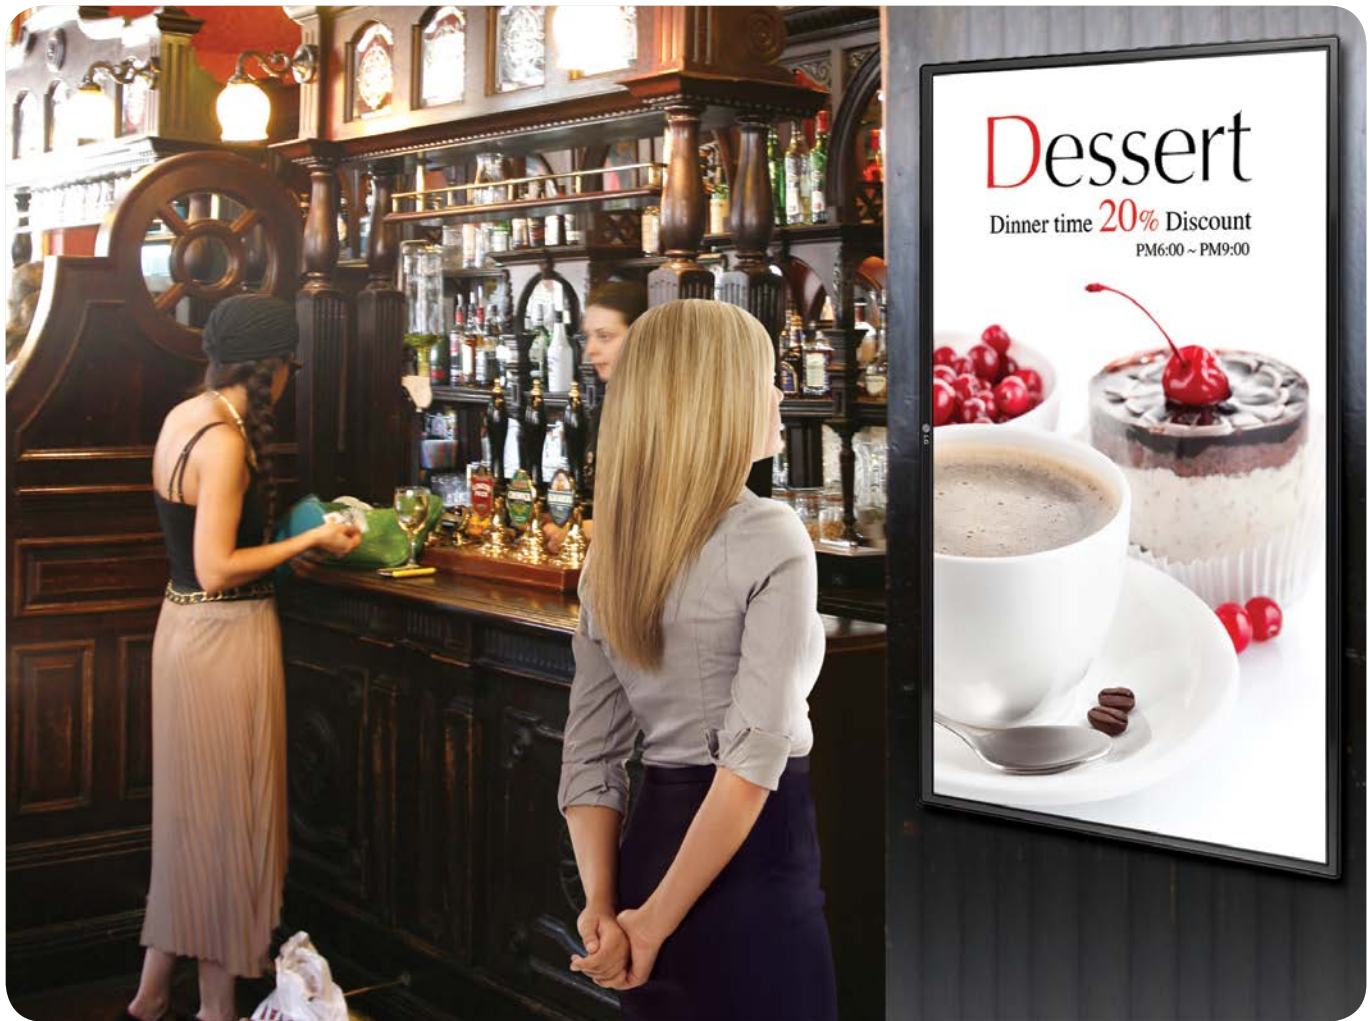

Portrait



Landscape

## NARROW BEZEL & SLIM DEPTH

With narrower bezel and slimmer depth than those of competitor's, you can save space more efficiently with WL30.

Competitor



40" : 17.4mm 93.5mm  
46" : 17.4mm 94.5mm  
55" : 17.5mm 94.5mm

WL30



42" : 13.4mm 79mm  
47" : 13.4mm 84.5mm  
55" : 13.4mm 82.3mm

## EXPANDABLE HD-SDI OPTION BOARD (55WL30, 60WL30)



## MEDIA PLAYER INTEGRATED SOLUTION

The solution integrated with media player foregoes the need for additional media players and allows you to cut down expenses.

Extra cost for a media player can be saved!



WL30 Series



8GB Internal Storage  
Memory Built-in for WL30

+



Free Software  
(SuperSign Elite-w lite)

THE NEW ENHANCED DISPLAY

# WL30 42F", 47F", 55F", 60F"



## FEATURES

- Portrait & Landscape
- 1,920 x 1,080 (FHD)
- Brightness : 400nit (42F", 47F", 60F"), 350nit (55F")
- 8GB Internal Storage Memory Built-in
- Expandable HD-SDI Option Board (55F", 60F")
- Low Power Consumption
- Narrow Bezel & Slim Depth :  
 13.4mm(T/L/R), 18mm(B), 79mm(D) (42F")  
 13.4mm(T/L/R), 18mm(B), 84.5mm(D) (47F")  
 13.4mm(T/L/R), 18mm(B), 82.3mm(D) (55F")  
 13.4mm(T/L/R), 18mm(B), 68.3mm(D) (60F")

## SPECIFICATIONS

WL30

PANEL	Screen Size	42F", 47F", 55F", 60F"
	Panel Technology	IPS
	Aspect Ratio	16 : 9
	Native Resolution	1920 x 1080 (FHD)
	Brightness	400nit(42F", 47F", 60F"), 350nit(55F")
	Contrast Ratio	1,000 :1
	Dynamic CR	500,000:1
	Viewing Angle (H x V)	178 x 178
	Response Time	42": 6ms (GTG), 47": 9ms (GTG BW), 55": 8ms (GTG BW), 60": 10ms (GTG BW)
	CONNECTIVITY	Input
Digital		HDMI(1), DVI-D(1), DP(1)
Analog		RGB(1)
Audio		RGB, DVI-D, Component (3.5Φ 1)
External Control		RS232C(1), RJ45(1), IR(1)
USB		Yes(1)
Output	Digital	DVI-D(1)
	Audio	No
	External Control	RS232C(1)
	USB	
PHYSICAL SPECIFICATION	Bezel Width	13.4mm(T/L/R), 18mm(B)
	Monitor Dimension (W x H x D)	42": 96.34cm x 56.2cm x 7.9cm, 47": 107.50cm x 62.48cm x 8.45cm, 55": 124.44cm x 72.02cm x 8.23cm, 60": 135.38cm x 78.14cm x 6.83cm
	Weight (Head)	42": 10kg, 47": 13kg, 55": 19kg, 60": 23kg(TBD)
	Carton Dimensions (W x H x D)	42": 105.0cm x 16.0cm x 70cm, 47": 118.0cm x 16.5cm x 77.0cm, 55": 134.5cm x 19.1cm x 87cm, 60": 146.5cm x 19.1cm x 93.2cm
	Packed Weight	42": 13.6kg, 47": 17kg, 55": 24.5kg, 60": 30kg (TBD)
	VESA™ Standard Mount Interface	42": 200mm x 200mm, 47"/55"/60": 400mm x 400mm
ENVIRONMENT CONDITIONS	Operation Temperature	0 °C to 40 °C
	Operation Humidity	10 % to 80 %
POWER	Power Supply	100-240V~, 50/60Hz
	Power Consumption	
	Typical / Smart Energy Saving	42": 90W/60W, 47": 100W/70W, 55": 140W/110W, 60": 180W/150W
	DPMS	0.7W (DP)
	Power Off	0.5W

STANDARD (CERTIFICATION)	Safety	UL, cUL, CB scheme, TUV
	EMC	FCC Class "A", VCCI, C-tick, CE, KCC
	ErP / Energy Star	Yes / Yes (Energy Star 6.0)
MEDIA PLAYER COMPATIBILITY	Slot PC Compatible (optional)	No
	External Media Player Attachable	Yes (NC1100 / NA1100 / NA1000)
SOFTWARE COMPATIBILITY	SuperSign Elite-w lite / Elite-c	Yes (Editing, Scheduling, Distribution & Play, Control) / Yes
ACCESSORY	Included	Remote Controller (include battery 2ea), Power Cord, IR Receiver, CD (Owner's Manual, SuperSign Program / Manual), ESG, RGB Cable

\* Image may differ slightly from actual product. Specifications are subject to change without prior notice.

## INTERFACE (42F", 47F", 55F", 60F")



## DIMENSION (unit : mm)

