

LG ELECTRONICS

DIGITAL SIGNAGE PLAYER MP500

MP500



The Integral Full HD Signage Player

to feed video and audio contents to
LG Digital Signage.

COMPATIBLE

MP500 is hybrid type signage player which can use as a stand alone or built-in type, either way suits to a certain usage scene.

CLEAR

MP500 supports vivid picture with Full HD resolution.

COMPLETE

Content management software Super Sign Elite-w lite is offered as a bundle.



LG ELECTRONICS DIGITAL SIGNAGE PLAYER MP500




- Intel Celeron P4500 Processor 1.86 GHz (Dual Core)
- Intel Core i5-520M Processor 2.40 GHz (Dual Core)
- Windows Embedded Standard, Windows7 Embedded
- Full HD x 2
- Maximum Resolution 2,560 x 1,600 @ 60 Hz (DP)
- Maximum Resolution 1,920 x 1,200 @ 60 Hz (HDMI)



EASY INSTALLATION & MAINTENANCE

Light MP500 Built-in Signage Player makes your signage look even slimmer and helps you maintain the system far more conveniently.



PC Built-in Player


SMART CHOICE TO DISPLAY FULL HD CONTENTS

MP500 offers high picture quality with 2,560 x 1,600 resolution or 1,920 x 1,200 resolution.



WS50, WS50B

DIMENSION (unit : mm)

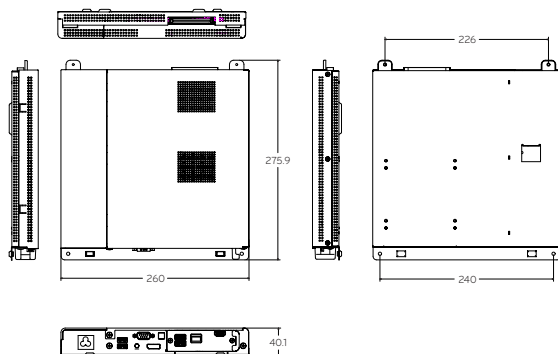

		MP500	
General Specification	Dimensions	260mm(W) x 401mm(H) x 275.9mm(D)	
	Weight	2.08kg (Only Set)	
	Carton Dimension	300mm(W) x 99mm(H) x 345mm(D) (Set Box)	
	CPU	Intel Celeron P4500 Processor 1.86 GHz (Dual Core) Intel Core i5-520M Processor 2.40 GHz (Dual Core)	
	Chip Set	Mobile Intel QM57 Express Chipset	
	Main Memory	DDR3 1333 2,048 MB SODIMM type	
	Secondary Storage Device	SATA SSD 8G (Option : 16G, 32G, 64G)	
	O/S	Windows Embedded Standard, Windows7 Embedded	
	Graphic Performance	Full HD x 2	
	Multi I/O Port	LAN Port	Intel 82577LM Gigabit(10/100/1,000 Mbps) Ethernet PHY
Input			
USB Port		Hi-Speed USB 2.0 port 480 Mbps rate (x4)	
4-in-1 Card		N/A	
PCI Express Card Slot		N/A	
Mini PCI Express Socket		Supported	
Output			
Serial Port		Supported	
Display Out		DP / HDMI *DP does not support Digital Audio	
LINE Out		Supported	
SPDIF (Digital Audio Out)	N/A		
Operational Specification	Resolution	Maximum Resolution 2,560 x 1,600 @ 60 Hz (DP) Maximum Resolution 1,920 x 1,200 @ 60 Hz (HDMI) Recommended Resolution 1,920 x 1,080 @ 60 Hz	
	Power	Rated Voltage AC 100-240V-, 50/60 Hz, 1.8A	
	Operating Conditions	Operating TePCerature	5% to 40%
		Operating Humidity	10% to 80%
		Storage TePCerature	-20% to 60%
	Storage Humidity	5% to 95%	

※ Image may differ slightly from actual product. Specifications are subject to change without prior notice.

