

Key Features

Convenient Maintenance

PoE & Low Power Consumption

PoE* allows the installer to connect the power and network using just one wire. This greatly simplifies the installation and maintenance processes in locations where adding a power outlet is expensive or prohibited.



* Power-over-Ethernet

Connectivity BEACON



Supports

With Beacon and Bluetooth Low Energy (BLE) supported by the 10SM3TB, stores can provide coupons and information in real-time which increase interactivity with customers at the moment of truth.



Simple Network Management Protocol

SNMP support ensures convenient network management.



SoftAP

The 10SM3TB with SoftAP software can operate as a wireless access point for mobile devices.



Enhanced Usability






Support for Android Environment

The application which can be operated on the screen with customers can be developed and used based on Android OS.



5.9GB Internal Memory + SD Card

With 5.9GB of internal memory and an additional SD card slot, you can play a sufficient amount of content within the internal memory or additional storage.





Small Display for Versatile Uses



Screen Size

10"

10SM3TB

• Brightness : 400cd/m²

- Bezel : 14mm (Even Bezel)
- Depth : 29.7mm
- Interface : USB, SD Card, RJ45

10SM3TB


• Special Features : Wi-Fi Built-in, K-Slot

Specifications

Specificatio		I USINISTE
PANEL	Screen Size	10 (10.1")
	Panel Technology	ADS
	Aspect Ratio	16:9
	Native Resolution	1,280 x 800 (HD)
	Brightness	Module : 450cd/m ² , SET : 400cd/m ² (W/Touch)
	Contrast Ratio	900 : 1
	Dynamic CR	x
	Viewing Angle (H x V)	160 x 160
	Surface Treatment	Hard Coating, 2H, Low Reflection (Front Polarizer)
	Orientation	Portrait & Landscape
CONNECTIVITY	Input	USB, SD Card
	Output	-
	External Control	RJ45
PHYSICAL SPECIFICATION	Bezel Color	Black
	Bezel Width	14mm (T/R/L/B)
	Monitor Dimension (W x H x D)	245.6 x 164.2 x 29.7mm
	Weight (Head)	0.63kg
	Carton Dimensions (W x H x D)	327 x 224 x 95mm
	Packed Weight	1.041kg
	VESA [™] Standard Mount Interface	50 x 50mm
SPECIAL FEATURES		Key Operation (Home, Power Key Operation), DPM Select, File Play with USB, Wi-Fi Built-in, Local Time Auto Setting, Wake on LAN, Password Change, BEACON, Internal Memory (System 0.15GB + Free 5.7GB), K-Slo
ENVIRONMENTAL CONDITIONS	Operating Temperature Range	0 °C to 40 °C
	Operating Humidity Range	10 % to 90 %
POWER	Power Supply	100-240V~, 50/60Hz
	Power Type	Built-in Power, Adaptor
	Power Switch	Power/Home
	Power Consumption Typ.	10W
AUDIO	Audio Power	1W (1W x 1Ch) for Internal Speaker
STANDARD (CERTIFICATION)	Safety	UL / cUL / TUV
	EMC	FCC Class "A" / CE
	ErP / Energy Star	Yes / Yes (Energy Star 6.0)
ACCESSORY	Basic	Adaptor, Manual (Web), ESG
	Optional	No

Dimension (unit : mm)

10'' 245.6 x 164.2 x 29.7 / 0.63 kg

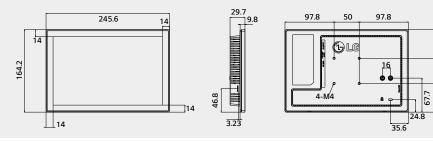

57.1

100

57.1

(-

Connectivity

1 LAN / PoE

- 2 DC-IN
- 3 USB IN
- 4 MICRO SD

Download LG Commercial Display Mobile App



LG may make changes to specifications and product descriptions without notice. Copyright © 2015 LG Electronics Inc. All rights reserved. "LG Life's Good" is a registered of LG Corp. The names of products and brands mentioned here may be the trademarks of their respective owners.

¢

Ċ

٢