

Slim Design Affordable


# 32"/42"/47"/55"/65" FULL HD DISPLAY LS33A



## SLIM DESIGN


Direct-LED panel featuring slim BLU offers stylishly slim monitors designed to fit perfectly into narrow spaces in retail shops while ensures high energy efficiency

Slim Design

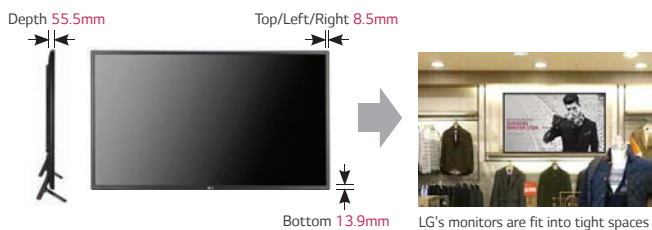

## PORTRAIT/LANDSCAPE MODES


Portrait/Landscape Scene available

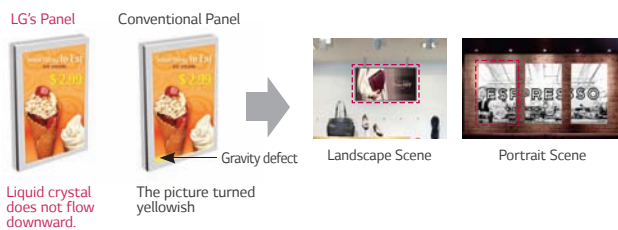

## COST-EFFECTIVE SOLUTION

SuperSign embedded player is suitable for running simple content in an effort to save cost and ease of installation and maintenance as well


No need for an additional media player

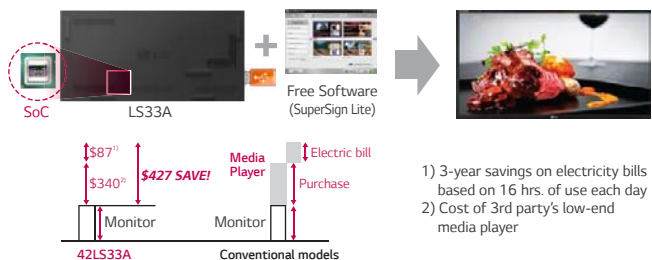

## REMOTE CONTROL VIA RS232C & NETWORK

SuperSign embedded player with RJ45 interface allows easy content transfer and control via network

Network based content control

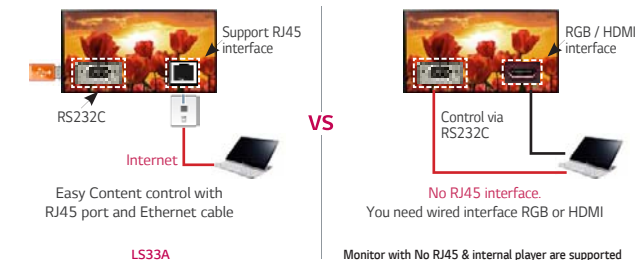

# LS33A SERIES 32", 42", 47", 55", 65"



## FEATURES

- Brightness: 300nit(32"/42"/47"), 330nit(55"), 350nit(65")
- Direct-LED Display
- Portrait/Landscape Orientation
- Embedded Media Player
- Vertical Retail Targets : SMB (Small & Medium Business), Retailers
- Energy Star 6.0 Compliant
- IPS Panel
- Low Screen Temperature
- No Blackening Defect
- Wide Viewing Angle



## SPECIFICATIONS

LS33A

PANEL		Screen Size	32", 42", 47", 55", 65"	PHYSICAL SPECIFICATION	Monitor Dimension (W x H x D)	32": 73.0cm x 42.9cm x 5.5cm 42": 96.0cm x 56.0cm x 5.5cm 47": 107.0cm x 62.0cm x 5.58cm 55": 123.8cm x 71.2cm x 5.68cm 65": 146.0cm x 84.0cm x 5.76cm	
		Panel Technology	IPS			Weight (Head)	32": 5.6kg / 42": 9.0kg / 47": 12.5kg / 55": 17.6kg / 65": 34kg
		Native Resolution	Full HD (1920X1080)		ENVIRONMENT CONDITIONS	Operation Temperature	0 °C to 40 °C
		Brightness	32"/42"/47": 300nit / 55": 330nit / 65": 350nit			Operation Humidity	10 % to 80 %
		Contrast Ratio	32"/42"/47": 1,200:1 / 65": 1,400:1		POWER	Typical / Smart Energy Saving	33": 45W 28W 42": 65W / 38W 47": 80W / 65W 55": 85W / 67W 65": 200W / 140W
		Dynamic CR	500,000:1				
		Viewing Angle (H x V)	178 x 178		STANDARD (CERTIFICATION)	Safety	UL / cUL / CB / TUV / KC
		Response Time	9ms(G to G BW)			EMC	FCC Class "A" / CE / KCC
CONNECTIVITY	Input (Rear)	Digital	HDMI(1), DVI-D(1)	ErP / Energy Star	Yes / Yes (Energy Star 6.0)		
		Analog	RGB(1)	MEDIA PLAYER COMPATIBILITY	Slot PC Compatible (optional)	No	
		USB	Yes(1)		External Media player Attachable	32": No / 42", 47", 55", 65": Yes (MP500/MP700)	
	Output	Digital	-	SOFTWARE COMPATIBILITY	SuperSign Elite-w lite / Elite-C	Yes / Yes	
	Audio	RGB(1)	ACCESSORY	included	Remote Controller(include battery 2ea), Power Cord, IR Receiver, CD(Owner's Manual, SuperSign Program / Manual), RGB Cable		
	External Control	Yes(1)					
PHYSICAL SPECIFICATION	Bezel Width	32": (R/L) 10.5mm(15.1mm for rearmost spot) (T) 10mm(14.6mm for rearmost spot) (B) 14mm(18.6mm for rearmost spot)					
		42": (R/L/T) 8.5mm(13.3mm for rearmost spot) (B) 14mm(18.8mm for rearmost spot)					
		47": (R/L/T) 8.5mm(13.2mm for rearmost spot) (B) 14mm(18.7mm for rearmost spot)					
		55": (R/L/T) 8.5mm(13.2mm for rearmost spot) (B) 14mm(18.7mm for rearmost spot)					
		65": (R/L/T) 9mm(14mm for rearmost spot) (B) 14.6mm(20mm for rearmost spot)					

## DIMENSION (unit: mm)

