

## Auto-Sensing Remote Jack Pack Full-Featured




When used with compatible LG displays or Zenith HCS5610 set-top-box, the RJP-201M provides a multi-media interface to the in-room TV for hotel guests. There is a wide range of A/V inputs for external portable devices such as DVD/CD players, laptop PCs, video game players, MP3 players, camcorders, etc. Your guests will find this full-featured jack pack easy to use. Just plug in to one of the 4 AC outlets, an audio or video source, sit back, and enjoy! The audio preference is your choice, regardless of what is showing on the TV screen.

COMPATIBLE LG DISPLAYS

Go to link [www.LGolutions.com](http://www.LGolutions.com) and select model RJP-201M

1-YEAR LIMITED WARRANTY  
(parts/labor)

Mixed Signal connection cable to TV display panel

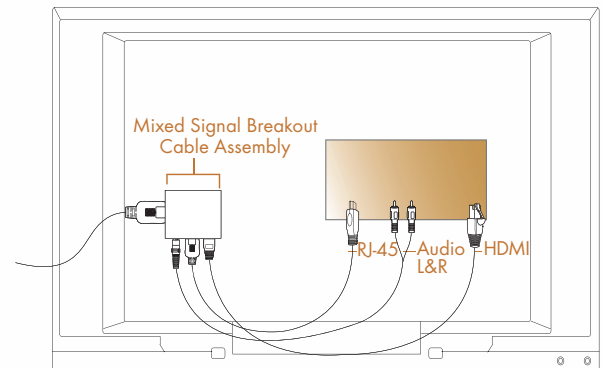

## RJP-201M

## AUTO-SENSING REMOTE JACK PACK

## SPECIFICATIONS



POP (Picture outside of Picture) can be used with TVs that have this feature



RJP-201M installed



Multiple components can be connected all at once

## GUEST ROOM FEATURES

The auto sensing remote jack pack (RJP) will conveniently install right in the room where the guests stay. This jack pack will allow guests to connect audio, video, and computer devices to hear and view on the in-room TV display panel. The RJP can be set up to interface with the TV display panel to show the image and/or sound from a portable DVD/CD Player, Camcorder, MP3 Player, Notebook computer, or portable Video Game Player. If the guest does not connect any devices, then the in-room TV display panel will remain on the source selected. When the guest connects a device, the interface switches the TV display panel to show the new source. Guest can recharge laptop or cell phone batteries while watching TV.

The RJP is designed to be able to process audio from one source, and video separately from a different source, if required. (The guest can work on a laptop computer while listening to music from an MP3 player). POP (Picture outside of Picture) feature can be utilized (on TVs that come equipped with this feature) by simply selecting channel up or down once the video source is connected. The picture from the connected device will show up in the larger picture on the left side of the screen, and the TV channel will show up in the smaller picture on the right side of the screen.

## REMOTE JACK PACK

Unit Dimensions (W×H×D)	16.49" x 4.08" x 2.18"
Recommended hole cutout	16.031" (16 1/32") W x 3.562" (3 9/16") H
Unit Weight	2.54 lbs
Color	Black
Type of Installation	Vertical Drawer Mount (desk back splash)
UPC Code	7 19192 90182 7
Carton Dimensions (W×H×D)	18.9" x 4.7" x 13.9"
Shipping Weight	3.31 lbs

## END-USER DEVICE INPUTS

Video In	Composite Video Jack, 1 Vpp, 75 ohms
Audio In LR	Left - Right Audio Jacks (Nom In: 250mV RMS @ 22K ohms) Overload In: 1.6V RMS Max
Audio In	3.5 mm Stereo Audio Jack
Digital Video In	Digital Video Connector
PC Video In	15-pin RGB PC Monitor Connector
Phone In	Phone Jack (6-Pin RJ-11)
Network In	LAN Jack (8-Pin RJ-45)
USB In	USB Connector, Charge(5V,0.5A), Data(5m) ("A"-type female)
AC Outlets x 4	AC 120V 60Hz (Maximum 7 Amps, total combined current allowed for AC outlets)

## OUTPUT

Audio In LR	Left - Right Audio Jacks Max: 1.6 V RMS (1 KHz) @ 600 ohms Typ: 250mV RMS @ 600 ohms
Digital Video Out	Digital Video Connector (HDMI)
Phone Out	Phone Jack (6-Pin RJ-11)

Network In	LAN Jack (8-Pin RJ-45)
USB Out	USB "A" type Male Plug
Control & Aux	Control Jack (8-Pin RJ-45) iPod Audio/Video Dock In (14-Pin Water)

## REGULATORY

UL FCC	Class B, Digital Video Device
--------	-------------------------------

## ENVIRONMENTAL PARAMETERS

Operating Temperature	0° to 40° Degrees Celsius (32° to 104° Degrees Fahrenheit)
Storage Temperature	-20° to 85° Degrees Celsius (-4° to 185° Degrees Fahrenheit)
Cooling Free Air Convection	Free Air Convection
Humidity	10° to 90° Non-Condensing

## SERVICE/LIMITED WARRANTY

Warranty (Parts/Labor)	1 Year
------------------------	--------

## SUPPLIED ACCESSORIES LIST

Cable Assembly Note: All cables 12 feet (approx.) in length for RJP-201M  
Mixed Signal Cable Assembly (approx. 12.9 ft)

Separate Cables	Phone Cable (6-Pin RJ-11) Network Cable (8-Pin RJ-45)
Attached Cord	AC Power Cord, 120V 60Hz

## Misc. Hardware

5-Retainer Clips, L-Shaped (4-Required)	
5-Machine Screws w/ Serrated Washers (4-Required)	
Optional IDS-20G	Coming soon

IDS-20G  
(iPod® Docking Station)

www.LGsolutions.com

LG Electronics U.S.A., Inc.  
Commercial Displays  
2000 Millbrook Drive  
Lincolnshire, IL 60069

Customer Service: 888.865.3026  
www.LGsolutions.com/support

Contact your LG Regional Sales Representative:  
Hospitality: 800.228.1236  
Vertical Markets: 800.897.8788  
Channel: 800.897.8871  
Healthcare: 877.793.6484  
E-mail: info@LGsolutions.com

SPEC\_RJP201M\_031104\_PR



All screen images are simulated. Dimensions and weights are approximate. Design, features and specifications subject to change without notice.

© Copyright 2011 LG Electronics USA, Inc. All Rights Reserved. "LG Life's Good" is a registered trademark of LG Corp.

HDMI, the HDMI Logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC. iPod is a registered trademark of Apple Inc. All other product and brand names are trademarks or registered trademarks of their respective companies.

Printed in the USA. March 2011



**LG**  
Life's Good