
Auto-Sensing Remote Jack Pack (RJP) Full-Featured

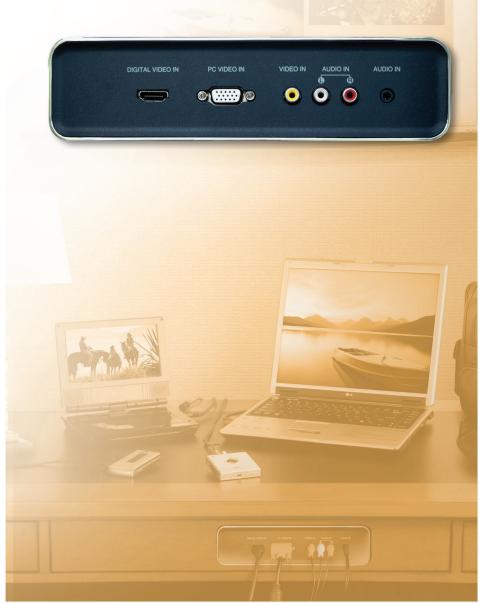

*Refers to the single cable between the RJP and the mixed signal breakout cable assembly.


NEW! SINGLE CABLE RJP*

When used with compatible LG displays, the RJP-401B provides a multi-media interface to the in-room TV display panel for hotel guests. There is a wide range of A/V inputs for external portable devices such as DVD/CD players, laptop PCs, video game players, MP3 players, camcorders, etc. Your guests will find this full-featured jack pack easy to use. Just plug in an audio or video source, sit back, and enjoy! The audio preference is your choice, regardless of what is showing on the TV screen.


COMPATIBLE LG DISPLAYS Go to link www.LGsolutions.com and select model RJP-401B

> 1-YEAR LIMITED WARRANTY (parts/labor)

Connection diagram from RJP-401B to TV



Mixed Signal connection cable to TV display panel







POP (Picture outside of Picture) can be used with TVs that have this feature

TOP VIEW FRONT VIEW 8.35" **BACK VIEW SIDE VIEW** 3.39"-

LGsolutions.com

Life's Good

LG Electronics U.S.A., Inc. Commercial Displays 2000 Millbrook Drive Lincolnshire, IL 60069

Customer Service: 888.865.3026 www.LGsolutions.com/support

Contact your LG Regional Sales Representative Hospitality (Guest Room Solutions): 800.228.1236 Channel (Reseller): 800.897.8871 Vertical Markets/SMB (Digital Signage Solutions): 800.897.8788 E-mail: info@LGsolutions.com

SPEC_RJP401B_061126_PR

GUEST ROOM FEATURES

The auto sensing remote jack pack (RJP) will conveniently install right in the room where the guests stay. This jack pack will allow guests to connect audio, video, and computer devices to hear and view on the in-room TV display panel. The RJP can be set up to interface with the TV display panel to show the image and/or sound from a portable DVD/CD Player, Camcorder, MP3 Player, Notebook computer, or portable Video Game Player. If the guest does not connect any devices, then the in-room TV display panel will remain on the source selected. When the guest connects a device, the interface switches the TV display panel to show the new source.

The RJP is designed to be able to process audio from one source, and video separately from a different source, if required. (The guest can work on a laptop computer while listening to music from an MP3 player). POP (Picture outside of Picture) feature can be utilized (on TVs that come equipped with this feature) by simply selecting channel up or down once the video source is connected. The picture from the connected device will show up in the larger picture on the left side of the screen, and the TV channel will show up in the smaller picture on the right side of the screen.

REMOTE JACK PACK

REMOTE JACK PACK	
Unit Dimensions (W×H×D)	8.35" x 2.17" x 3.39"
Recommended hole cutout	7.87" (7 14/16") W x 1.61" (1 10/16") H
Unit Weight	0.8 lbs.
Color	Black
Type of Installation	Vertical Wall Mount
Carton Dimensions (W×H×D)	15.75" x 11.0" x 5.2"
Shipping Weight	3.1 lbs.
END-USER DEVICE INPUTS (RJP)	front)
Video In	Composite Video Jack 1 Vpp, 75 ohms
Audio In L/R	Left - Right Audio Jacks
	(Nom In: 250mV RMS @ 22K ohms)
	Overload In: 1.6V RMS Max
Audio In	3.5 mm Stereo Audio Jack
Digital Video In (HDMI)	Digital Video Connector
PC Video In	15-pin RGB PC Monitor Connector
USB In	None (Only optional iPod Dock's USB thru path with
	24V Charger In)
INSTALLER CONNECTIONS (RJP	
Mixed Signal Out	MixedSignalConnector (only connect
	to mixed signal breakout cable)
Audio Out	3.5 Stereo Audio Jack for future use
INSTALLER CONNECTIONS (TV	Display Panel)
Mixed Signal Breakout/Cable Asse	embly (see illustration on front):
HDMI	1
Audio L-R	1 set
Control Cable (8-pin RJ-45)	1
REGULATORY	
FCC	Class B, Digital Video Device
CE, C-Tick	Yes
ENVIRONMENTAL PARAMETER	!S
Operating Temperature	32° to 104° Fahrenheit (0° to 40° Celsius)
Storage Temperature	-4° to 185° Fahrenheit (-20° to 85° Celsius)
Cooling	Free Air Convection
Humidity	10% to 90% Non-condensing
SUPPLIED ACCESSORIES LIST	
Mixed Signal Cable Assembly	1 (approx. 13.5 ft)
Installation & Setup Guide	1
Wall Hole Cutout Template	1
Security (pin-in) Torx (T-20) head screws	2 (installed)
Retainer Clips. L-Shaped	2 (installed)
WARRANTY	1 · · · · · · · · · · · · · · · · · · ·
Limited Warranty (Parts/Labor)	1 Year
UPC Code	7 19192 90364 7
01 0 0000	7 17172 700047

HDMI

All screen images are simulated. Dimensions and weights are approximate. Design, features and specifications subject to change without notice.

© Copyright 2011 LG Electronics USA, Inc. All Rights Reserved. "LG Life's Good" is a registered trademark of LG Corp.

HDMI, the HDMI Logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC. All other product and brand names are trademarks or registered trademarks of their respective companies.

