

M38D-B

▶ 20M38D-B

20" class (19.5" diagonal)

▶ 19M38D-B

19" class (18.5" diagonal)



FEATURES

4 SCREEN SPLIT

- Efficiently run several programs and have multiple active windows on the screen at the same time.

ON SCREEN CONTROL

- OnScreen Control allows you to modify your screen configuration by a few clicks without forcing physical buttons built in monitor.

FLICKER SAFE

- LG's Flicker-Safe technology protects users' eyes from fatigue by reducing flickering to almost zero.

SPECIFICATIONS

Native Display Resolution

20" 1600 x 900

19" 1366 x 768

Contrast Ratio 600: 1

5MS (G to G) Response Time

Color Weakness Mode, Flicker-Safe, My Display Presets, PIP, On Screen Control, Screen Split, Reader Mode


Vesa™ Compliant Wall Mountable

3-Year Limited Warranty Parts/Labor/Backlight



PROTECT YOUR EYES AND VIEW IN COMFORT

Did you know that your eyes are affected by flickers on the monitor while you may not have seen them? Over time, working, gaming and movie viewing can cause eye strain and fatigue. But, Flicker Safe and Reader Mode help maximize visual comfort by protecting your eyes from harmful blue light and reducing the flicker level to almost zero.

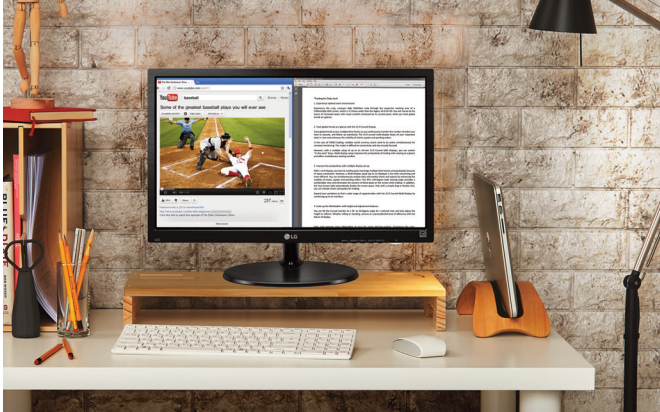

PRESET CUSTOMIZED OPTIONS WITH JUST A CLICK

OnScreen Control allows you to modify your screen configuration by a few clicks without forcing physical buttons built in monitor. My Display Presets offers customized picture mode for specific software. It has automatically applied to picture mode you already preset. You don't need to select the picture mode each time.




CUSTOMIZE YOUR WORKSPACE FOR MULTITASKING

Screen Split divides the display into multiple sections for different tasks by resizing the windows on the screen. Its advanced options have expanded to include 4 types of Picture-in-Picture(PIP) Mode among 14 options. With PIP Mode you can work on the main screen while watching a video in a smaller window floating on the screen.



OFFERS IMPROVED COLOR VISION TO COLOR WEAKNESS

Color revision algorithms are used to help those with color weakness who have difficulty distinguishing certain ranges of colors.

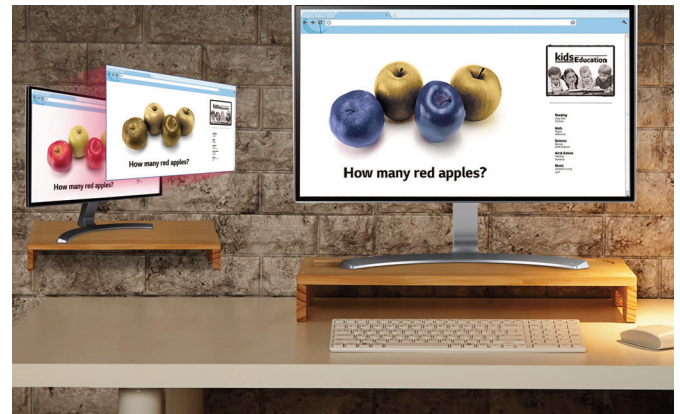

M38D-B


▶ 20M38D-B

20" class (19.5" diagonal)


▶ 19M38D-B

19" class (18.5" diagonal)


20M38D-B

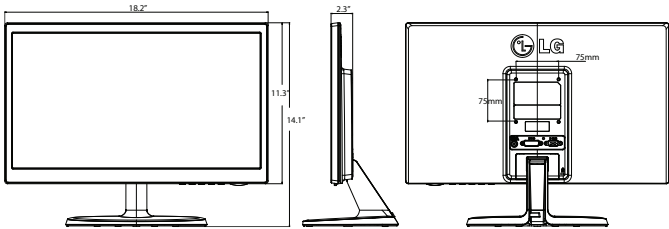

19M38D-B

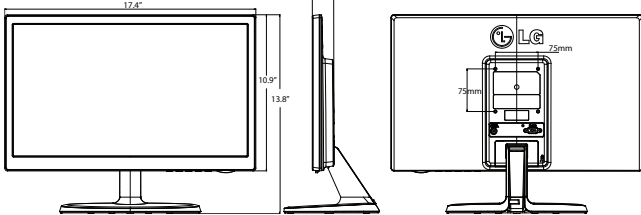

Jack Panel



FEATURE	Model	20M38D-B	19M38D-B
	Size	20" class (19.5" diagonal)	19" class (18.5" diagonal)
	Panel Type	TN	
	Color Gamut (CIE1976)	72%	
	Color Depth (Number of Colors)	16.7M colors	
	Pixel pitch (mm)	0.271X0.262	0.3X0.3
	Aspect Ratio	16:9	
	Resolution	1600 x 900	1366 x 768
	Brightness (Typ.)	200cd/m2	
	Contrast Ratio (Original)	600:1	
	(DFC)	Mega	
	Response Time, Typ.(on/off)	5ms	
	Viewing Angle(CR≥10)	90/65	
	Surface Treatment	Anti glare ,3H	
JACK INPUT / OUTPUT	D-Sub	Yes	
	DVI-D	Yes	
	[Jack Location]	Back	
POWER	Type	Adapter	
	Input	100 ~ 240Vac, 50/60Hz	
	Normal On (EPA)	16W	13W
	Normal On (typ.)	20W	18W
	Sleep Mode (Max)	0.3W	
	DC Off (Max)	0.3W	
FREQUENCY	H-Frequency (D-Sub)	30 ~ 83kHz	30 ~ 61kHz
	V-Frequency (D-Sub)	56 ~ 75Hz	56 ~ 75Hz
	H-Frequency (DVI-D)	30 ~ 83kHz	30 ~ 61kHz
	V-Frequency (DVI-D)	56 ~ 75Hz	56 ~ 75Hz

VCONTROL KEY	Model	20M38D-B	19M38D-B
	Key Number (Power Key Included)	6	
	Key Type	Tact Type	
	LED Color (On mode)	White	
	LED Color (Power save mode)	White Blinking	
	[Key Location]	Bottom	
OSD	Languages	English, Germanic, French, Spanish, Italian, Swedish, Finnish, Portuguese, Polish, Russian, Greek, Chinese, Japanese, Korean, Ukrainian, Portuguese(brazil), Hindi	
SPECIAL FEATURE	Picture Mode	Yes	
	Reader Mode	Yes	
	Original Ratio	Yes	
	DDC/CI	Yes	
	HDCP	Yes	
	Intelligent Auto (Auto Adjustment)	Yes	
	Key Lock	Yes	
	Plug & Play	Yes	
	Color Weakness	Yes	
	Flicker safe	Yes	
COLOR	4 screen split	Yes	
	On Screen Control	Yes	
	Front	Black Hairline	
	B/Cover	Black Texture	
	Stand	Black high glossy	
STAND	Base	Black Hairline	
	Base Detachable	Yes	
	Tilt (Angle)	Yes / -5° ~ 20°	
CABINET	WxHxD (with Stand)	18.2" x 6.6" x 14.1"	17.4" x 6.6" x 13.8"
	WxHxD (without Stand)	18.2" x 2.3" x 11.3"	17.4" x 2.3" x 10.9"
	Box	21.3" x 14.2" x 4.6"	20.0" x 13.5 x 4.6"
	VESA™ Standard Mount	75mm x75mm	75mm x75mm
	Weight (with Stand)	4.9 lbs	4.6 lbs
	Weight (without Stand)	4.4 lbs	4.2 lbs
	Box	6.6 lbs	6.2 lbs
STANDARD	UL (cUL)	Yes	
	TUV-TYPE	Yes	
	FCC-B, CE	Yes	
	Windows	Yes (win10)	
	ACCESSORIES		
OTHER	Power Cord	Yes	
	D-Sub	Yes	
	UPC	7 19192 20017 3	7 19192 20016 6
	Warranty	3-Year Limited Warranty (Parts/Labor/Backlight)	





www.LG.com/us/commercial

LG Electronics U.S.A., Inc.
HE B2B Division
2000 Millbrook Drive
Lincolnshire, IL 60069

Customer Service: 888.865.3026
www.LG.com/us/commercial/display-support

Contact your LG Regional Sales Representative:
Channel: 800.897.8871
Hospitality: 800.228.1236
E-mail: info@LGsolutions.com

SPEC_M38D-B_061620_PR

All screen images are simulated. Dimensions and weights are approximate. Design, specifications, and features subject to change without notice.

© Copyright 2016 LG Electronics USA, Inc. All Rights Reserved. "LG Life's Good" is a registered trademark of LG Corp.

ENERGY STAR is a registered trademark of the U.S. Environmental Protection Agency. In Plane Switching is a trademark of LG Philips LCD Ltd. VESA is a trademark of Video Electronics Standards Association. HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC.

All other product and brand names are trademarks or registered trademarks of their respective companies.

Printed in the USA. June 2016