


Innovation for a Better Life



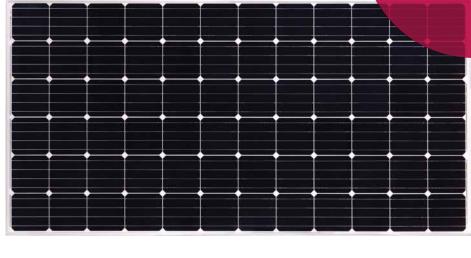

LG355S2W-A5

72 cell

LG MonoX[®] Plus is LG Electronics' high-guality monocrystalline module. The quality is the result of our strong commitment to developing a module to improve benefits for customers. Features of MonoX® Plus include durability, convenient installation, and aesthetic exterior.





Enhanced Performance Warranty

LG Mono X® Plus has an enhanced performance warranty. The initial degradation of cells has -2%, and the annual rate of degradation has fallen -0.55%/yr.



As well as the enhanced performance warranty,

LG Mono X[®] Plus is covered by product warranty

Improved Product Warranty

for 12 years.



Reduced LID

LG Mono X® Plus has reduced the initial degradation of solar cells by applying LG's new LiLY (LID-improvement for Lifetime Yield) Technology, which controls the reaction of Boron and Oxygen, the main cause of LID (Light Induced Degradation).

Light and Convenient

LG Mono X® Plus has been carefully designed, it weighs just 21.3kg(46.9 lb) and has better grips that allow for quick installation.

About LG Electronics

LG Electronics is a global player who has been committed to expanding its capacity, based on solar energy business as its future growth engine. We embarked on a solar energy source research program in 1985, supported by LG Group's rich experience in semi-conductor, LCD, chemistry, and materials industry. We successfully released first Mono X® series to the market in 2010, which were exported to 32 countries in the following 2 years, thereafter. In 2013, NeON[™] (previously known as Mono X[®] NeON) & 2015 NeON2 with CELLO technology won "Intersolar Award", which proved LG is the leader of innovation in the industry.





Mechanical Properties

Cells	6 x 12
Cell Vendor	LG
Cell Type	Monocrystalline / P-type
Cell Dimensions	161.7 x 161.7 mm / 6 inches
# of Busbar	4
Dimensions (L x W x H)	2024 x 1024 x 40 mm
	79.69 x 40.31 x 1.57 inch
Front Load	5400Pa
Rear Load	4300Pa
Weight	21.7 kg
Connector Type	MC4
Junction Box	IP68 with 3 Bypass Diodes
Cables	1200 mm x 2 ea / 47.24 in x 2 ea
Glass	High Transmission Tempered Glass
Frame	Anodized Aluminium

Certifications and Warranty


Certifications	IEC 61215, IEC 61730-1/-2
	UL 1703
	IEC 61701 (Salt mist corrosion test)
	IEC 62716 (Ammonia corrosion test)
	ISO 9001
Module Fire Performance (USA)	Туре 1
Fire Rating (CANADA)	Class C (ULC / ORD C1703)
Product Warranty	12 years
Output Warranty of Pmax	Linear warranty**

** 1) 1st year : 98%, 2) After 1st year : 0.55% annual degradation, 3) 25 years : 84.8%

Temperature Characteristics

NOCT	45 ± 3 ℃	
Ртрр	-0.41%/°C	
Voc	-0.30%/°C	
lsc	0.03 %/°C	

Characteristic Curves

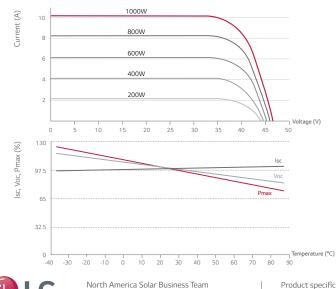

Electrical Properties (STC *)

Module	355W	
Maximum Power (Pmax)	355	
MPP Voltage (Vmpp)	37.4	
MPP Current (Impp)	9.50	
Open Circuit Voltage (Voc)	46.4	
Short Circuit Current (Isc)	10.07	
Module Efficiency	17.1	
Operating Temperature	-40 ~ +90	
Maximum System Voltage	1500 (UL)	
Maximum Series Fuse Rating	20	
Power Tolerance (%)	0 ~ +3	

* STC (Standard Test Condition): Irradiance 1000 W/m², Ambient Temperature 25 °C, AM 1.5

* The nameplate power output is measured and determined by LG Electronics at its sole and absolute discretion.
* The typical change in module efficiency at 200 W/m² in relation to 1000 W/m² is -2.0%.


Electrical Properties (NOCT*)

Module	355W
Maximum Power (Pmax)	260
MPP Voltage (Vmpp)	34.3
MPP Current (Impp)	7.58
Open Circuit Voltage (Voc)	43.0
Short Circuit Current (Isc)	8.10

* NOCT (Nominal Operating Cell Temperature): Irradiance 800W/m², ambient temperature 20 °C, wind speed 1m/s

Dimensions (mm/in)



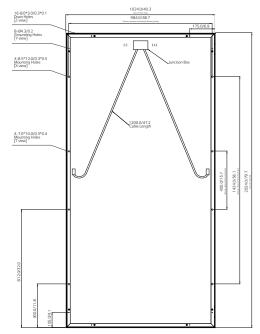

* The distance between the center of the mounting/grounding holes.

G Life's Good

LG Electronics U.S.A. Inc 1000 Sylvan Ave, Englewood Cliffs, NJ 07632

Contact: lg.solar@lge.com

www.lgsolarusa.com

Product specifications are subject to change without notice.

Copyright © 2017 LG Electronics. All rights reserved. 01/01/2017 $\,$

Innovation for a Better Life

