



LG THERMA V PRODUCT CATALOGUE

2020 - 2021




Distributed by





www.lg.com http://partner.lge.com

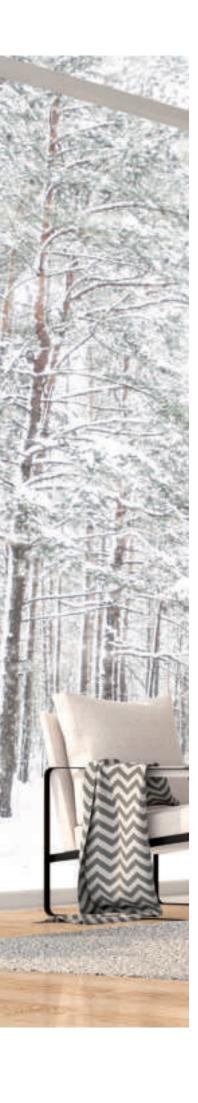

INDEX THERMA V_{III}

INTRODUCTION

LG BUSINESS PARTNERSHIP &	004
PRE-SALES/ENGINEERING TOOLS	
HEAT PUMP TECHNOLOGY	010
THERMA V INTRODUCTION	012
WHAT IS LG THERMA V	014
LG AIR TO WATER HEAT PUMP SOLUTION OVERVIE	W 016
THERMA V LINE-UP OVERVIEW	018
THERMA V LINE-UP INTRODUCTION	020

FEATURES

FEATURE OVERVIEW	026
EXCELLENT PERFORMANCE & EFFICIENCY	028
USER CONVENIENCE	034
EASY INSTALLATION & MAINTENANCE	042

PRODUCTS

MONOBLOC

R32 MONOBLOC	046
R32 SILENT MONOBLOC	064

HYDROSPLIT

R32 HYDROSPLIT 076

SPLIT

R32 SPLIT	090
R32 IWT	100
R410A SPLIT	112
R410A IWT	124
HIGH TEMPERATURE	136

ACCESSORIES

ACCESSORIES	150
LG WI-FI MODEM	154
DOMESTIC HOT WATER TANK	155
COMBINED TEST WITH DHW TANK	156




LG BUSINESS PARTNERSHIP & PRE-SALES/ENGINEERING TOOLS

European Business Infrastructure

LG Electronic's European Air Solution department is committed to ensuring your business success. With 16 pan-European sales offices and academies, we want deliver on our promise of support, efficiency and proactivity throughout each stage of our business partnership.

Our highly competitive products are delivered through our dedicated European distribution centre to ensure a steady and reliable supply of inventory.

At our European Energy Lab, LG Business Solutions is developing heat pump technology that is optimized for the varied European climates and weather patterns along with continuous product performance verification.

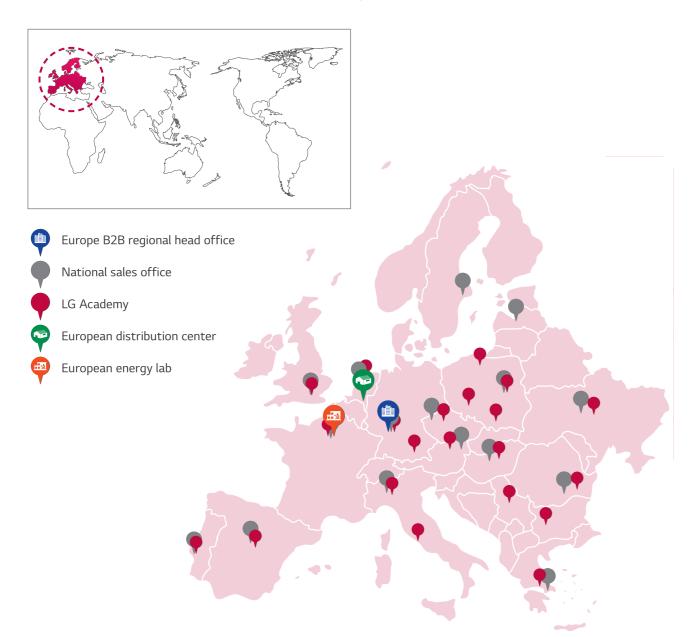

Pre-sales/Engineering Tools

THERMA V

INTRODUCTION

HEAT PUMP

TECHNOLOGY

LG BUSINESS
PARTNERSHIP &

PRE-SALES/

TOOLS

ENGINEERING

LG provides a variety of software to support THERMA V for all customers including designers, installers, and end users.

WHAT IS

THERMA V

LG AIR TO

HEAT PUMP

SOLUTION

OVERVIEW

WATER

1, LG THERMA V SELECTOR

The LG THERMA V Selector is a mobile application for designers, installers and end users, which provide various real-life simulations. An energy simulation can quickly indicate energy consumption and cost as well as CO₂ emission values that can be vastly reduced from conventional heating systems using minimal input values. With both model selection and energy simulation tools, quick and accurate selection is made possible with detailed input values such as desired system configuration, required heating and domestic hot water (DHW) load, which will calculate payback, result in a faster energy simulation and generate cost comparisons. Sound level can also be calculated through simulations based on the installation environment.

THERMA V

OVERVIEW

LINE-UP

THERMA V

INTRODUCTION


LINE-UP

2. LATS THERMA V

LATS THERMA V IS a PC-based model selection programme of LG THERMA V products, enabling an accurate and quick selection of the most suitable model in each end-user environment. In addition to model selection, faster energy simulation and cost comparison to other system is possible. Furthermore, customer is easily able to simulate payback comparing conventional system such as gas boiler, electric boiler by using LATS THERMA V.

3. LGMV

LGMV is a useful engineering tool that monitors THERMA V's real-time refrigerant and water cycle. It assists installers with effective and efficient start-up and commissioning after the THERMA V installation. LGMV enables service/field engineers to detect the errors and troubleshooting for fast and reliable problem solving.



^{*} LG THERMA V selector is available on the Google Play store, and a version for iOS is available within 2020 on the Appstore.

^{*} LATS THERMA V is available on the LG Partner portal.

^{*} LGMV is available on the LG Partner portal.

007

THERMA V.

THERMA V SELECTOR



How to install?

Search "LG Energy Payback" in Google Play Store.

Android

URL: https://play.google.com/store/apps/details?id=com.lg.smartinverterpayback

* iOS version will be available within 2020 on the Apple App Store.






LG BUSINESS PARTNERSHIP & PRE-SALES/ **ENGINEERING TOOLS**

HEAT PUMP TECHNOLOGY THERMA V WHAT IS INTRODUCTION THERMA V LG AIR TO WATER **HEAT PUMP** SOLUTION OVERVIEW

THERMA V LINE-UP OVERVIEW

THERMA V LINE-UP INTRODUCTION

Simulation Mode

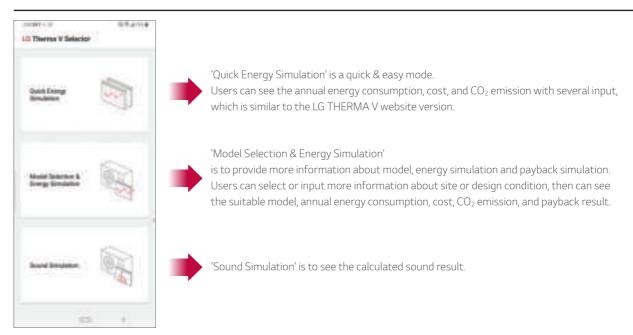

Model Selection & Energy Simulation

Before choosing an air to water heat pump, many customers wonder how much energy costs can be saved compared to conventional heating systems, and how to select a product with the right capacity for the home. The LG THERMA V selector allows you to calculate annual energy costs and payback periods as well as model selection through sophisticated simulations through simple input values.

- City selection
- Building area input

+ Clustry Austria

It has been been been reader

0 ---

0 ----

0 ----· Tracking I Household I Street

S. hapin't for head

10

0 ====


- Operation mode selection
- Load input
- Model type selection
 - + Country Austria

0

0

- Operation period selection

- Design condition input
- System selection to be compared
- Costs input for systems
- Searching model that meets



- 10 0

THERMA VI

THERMA V SELECTOR

Result & Report

After the simulation, analysis results including initial investment cost, annual energy consumption, and payback period can be checked in the form of various graphs. Moreover, this report is provided in PDF format and can be shared by e-mail and messenger.

- 15-year LCC analysis

- 15-year LCC analysis graph

- Payback year

Result

- Simulation conditions summary
- Initial cost
- Annual energy consumption
- Section (Sept. Assets) Man. eri (tr. innielis) in in



- Annual cost
- Annual CO₂ emission
- 10-year LCC analysis




Report

- Cover page

- Site information & design condition
- Product specification
- The
- Annual energy consumption - Life cycle cost

12012111111111

- Drawings



LG BUSINESS PARTNERSHIP & PRE-SALES/ **ENGINEERING TOOLS**

HEAT PUMP TECHNOLOGY THERMA V INTRODUCTION

LG AIR TO WATER THERMA V **HEAT PUMP** SOLUTION

OVERVIEW

THERMA V LINE-UP OVERVIEW

THERMA V LINE-UP INTRODUCTION

Sound Simulation

Consumers are also wondering how much sound level will be after installing the Air to Water Heat Pump product. Using the sound simulation function of THERMA V selector, you can predict the expected sound pressure values in the daytime and nighttime according to the installation distance and conditions.

WHAT IS

- Model selection
- Distance input
- Solid angle selection
- Reference for solid angle selection







^{*} The image above is a simulation example in case of R32 Silent Monobloc in low noise mode.

HEAT PUMP TECHNOLOGY


LG Electronics leads the way in heat pump technology

As a leading HVAC supplier, LG's heating product portfolio comprises a wide range of highly energy efficient renewable energy systems, providing the right heating solution for any requirement and building.

What is a Heat Pump System?

Modern Technology to Replace Conventional Boilers


Historically, conventional heating systems have used either oil or gas or have been direct electric heaters. In such conventional heating systems, environmental aspects such as fossil fuel use and environmental pollution have been overlooked. In recent years, interest in these environmentally friendly devices has been increasing and in order to meet these market demands, LG has further developed their heat pump technology to produce the most efficient, environmentally friendly products in the industry.

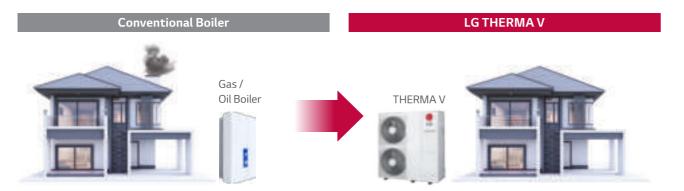

Modern Technology for Renewable Energy

The term "heat pump" refers to a technique that pumps heat from renewable energy sources, like the air, ground and water. A heat pump device transforms this energy into a usable heat source via the refrigerant cycle.

With heat pump technology like THERMA V, 80% of the energy required to produce heating and hot water in a home is generated from a natural air source.

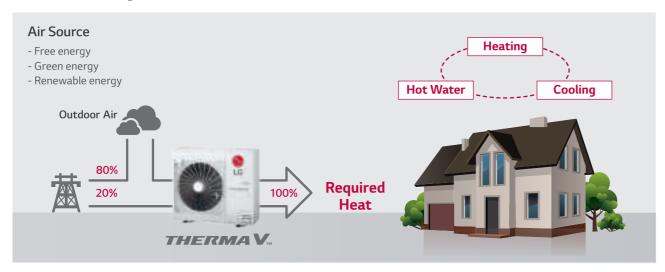

LG BUSINESS PARTNERSHIP & PRE-SALES/ ENGINEERING TOOLS

HEAT PUMP TECHNOLOGY

THERMA V INTRODUCTION

WHAT IS


THERMA V

LG AIR TO WATER HEAT PUMP SOLUTION OVERVIEW

THERMA V LINE UP OVERVIEW

THERMA V LINE UP INTRODUCTION

How do Air to Water Heat Pumps Work?

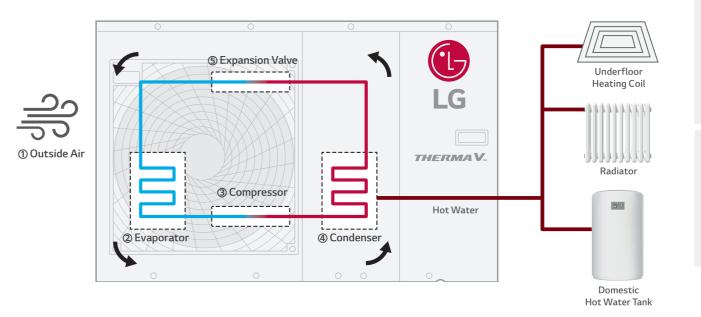

① Outside Air

Heat is extracted from the outside air.

② Evaporator

As low temperature liquid refrigerant absorbs heat energy from the air, it transforms from liquid to vapor phase.

③ Compressor

The vaporized refrigerant flows into the compressor. The electric energy used to operate the compressor is converted into heat and added to the refrigerant.

4 Condenser

High temperature refrigerant gas flows into the heat exchanger and conveys heat energy to water by the heat exchanged between refrigerant and water.

⑤ Expansion Valve

High-pressure liquid refrigerant flows through the expansion valve to restore the refrigerant to its original condition.

THERMA VI

LG BUSINESS
PARTNERSHIP &
PRE-SALES/
ENGINEERING
TOOLS

HEAT PUMP TECHNOLOGY THERMA V INTRODUCTION WHAT IS THERMA V LG AIR TO WATER HEAT PUMP SOLUTION

OVERVIEW

THERMA V THERMA V
LINE-UP LINE-UP
OVERVIEW INTRODUCTION

The Green Choice:

THERMA VIM

Discover the ultimate eco-conscious, energy efficient and convenient heating solution

Today's informed consumer will consider multiple factors when choosing a heating solution, like an Air to Water Heat Pump (AWHP) to include user-friendliness, reliability and regulation-compliance. European consumers are the most subject to shifting regulations year after year.

As a solution to the modern requirements, R32 refrigerant takes centre stage for a new smart solution. With a 68% reduced Global Warming Potential (GWP) from the current refrigerant, R410A, R32-applied products are not only eco-conscious but also meet the consumers' needs for energy efficiency, performance and more. LG Electronics' THERMA V R32 AWHP line-up fulfills both European regulations as well as customer needs.



- Ultimate Energy Efficiency: A+++ in the ErP energy labelling regulation, wide operation range, reduced noise level
- Excellent Performance : R1 Compressor embedded, high heating capacity at low ambient temperature
- $\bullet \ \mathsf{User} \ \mathsf{Convenience} : \mathsf{LG} \ \mathsf{ThinQ} \ \mathsf{Wi-Fi} \ \mathsf{control}, \ \mathsf{convenient} \ \mathsf{scheduler}, \ \mathsf{wider} \ \mathsf{connectivity}, \ \mathsf{energy} \ \mathsf{monitoring}$

THERMA V.

WHAT IS LG THERMA V?

LG's Advanced Heating Technology

The LG THERMA V air to water heat pump system has been specially designed to provide a space and domestic hot water solution to both new build and renovated homes. Even more remarkable thing is LG's advanced heating technology, market leading technology that can minimize energy consumption than any solution in the market.



Space Heating

The wide span THERMA V systems with high efficiency can cover heating loads of various types of houses.


Domestic Hot Water

As the hot water efficiency becomes more and more important, THERMA V can provide an optimized solution for this.

Space Cooling

THERMA V is a single device that can also provide a cooling solution besides the heating and hot water provided by boilers.

High Efficiency and Low CO₂ Emission

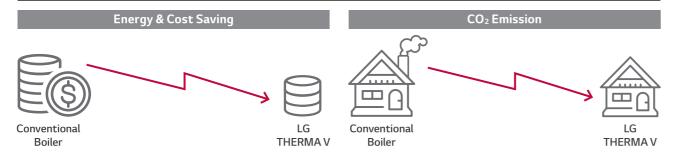

LG BUSINESS
PARTNERSHIP &
PRE-SALES/
ENGINEERING
TOOLS

HEAT PUMP TECHNOLOGY THERMA V INTRODUCTION WHAT IS THERMA V LG AIR TO THERMA V
WATER LINE-UP
HEAT PUMP OVERVIEW
SOLUTION

THERMA V LINE-UP INTRODUCTION

Benefits of LG THERMA V



For Homeowners

- Energy saving by utilizing renewable energy and high efficiency equipment

OVERVIEW

- Multiple solutions with space heating, cooling and DHW supply
- Economic support through domestic renewable heat incentive programme
- Save investment cost thanks to the compatibility with existing heating installations like radiator, boiler, etc.
- Save valuable machine room space with the small footprint



For Installers & Designers

- Time saving with features for quicker installation and commissioning
- Excellent heating performance even at low ambient temperature
- Less manpower for handling with the compact size and light weight
- Low repair cost and high reliability with durable equipment
- Same controller interface for all LG products, requiring less training



For End-users

- Energy saving by utilizing renewable energy and high efficiency equipment
- Multiple solutions with space heating, cooling and DHW supply
- Low repair cost and high reliability with durable equipment
- Various user convenient functions
- No disturbing to neighbors with low noise
- Convenient control by user-friendly remote controller
- Remote connectivity for control and monitoring via LG ThinQ

LG AIR TO WATER HEAT PUMP SOLUTION OVERVIEW

LG BUSINESS PARTNERSHIP & PRE-SALES/ ENGINEERING TOOLS

HEAT PUMP TECHNOLOGY THERMA V INTRODUCTION WHAT IS LG AIR TO THERMA V WATER HEAT PUMP SOLUTION

OVERVIEW

THERMA V LINE-UP OVERVIEW

THERMA V LINE-UP INTRODUCTION

		Monobloc Hydrosplit - Silent Hydro Box (Wall hung) Hydro Box (Wall hung)		Split IWT (Integrated Water T	iank)	Floor standing			
	-		Siterit	riyaro box (vvaii riarig)	Tiyaro Box (t	vali nung)	TWY (Integrated water)	anky	Floor standing
		A							
		R32 Monobloc	R32 Silent Monobloc	R32 Hydrosplit	R32 Split	R410A Split	R32 IWT	R410A IWT	High Temperature
		1Ø:5/7/9/12/14/16kW 3Ø:12/14/16kW	1Ø : 9kW	1Ø : 12/14/16kW 3Ø : 12/14/16kW	1Ø:5/7/9kW	1Ø:12/14/16kW 3Ø:12/14/16kW	1Ø:5/7/9kW	1Ø : 9/12/14/16kW 3Ø : 12/14/16kW	1Ø : 16 kW
Line-up		0	0	0	0	9	•	0 0	0
Application	n	Heating, Coolin	ng and DHW	Heating, Cooling and DHW	Heating, Coolir	ng and DHW	Heating, Cooling and DHW	Heating, Cooling and DHW	Heating and DHW
Energy La	bel	Space Heating 1) A* 5/7/9 kW	35°C Space A···	35°C Space A····	Space Heating 35°C Space Heating Combination	35°C ————————————————————————————————————	Space Heating	Space Heating	35°C Space A*
		DHW 12/14/16 kW Heating 2) A* 5/7/9 kW		Heating	with OSHW- 200F (profile L) Heating A* 16 kW		Profile L DHW Heating	Profile XL DHW Heating	Heating
Operation	Outdoor Air	-25 ~ 35°C	-25 ~ 35°C	-25 ~ 35°C	-25 ~ 35°C	-20 ~ 35°C	-25 ~ 35°C	-20 ~ 35°C	-25 ~ 35°C
Range (heating)	Leaving Water	15 ~ 65°C	15 ~ 65°C	15 ~ 65°C	15 ~ 65°C	15 ~ 57°C	15 ~ 65°C	25 ~ 58°C	25 ~ 80°C
Customer Needs	Designer & Installer	Don't want refrigerant Using existing facilities conventional boiler Saving installation and commissioning time No indoor unit		- Don't want refrigerant piping work - Using existing facilities for conventional boiler - Saving installation and commissioning time - Easy to carry - Minimized wiring works - Eliminating the potential freezing risk at exposed water piping		s ial freezing risk	- Saving installation and commissioning time - Where mechanical room is very limited - Easy to carry - Saving installation space for buffer tank and expansion tank	- Saving installation time - Where mechanical room is very limited	- Solution for poorly insulated or old house - High DHW temperature to meet sanitary water regulation - Using existing facilities (old radiators)
	End-User	- Low operation cost - Reliable operation and l - Easy and intuitive contr		Control integration between boiler a Remote control by smartphone Quiet operation	and THERMA V		- Low operation cost - Reliable operation and long lifetime	- Remote control by smartphone - Quiet operation	
		- Don't want to install re	frigerant piping indoors	;	- Eliminating the potenti	3	- Easy and intuitive controls	- Necessity to install indoor unit in living space due to Insufficient machine room space	- Easy and intuitive controls
		High energy efficiencyHigh corrosion resistancNew interface (standard)	e heat exchanger - E	LG ThinQ Wi-Fi control solution Easy commissioning by PC tool (LG heat Low noise mode operation with schedu		ith 3 rd party boiler	- High energy efficiency - High corrosion resistance heat exchanger	- Low noise mode operation with schedule s	setting
LG Approach		- All in one concept (no refrigerant piping work) - THERMA V Silent Monobloc		- No refrigerant piping work	- Placing hydronic components and water piping in the mechanical room		- All in one concept (integrated DHW tank with indoor unit) - Light weight and small size units - New interface (standard III remote controller) - Sophisticated and harmonious exterior of indoor unit - Provides an option to integrate buffer tank and DHW expansion tank into indoor units - Easy commissioning by PC tool (LG heating configurator) - LG ThinQ Wi-Fi control solution	- All in one concept (integrated DHW tank with indoor unit) - Sophisticated and harmonious exterior of indoor unit	- Max. 80°C LWT by Cascade 2 stage compression (R410A - R134a) - Suitable for old radiator - New interface (standard III remote controller) - LG ThinQ Wi-Fi control solution
		- Multiple solution (heating		ly) - Hybrid operation with existing fac - Economic support by incentive pro		utilizing renewable efficient equipment	- Energy saving by utilizing renewable energy and high efficient equipment	- Free of freezing risk against exposed wate - Economic support by incentive program	er piping even long black out
Benefit		- Simple replacement of existing boiler while maintaining the existing heating system - Saving mechanical room space - Reduce the potential risk of flammable refrigerant		energy and high efficient equipment - Free of freezing risk against exposed water piping even long black out		- Multiple solution (heating, cooling and DHW supply) - Use of valuable machine room space for private purpose - Quick & easy installation and commissioning	Multiple solution (heating, cooling and DHW supply) Use of valuable machine room space for private purpose Quick & easy installation and commissioning	- Multiple solution (heating and DHW supply) - Obtaining 80°C high temperature water without supplementary heater - Simple replacement of existing boiler	

¹⁾ Combination with OSHW-200F (profile L) 2) Combination with OSHW-300F (profile XL)

THERMAV... LINE-UP OVERVIEW

Туре		Refrigerant Line-up (Capacity (kW)	pacity (kW) 5.5			7.0		
			R32	1Ø 230V	HM051M U43	0	HM071M U43	0		
Monobloc	-	R32	Monobloc	3Ø 400V						
	Silent		R32 Silent Monobloc	1Ø 230V						
Hydrosplit	Hydro	R32	R32 Split	1Ø 230V						
	Вох		,	3Ø 400V						
	Hydro		D22 C-1:4	10.2201	HN0916M NK4		HN0916M NK4			
	Вох	- R32	R32 Split	1Ø 230V	HU051MR U44	0	HU071MR U44	0		
	IWT		R32 IWT	1Ø 230V -	HN0916T NB1		HN0916T NB1	*		
					HU051MR U44	0	HU071MR U44	0		
	Hydro		R410A Split	1Ø 230V						
Split	Вох	R410A		3Ø 400V						
	IWT	KHOK	R410A IWT	1Ø 230V						
	1001	1001		3Ø 400V						
	Floor Standing	R410A + R134a	High Temperature	1Ø 230V						

^{*} Production of this product could be discontinued without prior notice considering manufacturer's circumstances.

•	•	•	•	•	•	•
LG BUSINESS	HEAT PUMP	THERMA V	WHAT IS	LG AIR TO	THERMA V	THERMA V
PARTNERSHIP &	TECHNOLOGY	INTRODUCTION	THERMA V	WATER	LINE-UP	LINE-UP
PRE-SALES/ ENGINEERING				HEAT PUMP SOLUTION	OVERVIEW	INTRODUCTIO
TOOLS				OVERVIEW		

9.0		12.0		14.0		16.0	
HM091M U43	0	HM121M U33	0	HM141M U33	00	HM161M U33	0
		HM123M U33	0	HM143M U33	00	HM163M U33	0
HM091MRS U33	0						
		HN1600MB NK0		HN1600MB NK0	10	HN1600MB NK0	
		HU121MRB U30	00	HU141MRB U30	0	HU161MRB U30	0
		HN1600MB NK0		HN1600MB NK0	Ñ	HN1600MB NK0	
		HU123MRB U30	0	HU143MRB U30	0	HU163MRB U30	0
HN0916M NK4							
HU091MR U44	0						
HN0916T NB1	10						
HU091MR U44	0						
		HN1616 NK3		HN1616 NK3	F)	HN1616 NK3	
		HU121 U33	00	HU141 U33	0	HU161 U33	00
		HN1639 NK3	Ñ,	HN1639 NK3	fi.	HN1639 NK3	
		HU123 U33	00	HU143 U33	00	HU163 U33	00
HN1616T NB0		HN1616T NB0	•	HN1616T NB0	*	HN1616T NB0	•
HU091 U43	0	HU121 U33	00	HU141 U33	00	HU161 U33	00
		HN1616T NB0		HN1616T NB0	•	HN1616T NB0	•
		HU123 U33	00	HU143 U33	0	HU163 U33	00
						HN1610H NK3	•
						HU161HA U33	00

THERMA V.

LINE-UP INTRODUCTION



THERMA V R32 Monobloc

The LG THERMA V R32 Monobloc is a fully packaged unit, where the indoor and outdoor units are combined as one module.

The outdoor Monobloc unit is connected to only water piping, therefore there is no need for refrigerant piping.

Hydronic components such as the plate heat exchanger, expansion tank and water pump are situated inside the outdoor unit.

The Monobloc is designed for energy efficiency, convenience, and easy-to-use controls. Operating with low Global Warming Potential (GWP) R32 refrigerant and LG's exclusive R1 compressor, power meets sustainable heating. The system has an optional Wi-Fi modem and with LG's smartphone app, LG ThinQ, users can monitor and remotely control compatible LG products.

Line-up	Capacity (kW)	5.5	7.0	9.0	12.0	14.0	16.0
R32	1Ø 230V	HM051M U43	HM071M U43	HM091M U43	HM121M U33	HM141M U33	HM161M U33
Monobloc	3Ø 400V	-	-	-	HM123M U33	HM143M U33	HM163M U33



THERMA V R32 Silent Monobloc

The LG THERMA V R32 Silent Monobloc is designed for lower noise levels than conventional Monobloc series while retaining its previous advantages; All in one with eco-conscious R32 refrigerant and LG's powerful yet stable R1 compressor.

Thanks to its low noise level corresponding with DACH region noise regulations, THERMA V R32 Silent Monobloc offers maximized installation flexibility which allows installing within minimum safety space as 5m from neighboring houses. Moreover, the energy efficiency of THERMA V R32 Silent Monobloc is remarkably enhanced compared to conventional Monobloc as so it is recognized as an ultra-high efficient model.


Line-up	Capacity (kW)	9.0
R32 Silent Monobloc	1Ø 230V	HM091MRS U33

LG BUSINESS
PARTNERSHIP &
PRE-SALES/
ENGINEERING
TOOLS

HEAT PUMP TECHNOLOGY THERMA V INTRODUCTION WHAT IS THERMA V LG AIR TO T
WATER LI
HEAT PUMP O
SOLUTION
OVERVIEW

THERMA V
LINE-UP
OVERVIEW

THERMA V
LINE-UP
INTRODUCTION



THERMA V R32 IWT

THERMA V R32 IWT, or integrated water tank, is a domestic hot water supply, space heating and cooling solution that conveniently combines an indoor hot water tank with a separate outdoor unit. THERMA V R32 IWT is the perfect space-saving solution for residential applications because hydronic components like the Domestic Hot Water (DHW) and buffer tanks, which are typically installed separately, are fully integrated.

Line-up	Capacity (kW)	5.5	7.0	9.0			
R32 IWT	1Ø 230V	HN0916T NB1		HN0916T NB1	HN0916T NB1		
N.SZ IVV I	2300	HU051MR U44	HU071MR U44	HU091MR U44			



THERMA V R32 Split

The LG THERMA V R32 Split is a hydro box type system consisting of an indoor hydro box unit and an outdoor unit. The two units are connected by refrigerant piping only, thus hydronic components such as plate heat exchanger, expansion tank and water pump are located within the indoor unit. Due to the split nature, freezing will not compromise this unit regardless of outdoor ambient temperatures.

The Split has been designed specifically for new build and renovated houses. LG's highly efficient products can deliver effective space heating and hot water supply while operating with low Global Warming Potential (GWP) R32 refrigerant and LG's exclusive R1 compressor. The system has an optional Wi-Fi modem and with LG's smartphone app, LG ThinQ, users can monitor and remotely control compatible LG products.

Line-up	Capacity (kW)	5.5	7.0	9.0
R32 Split	10.2201	HN0916M NK4	HN0916M NK4	HN0916M NK4
K32 Split	1Ø 230V	HU051MR U44	HU071MR U44	HU091MR U44

THERMAV

LINE-UP INTRODUCTION



THERMA V R410A IWT

The LG THERMA V R410A IWT, or integrated water tank is an integrated unit that indoor unit is combined with a domestic hot water tank while outdoor unit is separately located outside.

THERMA V R410A IWT is more suitable for the house which has less indoor spaces because hydronic components such as DHW tank and buffer tank normally installed additionally are integrated as one unit.

LG's THERMA V R410A IWT is providing generous benefits supported by LG THERMA V's powerful and durable outdoor units.

* Production of this product could be discontinued without prior notice considering manufacturer's circumstances.

Line-up	Capacity (kW)	9.0	12.0	14.0	16.0
R410A IWT	1Ø 230V	HN1616T NB0	HN1616T NB0	HN1616T NB0	HN1616T NB0
		HU091 U43	HU121 U33	HU141 U33	HU161 U33
K4TOATWT	3Ø 400V	-	HN1616T NB0	HN1616T NB0	HN1616T NB0
		-	HU123 U33	HU143 U33	HU163 U33



THERMA V R410A Split

The LG THERMA V R410A Split is a hydro box type system consisting of an indoor hydro box unit and an outdoor unit. The two units are connected by refrigerant piping only, thus hydronic components such as the plate heat exchanger, expansion tank and water pump are located within the indoor unit. Due to the split nature, freezing will not compromise this unit regardless of outdoor ambient temperatures.

LG's THERMA V R410A Split is designed for the benefit of users and installers who want to apply a heating solution to a large capacity building or applications subject to colder climate conditions. It has a maximized energy efficiency of A++ in the mid-temperature ranges, which leads reduced operating costs.

Line-up	Capacity (kW)	12.0	14.0	16.0
	1Ø 230V	HN1616 NK3	HN1616 NK3	HN1616 NK3
D4104 C 13		HU121 U33	HU141 U33	HU161 U33
R410A Split	3Ø 400V	HN1639 NK3	HN1639 NK3	HN1639 NK3
		HU123 U33	HU143 U33	HU163 U33

LG BUSINESS
PARTNERSHIP &
PRE-SALES/
ENGINEERING
TOOLS

HEAT PUMP TECHNOLOGY THERMA V INTRODUCTION WHAT IS THERMA V LG AIR TO
WATER
HEAT PUMP
SOLUTION
OVERVIEW

THERMA V
LINE-UP
OVERVIEW

THERMA V
LINE-UP
INTRODUCTION



THERMA V R32 Hydrosplit

With innovation and safety in mind, the LG THERMA V R32 Hydrosplit separates the Indoor Unit (IDU) and Outdoor Unit (ODU), connecting them through water pipes. The unit's heat exchanger is located within the ODU, reducing the risk of indoor refrigerant leakage. Quick and easy installation is made possible by the IDU's built-in hydronic components such as water pump, expansion tank, and air vent as well as the fact that the electric wiring can be done in the same space as the IDU.

Line-up	Capacity (kW)	12.0	14.0	16.0	
	1Ø 230V	HN1600MB NK0	HN1600MB NK0	HN1600MB NK0	
R32	10 2300	HU121MRB U30	HU141MRB U30	HU161MRB U30	
Hydrosplit	3Ø 400V	HN1600MB NK0	HN1600MB NK0	HN1600MB NK0	
		HU123MRB U30	HU143MRB U30	HU163MRB U30	



THERMA V High Temperature

The LG THERMA V High Temperature unit is a split type that consists of a floor standing indoor unit and an outdoor unit. Thanks to cascade (2 stage) compression technology, it can supply high leaving water temperature up to 80°C with high energy efficiency.

This unit is suitable for houses which have poor insulation, older features or have to meet sanitary water regulations, which requires a higher water temperature.

Line-up	Capacity (kW)	16.0
High Temperature	10 2200	HN1610H NK3
	1Ø 230V	HU161HA U33



THERMA V.

FEATURE OVERVIEW

LG THERMA V's Unique Features

LG THERMA V has been designed for providing efficient space heating and domestic hot water heating with usage convenience to the customer. To achieve this ultimate goal, LG has been developed and applied core technologies and functions for heating to the LG THERMA V.

User Convenience


LG THERMA V is equipped with various user convenience functions, which allow for enhanced comfort and control. The text-based user-friendly interface on the remote control allows for optimized user intuition and the unit's wide connectivity also provide user control convenience.

Excellent Performance & Efficiency

LG THERMA V provides world-class energy efficiency by adopting LG's revolutionary technology such as the R1 compressor and the Black Fin heat exchanger. LG products have achieved a high heating performance even in extremely cold weather conditions and LG THERMA V can bring customers peace of mind through product reliability.

Easy Installation & Maintenance

tionary design flexibility to professional installers.
The LG Heating Configurator also allows products professionals to save time during commissioning. During maintenance, the clip type connection allows fast and easy disassembly of the components.

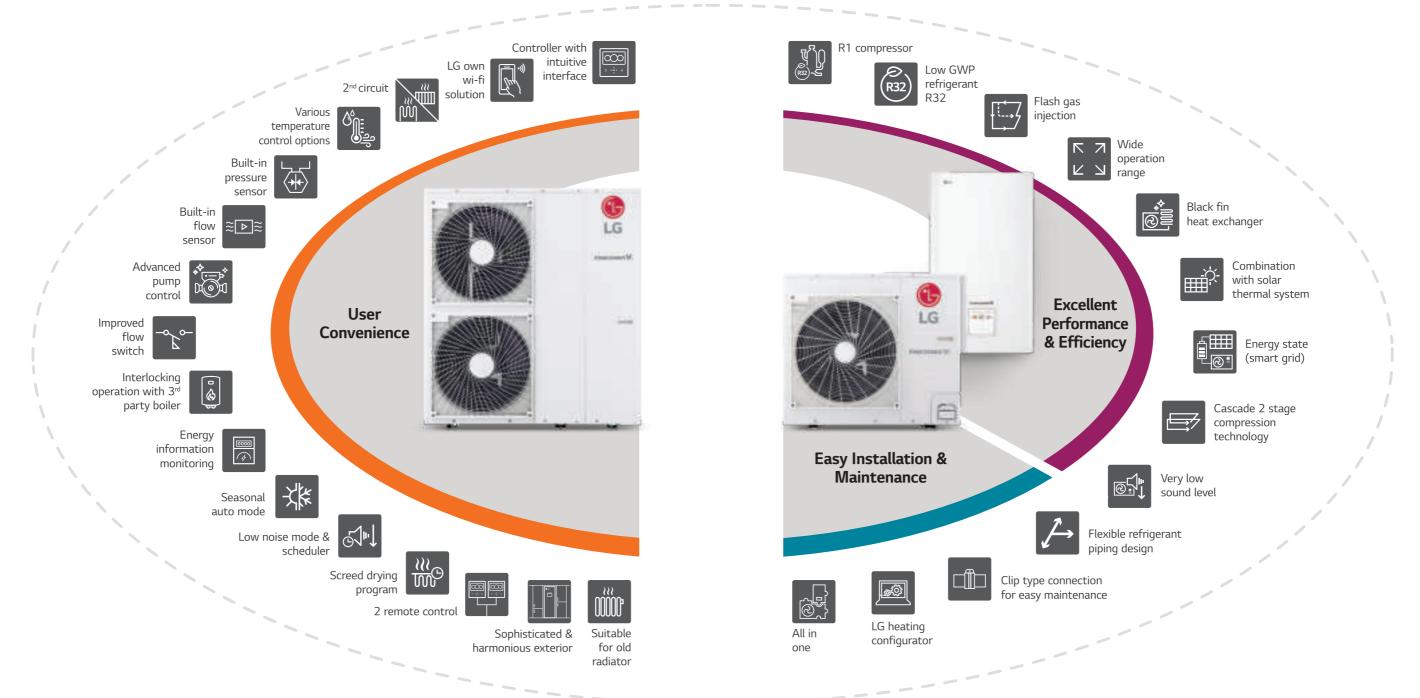

EXCELLENT PERFORMANCE & EFFICIENCY



* Applied model: R32 Series and High temp..



- Max. 4 dB(A) ↓

- Superior reliability

- Decreased weight (**20% ↓) - Bottom compression & simple structure


R1Compressor[™]

* LG Internal test result, based on single split 10kW cassette.

028

- ** LG Internal test result, based on conventional compressor. (rotary type GPT442M)
- *** Max. operation range of R1 compressor is 135Hz for AWHP products.


The LG R1 Compressor offers enhanced efficiency and reliability. The R1's advanced technological components and functionality, as compared to the conventional scroll compressor, improve its operational range and the scroll's tilting motion.

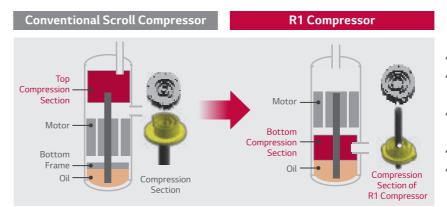


- Scroll compressor with simple structure
- High efficiency (low load at low speed/total efficiency)
- Low noise (high speed possible)
- Improved tilting motion of scroll
- 20% weight reduction (vs. conventional compressor)

Seasonal Energy Efficiency

SEER 20%, SCOP 13% improvement (vs. rotary)



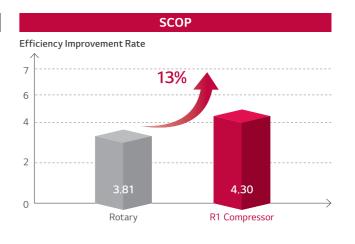


* LG Internal test result, based on single split 10kW CST.

Wide Operation Range

- Optimized for various cooling & Heat load operation
- World best compressor speed (up to 150Hz)
- Optimized for even low load operation (down to 10Hz)

(efficiency increases/improved comfort)

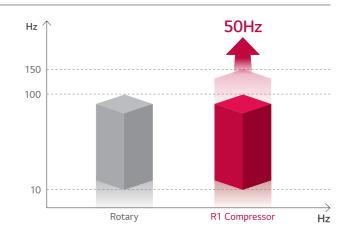

^{*} Applied models: R32 Monobloc, R32 Split, R32 IWT, R32 Hydrosplit, and High Temperature

EXCELLENT PERFORMANCE & EFFICIENCY



Low GWP Refrigerant R32

* Applied model: R32 Series

Background

Due to accelerated global warming and the destruction of the ozone layer, various international conventions and meetings are held to enhance restrictions to the use of refrigerant or enforce the us of eco-conscious refrigerant R32 is internationally acclaimed for being eco-friendly. This low volume refrigerant is as efficient as any conventional refrigerant but boasts a 68% reduced global warming potential.



Comparison & Benefit

R32 efficiently works even in small volume compared to existing R410A refrigerant, which decreases the potential hazard of global warming. Furthermore, R32 refrigerant is easy to recycle thanks to its single composition.

Descriptio	n	R32	R410A			
	Low Global Warming Potential (GWP)	675	2088			
	Lower Amount of Gas Charge	Less Gas	D% High			
î	Higher System Performance	R32 systems also use less refrigerar	nt per kilowatt of capacity delivered.			
	Simple Refrigerant Recyclability	Single component	Mixture R32 50%/R125 50%			
K 7 L J	High Capacity	High refrigerant compression rates lead to high capacity as compared to existing refrigerant R22 and R410A.				

protection logic

Flash Gas Injection

* Applied model: R32 Series


When applying R32 refrigerant to heat pump, it is very important to properly control the discharge temperature of the compressor. With the LG THERMA V R32 series, flash gas injection technology is applied to control the discharge temperature of the compressor efficiently. As a result of this technology, the heating operation range is expanded and the heating performance at low ambient temperature is enhanced.


Vapor Injection

• Discharge temperature of compressor is very high (160°C)

Flash Gas Injection

- Discharge temperature of compressor is below (110°C)
- Failure of injection cycle and compressor operation under • Good operation of injection cycle






Wide Operation Range

* Applied model: R32 Series

With a Leaving Water Temperature (LWT) of up to 65°C, the THERMA VR32 series can integrate with a mid-temperature radiator, making this product line-up highly competitive for renovations as well as new build houses.

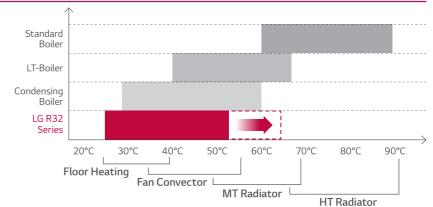

Note: Ensure the LG Electronics installation manuals are consulted for correct installation measures and safety precautions.

THERMAV

EXCELLENT PERFORMANCE & EFFICIENCY



Black Fin Heat Exchanger

* Applied model: R32 Series and High temp..

The THERMA V line-up includes a heat exchanger enhanced by black coating with enhanced epoxy resin for strong protection from various corrosive external conditions such as salt contamination and air pollution including factory fumes. This improvement in durability prolongs the product's lifespan and lowers both the operational and maintenance costs.



Longer lifespan, lower operation costs



Strengthened corrosion resistant coating

Black Fin


Hydrophilic Film (water flow)

The hydrophilic coating minimizes moisture build up on the fin.

Acryl + Epoxy + Melamine Resin (corrosion resistant)

The black coating provides strong protection from corrosion.

Aluminum Fin





SST (Salt Spray Test)


Test Process



Test process is conducted according to ISO 9227. 1) Salty water concentration: NaCl aqueous solution (5%)


CCT (Cyclic Corrosion Test)

Test Process




Test process is conducted according to ISO 14933.

- 1) Salty water concentration: NaCl aqueous solution (5%)
- 2) Deionized water
- ※ Dry condition changed: 60°C, 4hr → 70°C, 2hr
- Test Result (5% area of defects compared to initial) • Test Result (5% area of defects compared to initial)




corrosion & refrigerant leakage



Combination with Solar Thermal System * Applied model: R32 Series, R410A Split Hydro Box

THERMA V can combine with the solar thermal system enabling water heating in the Domestic Hot Water (DHW) tank. It first measures the temperature difference between the solar collector and DHW tank and begins to heat up if the solar collector temperature is higher than the DHW tank.

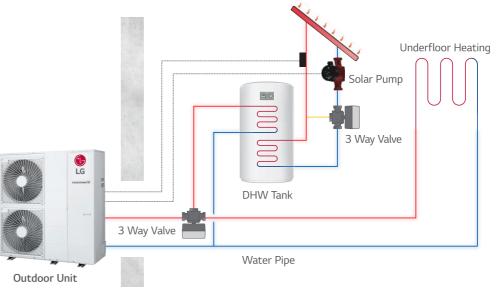


^{*} Mandatory accessory: Solar Thermal Kit (PHLLA) is required except for R32 Hydrosplit which needs PT-1000 type sensor (field supply).

Energy State

* Applied model: R32 Hydrosplit, R32 Monobloc, R32 Silent Monobloc R32 IWT, R32 split, R410 split and High Temp. models have limited energy state function (ES1 ~ ES4 only).

For more detail, please refer to the installation manual.

THERMA V is operated automatically according to the status signals received from power supply companies. This function can correspond to each country's specific tariff for heat pump application on smart grids.

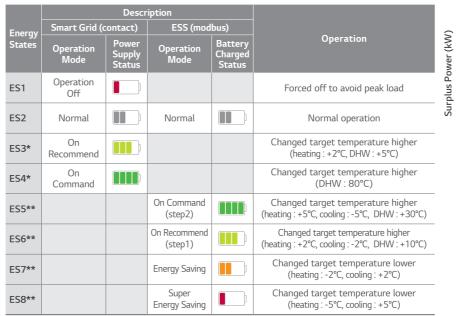

* Contact signal designated ES3 and ES4 can be changed to ES5 ~ ES8.

** Offset values of heating, cooling and DHW are changeable

*** THERMA V can connect not only ESS but also 3rd party controller through Modbus, in that case, ES1 to ES8 are used.

[Area of energy state for ESS] ES2 ES7 10 20 30 40 50 60 70 80 90 100 Battery SoC (%)

• SoC : State of Charge

• Surplus Power (SP) = PV Power - Load Power · Area of Energy State for ESS can be adjusted

033

THERMA V.

USER CONVENIENCE



Controller with Intuitive Interface * Applied model: R32 Series, R410A Split Hydro Box, High Temp.

THERMA V is equipped with new remote controller which supports various functions.


Premium Design

- New modern design 4.3 inch color LCD display
- Capacitive touch button (especially on/off button turn on LED)

User Friendly Interface

- Information displayed with simple graphic, icon & text
- Navigation button, easy to use







Enhanced Energy Information with Simple Interface

- A clear view of instantaneous power consumption against target
- Accumulated power consumption and produced heat energy per week, month or year







Convenient Functions


- Optimize schedule setting logic
- Set the period, date, on/off time, operation mode, target temp. easy installation setting



LG Own Wi-Fi Solution

* Applied model: R32 Series, R410A Split Hydro Box, High Temp.

Access your THERMA V anytime from anywhere.

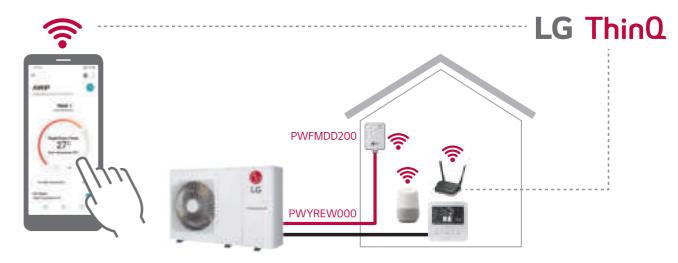

- * Search "LG ThinQ" on Google market or App store, then download the app.
- * Google home voice is supported in United Kingdom, France, Germany, Spain, Italy, Austria, Ireland and Portugal
- * Mandatory accessory: PWFMDD200 (LG Wi-Fi modem) and PWYREW000 (10m extension connect cable in between THERMA V indoor and Wi-Fi modem)







Simple Operation by LG ThinQ

- Operation on/off
- Energy monitoring • Operation mode selection • ESS monitoring

On/off reservation

- Current temperature
- Temperature setting
- Scheduling
- Silent mode reservation Holiday mode

Quick DHW heating

- Simple Operation by Google Voice
- Operation on/off (including DHW heating)
- Operation mode selection




USER CONVENIENCE



* Applied model: R32 Series, R410A Split Hydro Box


2 Zones (circuit 1/circuit 2) temperature control through separate heating circuits is possible with mixing valve kit.

2 Zones Temperature Control

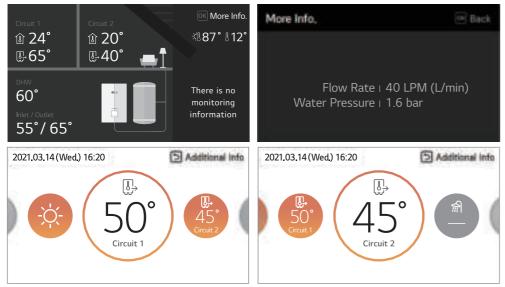

Setting circuit 1 temperature

Setting circuit 2 temperature

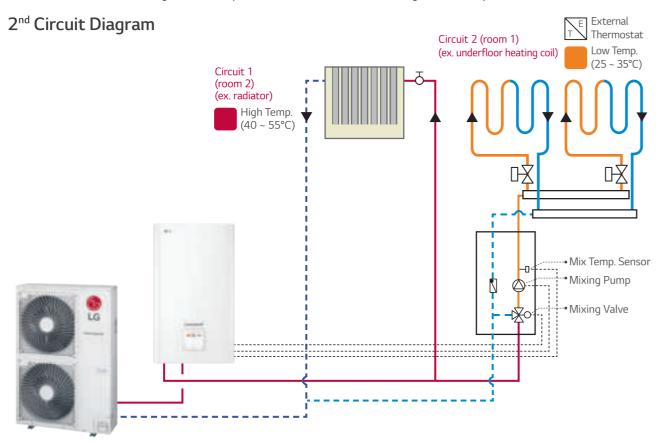


^{*} The picture above is drawn based on Therma V R32 Hydrosplit.

Various Temperature Control Options * Applied model: R32 Series, R410A Split Hydro Box, High Temp.

Various temperature control options are possible for the user's comfort and convenience, to include the newly added simultaneous control option (room and water temperature).


- Control based on leaving water temperature Air Temp.
- Control based on entering water temperature
- Control based on room air temperature
- Control based on room air and water temperature simultaneously
- Thermo On: When satisfied both room air temp condition and water temperature condition
- Thermo Off: When satisfied room air temp condition or water temperature condition

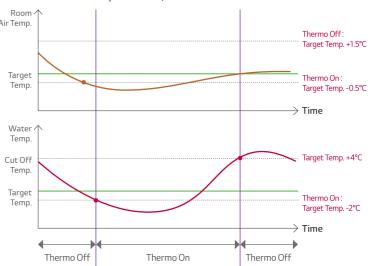

Advanced Pump Control Options

* Applied model: R32 Hydrosplit

Various pump control options are possible for the user's convenience. With the R32 Hydrosplit, the water flow rate can be changed as per heat load condition, therefore it makes more energy efficient operation during low load condition.

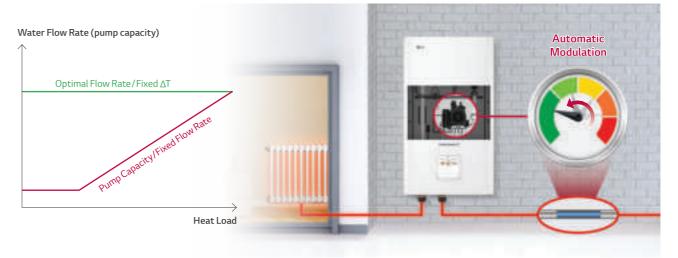

Options	Description	Water Flow Change as per Load Condition
Pump Capacity	It operates with the capacity set for the water pump. (range 10 ~ 100%)	No
Fixed Flow Rate	Automatically controlled to maintain the set flow rate. (range 17 ~ 46 LPM)	No
Fixed ∆T*	Automatically controlled to maintain the set ΔT . (range 5 ~ 13°C)	Yes
Optimal Flow Rate (default)	ΔT is changed as per target temperature.	Yes

 $^{^*\}Delta T$ = temperature difference between inlet and outlet water temperature.

^{*} For products other than the R32 Hydrosplit, it is mandatory to consult with LG regional engineer for 2^{nd} circuit system configuration before installing.

THERMA V.

USER CONVENIENCE



Built-in Flow Sensor

* Applied model: R32 Hydrosplit, R32 IWT, R32 Split

Flow sensor provides actual flow rate information on the wired remote control display.

• Flow sensor type : Vortex

• Measuring duration : 1s






~<u>~</u>~

Improved Flow Switch

* Applied model: R32 Monobloc, R410A Split, R410A IWT, High Temp..

By applying the magnetic type of flow switch, the field trouble occurrence related to water flow switch will be decreased.

• No contact between sensing part (magnet) and water





Interlocking Operation with 3rd Party Boiler * Applied model: R32 Series, R410A Split Hydro Box

3rd Party boiler such as oil, gas or electric boiler can be activated automatically or manually by the THERMA V controller.

Control Mode: Auto/Manual


• Auto control mode :


In order to protect THERMA V, 3rd party boiler is automatically activated when outdoor temperature is lower than certain temperature instead of THERMA V. (default: -7°C, range: -25 ~ 15°C)

Manual control mode:

User can manually operate 3rd party boiler via Standard III (RS3) remote controller as needed.

Auto Control Mode






 * $3^{\rm rd}$ Party boiler should have a water pump integrated with it.

0000


Energy Information Monitoring

* Applied model : All Line-up except R410A IWT

Power consumption and heat provided by the THERMA V can be measured and monitored on the remote controller using meter interface.

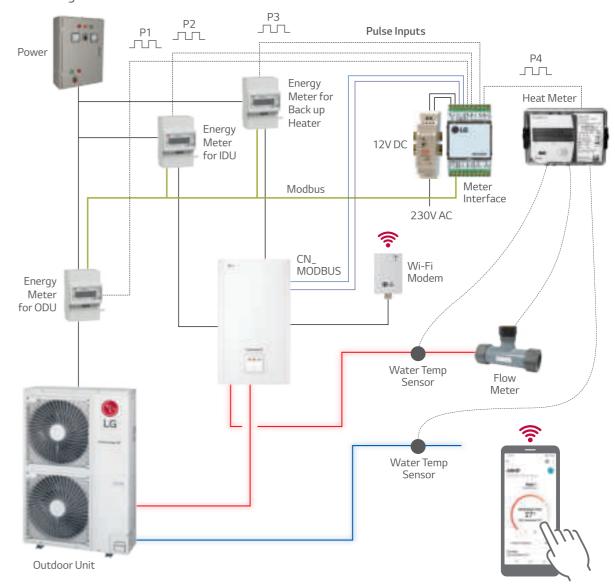

^{*} Mandatory accessory : PENKTH000 (meter Interface)



Yea	ar on Year Usage	≦ Back OK OK
	Power	Calorie
	2021.05	Heat Cool DHW
	2020.05 0 kWh	Year on Year Growth
<		>
	2021.05 ₀ kWh	O%

041

THERMA V.


USER CONVENIENCE


Seasonal Auto Mode

* Applied model: R32 Series, R410A Split Hydro Box Detailed set values and ranges are differ by product. For more detail, please refer to the installation manual for each product.

In this mode, the target temperature and operation mode will be changed automatically according to the outdoor temperature.

Setting	Description	Range (°C)	Defau Circuit 1	lt (°C) Circuit 2	Target Temp	р.	1		HeatingCoolingDHW
Out1	Heating Lower Ambient Temp.	25 25	-1	0	LW _{DHW}				
Out2	Heating Higher Ambient Temp.	-25 ~ 35	1	8		Čascona	l Auto Curve	Chift (within	- +E°C)
Out3	Cooling Lower Ambient Temp.	10.46	3	0	LW1 (RA1)	Seasona	t Auto Curve	Silit (Within	115 C)
Out4	Cooling Higher Ambient Temp.	10 ~ 46	4	0		V Heat	The same of the sa		1
LW1	Heating Higher Water Temp.	Use Heater: 15 ~ 65	50	35	111/2	Heal			
LW2	Heating Lower Water Temp.	No Heater: 20 ~ 65	40	28	LW2 (RA2)			ô Off	
LW3	Cooling Higher Water Temp.	Use FCU: 5 ~ 27	12	18	LW3 •				
LW4	Cooling Lower Water Temp.	No FCU: 16 ~ 27	10	16	(RA3)				
RA1	Heating Higher Air Temp.	16 ~ 30°C	2	1					Cool
RA2	Heating Lower Air Temp.	18 ~ 30°C	1	9	LW4				
RA3	Cooling Higher Air Temp.	18 ~ 30°C	2	1	(RA4)	Seaso	nal Auto Curv	ve Shift (wit	:hin ±5°C) 🖟
RA4	Cooling Lower Air Temp.	18 ~ 30°C	1	9					
This tab	le is for R32 Hydrosplit.					Out1	Out2	Out3	Out4
- Same	104	No.		200		-410 N	700		Outdoor Air Ter







^{*} The graphical seasonal auto mode setting is only possible with the R32 Hydrosplit.

Low Noise Mode & Scheduler

* Applied model : All Line-up except High Temp.

Low noise mode operation can be activated by remote controller and set on a weekly on/off schedule to reduce the unit's noise level.






Screed Drying Program

* Applied model: R32 Series, R410A Split Hydro Box

THERMA V has an automatic program for drying out the screed of an underfloor heating system during the construction of a house.

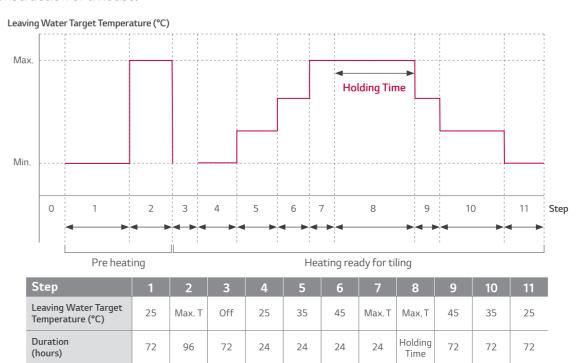




* Applied model: All Line-up except R410A IWT

Enhanced convenience with an additional control installed in another residential area.

System Diagram

[Machine Room] [Living Room]



Outdoor Unit

- * Master is for the installation setting
- * Slave is for user setting.

Standard III (RS3) Controller Interface

• THERMA V is operating based the room where slave controller is installed.





THERMA V.

EASY INSTALLATION & MAINTENANCE




LG Heating Configurator

* Applied model: R32 Series, R410A Split Hydro Box R32 IWT, R32 Hydrosplit will be supported within 2020.

Easy Installation Setting and Commissioning

- Based on installation site information, installers can prepare presetting with the LG heating configurator and save data into a memory card from the office.
- Once on site, installers can simply insert memory card into the back of the remote control to activate configuration data.




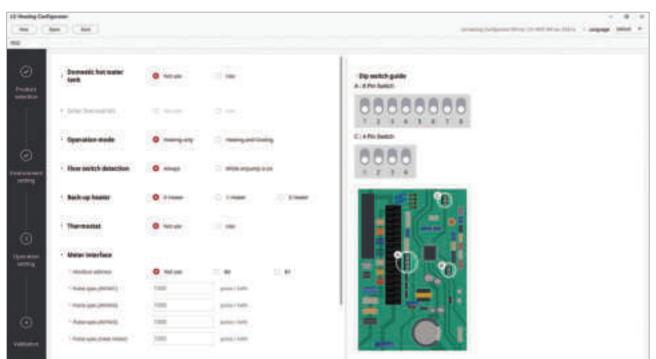

Clip Type Connection for Easy Maintenance * Applied model: R32 Series, R410A Split Hydro Box

- Easy access to water pump and strainer (front panel)
- Clip type connection for components




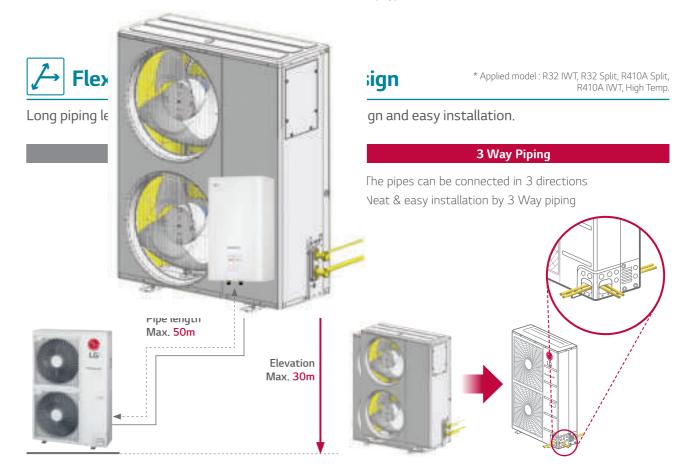



047

THERMA V_{TM} (R32) R32 MONOBLOC

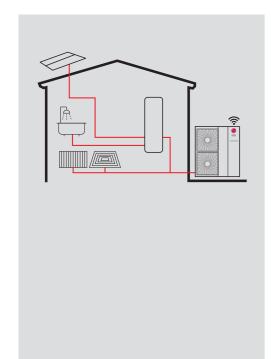

Excellent Performance & Efficiency









User Convenience











Easy Installation & Maintenance










Energy Labeling



Monobloc Concept

The LG THERMA V R32 Monobloc is a fully packaged unit, where the indoor and outdoor units are combined as one module. This unit does not require refrigerant piping work since the Monobloc's outdoor unit is connected exclusively to water piping. Further, hydronic components such as plate heat exchanger, expansion tank and water pump are included in the package.





Capacity Range (Heating & Cooling)

R32 Monobloc

Capacity Range [kW]	5	7	9	12	14	16
Heating Capacity	(5.5)	(7.0)	(9.0)	(12.0)	(14.0)	(16.0)
Cooling Capacity	(5.5)	(7.0)	(9.0)	(12.0)	(14.0)	(16.0)

Operation Range (Heating & Cooling)





^{*} Detailed description for each function is presented on page $26 \sim 43$.

^{* 16}kW 1Ø model.

^{*} A+++ to D scale.


THERMA V_{TM} (R32) MONOBLOC

PRODUCT FEATURES

All in One Concept

THERMA V's all in one concept and reduce weight allow for quicker and easier installations.

- LG provides fully packaged THERMA V Monobloc: additional hydronic components are included in the package
- Easier and quicker installation without refrigerant piping work

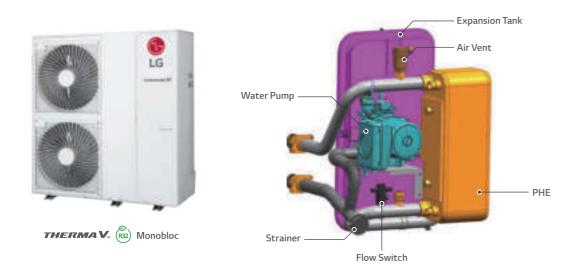

High Heating Performance even at Low Temperature


The R32 Monobloc provides excellent heating performance – especially at low ambient temperature. The heating capacity of THERMA V R32 Monobloc at low ambient temperature is 20% higher than the R410A Monobloc.



1. LWT: Leaving Water Temperature, OAT: Outdoor Air Temperature

High Energy Efficiency


The energy label directive is a key factor in selecting a heating device in the European heating market. The R32 Monobloc type has an energy label rating (ErP) of A+++.

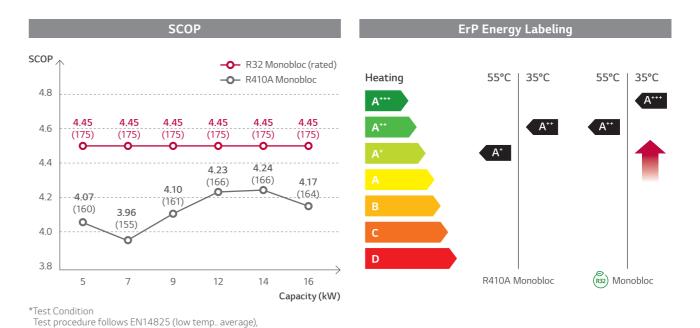

Reduced Noise Level

based on the single phase model line-up.

THERMA V R32 Monobloc boasts reduced noise levels compared to previous generations as well as everyday environments.

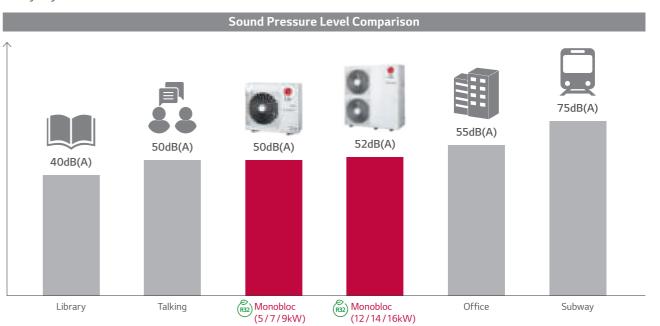

THERMA V_{TM} (R32) MONOBLOC

PRODUCT SPECIFICATION

R32 Monobloc

HM051M U43 HM071M U43 HM091M U43























Features

- High energy efficiency (SCOP4.45/A+++)
- Excellent performance at low ambient temperature (100% @ -7°C)
- Wide operation range (ambient : -25 ~ 35°C/water side : 15 ~ 65°C)
- R32 refrigerant with low GWP
- R1 scroll compressor
- Black Fin heat exchanger
- LG ThinQ
- KEYMARK/EHPA certification/MCS/Eurovent certification

Model Line-up

		Model Name				
Category	Unit	Capacity (kW)				
		5.5	7.0	9.0		
1 Phase Model 220 ~ 240V, 1Ø, 50Hz Monobloc Unit		HM051M U43	HM071M U43	HM091M U43		

Seasonal Energy

Description	Description			HM051M U43	HM071M U43	HM091M U43
Average Climate Wate	Average	SCOP	W/W	4.45	4.45	4.45
	Climate Water	Seasonal Space Heating Efficiency (η _s)	%	175	175	175
Space Heating (according to	Outlet 35°C	Seasonal Space Heating Eff. Class (A+++ to D scale)	-	A+++	A+++	A+++
EN14825)	Average	SCOP	-	3.12	3.12	3.12
	Climate Water Outlet 55°C	Seasonal Space Heating Efficiency (η _s)	%	122	122	122
		Seasonal Space Heating Eff. Class (A+++ to D scale)	-	A+	A+	A+

Nominal Capacity and Nominal Power Input

Description		OAT (DB)	LWT (DB)	Unit	HM051M U43	HM071M U43	HM091M U43
		7°C	35°C		5.50	7.00	9.00
	Heating	7°C	55°C		5.50	5.50	5.50
Nominal Capacity		2°C	35°C	kW	3.30	4.20	5.40
	Cooling	35°C	18°C		5.50	7.00	9.00
	Cooling	35°C	7°C		5.50	7.00	9.00
	Heating	7°C	35°C	kW	1.22	1.56	2.15
		7°C	55°C		2.04	2.04	2.04
Nominal Power Input		2°C	35°C		0.94	1.20	1.54
1 ower input	C. II.	35°C	18°C		1.20	1.56	2.14
	Cooling	35°C	7°C		1.96	2.59	3.46
		7°C	35°C		4.50	4.50	4.18
COP	Heating	7°C	55°C	W/W	2.70	2.70	2.70
		2°C	35°C		3.52	3.51	3.50
EER	Cooling	35°C	18°C	W/W	4.60	4.50	4.20
CCR	Cooling	35°C	7°C	VV/VV	2.80	2.70	2.60

Product Specification

Technical Spe	cification			Unit	HM051M U43	HM071M U43	HM091M U43	
	Operation Range	Heating				15 ~ 65		
	(leaving water	Cooling	Min. ~ Max.	°CDB	5 ~ 27 (16 ~ 27) ²⁾			
Water Side	temperature)	DHW ¹⁾				15 ~ 80		
vvater side	Piping Connections	Water	Inlet	mm (inch)	Male PT 25.4 (1)			
	Piping Connections	Circuit	Outlet	mm (inch)		Male PT 25.4 (1)		
	Rated Water Flow Rate at LWT 35°C			LPM	15.81	20.12	25.87	
	Operation Range	Heating	Min. ~ Max	°CDB		-25 ~ 35		
	(outdoor temp.)	Cooling	IVIIII. ~ IVIdX.	CDB	5 ~ 48			
	Compressor	Quantity		EA	1			
Refrigerant	Compressor	Туре	Туре		ŀ	Hermetic Sealed Scro	ll	
Side		Туре		-		R32		
	Refrigerant	GWP (global wa	rming potential)	-		675		
	Refrigerant	Precharged Amount		g	1,400			
		t-CO ₂ eq		-	0.945			
Sound Power L	evel	Heating	Rated	dB(A)		60		
Sound Pressure	e Level (at 1m)	Heating	Rated	dB(A)	50			
Dimensions		Unit	WxHxD	mm		1,239 x 834 x 330		
Weight		Unit		kg		91.0		
		Voltage, Phase,	Frequency	V, Ø, Hz		220 ~ 240, 1, 50		
Dawer Cupel		Rated Running	Heating	А	5.4	6.9	9.6	
Power Supply		Current	Cooling	А	5.3	6.9	9.5	
		Recommended	Circuit Breaker	А	16	20	25	
		Power Supply Cable (included earth, H07RN-F)		mm² x cores	4.0 x 3C			

1) DHW 58 ~ 80°C operating is available only when the booster heater is operating.

2) When fan coil unit not used.

- 1. Due to our policy of innovation some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the reverberation rooms by ISO 9614 standard.
- Therefore, these values can be increased owing to ambient conditions during operation.

 4. Performances are accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions acc. ErP regulation. For max. capacities, refer to performance data.

 Rated running current: outdoor temp. 7°CDB / 6°CWB, LWT 35°C

 This product contains fluorinated greenhouse gases.

PRODUCT SPECIFICATION

Performance Table for Heating Operaion

Maximum Heating Capacity (Including Defrost Effect)

HM051M U43

Outdoor	LWT 30°C	LWT 35°C	LWT 40°C	LWT 45°C	LWT 50°C	LWT 55°C	LWT 60°C	LWT 65°C
Temperature	TC							
-25°C DB	3.79	3.67	3.54	3.42	-	-	-	-
-20°C DB	4.22	4.09	3.96	3.83	3.70	-	-	-
-15°C DB	4.66	4.52	4.38	4.25	4.11	3.97	-	-
-7°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	-
-4°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
-2°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
2°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
7°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
10°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
15°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
18°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
20°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
35°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50

HM071M U43

Outdoor	LWT 30°C	LWT 35°C	LWT 40°C	LWT 45°C	LWT 50°C	LWT 55°C	LWT 60°C	LWT 65°C
Temperature	TC							
-25°C DB	4.82	4.67	4.51	4.36	-	-	-	-
-20°C DB	5.38	5.21	5.05	4.88	4.72	-	-	-
-15°C DB	5.93	5.76	5.58	5.41	5.23	5.06	-	-
-7°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	-
-4°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
-2°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
2°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
7°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
10°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
15°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
18°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
20°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
35°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00

HM091M U43

Outdoor	LWT 30°C	LWT 35°C	LWT 40°C	LWT 45°C	LWT 50°C	LWT 55°C	LWT 60°C	LWT 65°C
Temperature	TC							
-25°C DB	6.20	6.00	5.80	5.60	-	-	-	-
-20°C DB	6.91	6.70	6.49	6.28	6.06	-	-	-
-15°C DB	7.63	7.40	7.18	6.95	6.73	6.50	-	-
-7°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	-
-4°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
-2°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
2°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
7°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
10°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
15°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
18°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
20°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
35°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C), LPM: Liters Per Minute (\(\ell \)/min), TC: Total Capacity (kW) 2. Direct interpolation is permissible. Do not extrapolate.

 3. Measuring procedure follows EN-14511.

- Rated values are based on standard conditions and it can be found on specifications.
 Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
 In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

Performance Table for Cooling Operation

Maximum Cooling Capacity

HM051M U43

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	5.16	5.65	6.14	6.47	6.96	7.29	7.62
20°C DB	5.29	5.59	5.89	6.08	6.38	6.58	6.77
30°C DB	5.43	5.53	5.63	5.69	5.79	5.86	5.92
35°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50
40°C DB	5.57	5.50	5.43	5.38	5.31	5.27	5.22
45°C DB	5.64	5.50	5.36	5.27	5.13	5.04	4.94

HM071M U43

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	6.56	7.19	7.82	8.24	8.86	9.28	9.70
20°C DB	6.74	7.11	7.49	7.74	8.12	8.37	8.62
30°C DB	6.91	7.04	7.16	7.25	7.37	7.46	7.54
35°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00
40°C DB	7.09	7.00	6.91	6.85	6.76	6.70	6.65
45°C DB	7.18	7.00	6.82	6.70	6.53	6.41	6.29

HM091M U43

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	8.44	9.24	10.05	10.59	11.40	11.93	12.47
20°C DB	8.66	9.15	9.63	9.95	10.44	10.76	11.08
30°C DB	8.89	9.05	9.21	9.32	9.48	9.59	9.69
35°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00
40°C DB	9.11	9.00	8.89	8.81	8.70	8.62	8.54
45°C DB	9.23	9.00	8.77	8.62	8.39	8.24	8.09

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C), LPM: Liters Per Minute (ℓ/\min) , TC: Total Capacity (kW)
- Direct interpolation is permissible. Do not extrapolate.
 Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
 Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
 In accordance with the test standard (or nations), the rating will vary slightly.

[Unit:mm]

3D View


PRODUCT SPECIFICATION


Drawings


		Model Name					
Category	Unit	Capacity (kW)					
		5.5	7.0	9.0			
1 Phase Model 220 ~ 240V, 1Ø, 50Hz	Monobloc Unit	HM051M U43	HM071M U43	HM091M U43			

HM051M U43 HM071M U43


HM091M U43

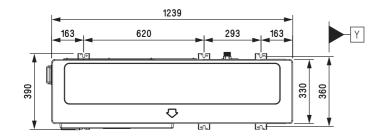

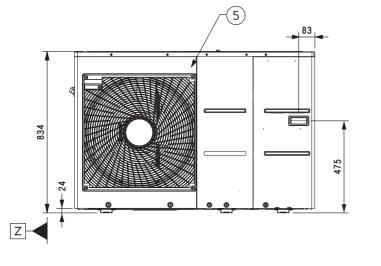



[Unit:mm]



No.	Part Name	Description
1	Entering Water Pipe	Male PT 1 inch
2	Leaving Water Pipe	Male PT 1 inch
3	Strainer	Filtering and stacking particles inside circulating water
4	Top Cover	-
5	Front Panel	-
6	Side Panel	-
7	Low Voltage	Accessory kit cables
8	Unit Power	Outdoor entry power cable
9	Water Pump	-
10	Plate Heat Exchanger	Heat exchange between refrigerant and water
11	Pressure Gauge	Indicates circulating water pressure
12	Safety Valve	Open at water pressure 3bar
13	Indoor Control Box	Indoor PCB and terminal blocks
14	Outdoor Control Box	Outdoor PCB and terminal blocks

THERMA V_{TM} (R32) MONOBLOC

PRODUCT SPECIFICATION

R32 Monobloc

HM121M U33 HM141M U33 HM161M U33 HM123M U33 HM143M U33 HM163M U33



























Features

- High energy efficiency (SCOP 4.45 / A+++)
- Excellent performance at low ambient temperature (100% @ -7°C)
- Wide operation range (ambient : -25 ~ 35°C/water side : 15 ~ 65°C)
- R32 refrigerant with low GWP
- R1 scroll compressor
- Black Fin heat exchanger
- LG ThinQ
- KEYMARK/EHPA¹⁾ certification/MCS/Eurovent certification

1) Approved model by EHPA: HM123M U33, HM143M U33, HM163M U33.

Model Line-up

		Model Name					
Category	Unit	Capacity (kW)					
		12.0	14.0	16.0			
1 Phase Model 220 ~ 240V, 1Ø, 50Hz	Monobloc Unit	HM121M U33	HM141M U33	HM161M U33			
3 Phase Model 380 ~ 415V, 3Ø, 50Hz	Monobloc Unit –	HM123M U33	HM143M U33	HM163M U33			

Seasonal Energy

Description			Unit	HM121M U33 HM123M U33	HM141M U33 HM143M U33	HM161M U33 HM163M U33
	Average	SCOP	W/W	4.45	4.45	4.45
Climate Water	Seasonal Space Heating Efficiency (ηs)	%	175	175	175	
Space Heating	Outlet 35°C	Seasonal Space Heating Eff. Class (A+++ to D scale)	-	A+++	A+++	A+++
(according to EN14825)	Average	SCOP	-	3.18	3.18	3.18
Climate Wate	Climate Water	Seasonal Space Heating Efficiency (ηs)	%	124	124	124
	Outlet 55°C	Seasonal Space Heating Eff. Class (A+++ to D scale)	-	A+	A+	A+

Nominal Capacity and Nominal Power Input

Description		OAT (DB)	LWT (DB)	Unit	HM121M U33 HM123M U33	HM141M U33 HM143M U33	HM161M U33 HM163M U33
		7°C	35°C		12.00	14.00	16.00
	Heating	7°C	55°C		12.00	12.00	12.00
Nominal Capacity		2°C	35°C	kW	11.00	12.00	13.80
	Caaliaa	35°C	18°C		12.00	14.00	16.00
	Cooling	35°C	7°C		12.00	14.00	16.00
		7°C	35°C		2.61	3.11	3.64
	Heating	7°C	55°C	kW	4.29	4.29	4.29
Nominal Power Input		2°C	35°C		3.13	3.42	3.94
1 ower input	Carlina	35°C	18°C		2.61	3.26	4.00
	Cooling	35°C	7°C		4.44	5.38	6.40
		7°C	35°C		4.60	4.50	4.40
СОР	Heating	7°C	55°C	W/W	2.80	2.80	2.80
		2°C	35°C		3.52	3.51	3.50
EER	Cooling	35°C	18°C	W/W	4.60	4.30	4.00
EER	Cooling	35°C	7°C		2.70	2.60	2.50

Product Specification

Technical S	Specification			Unit	HM121M U33	HM141M U33	HM161M U33	HM123M U33	HM143M U33	HM163M U	
	Operation Range	Heating					15 -	- 65			
	(leaving water	Cooling	Min. ~ Max.	°CDB	5 ~ 27 (16 ~ 27) ²⁾						
Water	temperature)	DHW ¹⁾					15 -	- 80			
Side Piping Connections	Water	ter Inlet				Male PT	25.4 (1)				
	Circuit	Outlet	mm (inch)			Male PT	25.4 (1)				
	Rated Water Flor	w Rate at LWT 35	5°C	LPM	34.50	40.25	46.00	34.50	40.25	46.00	
	Operation Range	Heating	NA:- NA	°CDB			-25	~ 35			
(outdoor temp.)	Cooling	ling Min. ~ Max.				5 ~	48				
	Compressor	Quantity		EA		1					
Refrigerant	Compressor	Туре		-	Hermetic Sealed Scroll						
Side		Туре		-	R32						
	Defeirement	GWP (global war	ming potential)	-			67	75			
	Refrigerant	Precharged Amount		g	2,400						
		t-CO ₂ eq		-	1.620						
Sound Powe	er Level	Heating	Rated	dB(A)			6	3			
Sound Press	ure Level (at 1m)	Heating	Rated	dB(A)	52						
Dimensions		Unit	WxHxD	mm			1,239 x 1,	380 x 330			
Weight		Unit		kg			12	4.5			
		Voltage, Phase,	Frequency	V, Ø, Hz	2	20 ~ 240, 1, 5	0	3	80 ~ 415, 3, 5	0	
Dawar Cunn	l	Rated Running	Heating	А	11.6	13.8	16.1	3.8	4.6	5.4	
Power Supply		Current	Cooling	А	11.6	14.4	17.7	3.8	4.8	5.9	
		Recommended 0	ircuit Breaker	А		40			16		
Wiring Conr	Niring Connections Power Supply Cable (included earth, H07RN-F)			mm² x cores	6.0 x 3C 4.0 x 5C						

1) DHW $58 \sim 80^{\circ}\text{C}$ operating is available only when the booster heater is operating.

2) When fan coil unit not used.

- 1. Due to our policy of innovation some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the reverberation rooms by ISO 9614 standard.
- Therefore, these values can be increased owing to ambient conditions during operation.

 4. Performances are accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions acc. ErP regulation. For max. capacities, refer to performance data.

 Rated running current: outdoor temp. 7°CDB / 6°CWB, LWT 35°C

 This product contains fluorinated greenhouse gases.

PRODUCT SPECIFICATION

Performance Table for Heating Operaion

Maximum Heating Capacity (Including Defrost Effect)

HM121M U33 / HM123M U33

Outdoor	LWT 30°C	LWT 35°C	LWT 40°C	LWT 45°C	LWT 50°C	LWT 55°C	LWT 60°C	LWT 65°C
Temperature	TC							
-25°C DB	8.75	8.50	8.25	8.00	-	-	-	-
-20°C DB	10.13	10.00	9.88	9.75	9.63	-	-	-
-15°C DB	11.50	11.50	11.50	11.50	11.50	11.50	-	-
-7°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	-
-4°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
-2°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
2°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
7°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
10°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
15°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
18°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
20°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
35°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00

HM141M U33 / HM143 U33

Outdoor	LWT 30°C	LWT 35°C	LWT 40°C	LWT 45°C	LWT 50°C	LWT 55°C	LWT 60°C	LWT 65°C
Temperature	TC							
-25°C DB	9.25	9.00	8.75	8.50	-	-	-	-
-20°C DB	10.63	10.50	10.38	10.25	10.13	-	-	-
-15°C DB	12.00	12.00	12.00	12.00	12.00	12.00	-	-
-7°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	-
-4°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
-2°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
2°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
7°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
10°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
15°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
18°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
20°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
35°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00

HM161M U33 / HM163 U33

Outdoor	LWT 30°C	LWT 35°C	LWT 40°C	LWT 45°C	LWT 50°C	LWT 55°C	LWT 60°C	LWT 65°C
Temperature	TC							
-25°C DB	10.50	10.00	9.50	9.00	-	-	-	-
-20°C DB	12.30	11.75	11.44	11.13	10.75	-	-	-
-15°C DB	14.10	13.50	13.38	13.25	13.13	13.00	-	-
-7°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	-
-4°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
-2°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
2°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
7°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
10°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
15°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
18°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
20°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
35°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00

1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C), LPM: Liters Per Minute (\(\ell \)/min), TC: Total Capacity (kW) 2. Direct interpolation is permissible. Do not extrapolate.

3. Measuring procedure follows EN-14511.

Rated values are based on standard conditions and it can be found on specifications.
Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
In accordance with the test standard (or nations), the rating will vary slightly.

4. The shaded areas are not guaranteed continuous operation.

Performance Table for Cooling Operation

Maximum Cooling Capacity

HM121M U33 / HM123M U33

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	11.25	12.33	13.40	14.12	15.20	15.91	16.63
20°C DB	11.55	12.20	12.84	13.27	13.92	14.35	14.78
30°C DB	11.85	12.07	12.28	12.42	12.64	12.78	12.93
35°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
40°C DB	12.15	12.00	11.85	11.75	11.59	11.49	11.39
45°C DB	12.30	12.00	11.69	11.49	11.19	10.99	10.78

HM141M U33 / HM143 U33

Outdoor Temperature	LWT 7°C TC	LWT 10°C TC	LWT 13°C TC	LWT 15°C TC	LWT 18°C TC	LWT 20°C TC	LWT 22°C TC
10°C DB	13.13	14.38	15.64	16.47	17.73	18.57	19.40
20°C DB	13.48	14.23	14.98	15.48	16.24	16.74	17.24
30°C DB	13.83	14.08	14.33	14.49	14.75	14.91	15.08
35°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00
40°C DB	14.18	14.00	13.82	13.70	13.53	13.41	13.29
45°C DB	14.35	14.00	13.64	13.41	13.05	12.82	12.58

HM161M U33 / HM163 U33

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	15.00	16.43	17.87	18.83	20.26	21.22	22.17
20°C DB	15.40	16.26	17.12	17.70	18.56	19.13	19.70
30°C DB	15.80	16.09	16.37	16.57	16.85	17.04	17.23
35°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00
40°C DB	16.20	16.00	15.80	15.66	15.46	15.32	15.19
45°C DB	16.40	16.00	15.59	15.32	14.92	14.65	14.38

1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C), LPM: Liters Per Minute (\(\ell \)/min), TC: Total Capacity (kW) 2. Direct interpolation is permissible. Do not extrapolate.

3. Measuring procedure follows EN-14511.

• Rated values are based on standard conditions and it can be found on specifications.
• Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
• In accordance with the test standard (or nations), the rating will vary slightly.


THERMA V_{TM} (R32) MONOBLOC


PRODUCT SPECIFICATION

Drawings

			Model Name				
Category	Unit	Capacity (kW)					
		12.0	14.0	16.0			
1 Phase Model 220 ~ 240V, 1Ø, 50Hz	Monobloc Unit	HM121M U33	HM141M U33	HM161M U33			
3 Phase Model 380 ~ 415V, 3Ø, 50Hz	MONODIOC UNIT	HM123M U33	HM143M U33	HM163M U33			

HM121M U33 / HM141M U33 / HM161M U33 HM123M U33 / HM143M U33 / HM163M U33 [Unit:mm]

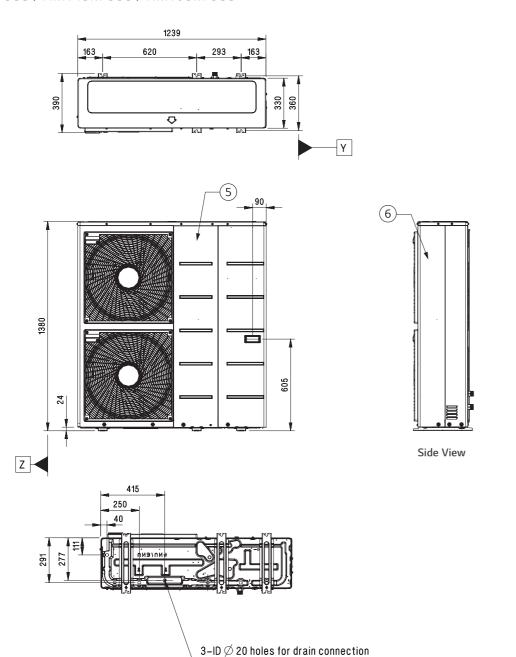

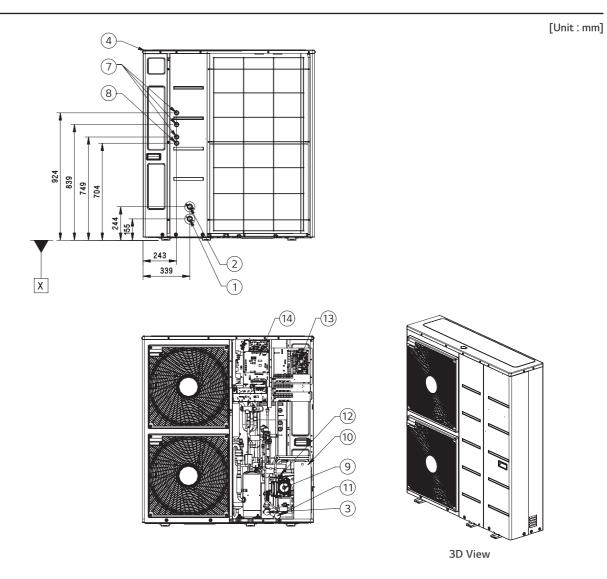

No.	Part Name	Description
1	Entering Water Pipe	Male PT 1 inch
2	Leaving Water Pipe	Male PT 1 inch
3	Strainer	Filtering and stacking particles inside circulating water
4	Top Cover	-
5	Front Panel	-
6	Side Panel	-
7	Low Voltage	Accessory kit cables
8	UNIT Power	Outdoor entry power cable
9	Water Pump	-
10	Plate Heat Exchanger	Heat exchange between refrigerant and water
11	Pressure Gauge	Indicates circulating water pressure
12	Safety Valve	Open at water pressure 3bar
13	Indoor Control Box	Indoor PCB and terminal blocks
14	Outdoor Control Box	Outdoor PCB and terminal blocks



PRODUCT SPECIFICATION

Electric Back up Heater


HA031M E1 HA061M E1 HA063M E1



Product Specification


Electrical Spe	cification	Unit	HA031M E1	HA061M E1	HA063M E1		
	Туре	-		Sheath			
	Number of Heating Coil	EA	1	2	3		
	Capacity Combination	kW	3.0	3.0 + 3.0	2.0 + 2.0 + 2.0		
Back up	Operation	-		Automatic			
Heater	Heating Steps	Step	1	2	1		
	Power Supply	V, Ø, Hz	220 ~ 24	380 ~ 415, 3, 50			
	Dimensions (W x H x D)	mm		210 x 607 x 217			
	Net Weight (unit)	kg	13.0	13.8	14.1		
Wiring	Power Supply Cable (included earth, H07RN-F)	mm ² x cores	1.5 x 3C	4.0 x 3C	2.5 x 4C		
Connections	Communication Cable (H07RN-F)	mm ² x cores	0.75 x 2C	0.75 x 4C	0.75 x 2C		

- Due to our policy of innovation some specifications may be changed without notification.
 Wiring cable size must comply with the applicable local and national codes. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.

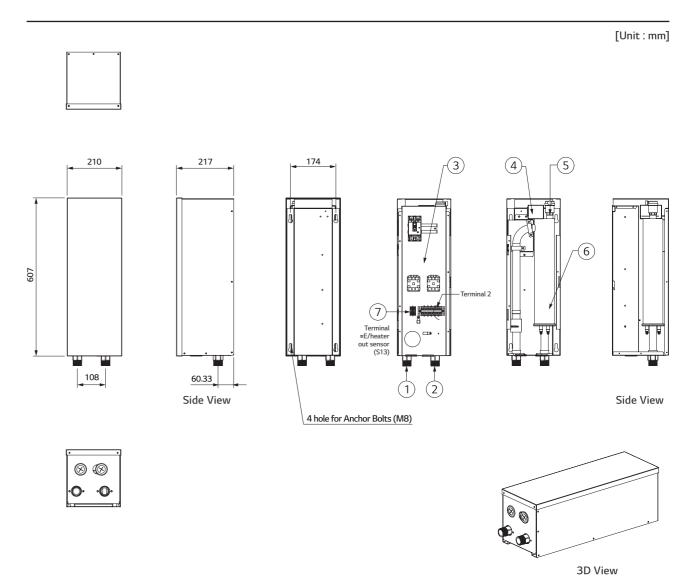

No.	Part Name	Description
1	Leaving Water Pipe	Male PT 1 inch
2	Entering Water Pipe	Male PT 1 inch
3	Control Box	Circuit breaker, Magnetic switch, Terminal blocks
4	Thermal Switch	Cut-off power input to E/heater at 90°C
5	Air Vent	Air purging when charging water
6	Electric Heater	Refer the related information
7	Back up Heater Outlet Sensor (S13)	Connect to unit (heat pump)

THERMA V_m (R32) R32 SILENT MONOBLOC

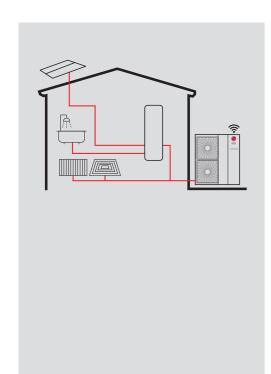

Excellent Performance & Efficiency



User Convenience
















Easy Installation & Maintenance







Energy Labeling



Silent Monobloc Concept

The LG THERMA V R32 Silent Monobloc is designed for lower noise levels than conventional Monobloc series while retaining its previous advantages; All in one with eco-conscious R32 refrigerant and LG's powerful yet stable R1 compressor. Thanks to its low noise level corresponding with DACH region noise regulations, THERMA V R32 Silent Monobloc offers maximized installation flexibility which allows installing within minimum safety space as 5m from neighboring houses. Moreover, the energy efficiency of THERMA V R32 Silent Monobloc is remarkably enhanced compared to conventional Monobloc as so it is recognized as an ultra-high efficient model.







Capacity Range (Heating & Cooling)

R32 Silent Monobloc

Capacity Range [kW]	9
Heating Capacity	• (9.0)
Cooling Capacity	• (9.0)

Operation Range (Heating & Cooling)






^{*} Detailed description for each function is presented on page 26 \sim 43.

PRODUCT FEATURES

Very Low Sound Level

With a sound level that is quieter than a library, THERMA V Silent Monobloc operates at 32dB(A) in Low noise mode, creating a tranquil environment indoors and outdoors.



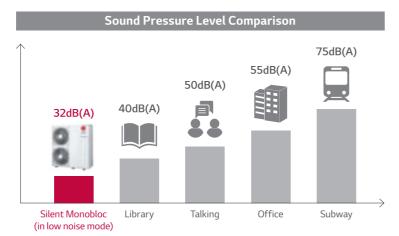


Installation Flexibility

THERMA V Silent Monobloc can be installed up to 4m (in low noise mode) from neighboring houses while complying with noise regulations.








de
_

Noise Regulation	Germany	(TA Lärm)	Austria (ÖNORM S 5021)		
In Residential Area (rest area)	D-1. (OC 22)	E04D(V)	Day (06 ~ 19)	45dB(A)	
	Day (06 ~ 22)	50dB(A)	Evening (19 ~ 22)	40dB(A)	
	Night (22 ~ 06)	35dB(A)	Night (22 ~ 06)	35dB(A)	


High Energy Efficiency

The energy label directive is a key factor of selecting heating device in Europe heating market. THERMA V Silent Monobloc has an energy label rating A+++ for low temperature application and A++ for medium temperature application in ErP energy labeling regulation.

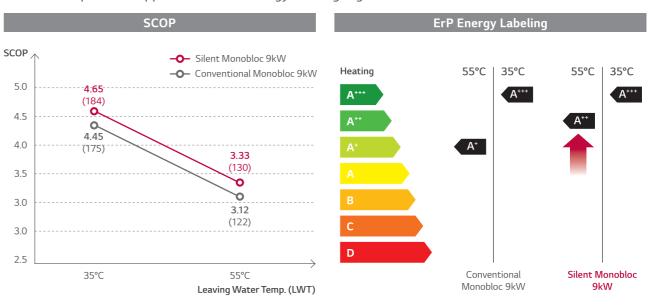

High Heating Performance even at Low Temperature

THERMA V Silent Monobloc provides excellent heating performance – especially at low ambient temperature. Heating Capacity at OAT -7°CDB & LWT 35°C is same as normal capacity¹⁾ and Heating Capacity at OAT -15°CDB & LWT 35°C is more than 80% of normal capacity.

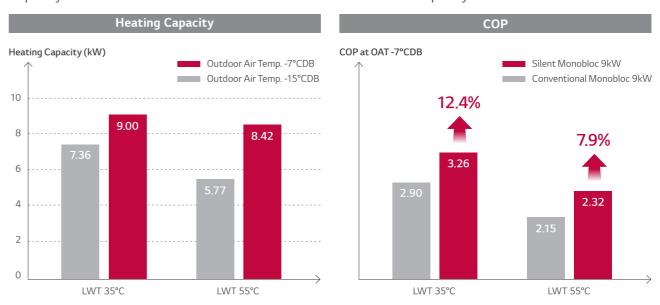

1) Normal : Outdoor air temperature 7°CDB / 6°CWB, Water outlet temperature 35°C

THERMA V... (R32) SILENT MONOBLOC

PRODUCT SPECIFICATION

R32 Silent Monobloc

HM091MRS U33





















Features

- Very Low Sound Level (32dB(A) at 5m in low noise mode)
- High energy efficiency (SCOP 4.68/A+++)
- Excellent performance at low ambient temperature (100% @ -7°C)
- Wide operation range (ambient: -25 ~ 35°C/water side: 15 ~ 65°C)
- R32 refrigerant with low GWP
- R1 scroll compressor
- Black Fin heat exchanger
- LG ThinQ
- KEYMARK/EHPA certification/MCS/Eurovent certification

Model Line-up

Category	Unit	Model Name Capacity (kW) 9.0	
1 Phase Model 220 ~ 240V, 1Ø, 50Hz	Monobloc Unit	HM091MRS U33	

Seasonal Energy

Description		Unit HM091MRS U33		
Average	SCOP	W/W	4.68	
	Climate Water	Seasonal Space Heating Efficiency (ηs)	%	184
Space Heating (according to	J	Seasonal Space Heating Eff. Class (A+++ to D scale)	-	A+++
EN14825)	Average	SCOP	-	3.33
Climate Water Outlet 55°C	Seasonal Space Heating Efficiency (η _s)	%	130	
	Seasonal Space Heating Eff. Class (A+++ to D scale)	-	A++	

Nominal Capacity and Nominal Power Input

Description		OAT (DB)	LWT (DB)	Unit	HM091MRS U33
	Heating	7°C	35°C		9.00
		7°C	55°C		6.00
Nominal Capacity		2°C	35°C	kW	8.00
	Cooling	35°C	18°C		9.00
	Cooling	35°C	7°C		9.00
	Heating	7°C	35°C		1.76
		7°C	55°C		2.14
Nominal Power Input		2°C	35°C	kW	2.16
Power Input	Caaliaa	35°C	18°C		1.80
	Cooling	35°C	7°C		3.00
	Heating	7°C	35°C		5.10
COP		7°C	55°C	W/W	2.80
		2°C	35°C		3.70
EER	Cooling	35°C	18°C	W/W	5.00
LLIV	Cooling	35°C	7°C	V V / V V	3.00

Product Specification

Technical S	pecification			Unit	HM091MRS U33
	Operation Range	Heating			15 ~ 65
	(leaving water	Cooling	Min. ~ Max.	°CDB	5 ~ 27 (16 ~ 27) ²⁾
Water	temperature)	DHW ¹⁾			15 ~ 80
Side	Piping	Water Circuit	Inlet	mm (inch)	Male PT 25.4 (1)
	Connections	Water Circuit	Outlet	mm (inch)	Male PT 25.4 (1)
	Rated Water Flow	Rate at LWT 35°C	<u> </u>	LPM	25.87
	Operation Range	Heating	NA:- NA	9CDD	-25 ~ 35
	(outdoor temp.)	Cooling	Min. ~ Max.	°CDB	5 ~ 48
	C	Quantity	·	EA	1
Refrigerant	Compressor	Туре		-	Hermetic Sealed Scroll
Side		Туре		-	R32
	Defrieses	GWP (global warming potential)		-	675
	Refrigerant	Precharged Amount		g	2,100
		t-CO ₂ eq		-	1.418
Sound Powe	r I oval	Llastina	Rated	1D(V)	57
Sound Powe	Level	Heating	Low noise	dB(A)	54
Cound Dross	ure Level (at 5m)	Llastina	Rated	dB(A)	35
Sound Press	ure Level (at 5m)	Heating	Low noise	dB(A)	32
Dimensions		Unit	WxHxD	mm	1,239 x 1,380 x 330
Weight		Unit		kg	115.5
		Voltage, Phase, Frequency		V, Ø, Hz	220 ~ 240, 1, 50
Power Suppl	v	Rated Running	Heating	А	7.83
rower suppl	у	Current	Cooling	А	7.99
		Recommended Circuit Breaker		А	16
Wiring Connections Power Supply Cable (included earth, H07RN-F)			ble (included earth, H07RN-F)	mm ² x cores	4.0 x 3C

- 1) DHW 58 ~ 80°C operating is available only when the booster heater is operating.
- 2) When fan coil unit not used.

- 1. Due to our policy of innovation some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the reverberation rooms by ISO 9614 standard.
- Therefore, these values can be increased owing to ambient conditions during operation.

 4. Performances are accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions acc. ErP regulation. For max. capacities, refer to performance data.

 Rated running current: outdoor temp. 7°CDB / 6°CWB, LWT 35°C

 This product contains fluorinated greenhouse gases.

THERMA V_m (R32) SILENT MONOBLOC

PRODUCT SPECIFICATION

Performance Table for Heating Operaion

Maximum Heating Capacity (Including Defrost Effect)

HM091MRS U33

Outdoor	LWT 30°C	LWT 35°C	LWT 40°C	LWT 45°C	LWT 50°C	LWT 55°C	LWT 60°C	LWT 65°C
Temperature	TC							
-25°C DB	5.66	5.09	4.57	4.02	-	-	-	-
-20°C DB	6.61	6.50	5.61	4.89	4.32	-	-	-
-15°C DB	7.33	7.36	7.25	6.99	6.35	5.77	-	-
-7°C DB	9.00	9.00	9.00	9.00	9.00	8.42	-	-
-4°C DB	9.00	9.00	9.00	9.00	9.00	9.00	6.87	-
-2°C DB	9.00	9.00	9.00	9.00	9.00	9.00	7.09	-
2°C DB	9.00	9.00	9.00	9.00	9.00	9.00	7.48	-
7°C DB	9.00	9.00	9.00	9.00	9.00	9.00	7.87	7.14
10°C DB	9.00	9.00	9.00	9.00	9.00	9.00	8.06	7.34
15°C DB	9.00	9.00	9.00	9.00	9.00	9.00	8.28	7.58
18°C DB	9.00	9.00	9.00	9.00	9.00	9.00	8.36	7.68
20°C DB	9.00	9.00	9.00	9.00	9.00	9.00	8.40	7.72
35°C DB	9.00	9.00	9.00	9.00	9.00	9.00	8.45	7.80

- Note

 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C), LPM: Liters Per Minute (\(\ell / \text{min} \)), TC: Total Capacity (kW)

 2. Direct interpolation is permissible. Do not extrapolate.

 3. Measuring procedure follows EN-14511.

 Rated values are based on standard conditions and it can be found on specifications.

 Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.

 In accordance with the test standard (or nations), the rating will vary slightly.


Performance Table for Cooling Operation

Maximum Cooling Capacity

HM091MRS U33

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	8.50	9.31	10.12	10.66	11.47	12.00	12.54
20°C DB	8.70	9.19	9.67	9.99	10.48	10.80	11.13
30°C DB	8.90	9.06	9.22	9.33	9.49	9.60	9.71
35°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00
40°C DB	9.10	9.02	8.94	8.89	8.81	8.76	8.71
45°C DB	9.20	9.04	8.89	8.78	8.63	8.52	8.42


- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C), LPM: Liters Per Minute (\(\ell / \text{min} \), TC: Total Capacity (kW) 2. Direct interpolation is permissible. Do not extrapolate.
- 3. Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
 Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
 In accordance with the test standard (or nations), the rating will vary slightly.

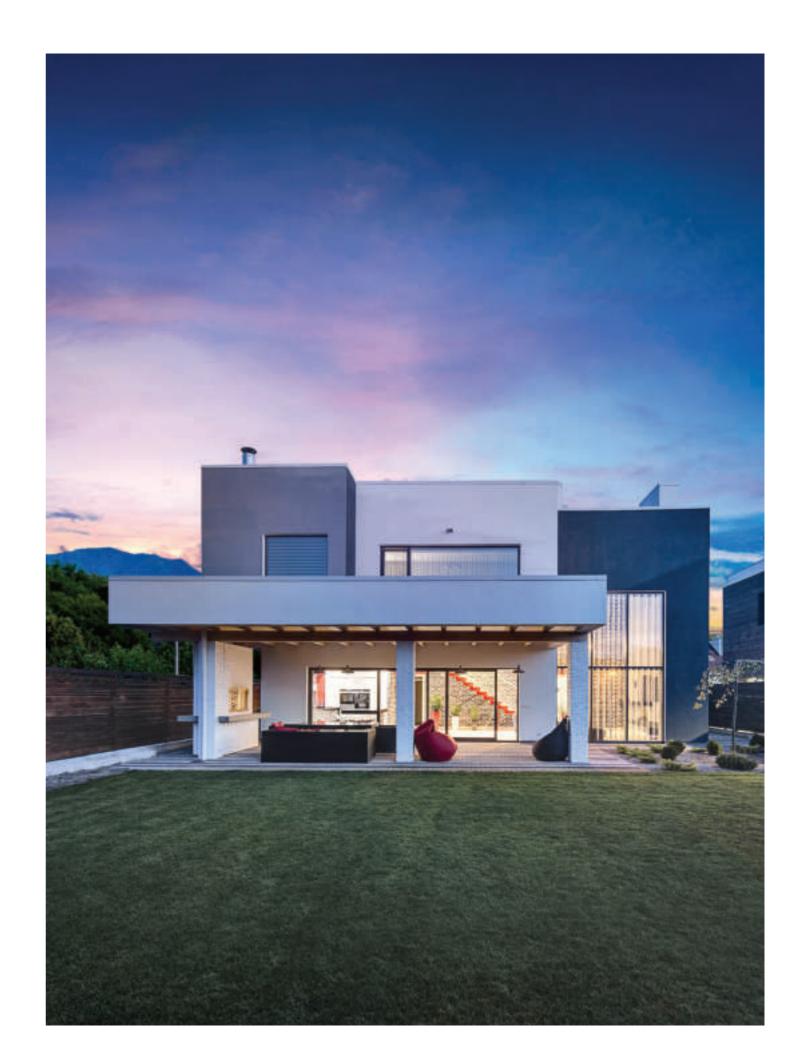


Drawings

		Model Name
Category	Unit	Capacity (kW)
		9.0
1 Phase Model 220 ~ 240V, 1Ø, 50Hz	Monobloc Unit	HM091MRS U33

HM091MRS U33 [Unit:mm]

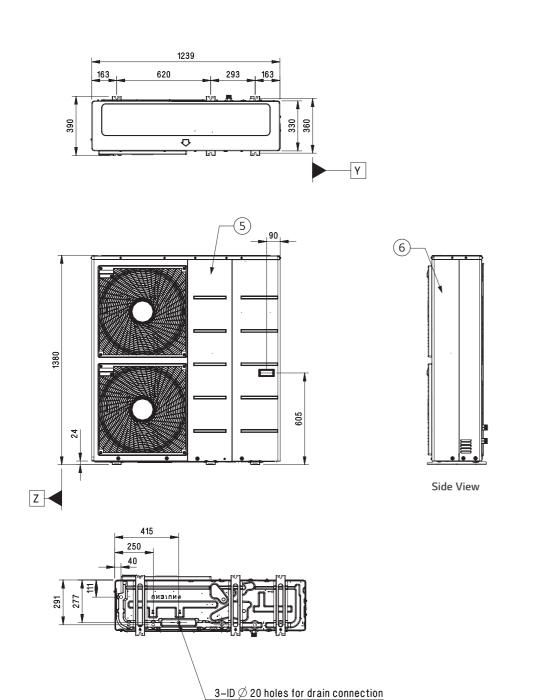

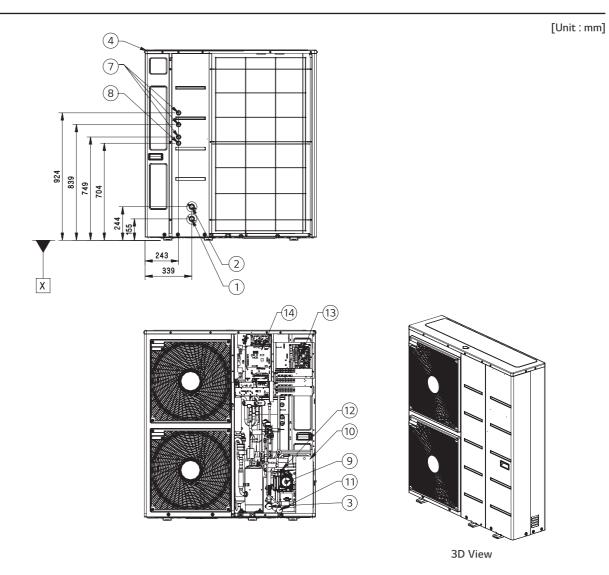

No.	Part Name	Description
1	Entering Water Pipe	Male PT 1 inch
2	Leaving Water Pipe	Male PT 1 inch
3	Strainer	Filtering and stacking particles inside circulating water
4	Top Cover	-
5	Front Panel	-
6	Side Panel	-
7	Low Voltage	Accessory kit cables
8	UNIT Power	Outdoor entry power cable
9	Water Pump	-
10	Plate Heat Exchanger	Heat exchange between refrigerant and water
11	Pressure Gauge	Indicates circulating water pressure
12	Safety Valve	Open at water pressure 3bar
13	Indoor Control Box	Indoor PCB and terminal blocks
14	Outdoor Control Box	Outdoor PCB and terminal blocks

Electric Back up Heater


HA031M E1 HA061M E1



Product Specification

Electrical Spe	cification	Unit	HA031M E1	HA061M E1	
	Туре	-	She	ath	
	Number of Heating Coil	EA	1	2	
	Capacity Combination	kW	3.0	3.0 + 3.0	
Back up	Operation	-	Auto	matic	
Heater	Heating Steps	Step	1	2	
	Power Supply	V, Ø, Hz	220 ~ 240, 1, 50		
	Dimensions (W x H x D)	mm	210 x 607 x 217		
Net Weight (unit)		kg	13.0	13.8	
Wiring	Power Supply Cable (included earth, H07RN-F)	mm ² x cores	1.5 x 3C	4.0 x 3C	
Connections	Communication Cable (H07RN-F)	mm ² x cores	0.75 x 2C	0.75 x 4C	


- Due to our policy of innovation some specifications may be changed without notification.
 Wiring cable size must comply with the applicable local and national codes. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.

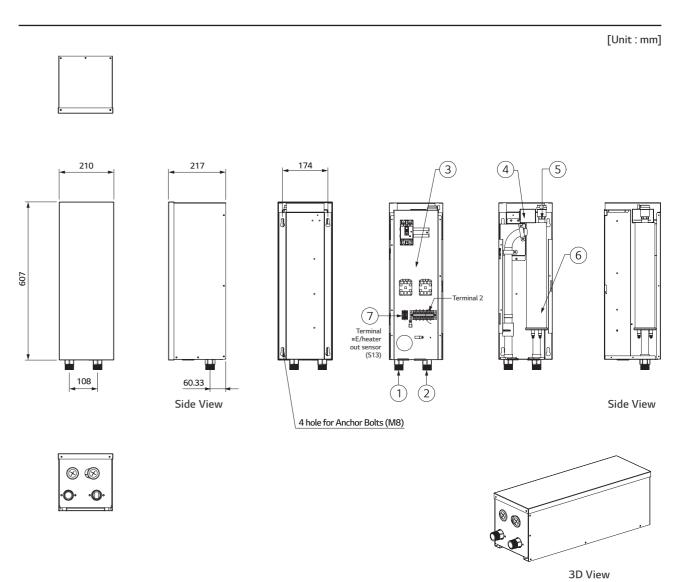

No.	Part Name	Description
1	Leaving Water Pipe	Male PT 1 inch
2	Entering Water Pipe	Male PT 1 inch
3	Control Box	Circuit breaker, Magnetic switch, Terminal blocks
4	Thermal Switch	Cut-off power input to E/heater at 90°C
5	Air Vent	Air purging when charging water
6	Electric Heater	Refer the related information
7	Back up Heater Outlet Sensor (S13)	Connect to unit (heat pump)



THERMA V. (R32) **R32 HYDROSPLIT**



Excellent Performance & Efficiency









User Convenience















Advanced

Easy Installation & Maintenance








Hydrosplit LG heating Clip configurator¹⁾ connection

1) Will be supported within this year.

Energy Labeling



Hydrosplit Concept

With innovation and safety in mind, the LG THERMA V Hydrosplit separates the Indoor unit (IDU) and outdoor unit (ODU), connecting them through water pipes.

The unit's heat exchanger is located within the ODU, reducing the risk of indoor refrigerant leakage. Quick and easy installation is made possible by the IDU's built-in hydronic components such as water pump, expansion tank, and air vent as well as the fact that the electric wiring can be done in the same space as the IDU.





Capacity Range (Heating & Cooling)

R32 Hydrosplit

Capacity Range [kW]	12	14	16
Heating Capacity	(12.0)	(14.0)	(16.0)
Cooling Capacity	(12.0)	(14.0)	(16.0)

Operation Range (Heating & Cooling)





076

* A+++ to D scale.


^{*} Detailed description for each function is presented on page 26 ~ 43.

THERMA V... (R32) HYDROSPLIT

PRODUCT FEATURES

Hydrosplit Concept


The THERMA V R32 Hydrosplit connects an IDU and ODU by water pipes due to the heat exchanger's location in the outdoor unit, thus reducing the risk of indoor refrigerant leakage.

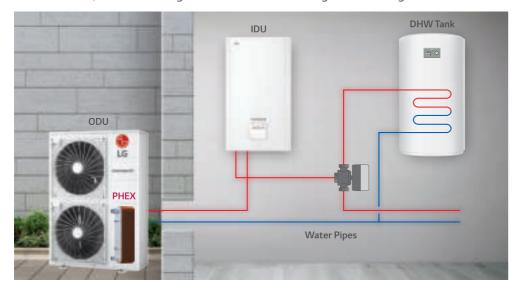

^{*} PHEX : Plate Heat Exchanger

No Risk of Indoor Refrigerant Leakage


As there is no refrigerant inside of room, no need to consider minimum floor area requirement for IDU due to R32 refrigerant. As a result, it is possible to expand living area more for other purpose.

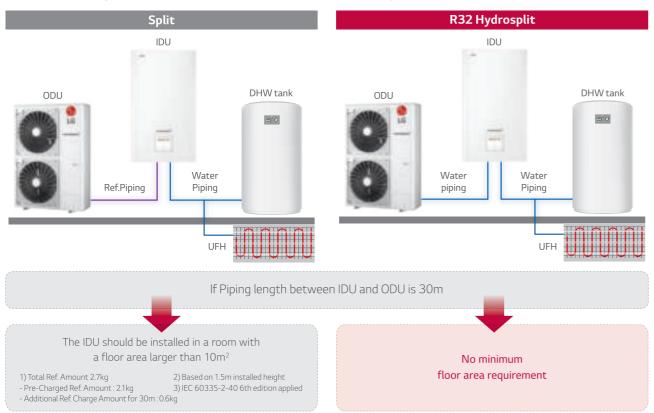

Modbus Communication


Considering the units in parallel installation, it is required to think how to control them.


The R32 Hydrosplit can be connected to 3rd party control system using Modbus protocol directly, without Modbus RTU gateway and PI485 gateway. Moreover, R32 Hydrosplit is able to support much more functions than conventional one using new Modbus memory map.

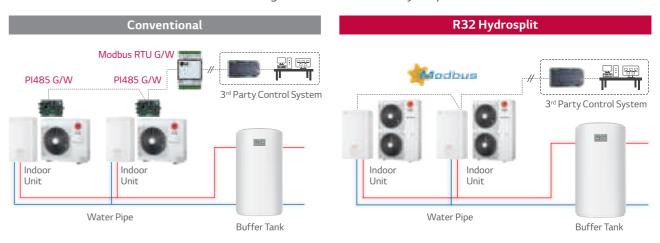

Visualized Seasonal Auto Mode Setting

In this mode, the target temperature and operation mode will be changed automatically according to the outdoor temperature. Moreover, now this function can be used in 2nd heating circuit and conveniently set using visualized graphic.





THERMA V_{IM} (R32) HYDROSPLIT

PRODUCT FEATURES

Advanced Pump Control Options

Various pump control options are possible for the user's convenience. With the R32 Hydrosplit, the water flow rate can be changed as per heat load condition, therefore it makes more energy efficient operation during low load condition.




Options	Description	Water Flow Change as per load condition
Pump Capacity	It operates with the capacity set for the water pump. (range 10 ~ 100%)	No
Fixed Flow Rate	Automatically controlled to maintain the set flow rate. (range 17 ~ 46 LPM)	No
Fixed ∆T*	Automatically controlled to maintain the set ΔT. (range 5 ~ 13°C)	Yes
Optimal Flow Rate (default)	ΔT is changed as per Target Temp.	Yes


^{*} ΔT = temperature difference between inlet and outlet water temperature.

Water Circuit Monitoring

It is possible to monitor via remote controller not only temperature of water circuit but also flow rate and pressure. This information is not only useful to the installer during installation, but also helps to

periodically clean the strainer.





High Energy Efficiency


The energy label directive is a key factor in selecting a heating device in the European heating market. The R32 Hydrosplit has an energy label rating (ErP) for space heating of A+++.




Test Condition
Test procedure follows EN14825 (low temp. average). based on the single phase model line-up.

High Heating Performance even at Low Temperature

The R32 Hydrosplit provides excellent heating performance – especially at low ambient temperatures. Its heating capacity at OAT -7°CDB is the same as normal capacity and heating capacity at OAT -15°CDB reaches more than 90% of normal capacity¹⁾. The heating capacity of the R32 Hydrosplit is 18.5% higher at low ambient temperatures and 44.3% higher at mid ambient temperature than the R410A Split.

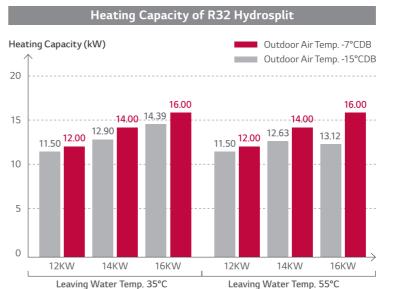



Comparison with Previous Model

1) Normal : Outdoor air temperature 7°CDB / 6°CWB, Water outlet temperature 35°C

THERMA V... (R32) HYDROSPLIT

PRODUCT SPECIFICATION

R32 Hydrosplit

IDU

HN1600MB NK0

ODU

HU121MRB U30 / HU123MRB U30 HU141MRB U30 / HU143MRB U30 HU161MRB U30 / HU163MRB U30

























Features

- Water pipes connects IDU & ODU
- High energy efficiency (SCOP up to 4.60/A+++)
- Hydronic components built into IDU: water pump, expansion tank, air vent
- Excellent performance at low ambient temperature (100% @ -7°C)
- Wide operation range (ambient : -25 ~ 35°C/water side : 15 ~ 65°C)
- Built-in water flow & pressure sensors to monitor real-time water circuit
- Advanced water pump control (optimal flow rate, fixed capacity, fixed flow rate, fixed $\triangle T$)
- Enhanced 2nd circuit control logic
- R32 refrigerant with low GWP
- R1 scroll compressor
- Black Fin heat exchanger
- LG ThinQ
- KEYMARK/EHPA certification/MCS/Eurovent certification

Model Line-up

			Model Name				
Category	Unit		Capacity (kW)				
		12.0	14.0	16.0			
1 Phase Model	Outdoor Unit	HU121MRB U30	HU141MRB U30	HU161MRB U30			
220 ~ 240V, 1Ø, 50Hz	Indoor Unit		HN1600MB NK0				
3 Phase Model 380 ~ 415V, 3Ø, 50Hz	Outdoor Unit	HU123MRB U30	HU143MRB U30	HU163MRB U30			
	Indoor Unit		HN1600MB NK0				

Seasonal Energy

Description		Outdoor Unit	HU121MRB U30 HU123MRB U30	HU141MRB U30 HU143MRB U30	HU161MRB U30 HU163MRB U30	
		Indoor Unit	HN1600MB NKO			
Average		SCOP	-	4.60	4.57	4.55
Space	Climate Water	Seasonal Space Heating Efficiency (η _s)	%	181	180	179
Heating	Outlet 35°C	Seasonal Space Heating Eff. Class (A+++ to D scale)	-	A+++	A+++	A+++
(according	Average	SCOP	-	3.50	3.47	3.45
to EN14825) Climate Water	Seasonal Space Heating Efficiency (ηs)	%	137	136	135	
	Outlet 55°C	Seasonal Space Heating Eff. Class (A+++ to D scale)	-	A++	A++	A++

Nominal Capacity and Nominal Power Input

Description		OAT (DB)	LWT (DB)	Outdoor Unit	HU121MRB U30 HU123MRB U30	HU141MRB U30 HU143MRB U30	HU161MRB U30 HU163MRB U30
				Indoor Unit		HN1600MB NKO	
		7°C	35°C		12.00	14.00	16.00
Nominal Capacity	Heating	7°C	55°C		11.00	11.50	12.00
		2°C	35°C	kW	11.00	12.00	13.80
	Cooling	35°C	18°C		12.00	14.00	16.00
	Cooling	35°C	7°C		12.00	14.00	16.00
		7°C	35°C	kW	2.38	2.86	3.33
	Heating	7°C	55°C		3.79	4.04	4.29
Nominal Power Input		2°C	35°C		3.01	3.31	3.83
1 ower input	Cooling	35°C	18°C		2.53	3.26	4.00
	Cooling	35°C	7°C		4.44	5.38	6.40
		7°C	35°C		5.04	4.89	4.80
COP	Heating	7°C	55°C	W/W	2.90	2.85	2.80
		2°C	35°C		3.65	3.63	3.60
EER	Cooling	35°C	18°C	W/W	4.75	4.30	4.00
EER	Cooling	35°C	7°C	V V / V V	2.70	2.60	2.50

R32 Hydrosplit

Product Specification (Outdoor Unit)

Technical Specification	n		Unit	HU121MRB U30	HU141MRB U30	HU161MRB U30	HU123MRB U30	HU123MRB U30	HU143MRB U30
Operation Range	Heating	Min. ~ Max.	°CDB			-25	~ 35		
(outdoor temp.)	Cooling	IVIIII. ~ IVIAX.	°C			5 ~	48		
Campragar	Quantity		EA				1		
Compressor	Туре		-			Hermetic S	ealed Scroll		
	Туре		-			R:	32		
Refrigerant	GWP (global warming	g potential)	-			6	75		
Remgerant	Precharged Amount		g			2,1	00		
	t-CO ₂ eq		-		1.418				
Dining Connections W/	Water Circuit	Inlet	mm (inch)		Male PT 25.4(1)				
Piping Connections	vvater Circuit	Outlet	mm (inch)		Male PT 25.4(1)				
Rated Water Flow Rate	(at LWT 35°C)		LPM	34.5	40.3	46.0	34.5	40.3	46.0
Sound Power Level	Heating	Rated	dB(A)	61	62	63	61	62	63
Sound Pressure Level (at 1m)	Heating	Rated	dB(A)	53	54	55	53	54	55
Dimensions	Unit	WxHxD	mm			950 x 1,3	80 x 330		
Weight	Unit		kg			9	1.7		
	Voltage, Phase, Frequ	iency	V, Ø, Hz	2	220 ~ 240, 1, 50 280 ~ 415, 3, 50			50	
Power Supply	Rated	Heating	А	10.6	12.7	14.8	3.5	4.2	4.9
	Running Current	Cooling	А	11.2	14.4	17.7	3.7	4.8	5.9
	Recommended Circui	t Breaker	А	40				16	
Wiring Connections	Power Supply Cable (include	ed earth, H07RN-F)	mm ² x cores		6.0 x 3C			2.5 x 5C	

- 1. Due to our policy of innovation some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound power level is measured on the rated condition in the reverberation rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation.

 Sound pressure level is converted values from sound power level as per distance.

 4. Performances are based on the following conditions (It is according to EN14511):

 Interconnected pipe length is standard length and difference of elevation (outdoor ~ indoor unit) is 0m.

- 5. This product contains fluorinated greenhouse gases.
- 6. Strainer is accessory provided with the outdoor unit.


Product Specification (Indoor Unit)

Indoor Unit			Unit	HN1600MB NK0
0 0	Heating	Min. ~ Max.	°C	15 ~ 65
Operation Range (leaving water)	Cooling	Min. ~ Max.	°C	5~27 (16~27) ²⁾
(teaving water)	DHW ¹⁾	Min. ~ Max.	°C	15 ~ 80
Flow Sensor	Measuring Range	Min. ~ Max.	ℓ/min	5 ~ 80
Water Pressure Sensor	Measuring Range	Min. ~ Max.	bar(G)	0 ~ 20
Expansion Vessel	Volume		l	8
Safety Valve	Pressure Limit	Upper limit	bar	3
Dining Connections	Water Circuit	Inlet	mm (inch)	Male PT 25.4(1)
Piping Connections	vvater Circuit	Outlet	mm (inch)	Male PT 25.4(1)
Wiring Connections	Power and Communication Ca	ble (included earth, H07RN-F)	mm ² x cores	0.75 x 4C
Sound Power Level	Heating	Rated	dB(A)	44
Dimensions	Unit	WxHxD	mm	490 x 850 x 315
Weight	Unit		kg	30.3

- 1) DHW $58 \sim 80^{\circ}$ C operating is available only when the booster heater is operating.
- 2) When fan coil unit not used.

Accessory Parts (Optional Accessory)

Back up Heater¹⁾

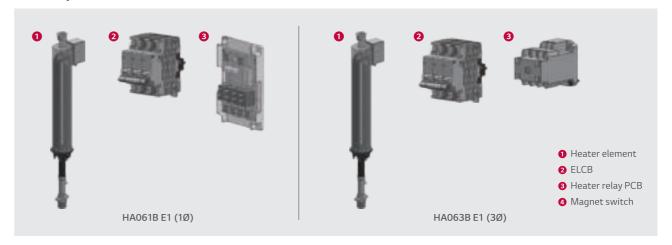


Electrical Specificati	on		HA061B E1	HA063B E1	
	Туре	-	- Sheath		
	No. of Heating Coil	EA	2	3	
Back up Heater	Max. Power Consumption	kW	3.0 + 3.0	2.0 + 2.0 + 2.0	
	Heating Step	Step	2	2	
	Power Supply	V, Ø, Hz	220 ~ 240, 1, 50	380 ~ 415, 3, 50	
Wiring Connection	Power Cable (included earth, H07RN-F)	mm² x cores	4.0 x 3C	2.5 x 4C	
	Communication Cable (included earth, H07RN-F)	mm ² x cores	0.75 x 4C	0.75 x 2C	

¹⁾ Available from November 2021

Accessory Parts (Separately Provided)

Strainer



Technical Spec	ification	Details
Manarial	Body	Brass
Material	Mesh	STAINLESS STEEL (STS304)
Mesh Size		30
Connection		PF 1 inch

Performance Table for Heating Operaion

Maximum Heating Capacity (Including Defrost Effect)

HU121MRB U30 + HN1600MB NK0 / HU123MRB U30 + HN1600MB NK0

Outdoor	LWT 30°C	LWT 35°C	LWT 40°C	LWT 45°C	LWT 50°C	LWT 55°C	LWT 60°C	LWT 65°C
Temperature	TC							
-25°C DB	9.66	8.85	8.42	8.29	-	-	-	-
-20°C DB	10.13	10.00	9.88	9.75	9.63	-	-	-
-15°C DB	11.50	11.50	11.50	11.50	11.50	11.50	-	-
-7°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	-
-4°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
-2°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
2°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
7°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
10°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
15°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
18°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
20°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
35°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00

HU141MRB U30 + HN1600MB NK0 / HU143MRB U30 + HN1600MB NK0

Outdoor	LWT 30°C	LWT 35°C	LWT 40°C	LWT 45°C	LWT 50°C	LWT 55°C	LWT 60°C	LWT 65°C
Temperature	TC							
-25°C DB	10.04	9.21	8.76	8.62	-	-	-	-
-20°C DB	11.82	11.25	10.95	10.67	10.59	-	-	-
-15°C DB	12.52	12.90	13.26	12.88	12.81	12.63	-	-
-7°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	-
-4°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
-2°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
2°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
7°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
10°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
15°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
18°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
20°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
35°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00

HU161MRB U30 + HN1600MB NK0 / HU163MRB U30 + HN1600MB NK0

Outdoor	LWT 30°C	LWT 35°C	LWT 40°C	LWT 45°C	LWT 50°C	LWT 55°C	LWT 60°C	LWT 65°C
Temperature	TC							
-25°C DB	10.98	10.00	9.50	9.33	-	-	-	-
-20°C DB	13.43	12.54	12.03	11.78	11.47	-	-	-
-15°C DB	14.23	14.39	14.50	13.95	13.86	13.12	-	-
-7°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	-
-4°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
-2°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
2°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
7°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
10°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
15°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
18°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
20°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
35°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00

- 1. DB : Dry Bulb Temperature (°C), LWT : Leaving Water Temperature (°C), LPM : Liters Per Minute (ℓ/\min) , TC : Total Capacity (kW)
- Direct interpolation is permissible. Do not extrapolate.
 Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
 In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

Performance Table for Cooling Operation

Maximum Cooling Capacity

HU121MRB U30 + HN1600MB NK0 / HU123MRB U30 + HN1600MB NK0

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
20°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
30°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
35°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
40°C DB	11.75	12.00	12.00	12.00	12.00	12.00	12.00
45°C DB	11.50	12.00	12.00	12.00	12.00	12.00	12.00

HU141MRB U30 + HN1600MB NK0 / HU143MRB U30 + HN1600MB NK0

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00
20°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00
30°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00
35°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00
40°C DB	13.75	14.00	14.00	14.00	14.00	14.00	14.00
45°C DB	13.50	14.00	14.00	14.00	14.00	14.00	14.00

HU161MRB U30 + HN1600MB NK0 / HU163MRB U30 + HN1600MB NK0

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00
20°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00
30°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00
35°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00
40°C DB	15.75	16.00	16.00	16.00	16.00	16.00	16.00
45°C DB	15.50	16.00	16.00	16.00	16.00	16.00	16.00

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C), LPM: Liters Per Minute (ℓ/\min) , TC: Total Capacity (kW)
- Direct interpolation is permissible. Do not extrapolate.
 Measuring procedure follows EN-14511.

- Rated values are based on standard conditions and it can be found on specifications.
 Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
 In accordance with the test standard (or nations), the rating will vary slightly.


Drawings


5-ID Ø20 holes for drain connection


			Model Name					
Category	Unit		Capacity (kW)					
		12.0	14.0	16.0				
1 Phase Model	Outdoor Unit	HU121MRB U30	HU141MRB U30	HU161MRB U30				
220 ~ 240V, 1Ø, 50Hz	Indoor Unit		HN1600MB NK0					
3 Phase Model 380 ~ 415V, 3Ø, 50Hz	Outdoor Unit	HU123MRB U30	HU143MRB U30	HU163MRB U30				
	Indoor Unit		HN1600MB NK0					


No.	Part Name	Description
1	Entering Water Pipe	Male PT 1 inch
2	Leaving Water Pipe	Male PT 1 inch
3	Unit Power	Power Cable Hole
4	Low Voltage	Communication Cable Hole
5	Handle	-
6	Air Outlet	-
7	Control Box	PCB and terminal blocks

HN1600MB NK0 [Unit:mm]










No.	Part Name	Description
1	Leaving Water Pipe	Male PT 1 inch
2	Entering Water Pipe	Male PT 1 inch
3	Water Pump	GRUNDFOS UPML GEO 20-105 CHBL
4	Safety Valve	Open at water pressure 3 bar
5	Control Box	PCB and Terminal blocks
6	Flow Sensor	SIKA VVX20 5-80 LPM
7	Pressure Sensor	SENSATA 2HMP3-04W 0-2MPa
8	Expansion Tank	Absorbing volume change of heated water
9	Air Vent	Air purging when charging water

THERMA V... (R32) **R32 SPLIT**





Excellent Performance & Efficiency









User Convenience
















Easy Installation & Maintenance







Energy Labeling




^{* 9}kW 1Ø model. * A+++ to D scale.

Split Hydro Box Concept

The LG THERMA V R32 Split is a hydro box type comprising a separate indoor and outdoor unit, which are connected by refrigerant piping. Hydronic components such as plate heat exchanger, expansion tank and water pump are located within the indoor unit, making the unit capable of withstanding freezing outside ambient temperatures.





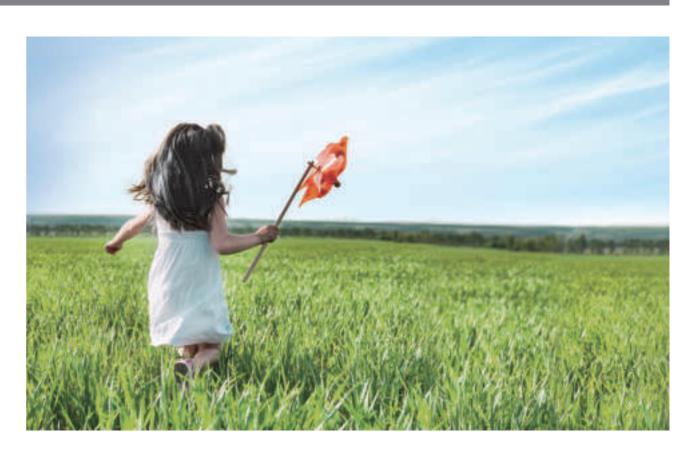



Capacity Range (Heating & Cooling)

R32 Split

Capacity Range [kW]	5	7	9
Heating Capacity	(5.5)	(7.0)	(9.0)
Cooling Capacity	(5.5)	(7.0)	(9.0)

Operation Range (Heating & Cooling)





^{*} Detailed description for each function is presented on page 26 \sim 43.


PRODUCT FEATURES

High Energy Efficiency

Test procedure follows EN14825 (low temp average),


based on the single phase model line-up

The energy label directive is a key factor in selecting a heating device in the European heating market. The R32 Split type has an energy label rating (ErP) of A+++.

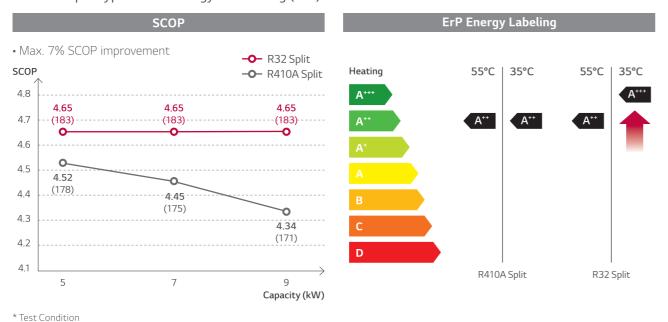


High Heating Performance even at Low Temperature

The R32 Split provides excellent heating performance – especially at low ambient temperatures. Its heating capacity at OAT -7°CDB is the same as normal capacity and heating capacity at OAT -15°CDB reaches more than 85% of normal capacity. The heating capacity of the R32 Split at low ambient temperatures is 18% higher than the R410A Split.

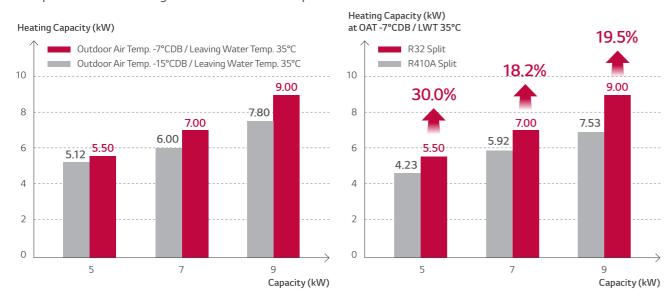

Reduced Noise Level

THERMA V R32 Split has a low noise level slightly higher than conversation.

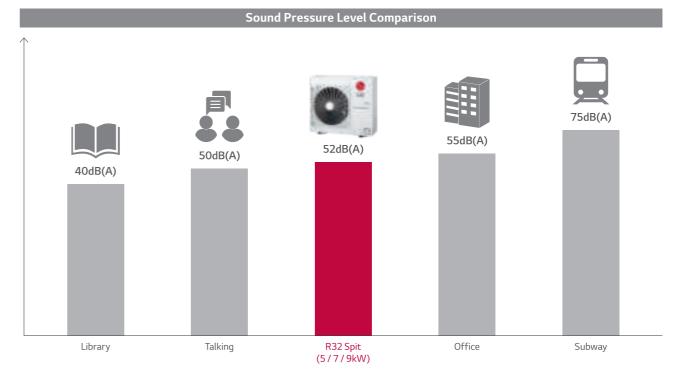

THERMA V_{IM} (R32) SPLIT

PRODUCT SPECIFICATION

R32 Split

IDU

HN0916M NK4

ODU

HU051MR U44 HU071MR U44 HU091MR U44





















Features

- High energy efficiency (SCOP 4.65/A+++)
- Excellent performance at low ambient temperature (100% @ -7°C)
- Wide operation range

(ambient: $-25 \sim 35$ °C/water side: $15 \sim 65$ °C)

- R32 refrigerant with low GWP
- R1 scroll compressor
- Black Fin heat exchanger
- LG ThinQ
- KEYMARK/EHPA certification/MCS/ Eurovent certification

Model Line-up

			Model Name	odel Name		
Category	Unit	Capacity (kW)				
		5.5	7.0	9.0		
1 Phase Model	Outdoor Unit	HU051MR U44	HU071MR U44	HU091MR U44		
220 ~ 240V, 1Ø, 50Hz	Indoor Unit		HN0916M NK4			

Seasonal Energy

Description			Outdoor Unit	HU051MR U44	HU071MR U44	HU091MR U44
Description	Description				HN0916M NK4	
	Average	SCOP	-	4.65	4.65	4.65
Space	Climate Water	Seasonal Space Heating Efficiency (ηs)	%	183	183	183
Heating	Outlet 35°C	Seasonal Space Heating Eff. Class (A+++ to D scale)	-	A+++	A+++	A+++
(according	Average	SCOP	-	3.23	3.23	3.23
to EN14825)	to EN14825) Climate Water	Seasonal Space Heating Efficiency (η _s)	%	126	126	126
Outlet 55°C		Seasonal Space Heating Eff. Class (A+++ to D scale)	-	A++	A++	A++

Nominal Capacity and Nominal Power Input

Description		OAT (DB)	LWT (DB)	Outdoor Unit	HU051MR U44	HU071MR U44	HU091MR U44		
Description		OAI (DB)	LVVI (DB)	Indoor Unit		HN0916M NK4			
		7°C	35°C		5.50	7.00	9.00		
Nominal Capacity	Heating	7°C	55°C		5.50	5.50	5.50		
		2°C	35°C	kW	3.30	4.20	5.40		
	Cooling	35°C	18°C		5.50	7.00	9.00		
	Cooling	35°C	7°C		5.50	7.00	9.00		
		7°C	35°C	kW	1.12	1.43	1.94		
Nominal	Heating	7°C	55°C		1.57	1.57	1.57		
Power Input		2°C	35°C		0.94	1.20	1.54		
rower input	Cooling	35°C	18°C		1.20	1.56	2.14		
	Cooling	35°C	7°C		1.96	2.59	3.46		
		7°C	35°C		4.90	4.90	4.65		
COP	Heating	7°C	55°C	W/W	3.50	3.50	3.50		
		2°C	35°C		3.52	3.51	3.50		
EER	Cooling	35°C	18°C	W/W	4.60	4.50	4.20		
EER	Cooling	35°C	7°C	VV/ VV	2.80	2.70	2.60		

Product Specification (Outdoor Unit)

Technical Specification			Unit	HU051MR U44	HU071MR U44	HU091MR U44
Operation Range	Heating	Min. ~ Max.	°CDB		-25 ~ 35	
(outdoor temp.)	Cooling	IVIIII. ~ IVIdX.	°C	5 ~ 48		
C	Quantity		EA	1		
Compressor	Туре		-	Hermetic Sealed Scroll		
	Туре		-		R32	
Dofrigorant	GWP (global warming potential)		-		675	
Refrigerant	Precharged Amount		g		1,500	
	t-CO ₂ eq		-		1.013	
	Outer Diameter	Gas	mm (inch)		Ø15.88 (5/8)	
D	Outer Diameter	Liquid	mm (inch)	Ø9.52 (3/8)		
	Lanath	Standard	m		5	
Piping Connections	Length	Max.	m		50	
Connections	Level Difference	Max.	m		30	
	Chargeless-Pipe Length		m	10		
	Additional Charging Volume		g/m	30		
Rated Water Flow Rate (a	at LWT 35°C)		LPM	15.81	20.12	25.87
Sound Power Level	Heating	Rated	dB(A)		60	
Sound Pressure Level (at 1m)	Heating	Rated	dB(A)		52	
Dimensions	Unit	WxHxD	mm	950 x 834 x 330		
Weight	Unit		kg		60.0	
	Voltage, Phase, Frequency	1	V, Ø, Hz		220 ~ 240, 1, 50	
Power Supply	Rated Running Current	Heating	А	5.0	6.3	8.6
rower supply	rated Rullilling Current	Cooling	А	5.3	6.9	9.5
	Recommended Circuit Bre	aker	А	16	20	25
Wiring Connections	Power Supply Cable (include	ded earth, H07RN-F)	mm ² x cores		4.0 x 3C	

- Due to our policy of innovation some specifications may be changed without notification.
 Wiring cable size must comply with the applicable local and national codes. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound power level is measured on the rated condition in the reverberation rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation Sound pressure level is converted values from sound power level as per distance.
- Performances are based on the following conditions (It is according to EN14511): Interconnected pipe length is standard length and difference of elevation (outdoor ~ indoor unit) is 0m.
- 5. This product contains fluorinated greenhouse gases.

Product Specification (Indoor Unit)

Technical Specification	on.		Unit	HN0916M NK4
rechilical Specification			Onit	15 ~ 65
Operation Range	Heating	841 84	0CDD	
(leaving water)	Cooling	Min. ~ Max.	°CDB	5 ~ 27 (16 ~ 27) ²⁾
	DHW ¹⁾			15 ~ 80
	Туре		-	Vortex
Flow Sensor	Measuring Range	Min. ~ Max.	ℓ/min	5 ~ 80
	Flow (trigger point)	Min.	ℓ/min	7
	Matau Cinavit	Inlet	mm (inch)	Male PT 25.4 (1)
Piping Connections	Water Circuit	Outlet	mm (inch)	Male PT 25.4 (1)
	Defeirement Circuit	Gas	mm (inch)	Ø15.88 (5/8)
	Refrigerant Circuit	Liquid	mm (inch)	Ø9.52 (3/8)
Sound Power Level	Heating	Rated	dB(A)	44
Dimensions	Unit	WxHxD	mm	490 x 850 x 315
Weight	Unit		kg	40.5
Electrical Specificati	on		Unit	HN0916M NK4
Wiring Connections	Power and Communication Cable (included earth, H07RN-F)	mm ² x cores	0.75 x 4C
	Туре		-	Sheath
	Number of Heating Coil		EA	2
	Capacity Combination		kW	3.0 + 3.0
Pack up Hoator	Operation		-	Automatic
Back up Heater	Heating Steps		Step	2
	Power Supply		V, Ø, Hz	220 ~ 240, 1, 50
	Rated Current		A	25.0
	Power Supply Cable (included ea	arth, H07RN-F)	mm ² x cores	4.0 x 3C

- 1) DHW $58 \sim 80^{\circ}\text{C}$ operating is available only when the booster heater is operating.
- 2) When fan coil unit not used.



Performance Table for Heating Operaion

Maximum Heating Capacity (Including Defrost Effect)

HU051MR U44 + HN0916M NK4

Outdoor	LWT 30°C	LWT 35°C	LWT 40°C	LWT 45°C	LWT 50°C	LWT 55°C	LWT 60°C	LWT 65°C
Temperature	TC							
-25°C DB	4.02	3.90	3.78	3.66	-	-	-	-
-20°C DB	4.64	4.51	4.38	4.26	4.13	-	-	-
-15°C DB	5.26	5.12	4.99	4.85	4.72	4.58	-	-
-7°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	-
-4°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	-
-2°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	-
2°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
7°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
10°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
15°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
18°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
20°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
35°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50

HU071MR U44 + HN0916M NK4

Outdoor	LWT 30°C	LWT 35°C	LWT 40°C	LWT 45°C	LWT 50°C	LWT 55°C	LWT 60°C	LWT 65°C
Temperature	TC							
-25°C DB	5.00	4.85	4.71	4.56	-	-	-	-
-20°C DB	5.58	5.43	5.27	5.11	4.95	-	-	-
-15°C DB	6.17	6.00	5.83	5.66	5.49	5.32	-	-
-7°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	-
-4°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	-
-2°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	-
2°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
7°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
10°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
15°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
18°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
20°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
35°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00

HU091MR U44 + HN0916M NK4

Outdoor	LWT 30°C	LWT 35°C	LWT 40°C	LWT 45°C	LWT 50°C	LWT 55°C	LWT 60°C	LWT 65°C
Temperature	TC							
-25°C DB	6.40	6.20	6.00	5.80	-	-	-	-
-20°C DB	7.23	7.00	6.77	6.54	6.31	-	-	-
-15°C DB	8.06	7.80	7.54	7.28	7.02	6.76	-	-
-7°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	-
-4°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	-
-2°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	-
2°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
7°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
10°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
15°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
18°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
20°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
35°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C), LPM: Liters Per Minute (\(\ell \)/min), TC: Total Capacity (kW) 2. Direct interpolation is permissible. Do not extrapolate.

 3. Measuring procedure follows EN-14511.

- Rated values are based on standard conditions and it can be found on specifications.
 Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
 In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

Performance Table for Cooling Operation

Maximum Cooling Capacity

HU051MR U44 + HN0916M NK4

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	6.42	6.95	7.49	7.85	8.39	8.75	9.11
20°C DB	6.05	6.37	6.70	6.91	7.23	7.45	7.66
30°C DB	5.68	5.79	5.90	5.97	6.08	6.15	6.22
35°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50
40°C DB	5.32	5.34	5.35	5.37	5.38	5.40	5.41
45°C DB	5.13	5.17	5.21	5.23	5.27	5.29	5.32

HU071MR U44 + HN0916M NK4

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	8.17	8.85	9.54	9.99	10.68	11.13	11.59
20°C DB	7.70	8.11	8.52	8.80	9.21	9.48	9.75
30°C DB	7.23	7.37	7.51	7.60	7.74	7.83	7.92
35°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00
40°C DB	6.77	6.79	6.81	6.83	6.85	6.87	6.88
45°C DB	6.53	6.58	6.63	6.66	6.70	6.74	6.77

HU091MR U44 + HN0916M NK4

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	10.50	11.38	12.26	12.85	13.73	14.31	14.90
20°C DB	9.90	10.43	10.96	11.31	11.84	12.19	12.54
30°C DB	9.30	9.48	9.65	9.77	9.95	10.06	10.18
35°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00
40°C DB	8.70	8.73	8.76	8.78	8.81	8.83	8.85
45°C DB	8.40	8.46	8.52	8.56	8.62	8.66	8.70

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C), LPM: Liters Per Minute (ℓ/\min) , TC: Total Capacity (kW)
- Direct interpolation is permissible. Do not extrapolate.
 Measuring procedure follows EN-14511.

- Rated values are based on standard conditions and it can be found on specifications.
 Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
 In accordance with the test standard (or nations), the rating will vary slightly.

THERMA V_{TM} (R32) SPLIT


PRODUCT SPECIFICATION


Drawings

			Model Name				
Category	Unit	Capacity (kW)					
		5.5	7.0	9.0			
1 Phase Model	Outdoor Unit	HU051MR U44	HU071MR U44	HU091MR U44			
220 ~ 240V, 1Ø, 50Hz	Indoor Unit	HN0916M NK4					


HU051MR U44 / HU071MR U44 / HU091MR U44

[Unit:mm]

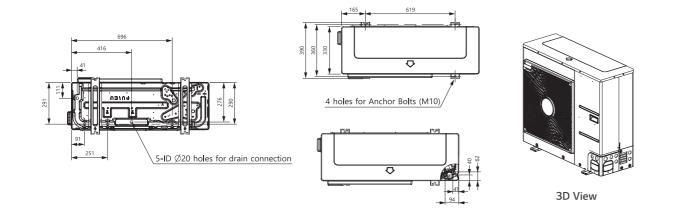

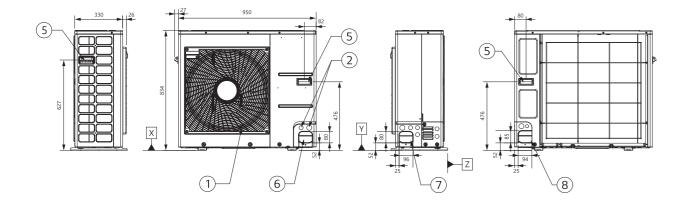


No.	Part Name	Description
1	Air Outlet	-
2	Power and Communication Cable Hole	-
3	Gas Pipe Connection	Flare joint
4	Liquid Pipe Connection	Flare joint
5	Handle	-
6	Pipe Routing Hole (front)	-
7	Pipe Routing Hole (side)	-
8	Pipe Routing Hole (back)	-



Piping Connection Port


HN0916M NK4 [Unit:mm]

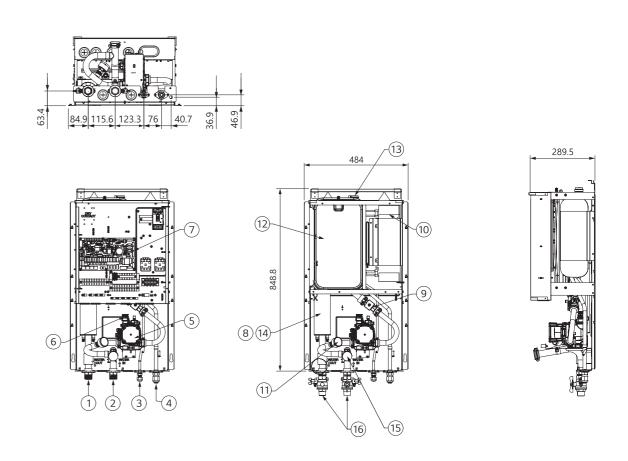

No.	Part Name	Description
1	Leaving Water Pipe	Male PT 1 inch
2	Entering Water Pipe	Male PT 1 inch
3	Refrigerant Pipe	Ø9.52 (mm)
4	Refrigerant Pipe	Ø15.88 (mm)
5	Water Pump	GROUNDFOS UPM3K 20-75 CHBL
6	Safety Valve	Open at water pressure 3bar
7	Control Box	PCB and terminal blocks
8	Thermal Switch	Cut-off power input to electric heater at 90°C (manual return at 55°C)
9	Flow Sensor	SIKA VVX20 5-80LPM
10	Plate Heat Exchanger	Heat exchange between refrigerant and water
11	Pressure Gage	Indicates circulating water pressure
12	Expansion Tank	Absorbing volume change of heated water
13	Air Vent	Air purging when charging water
14	Electric Heater	6kW
15	Strainer	Filtering and stacking particles inside circulating water
16	Shut-off Valve	To drain or to block water, when pipe connecting

R32 IWT (INTEGRATED WATER TANK)





THERMA V... (R32)

Excellent Performance & Efficiency




User Convenience





interface











Energy

Easy Installation & Maintenance








All in one LG heating

- configurator1) piping design 1) Will be supported within this year.
- * Detailed description for each function is presented on page 26 ~ 43.


Energy Labeling



- * 9kW 1Ø model.
- * A+++ to D scale.
- ① DHW storage tank (200ℓ)
- 2 Main water pump
- 3 Water pump for DHW charging
- 4 Main plate heat exchanger (ref./water) 5 Plate heat exchanger for DHW (water/DHW)
- 6 Back up electric heater (max. 6kW)
- **7** 3 Way diverting valve
- 8 Expansion vessel for heating (12*l*)
- 9 Flow sensor
- **11** Buffer tank (40ℓ, option)
- (2) RS3 Remote controller (attached on the front panel)

IWT (Integrated Water Tank) Concept

THERMA V R32 IWT, or integrated water tank, is a domestic hot water supply, space heating and cooling solution that conveniently combines an indoor hot water tank with a separate outdoor unit. THERMA V R32 IWT is the perfect space-saving solution for residential applications because hydronic components like the Domestic Hot Water (DHW) and buffer tanks, which are typically installed separately, are fully integrated.

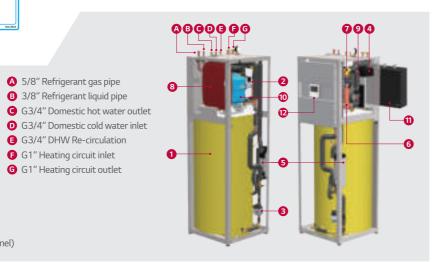





Capacity Range (Heating & Cooling)

R32 IWT

Capacity Range [kW]	5	7	9
Heating Capacity	(5.5)	(7.0)	(9.0)
Cooling Capacity	(5.5)	(7.0)	(9.0)

Operation Range (Heating & Cooling)





100

A 5/8" Refrigerant gas pipe

6 G1" Heating circuit inlet

G G1" Heating circuit outlet


THERMA V... (INTEGRATED WATER TANK)

PRODUCT FEATURES

Save Space & Time

Compared with conventional system, easy & quick installation is possible and smaller spaces are required for installation.





tank for DHW circuit (8l) (optional)

- Enough rooms for product installation
- Need to secure the space for water tank
- More water piping work & more installation time

Sophisticated and Harmonious Exterior

The THERMA V R32 IWT indoor unit can be installed in multiple indoor spaces, to include the utility or laundry room, garage or kitchen due to its sleek design.



High Energy Efficiency


in accordance with EN16147.


The energy label directive is a key factor in selecting a heating device in the European heating market. The R32 IWT has an energy label rating (ErP) for space heating of A+++. Furthermore, As all new buildings in EU countries to be nearly Zero-Energy Building (nZEB) by the end of 2020, Water Heating Efficiency is getting more important. The R32 IWT has an A+ water heating efficiency class at Declared load profile L.



High Heating Performance even at Low Temperature

The R32 IWT provides excellent heating performance – especially at low ambient temperatures. Its heating capacity at OAT -7°CDB is the same as normal capacity and heating capacity at OAT -15°CDB reaches more than 85% of normal capacity. The heating capacity of the R32 IWT is 19.5% higher at low ambient temperatures and 26.2% higher at mid ambient temperatures than the R410A IWT.

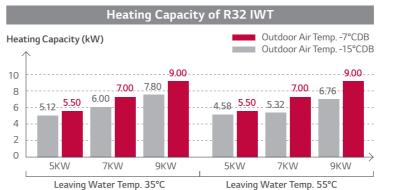



THERMA V... (R32) IWT (INTEGRATED WATER TANK)

PRODUCT SPECIFICATION

R32 IWT

IDU

HN0916T NB1

ODU

HU051MR U44

HU071MR U44 HU091MR U44

























Features

- High energy efficiency (SCOP up to 4.52/A+++ and water heating efficiency 125%)
- DHW tank (2001) & hydronic component integration
- Integrable buffer tank (40 ℓ) & expansion tank for DHW circuit (8 ℓ) (optional)
- Excellent performance at low ambient temperature (100% @ -7°C)
- Wide operation range (ambient : $-25 \sim 35$ °C/water side : $15 \sim 65$ °C)
- R32 refrigerant with low GWP
- R1 scroll compressor
- Black Fin heat exchanger
- LG ThinQ
- KEYMARK/EHPA certification/Eurovent certification

Model Line-up

			Model Name				
Category	Unit	Capacity (kW)					
		5.5	7.0	9.0			
1 Phase Model	Outdoor Unit	HU051MR U44	HU071MR U44	HU091MR U44			
220 ~ 240V, 1Ø, 50Hz	Indoor Unit		HN0916T NB1				

Seasonal Energy

Description			Outdoor Unit	HU051MR U44	HU071MR U44	HU091MR U44
Description			Indoor Unit		HN0916T NB1	
	Average	SCOP	-	4.52	4.47	4.45
Space	Climate Water	Seasonal Space Heating Efficiency (η _s)	%	178	176	175
Heating	Outlet 35°C	Seasonal Space Heating Eff. Class (A+++ to D scale)	-	A+++	A+++	A+++
(according	Average	SCOP	-	3.01	3.00	3.03
to EN14825)	Climate Water	Seasonal Space Heating Efficiency (η _s)	%	117	117	118
	Outlet 55°C	Seasonal Space Heating Eff. Class (A+++ to D scale)	-	A+	A+	A+
		Declared Load Profile	-	L	L	L
	Average Climate	Water Heating Efficiency (η_{wh})	%	125	125	125
		SOP _{DHW}	-	2.89	2.89	2.89
		Water Heating Efficiency Class	-	A+	A+	A+
Domestic		Declared Load Profile	-	L	L	L
Hot Water Efficiency	Warmer	Water Heating Efficiency (n _{wh})	%	156	156	156
acc.	Climate	SOP _{DHW}	-	3.61	3.61	3.61
EN16147		Water Heating Efficiency Class	-	-	-	-
		Declared Load Profile	-	L	L	L
	Colder	Water Heating Efficiency (n _{wh})	%	106	106	106
	Climate	SOP _{DHW}	-	2.44	2.44	2.44
		Water Heating Efficiency Class	-	-	-	-

Nominal Capacity and Nominal Power Input

D		OAT (DD)	LVA/T (DD)	Outdoor Unit	HU051MR U44	HU071MR U44	HU091MR U44			
Description		OAT (DB)	LWT (DB)	Indoor Unit		HN0916T NB1				
	Heating	7°C	35°C		5.50	7.00	9.00			
Nominal Capacity	пеаспід	7°C	55°C	kW	5.00	5.25	5.50			
	Cooling	35°C	18°C		5.50	7.00	9.00			
	Heating	7°C	35°C		1.22	1.56	2.05			
Nominal Power Input	Heating	7°C	55°C	kW	1.92	2.02	2.12			
1 ower input	Cooling	35°C	18°C		1.20	1.59	2.20			
COP	Heating	7°C	35°C	W/W	4.50	4.50	4.40			
COP	Heating	7°C	55°C	VV/VV	2.60	2.60	2.60			
EER	Cooling	35°C	18°C	W/W	4.60	4.40	4.10			

THERMA V... (INTEGRATED WATER TANK)

PRODUCT SPECIFICATION

R32 IWT

Product Specification (Outdoor Unit)

Technical Specification			Unit	HU051MR U44	HU071MR U44	HU091MR U44
Operation Range	Heating	Min. ~ Max.	°CDB		-25 ~ 35	
(outdoor temp.)	Cooling	IVIII. ~ IVIAX.	°C			
C	Quantity		EA		1	
Compressor	Туре		-	H	lermetic Sealed Scro	ll
	Туре		-		R32	
Deficience	GWP (global warming pote	ential)	-		675	
Refrigerant	Precharged Amount		g		1,500	
	t-CO ₂ eq		-		1.013	
	Outer Diameter	Gas	mm (inch)		Ø15.88 (5/8)	
	Outer Diameter	Liquid	mm (inch)	Ø9.52 (3/8)		
Dining	Length	Standard	m	5		
Piping Connections		Max.	m	50		
Connections	Level Difference	m	30			
	Chargeless-Pipe Length	m	10			
	Additional Charging Volume		g/m	30		
Rated Water Flow Rate (a	t LWT 35°C)		LPM	15.81	20.12	25.87
Sound Power Level	Heating	Rated	dB(A)	60		
Sound Pressure Level (at 1m)	Heating	Rated	dB(A)		52	
Dimensions	Unit	WxHxD	mm		950 x 834 x 330	
Weight	Unit		kg		60.0	
	Voltage, Phase, Frequency		V, Ø, Hz		220 ~ 240, 1, 50	
Power Supply	Rated Running Current	Heating	А	5.4	6.9	9.1
rower Supply	Nated Naming Current	Cooling	А	5.3	7.1	9.8
	Recommended Circuit Brea	aker	А	16	20	25
Wiring Connections	Power Supply Cable (includ	ed earth, H07RN-F)	mm ² x cores		4.0 x 3C	

- 1. Due to our policy of innovation some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound power level is measured on the rated condition in the reverberation rooms by ISO 9614 standard.
- Therefore, these values can be increased owing to ambient conditions during operation. Sound pressure level is converted values from sound power level as per distance.
- 4. Performances are based on the following conditions (It is according to EN14511):
- Interconnected pipe length is standard length and difference of elevation (outdoor ~ indoor unit) is 0m.
- 5. This product contains fluorinated greenhouse gases.

Product Specification (Indoor Unit)

Description			Unit	HN0916T NB1
Operation Bonco	Heating	Min. ~ Max.	°C	15 ~ 65
Operation Range (leaving water)	Cooling	Min. ~ Max.	°C	5 ~ 27 (16~27) ²⁾
(leaving water)	DHW ¹⁾	Min. ~ Max.	°C	15~80
Flow Sensor	Measuring Range	Range Min. ~ Max.		5 ~ 80
Safety Valve	Heating Circuit		bar	3
Safety valve	DHW Circuit		bar	10
Expansion Vessel (heating circuit)	Volume		l	12
	Refrigerant Circuit	Gas (outer diameter)	mm (inch)	Ø 15.88 (5/8)
	Remigerant Circuit	Liquid (outer diameter)	mm (inch)	Ø 9.52 (3/8)
	Water Circuit	Inlet	inch	G1" (Ø 22 mm) internal thread
Piping Connections	vvater Circuit	Outlet	inch	G1" (Ø 22 mm) internal thread
	DHW Tank	Cold Water Inlet	inch	G3/4" (Ø 19.75 mm) internal
	Water Circuit	Hot Water Outlet	inch	G3/4" (Ø 19.75 mm) internal
	vvater Circuit	Re-circulation	inch	G3/4" (Ø 19.75 mm) internal
Domestic Hot Water Tank	Water Volume	Rated	l	200
Domestic not water fank	Internal Thermal Pro	otect Limit	°C	85
Sound Power Level			dB(A)	43
Dimensions (W x H x D)		Unit	mm	602 x 1,810 x 680
Weight (without water)		Unit	kg	140
Power Supply			V, Ø, Hz	220 ~ 240, 1, 50
Electric Heater	Capacity		kW	10:2/4 30:6
Electric Heater	Power Supply		V, Ø, Hz	220 ~ 240, 1, 50 / 380 ~ 415, 3, 50

- 1) DHW 58 \sim 80°C operating is available only when the electric heater is operating.
- 2) When fan coil unit not used.

Accessory Parts (Optional Accessory)

Buffer Tank for Space Heating



As an optional accessory, the installer can install a standard 40ℓ buffer tank for space heating. Fitting seamlessly into the main casing, it can be attached on the backside of the IWT unit.

Buffer tank for space h	eating	Unit	OSHB-40KT.AEU		
Water Volume		l	40		
Dimensions (W x H x D)		mm	518 x 560 x 175		
Weight (w/o water) Product		kg	24		

Expansion Vessel for DHW



As an optional accessory, the installer can install a standard 81 DHW expansion vessel that conveniently fits inside the indoor unit. It is provided with an accessory kit that includes a flexible connection tube.

Expansion vessel for D	HW	Unit	OSHE-12KT.AEU
Expansion Volume		l	8
Connection		inch	3/4
Max. Pressure		bar	10
Pre-charge		bar	3
Dimensions (W x H x D)		mm	416 x 238 x 502
Weight (w/o water) Product		kg	2.5

Performance Table for Heating Operaion

Maximum Heating Capacity (Including Defrost Effect)

HU051MR U44 + HN0916T NB1

Outdoor	LWT 30°C	LWT 35°C	LWT 40°C	LWT 45°C	LWT 50°C	LWT 55°C	LWT 60°C	LWT 65°C
Temperature	TC							
-25°C DB	4.02	3.90	3.78	3.66	-	-	-	-
-20°C DB	4.64	4.51	4.38	4.26	4.13	-	-	-
-15°C DB	5.26	5.12	4.99	4.85	4.72	4.58	-	-
-7°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	-
-4°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	-
-2°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	-
2°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
7°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
10°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
15°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
18°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
20°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
35°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50

HU071MR U44 + HN0916T NB1

Outdoor	LWT 30°C	LWT 35°C	LWT 40°C	LWT 45°C	LWT 50°C	LWT 55°C	LWT 60°C	LWT 65°C
Temperature	TC							
-25°C DB	5.00	4.85	4.71	4.56	-	-	-	-
-20°C DB	5.58	5.43	5.27	5.11	4.95	-	-	-
-15°C DB	6.17	6.00	5.83	5.66	5.49	5.32	-	-
-7°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	-
-4°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	-
-2°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	-
2°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
7°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
10°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
15°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
18°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
20°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00
35°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00	7.00

HU091MR U44 + HN0916T NB1

Outdoor	LWT 30°C	LWT 35°C	LWT 40°C	LWT 45°C	LWT 50°C	LWT 55°C	LWT 60°C	LWT 65°C
Temperature	TC							
-25°C DB	6.40	6.20	6.00	5.80	-	-	-	-
-20°C DB	7.23	7.00	6.77	6.54	6.31	-	-	-
-15°C DB	8.06	7.80	7.54	7.28	7.02	6.76	-	-
-7°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	-
-4°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	-
-2°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	-
2°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
7°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
10°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
15°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
18°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
20°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00
35°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00

1. DB : Dry Bulb Temperature (°C), LWT : Leaving Water Temperature (°C), LPM : Liters Per Minute (ℓ/\min) , TC : Total Capacity (kW)

Direct interpolation is permissible. Do not extrapolate.
 Measuring procedure follows EN-14511.

• Rated values are based on standard conditions and it can be found on specifications.
• Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
• In accordance with the test standard (or nations), the rating will vary slightly.

4. The shaded areas are not guaranteed continuous operation.

Performance Table for Cooling Operation

Maximum Cooling Capacity

HU051MR U44 + HN0916T NB1

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	6.42	6.95	7.49	7.85	8.39	8.75	9.11
20°C DB	6.05	6.37	6.70	6.91	7.23	7.45	7.66
30°C DB	5.68	5.79	5.90	5.97	6.08	6.15	6.22
35°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50
40°C DB	5.32	5.34	5.35	5.37	5.38	5.40	5.41
45°C DB	5.13	5.17	5.21	5.23	5.27	5.29	5.32

HU071MR U44 + HN0916T NB1

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	8.17	8.85	9.54	9.99	10.68	11.13	11.59
20°C DB	7.70	8.11	8.52	8.80	9.21	9.48	9.75
30°C DB	7.23	7.37	7.51	7.60	7.74	7.83	7.92
35°C DB	7.00	7.00	7.00	7.00	7.00	7.00	7.00
40°C DB	6.77	6.79	6.81	6.83	6.85	6.87	6.88
45°C DB	6.53	6.58	6.63	6.66	6.70	6.74	6.77

HU091MR U44 + HN0916T NB1

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
10°C DB	10.50	11.38	12.26	12.85	13.73	14.31	14.90
20°C DB	9.90	10.43	10.96	11.31	11.84	12.19	12.54
30°C DB	9.30	9.48	9.65	9.77	9.95	10.06	10.18
35°C DB	9.00	9.00	9.00	9.00	9.00	9.00	9.00
40°C DB	8.70	8.73	8.76	8.78	8.81	8.83	8.85
45°C DB	8.40	8.46	8.52	8.56	8.62	8.66	8.70

1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C), LPM: Liters Per Minute (ℓ/\min) , TC: Total Capacity (kW)

Direct interpolation is permissible. Do not extrapolate.
 Measuring procedure follows EN-14511.

• Rated values are based on standard conditions and it can be found on specifications.
• Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
• In accordance with the test standard (or nations), the rating will vary slightly.

THERMA V... (R32) IWT (INTEGRATED WATER TANK)


PRODUCT SPECIFICATION


Drawings

			Model Name				
Category	Unit	Capacity (kW)					
		5.5	7.0	9.0			
1 Phase Model	Outdoor Unit	HU051MR U44	HU071MR U44	HU091MR U44			
220 ~ 240V, 1Ø, 50Hz	Indoor Unit		HN0916T NB1				


HU051MR U44 / HU071MR U44 / HU091MR U44

[Unit:mm]

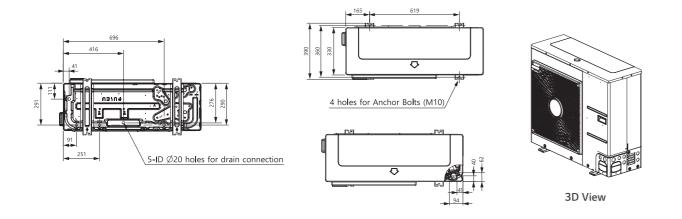

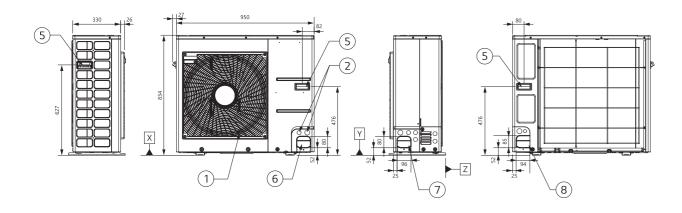



No.	Part Name	Description
1	Air Outlet	-
2	Power and Communication Cable Hole	-
3	Gas Pipe Connection	Flare joint
4	Liquid Pipe Connection	Flare joint
5	Handle	-
6	Pipe Routing Hole (front)	-
7	Pipe Routing Hole (side)	-
8	Pipe Routing Hole (back)	-




Piping Connection Port


HN0916T NB1 [Unit:mm]





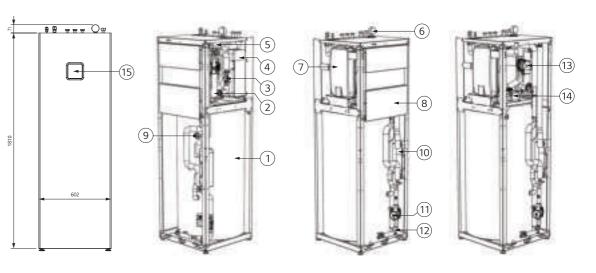

No.	Part Name	Description	No.	Description
1	DHW Tank	Domestic Hot Water Tank (200L)	Α	G5/8" Refrigerant Gas Pipe
2	Heater	Electric Back up Heater (6kW)	В	G3/8" Refrigerant liquid Pipe
3	Flow Sensor	SIKA VVXC9SNBUC00252P	С	G3/4" Domestic hot water outlet
4	Heat Exchanger	Plate-heat-exchanger (refrigerant/water)	D	G3/4" Domestic cold water inlet
5	3 Way Valve	3 Way valve (DHW/heating)	Е	G3/4" DHW Re-circulation
6	Pressure Gauge	Pressure gauge	F	G1" Heating circuit inlet
7	Expansion Vessel (12L)	Expansion vessel for Heating	G	G1" Heating circuit outlet
8	Control Box	PCB and terminal blocks	Н	Cable lead throughs
9	Magnesium Anode	To prevent corrosion		
10	Heat Exchanger	Plate-heat-exchanger (water/DHW)		
11	Water Pump	DHW Tank Charging Pump		
12	DHW Strainer	DHW Strainer		
13	Water Pump	Main circulation pump		
14	Bracket	For DHW Expansion vessel (accessory)		
15	Remote Controller	Built-in remote controller		

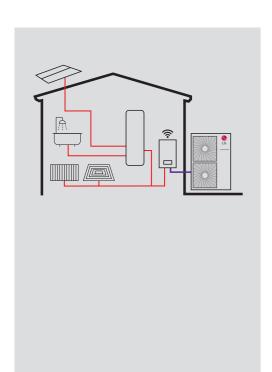

THERMA V_{IM}

R410A SPLIT

Excellent Performance & Efficiency









User Convenience












Easy Installation & Maintenance







Energy Labeling




^{* 14}kW 1Ø model * A+++ to D scale.

Split Hydro Box Concept

The LG THERMA V R410A Split is a hydro box type comprising a separate indoor and outdoor unit, which are connected by refrigerant piping. Hydronic components such as plate heat exchanger, expansion tank and water pump are located within the indoor unit, making the unit capable of withstanding freezing outside ambient temperatures.





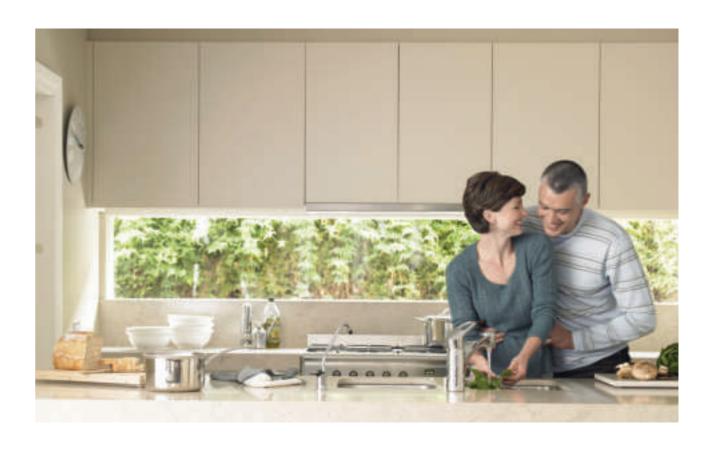



Capacity Range (Heating & Cooling)

R410A Split

Capacity Range [kW]	12	14	16
Heating Capacity	(12.0)	(14.0)	(16.0)
Cooling Capacity	(10.4)	(12.0)	(13.0)

Operation Range (Heating & Cooling)






^{*} Detailed description for each function is presented on page 26 ~ 43.

THERMAV... R410A SPLIT

PRODUCT FEATURES

High Energy Efficiency


The energy label directive is a key factor in selecting a heating device in the European heating market. The R410A Split type has an energy label rating (ErP) of A+++ except for 16kW model.

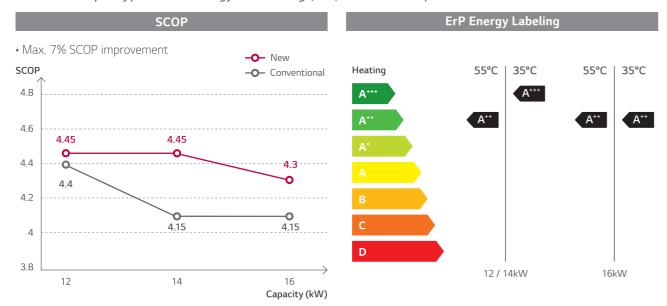

* Test Condition Test procedure follows EN14825 (low temp average), based on the single phase model line-up.

Energy Efficiency at -2°C

Energy efficiency is higher than others. (condition: ambient temp. -2°C/leaving water temp. 55°C)

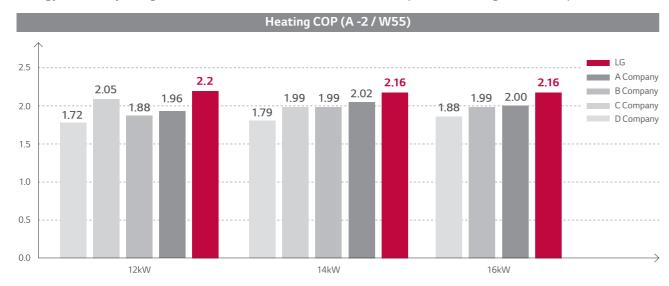


^{*} Peak value/Split models

BLDC (Brushless Direct Current Motor) Compressor


THERMA V is equipped with a BLDC compressor that uses a strong neodymium magnet. The compressor has improved efficiency compared to standard AC inverter product and it is optimized for seasonal efficiency.


- Minimized oil circulation
- Optimized vibration, noise
- High efficiency motor
- High reliability
- Optimized compression

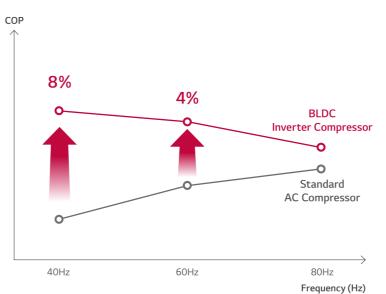

Corrosion Resistant Heat Exchanger

The outdoor heat exchanger is coated with a gold-coloured anti-corrosive epoxy treatment on the aluminum coil. This exhibits pre-eminent heat transfer properties of the coil for an extended period of time, whereas non-Gold Fin^{TM} coils progressively lose efficiency due to surface corrosion. Gold Fin^{TM} is extremely suitable for areas affected by high pollution and those exposed to salt water breeze.

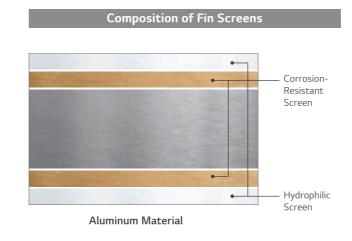



• Gold Fin[™] is long lasting and durable while enhancing the premium design aesthetic of the outdoor unit.

THERMA V_m R410A SPLIT

PRODUCT SPECIFICATION

R410A Split Hydro Box Type

IDU

HN1616 NK3 HN1639 NK3

ODU

HU121 U33 HU141 U33 HU161 U33 HU123 U33 HU143 U33 HU163 U33























Features

- High energy efficiency (SCOP up to 4.45/A+++)
- Maximum 57°C LWT
- Intuitive interface
- LG ThinQ
- Gold Fin heat exchanger
- KEYMARK/EHPA¹⁾ certification/MCS/Eurovent certification

1) Approved model by EHPA: HU123 U33, HU143 U33, HU163 U33.

Model Line-up

			Model Name					
Category	Unit	Capacity (kW)						
		12.0	14.0	16.0				
1 Phase Model	Outdoor Unit	HU121 U33	HU141 U33	HU161 U33				
220 ~ 240V, 1Ø, 50Hz	Indoor Unit		HN1616 NK3					
3 Phase Model	Outdoor Unit	HU123 U33	HU163 U33					
380 ~ 415V, 3Ø, 50Hz	Indoor Unit		HN1639 NK3					

Seasonal Energy

Description			Outdoor Unit	HU121 U33	HU141 U33	HU161 U33
Description			Indoor Unit		HN1616 NK3	
	Average	SCOP	W/W	4.45	4.45	4.30
	Climate Water Outlet 35°C	Seasonal Space Heating Efficiency (η _s)	%	175	175	169
Space Heating (according to		Seasonal Space Heating Eff. Class (A+++ to D scale)	-	A+++	A+++	A++
EN14825)	Average	SCOP	-	3.32	3.32	3.32
,	Climate Water	Seasonal Space Heating Efficiency (η _s)	%	130	130	130
	Outlet 55°C	Seasonal Space Heating Eff. Class (A+++ to D scale)	-	A++	A++	A++

Description			Outdoor Unit	HU123 U33	HU143 U33	HU163 U33
Description			Indoor Unit		HN1639 NK3	
	Average	SCOP	W/W	4.45	4.45	4.30
	Climate Water Outlet 35°C	Seasonal Space Heating Efficiency (n _s)	%	175	175	169
Space Heating		Seasonal Space Heating Eff. Class (A+++ to D scale)	-	A+++	A+++	A++
(according to EN14825)	Average	SCOP	-	3.32	3.32	3.32
	Climate Water	Seasonal Space Heating Efficiency (ns)	%	130	130	130
	Outlet 55°C	Seasonal Space Heating Eff. Class (A+++ to D scale)	-	A++	A++	A++

Nominal Capacity and Nominal Power Input

Description					HU121 U33	HU141 U33	HU161 U33
		OAT (DP)	LVA/T (DD)	LWT (DB) Unit Indoor	HU123 U33	HU143 U33	HU163 U33
		OAT (DB)	LVVI (DB)			HN1616 NK3	
				Unit		HN1639 NK3	
		7°C	35°C	kW	12.00	14.00	16.00
	Heating	7°C	55°C		12.50	12.50	12.50
Nominal Capacity		2°C	35°C		10.33	10.83	11.95
	Cooling	35°C	18°C		10.40	12.00	13.00
	Cooling	35°C	7°C		7.94	8.50	8.92
		7°C	35°C	kW	2.64	3.18	3.76
	Heating	7°C	55°C		4.94	4.94	4.94
Nominal Power Input		2°C	35°C		2.93	3.09	3.41
i ower input	Cli	35°C	18°C		2.60	3.08	3.60
	Cooling	35°C	7°C		2.66	3.03	3.30
		7°C	35°C		4.55	4.41	4.26
COP	Heating	7°C	55°C	W/W	2.53	2.53	2.53
		2°C	35°C		3.53	3.50	3.50
EER	Cooling	35°C	18°C	W/W	4.00	3.90	3.61
CER	Cooling	35°C	7°C	VV/VV	2.98	2.81	2.70

THERMA V_m R410A SPLIT

PRODUCT SPECIFICATION

R410A Split

Product Specification (Outdoor Unit)

Description			Unit	HU121 U33	HU141 U33	HU161 U33	HU123 U33	HU143 U33	HU163 U33		
Operation Range	Heating	Min. ~ Max.	°CDB			-20	~ 35				
(outdoor temp.)	Cooling	IVIIII. ~ IVIAX.	°C		5 ~ 48						
Compressor	Quantity		EA		1						
Compressor	Туре		-			Hermetic Seale	ed Twin Rotary				
	Туре		-			R41	0A				
Refrigerant	GWP (global war	ming potential)	-			2,08	37.5				
Reirigerant	Precharged Amo	unt	g	2,300							
	t-CO ₂ eq		-			4.8	01				
	Outer	Gas	mm (inch)			Ø15.88	3 (5/8)				
	Diameter	Liquid	mm (inch)	Ø9.52 (3/8)							
B	Length	Standard	m	7.5							
Piping Connections	Length	Max.	m	50							
Connections	Level Difference	Max.	m	30							
	Chargeless-Pipe	Length	m	7.5							
	Additional Charg	jing Volume	g/m	40							
Rated Water Flow	Rate (at LWT 35°	°C)	LPM	34.0	40.0	46.0	34.0	40.0	46.0		
Sound Power Level	Heating	Rated	dB(A)			6	6				
Sound Pressure Level (at 1m)	Heating	Rated	dB(A)			5	8				
Dimensions	Unit	WxHxD	mm			950 x 1,3	80 x 330				
Weight	Unit		kg			94	.0				
	Voltage, Phase,	Frequency	V, Ø, Hz	2	220 ~ 240, 1, 5	0	3	80 ~ 415, 3, 50)		
Dower Cupply	Rated Running	Heating	А	11.5	13.8	16.3	6.6	8.0	9.4		
Power Supply	Current	Cooling	А	11.3	13.4	15.7	6.5	7.7	9.0		
	Recommended C	ircuit Breaker	А		40			20			
Wiring Connections	Power Supply Ca (included earth,		mm ² x cores		6.0 x 3C			2.5 x 5C			

- 1. Due to our policy of innovation some specifications may be changed without notification.
 2. Wiring cable size must comply with the applicable local and national codes. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound power level is measured on the rated condition in the reverberation rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation. Sound pressure level is converted values from sound power level as per distance.

 4. Performances are based on the following conditions (It is according to EN14511):
- Interconnected pipe length is standard length and difference of elevation (outdoor ~ indoor unit) is 0m.
- 5. This product contains fluorinated greenhouse gases.

Product Specification (Indoor Unit)

Technical Specification				HN1616 NK3	HN1639 NK3
	Heating			15 ~ 57	
Operation Range (leaving water)	Cooling	Min. ~ Max.	°CDB	5 ~ 27 (1	6 ~ 27) ²⁾
(tearing water)	DHW ¹⁾			15 -	- 80
	Water Circuit	Inlet	mm (inch)	Male PT	25.4 (1)
Piping Connections	Water Circuit	Outlet	mm (inch)	Male PT	25.4 (1)
riping connections	Refrigerant Circuit	Gas	mm (inch)	Ø15.88	3 (5/8)
	Kerrigerant Circuit	Liquid	mm (inch)	Ø9.52	(3/8)
Sound Power Level	Heating	Rated	dB(A)	44	
Dimensions	Unit	Unit W x H x D		490 x 850 x 315	
Weight	Unit		kg	42.2	45.0
Electrical Specificatio			Unit	HN1616 NK3	HN1639 NK3
Wiring Connections	Power and Communication Ca	able (included earth, H07RN-F)	mm ² x cores	0.75 x 4C	
	Туре		-	Sheath	Sheath
	Number of Heating Coil	EA	2	3	
	Capacity Combination	Capacity Combination		3.0 + 3.0	3.0 + 3.0 + 3.0
Back up Heater	Operation		-	Automatic	Automatic
back up Heatel	Heating Steps		Step	2	2
	Power Supply		V, Ø, Hz	220 ~ 240, 1, 50	220 ~ 240, 1, 50
	Rated Current		А	25.0	13.0
	Power Supply Cable (included	earth, H07RN-F)	mm ² x cores	4.0 x 3C	2.5 x 4C

¹⁾ DHW 58 ~ 80°C operating is available only when the booster heater is operating.

²⁾ When fan coil unit not used.

121

THERMAV. R410A SPLIT

PRODUCT SPECIFICATION

Performance Table for Heating Operaion

Maximum Heating Capacity (Including Defrost Effect)

HU121 U33 + HN1616 NK3 / HU123 U33 + HN1639 NK3

Outdoor	LWT 30°C	LWT 35°C	LWT 40°C	LWT 45°C	LWT 50°C	LWT 55°C
Temperature	TC	TC	TC	TC	TC	TC
-20°C DB	10.89	11.00	11.37	11.74	-	-
-15°C DB	10.89	11.00	11.37	11.74	10.99	-
-7°C DB	10.89	11.00	11.37	11.74	11.72	11.09
-4°C DB	10.66	10.77	11.17	11.58	11.83	11.35
-2°C DB	10.54	10.65	11.07	11.49	11.89	11.53
2°C DB	10.22	10.33	10.79	11.26	11.74	11.88
7°C DB	11.88	12.00	12.13	12.25	12.38	12.50
10°C DB	12.03	12.16	12.28	12.41	12.54	12.66
15°C DB	12.29	12.42	12.55	12.67	12.80	12.93
18°C DB	12.44	12.57	12.70	12.83	12.96	13.10

HU141 U33 + HN1616 NK3 / HU143 U33 + HN1639 NK3

Outdoor	LWT 30°C	LWT 35°C	LWT 40°C	LWT 45°C	LWT 50°C	LWT 55°C
Temperature	TC	TC	TC	TC	TC	TC
-20°C DB	12.24	11.92	11.61	11.08	-	-
-15°C DB	12.47	12.14	11.96	11.56	10.99	-
-7°C DB	12.83	12.50	12.31	12.12	11.72	11.09
-4°C DB	12.28	11.96	11.95	11.93	11.83	11.35
-2°C DB	12.01	11.70	11.79	11.85	11.89	11.53
2°C DB	11.12	10.83	11.20	11.53	11.82	11.88
7°C DB	14.38	14.00	13.63	13.25	12.88	12.50
10°C DB	14.66	14.28	13.90	13.52	13.13	12.75
15°C DB	15.15	14.75	14.36	13.96	13.57	13.17
18°C DB	15.44	15.03	14.63	14.23	13.83	13.42

HU161 U33 + HN1616 NK3 / HU163 U33 + HN1639 NK3

Outdoor	LWT 30°C	LWT 35°C	LWT 40°C	LWT 45°C	LWT 50°C	LWT 55°C
Temperature	TC	TC	TC	TC	TC	TC
-20°C DB	12.79	12.13	11.61	11.08	-	-
-15°C DB	13.35	12.65	12.12	11.56	10.99	-
-7°C DB	14.24	13.50	12.93	12.34	11.72	11.09
-4°C DB	13.73	13.02	12.67	12.27	11.83	11.35
-2°C DB	13.37	12.68	12.48	12.22	11.89	11.53
2°C DB	12.60	11.95	12.07	12.09	12.03	11.88
7°C DB	16.88	16.00	15.13	14.25	13.38	12.50
10°C DB	17.38	16.48	15.58	14.68	13.78	12.88
15°C DB	18.23	17.28	16.34	15.39	14.45	13.50
18°C DB	18.73	17.76	16.79	15.82	14.85	13.88

- 1. DB : Dry Bulb Temperature (°C), LWT : Leaving Water Temperature (°C), LPM : Liters Per Minute (ℓ/\min) , TC : Total Capacity (kW)
- Direct interpolation is permissible. Do not extrapolate.
 Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
 In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

Performance Table for Cooling Operation

Maximum Cooling Capacity

HU121 U33 + HN1616 NK3 / HU123 U33 + HN1639 NK3

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
20°C DB	7.60	8.55	9.51	10.33	11.19	11.98	-
30°C DB	8.62	9.05	9.78	10.67	10.90	11.37	-
35°C DB	7.94	8.66	9.33	10.10	10.40	10.75	11.16
40°C DB	7.56	8.02	8.81	9.36	9.54	9.89	10.28
45°C DB	6.38	7.08	7.79	8.44	9.14	9.44	9.73

HU141 U33 + HN1616 NK3 / HU143 U33 + HN1639 NK3

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC TC	TC	TC
20°C DB	8.13	9.87	10.97	11.92	12.91	13.82	-
30°C DB	9.24	10.44	11.29	12.31	12.58	13.12	-
35°C DB	8.50	9.99	10.76	11.65	12.00	12.40	12.88
40°C DB	8.10	9.25	10.17	10.80	11.01	11.42	11.86
45°C DB	7.17	8.17	8.99	9.73	10.55	10.89	11.23

HU161 U33 + HN1616 NK3 / HU163 U33 + HN1639 NK3

LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
TC	TC	TC	TC	TC	TC	TC
8.54	10.69	11.89	12.91	13.98	14.97	-
9.70	11.31	12.22	13.34	13.63	14.21	-
8.92	10.82	11.66	12.63	13.00	13.43	13.96
8.51	10.03	11.02	11.70	11.93	12.37	12.85
7.52	8.85	9.73	10.55	11.42	11.80	12.16
	8.54 9.70 8.92 8.51	TC TC 8.54 10.69 9.70 11.31 8.92 10.82 8.51 10.03	TC TC TC 8.54 10.69 11.89 9.70 11.31 12.22 8.92 10.82 11.66 8.51 10.03 11.02	TC TC TC 8.54 10.69 11.89 12.91 9.70 11.31 12.22 13.34 8.92 10.82 11.66 12.63 8.51 10.03 11.02 11.70	TC TC TC TC 8.54 10.69 11.89 12.91 13.98 9.70 11.31 12.22 13.34 13.63 8.92 10.82 11.66 12.63 13.00 8.51 10.03 11.02 11.70 11.93	TC TC<

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C), LPM: Liters Per Minute (ℓ/\min) , TC: Total Capacity (kW)
- Direct interpolation is permissible. Do not extrapolate.
 Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
 In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

THERMA V. R410A SPLIT


PRODUCT SPECIFICATION


Drawings

			Model Name				
Category	Unit	Capacity (kW)					
		12.0	14.0	16.0			
1 Phase Model	Outdoor Unit	HU121 U33	HU141 U33	HU161 U33			
220 ~ 240V, 1Ø, 50Hz	Indoor Unit		HN1616 NK3				
3 Phase Model	Outdoor Unit	HU123 U33	HU143 U33	HU163 U33			
380 ~ 415V, 3Ø, 50Hz	Indoor Unit		HN1639 NK3				

HU121 U33 / HU141 U33 / HU161 U33 / HU123 U33 / HU143 U33 / HU163 U33


[Unit:mm]

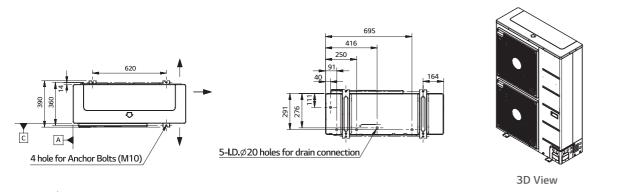

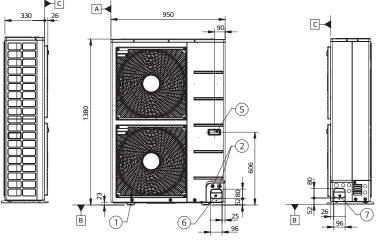


	
· · · · ·	
л I II	
1	
11 1	
il I	
11 1	
111 1 1	
]	
411 1 1	
111 1 11	
111 1	
<u> </u>	909
8	
	8 6
G 26 7	F 2 2 2
96	B 21-
	94


No.	Part Name	Description
1	Air Outlet	-
2	Power and Communication Cable Hole	-
3	Gas Pipe Connection	Flare joint
4	Liquid Pipe Connection	Flare joint
5	Handle	-
6	Pipe Routing Hole (front)	-
7	Pipe Routing Hole (side)	-
8	Pipe Routing Hole (back)	-




Piping Connection Port

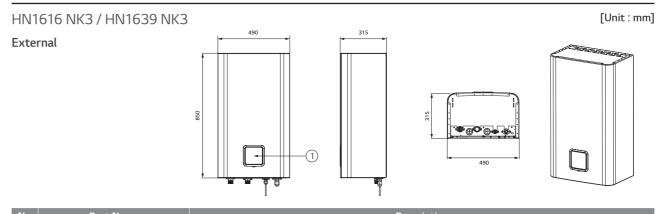


No.	Part Name	Description	
1	Control Panel	Built-in remote controller	
Inte	rnal	3 9 289.6	





No.	Part Name	Description
1	Leaving Water Pipe	Male PT 1 inch
2	Entering Water pipe	Male PT 1 inch
3	Refrigerant Pipe	Ø9.52 (mm)
4	Refrigerant Pipe	Ø15.88 (mm)
5	Water Pump	Max. head 9.5 / 7 / 6m
6	Safety Valve	Open at water pressure 3bar
7	Control Box	PCB and terminal blocks
8	Thermal Switch	Cut-off power input to electric heater at 90°C (manual return at 55°C)
9	Flow Switch	Minimum operation range at 15LPM
10	Plate Heat Exchanger	Heat exchange between refrigerant and water
11	Pressure Gage	Indicates circulating water pressure
12	Expansion Tank	Absorbing volume change of heated water
13	Air Vent	Air purging when charging water
14	Electric Heater	Please refer to the below Page 'Model name and related information'
15	Strainer	Filtering and stacking particles inside circulating water
16	Shut-Off Valve	To drain or to block water, when pipe connecting

THERMA V_{IM} R410A IWT (INTEGRATED WATER TANK)

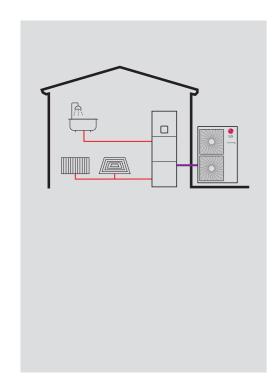

Excellent Performance & Efficiency



compressor refrigerant operation

User Convenience










Easy Installation & Maintenance



^{*} Detailed description for each function is presented on page 26 \sim 43.


Energy Labeling




^{* 16}kW 1Ø model * A+++ to D scale.

IWT (Integrated Water Tank) Concept

The LG THERMA V R410A IWT, or integrated water tank, is an integrated unit that indoor unit is combined with a domestic hot water tank while outdoor unit is separately located outside. THERMA V R410A IWT is more suitable for the house which has less indoor spaces because hydronic components such as DHW tank and buffer tank normally installed additionally are integrated as one unit.





Key Components


No.	Part Name	No.	Part Name
1	Heating/Cooling Inlet	А	Buffer Tank
2	Heating/Cooling Outlet	В	Circulating Pump
3	Warm Sanitary	С	Electric Flow Heater
4	DHW - Circulation	D	TT3000 Controller
5	Cold Sanitary Water - Supply	Е	Condenser
6	Gas Pipe 5/8" - Refrigerant	F	3 Way Valve
7	Liquid Pipe 3/8" - Refrigerant	G	DHW Tank
8	Mg. Anode		
9	Wiring Connection		


Capacity Range (Heating & Cooling)

R410A IWT

Capacity Range [kW]	9	12	14	16
Heating Capacity	• (9.0)	(12.0)	(14.0)	(16.0)
Cooling Capacity	(9.0)	(10.4)	(11.0)	(12.0)

Operation Range (Heating & Cooling)





THERMAV... R410A IWT (INTEGRATED WATER TANK)

PRODUCT FEATURES

Save Space & Time

Compared with conventional system, easy & quick installation is possible and smaller spaces are required for installation.



- Need to secure the space for water tank
- More water piping work & more installation time


Sophisticated and Harmonious Exterior

THERMA V R410A IWT indoor unit is suitable to install in indoor space like utility room, kitchen, etc. thanks to the sophisticated & harmonious exterior with white color and modern design.



Space Heating Efficiency

The energy label directive is a key factor in selecting a heating device in the European heating market. The R410A IWT has an energy label rating (ErP) of A++.

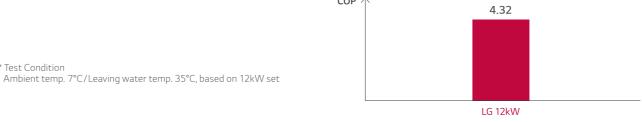

Quiet Operation

Due to quiet operation, it creates an atmosphere of calm and restfulness in case of indoor installation.


Operation Noise

- Sound power level: 36dB(A)
- Sound pressure level: 27dB(A)

Quiet operation.

Calm and restfulness indoor environment.



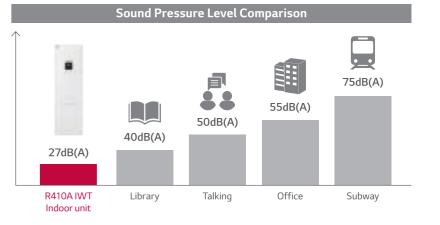


Temperature + Pressure Control & Quick Operating Response

Pressure control secures faster and more exact response than temperature control, so it reduces the time to reach the target water temperature by 44%.

Faster and More Exact with Pressure Control


- Quick response due to sensing with ready for operation.
- Ensures to reach target performance point without failing to keep a reliable operation.



Quick Reaching to Target Temperature

• Pressure control takes up to 44% less time to reach the desired water temperature with a high level of accuracy and stability.

Leaving Water Temperature (°C)



THERMAV... R410A IWT (INTEGRATED WATER TANK)

PRODUCT SPECIFICATION

R410A IWT

IDU

HN1616T NB0

ODU

HU091 U43

HU121 U33 HU141 U33

HU161 U33

HU123 U33

HU143 U33

HU163 U33









Mandatory accessory: PP485B00K.ENCXLEU



- Space (floor) heating efficiency with ErP A++10 class
- Maximum 58°C LWT
- Gold Fin heat exchanger
- EHPA²⁾ certification
- 1) under average climate conditions for medium-temperature application 2) Approved model by EHPA : HU091 U43, HU123 U33, HU143 U33, HU163 U33

Model Line-up

		Model Name							
Category	Unit	Capacity (kW)							
		9.0	12.0	14.0	16.0				
1 Phase Model	Outdoor Unit	HU091 U43	HU121 U33	HU141 U33	HU161 U33				
220 ~ 240V, 1Ø, 50Hz	Indoor Unit	HN1616T NB0							
3 Phase Model	Outdoor Unit	-	HU123 U33	HU143 U33	HU163 U33				
380 ~ 415V, 3Ø, 50Hz	Indoor Unit	-	- HN1616T NB0						

- 1. PP485B00K. ENCXLEU is required for communication between outdoor unit and indoor unit. (install at outdoor unit)
- 2. Production of this product could be discontinued without prior notice considering manufacturer's circumstances.

Seasonal Energy

			Outdoor	HU091 U43	HU121 U33	HU141 U33	HU161 U33
Description			Unit	H0091 043	HU123 U33	HU143 U33	HU163 U33
			Indoor Unit		HN161	6T NB0	
	Average	SCOP	W/W	4.04	4.20	4.15	4.15
	Climate Water	Seasonal Space Heating Efficiency (η _s)	%	159	165	163	163
Space Heating	Outlet 35°C	Seasonal Space Heating Eff. Class (A+++ to D scale)	-	A++	A++	A++	A++
(according to EN14825)	Average	SCOP	-	2.88	3.00	3.00	3.00
10 2111 1023)	Climate Water	Seasonal Space Heating Efficiency (η _s)	%	112	117	117	117
	Outlet 55°C	Seasonal Space Heating Eff. Class (A+++ to D scale)	-	A+	A+	A+	A+
Domestic Hot	General	Declared Load Profile	-	XL	XL	XL	XL
Water Efficiency	Average	Water Heating Efficiency (ŋwh)	%	98	89	89	89
acc. EN16147	Climate	Water Heating Energy Eff. Class (A + to F scale)	-	А	А	А	А

Nominal Capacity and Nominal Power Input

		CAT	LIMIT	Outdoor	HU091 U43	HU121 U33	HU141 U33	HU161 U33	
Description		OAT (DB)	LWT (DB)	Unit	H0091 045	HU123 U33	HU143 U33	HU163 U33	
		(55)	(55)	Indoor Unit		HN1616T NB0			
		7°C	35°C		9.00	12.00	14.00	16.00	
	Heating	7°C	55°C		6.70	12.50	12.50	12.50	
Nominal Capacity		2°C	35°C	kW	7.30	9.81	10.37	11.45	
	Cooling	35°C	18°C		9.00	10.40	11.00	12.00	
	Cooling	35°C	7°C		6.43	6.75	7.14	7.79	
	Heating	7°C	35°C	kW	2.23	2.78	3.43	4.18	
		7°C	55°C		2.79	4.89	4.89	4.89	
Nominal Power Input		2°C	35°C		2.27	3.12	3.30	3.64	
r ower input	Cooling	35°C	18°C		2.88	3.30	3.53	4.00	
	Cooling	35°C	7°C		2.76	3.20	3.42	3.87	
		7°C	35°C		4.04	4.32	4.08	3.83	
COP	Heating	7°C	55°C	W/W	2.40	2.56	2.56	2.56	
		2°C	35°C		3.22	3.14	3.14	3.15	
EED	Cooling	35°C	18°C	W/W	3.12	3.15	3.12	3.00	
EER	Cooling	35°C	7°C	00/00	2.33	2.11	2.09	2.01	

Product Specification (Outdoor Unit)

Description			Unit	HU091 U43	HU121 U33	HU141 U33	HU161 U33	HU123 U33	HU143 U33	HU163 (
Operation Range	Heating	B.41 . B.41 .	°CDB		-20 ~ 35						
(outdoor temp.)	Cooling	Min. ~ Max.	°CDB	5 ~ 48							
	Quantity	EA				1					
Compressor	Туре	-			Hermetic	Sealed Twi	n Rotary				
	Туре		-				R410A				
D. C	GWP (global warm	ing potential)	-				2,087.5				
Refrigerant	Precharged Amo	unt ¹⁾	g	1,800			2,3	300			
	t-CO ₂ eq		-	3.758			4.8	301			
	O D'	Gas	mm (inch)	Ø15.88 (5/8)							
	Outer Diameter	Liquid	mm (inch)	Ø9.52 (3/8)							
Connections	Standard		m	7.5							
	Length	Max.	m	50							
	Level Difference	Max.	m	30							
	Chargeless-Pipe L	ength	m				7.5				
	Additional Chargin	ng Volume	g/m		40						
Rated Water Flow Rate (at	LWT 35°C)		LPM	26.0	34.0	40.0	46.0	34.0	40.0	46.0	
Sound Power Level	Heating	Rated	dB(A)	65			6	6			
Sound Pressure Level (at 1m)	Heating	Rated	dB(A)	57			5	8			
Dimensions	Heating	Rated	mm	950 x 834 x 330			950 x 1,3	880 x 330			
Weight	Unit	WxHxD	kg	59.0			94	1.0			
	Voltage, Phase, Fr	equency	V, Ø, Hz		220 ~ 24	10, 1, 50		38	30 ~ 415, 3, 5	50	
Danier Complex	Rated Running	Heating	А	9.7	12.1	14.9	16.3	7.0	8.6	10.5	
Power Supply	Current	Cooling	А	12.5	14.3	15.3	17.4	8.3	8.8	10.0	
	Recommended Cir	cuit Breaker	А	30		40			20		
Wiring Connections Power Supply Cable (included earth, H07RN-F)		mm² x cores	4.0 x 3C 6.0 x 3C 2.5 x 5C			2.5 x 5C					

1) After installation, additional refrigerant must be charged 800g for HU091 U43 and 1,200g for the others.

- 1. Due to our policy of innovation some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound power level is measured on the rated condition in the reverberation rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation. Sound pressure level is converted values from sound power level as per distance.
- 4. Performances are based on the following conditions (It is according to EN14511): Interconnected pipe length is standard length and difference of elevation (outdoor ~ indoor unit) is 0m.

 5. This product contains fluorinated greenhouse gases.

THERMAV... R410A IWT (INTEGRATED WATER TANK)

PRODUCT SPECIFICATION

R410A IWT

Product Specification (Indoor Unit)

Description			Unit	HN1616T NB0
O	Heating		°CDB	25 ~ 58
Operation Range (leaving water)	Cooling	Min. ~ Max.	°CDB	7 ~ 25
(leaving water)	DHW		°CDB	10 ~ 60
	Туре		-	Hydro module with integrated boiler
	Material		-	Enameled steel
	Water Volume	Rated	l	200
DHW Tank	Internal Thermal Prote	ct limit	°C	95
DITTY TAIK	Maximum Water Pressure Limit		bar	10
		Material	-	Polyurethane foam
	Insulation	Thickness	mm	50
		Heat loss (for 24hr)	kWh	1.67
	Water Volume	Rated	l	40
Buffer Tank	Material		-	Steel powder coated
	Insulation Material		-	Closed cell foamed rubber
	Water Circuit	Inlet	mm (inch)	Male PT 25.4 (1)
	Water Circuit	Outlet	mm (inch)	Male PT 25.4 (1)
Piping	DHW Tank	Cold Inlet	mm (inch)	Male PT 19.05 (3/4)
Connections	Water Circuit	Hot Outlet	mm (inch)	Male PT 25.4 (1)
Connections	Water en care	Recirculation	mm (inch)	Male PT 19.05 (3/4)
	Refrigerant Circuit	Gas Liquid	mm (inch)	Ø15.88 (5/8)
			mm (inch)	Ø9.52 (3/8)
Sound Power Level	Heating Rated		dB(A)	36
Sound Pressure Level (at 1m)	Heating Rated		dB(A)	27
Dimensions	Unit	WxHxD	mm	607 x 2,079 x 725
Weight	Unit		kg	228
Electrical Specification			Unit	HN1616T NB0
	Туре		-	Sheath
	Number of Heating Co		EA	1
Back up Heater (1)	Capacity Combination	<u> </u>	kW	2
(1 phase)	Operation		-	Automatic
	Heating Steps		Step	1
	Power Supply		V, Ø, Hz	230, 1, 50
140.	Rated Current		A	8.7
Wiring Connections		cluded earth, H07RN-F)	mm ² x cores	4.0 x 3C
	Type	:1	-	Sheath
	Number of Heating Co		EA	2
Back up Heater (2)	Capacity Combination Operation	<u> </u>	kW	2.0 + 2.0
(1 phase)				Automatic 1
	Heating Steps Power Supply		Step V, Ø, Hz	230, 1, 50
	Rated Current		ν, છ, π2	17.4
Wiring Connections		icluded earth, H07RN-F)	mm ² x cores	4.0 x 3C
wiring connections		ictuded earth, HO/KIN-F)	IIIII x cores	Sheath
	Type Number of Heating Co	oil .	EA	Sheath 3
	Capacity Combination		kW	2.0 + 2.0 + 2.0
Back up Heater (3)	Operation		KVV	Automatic
(3 phase)	Heating Steps		Step	Automatic 1
	Power Supply		V, Ø, Hz	400, 3, 50
	Rated Current		ν, ω, π2	8.7
Wiring Connections		cluded earth, H07RN-F)	mm² x cores	2.5 x 5C
TTI ING CONNECCTIONS	. Just Jupply Cable (II	(10 / KIN-1)	THIT A COICS	2.5 A 3C

130

- 1. Due to our policy of innovation some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national code. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the reverberation rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation.
- 4. This is true for pipe connections of suitable dimensions and joint distance of up to 20m.
- Pipe dimensions and types of pumps must always be verified or determined by the designing engineer of electrical installations. Circulation pumps must be dimensioned in such a way so as to ensure rated voltage (see table) through the device.
- 5. The guideline about cable is taken into account laying B2 from the table A.52.4 IEC 60364-5-52. The cable in the installation pipe is fixed to the wall.
- 6. The size of electrical heater and the fuses depend on the choice of the connection power.
 7. Joint maximal load (circulation pumps, electronic valves ...) which can be connected to or powered by the internal unit, must not exceed the specified value. Higher consumed parts (i.e. pumps) should have their own supply.
- 8. This product contains fluorinated greenhouse gases.

Performance Table for Heating Operaion

Maximum Heating Capacity (Including Defrost Effect)

HU091 U43 + HN1616T NB0

Outdoor	LWT 30°C	LWT 35°C	LWT 40°C	LWT 45°C	LWT 50°C	LWT 55°C
Temperature	TC	TC	TC	TC	TC	TC
-20°C DB	7.00	6.58	6.24	5.89	-	-
-15°C DB	7.39	6.95	6.59	6.22	5.84	-
-7°C DB	8.01	7.53	7.44	7.33	7.24	7.13
-4°C DB	7.95	7.47	7.47	7.47	7.45	7.43
-2°C DB	7.89	7.42	7.48	7.54	7.60	7.64
2°C DB	7.77	7.30	7.50	7.69	7.87	8.04
7°C DB	9.58	9.00	8.89	8.78	8.66	8.55
10°C DB	9.82	9.23	9.09	8.95	8.81	8.67
15°C DB	10.22	9.61	9.43	9.24	9.06	8.88
18°C DB	10.46	9.84	9.63	9.42	9.21	9.00

U121 U33 + HN1616T NB0 / HU123 U33 + HN1616T NB0

Outdoor	LWT 30°C	LWT 35°C	LWT 40°C	LWT 45°C	LWT 50°C	LWT 55°C
Temperature	TC	TC	TC	TC	TC	TC
-20°C DB	10.29	10.39	10.72	10.61	-	-
-15°C DB	10.32	10.41	10.75	11.07	10.53	-
-7°C DB	10.34	10.44	10.51	10.78	10.57	10.63
-4°C DB	10.12	10.23	10.47	10.77	10.84	10.92
-2°C DB	10.01	10.11	10.42	10.73	10.96	11.12
2°C DB	9.71	9.81	10.23	10.65	11.08	11.51
7°C DB	11.88	12.00	12.00	12.00	12.00	12.00
10°C DB	12.38	12.51	12.55	12.59	12.63	12.67
15°C DB	13.23	13.37	13.47	13.58	13.68	13.79
18°C DB	13.73	13.88	14.03	14.17	14.32	14.46

HU141 U33 + HN1616T NB0 / HU143 U33 + HN1616T NB0

Outdoor	LWT 30°C	LWT 35°C	LWT 40°C	LWT 45°C	LWT 50°C	LWT 55°C
Temperature	TC	TC	TC	TC	TC	TC
-20°C DB	11.72	11.42	11.12	10.61	-	-
-15°C DB	11.94	11.63	11.46	11.07	10.53	-
-7°C DB	12.29	11.97	11.81	11.66	11.47	11.30
-4°C DB	11.76	11.45	11.54	11.61	11.65	11.73
-2°C DB	11.51	11.21	11.42	11.64	11.83	12.01
2°C DB	10.65	10.37	10.94	11.50	12.04	12.59
7°C DB	14.38	14.00	13.83	13.65	13.48	13.30
10°C DB	15.02	14.63	14.38	14.14	13.89	13.64
15°C DB	16.09	15.67	15.30	14.94	14.57	14.21
18°C DB	16.73	16.29	15.86	15.42	14.99	14.55

HU161 U33 + HN1616T NB0 / HU163 U33 + HN1616T NB0

Outdoor	LWT 30°C	LWT 35°C	LWT 40°C	LWT 45°C	LWT 50°C	LWT 55°C
Temperature	TC	TC	TC	TC	TC	TC
-20°C DB	12.25	11.61	11.12	10.61	-	-
-15°C DB	12.78	12.12	11.61	11.07	10.53	-
-7°C DB	13.64	12.93	12.55	12.16	11.75	11.33
-4°C DB	13.15	12.47	12.42	12.36	12.26	12.16
-2°C DB	12.81	12.14	12.32	12.47	12.61	12.71
2°C DB	12.07	11.45	12.08	12.67	13.26	13.82
7°C DB	16.88	16.00	15.80	15.60	15.40	15.20
10°C DB	17.79	16.87	16.51	16.14	15.78	15.42
15°C DB	19.31	18.31	17.68	17.05	16.41	15.78
18°C DB	20.22	19.17	18.38	17.59	16.79	16.00

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C), LPM: Liters Per Minute (ℓ/\min) , TC: Total Capacity (kW)
- 2. Direct interpolation is permissible. Do not extrapolate.

 3. Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- · Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
- In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

THERMA V... R410A IWT (INTEGRATED WATER TANK)

PRODUCT SPECIFICATION

Performance Table for Cooling Operation

Maximum Cooling Capacity

HU091 U43 + HN1616T NB0

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
20°C DB	9.00	9.33	9.66	9.88	10.21	10.75	-
30°C DB	9.00	9.11	9.22	9.29	9.40	9.89	-
35°C DB	9.00	9.00	9.00	9.00	9.00	9.47	9.94
40°C DB	7.80	8.13	8.45	8.67	9.00	9.25	9.49
45°C DB	6.60	7.25	7.91	8.35	9.00	9.02	9.04

U121 U33 + HN1616T NB0 / HU123 U33 + HN1616T NB0

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
20°C DB	10.40	10.51	10.63	10.71	10.82	11.51	-
30°C DB	10.40	10.44	10.48	10.50	10.54	11.21	-
35°C DB	10.40	10.40	10.40	10.40	10.40	11.07	11.73
40°C DB	9.73	9.91	10.09	10.22	10.40	10.99	11.57
45°C DB	9.06	9.42	9.79	10.03	10.40	10.91	11.41

HU141 U33 + HN1616T NB0 / HU143 U33 + HN1616T NB0

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
20°C DB	11.00	11.12	11.25	11.33	11.45	12.18	-
30°C DB	11.00	11.04	11.08	11.11	11.15	11.86	-
35°C DB	11.00	11.00	11.00	11.00	11.00	11.70	12.40
40°C DB	10.29	10.48	10.68	10.81	11.00	11.62	12.23
45°C DB	9.58	9.97	10.35	10.61	11.00	11.53	12.06

HU161 U33 + HN1616T NB0 / HU163 U33 + HN1616T NB0

Outdoor	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
Temperature	TC	TC	TC	TC	TC	TC	TC
20°C DB	12.00	12.13	12.27	12.36	12.49	13.29	-
30°C DB	12.00	12.04	12.09	12.12	12.16	12.94	-
35°C DB	12.00	12.00	12.00	12.00	12.00	12.77	13.53
40°C DB	11.23	11.44	11.65	11.79	12.00	12.68	13.35
45°C DB	10.45	10.87	11.30	11.58	12.00	12.58	13.16

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C), LPM: Liters Per Minute (\(\ell \)/min), TC: Total Capacity (kW) 2. Direct interpolation is permissible. Do not extrapolate.


 3. Measuring procedure follows EN-14511.


- Rated values are based on standard conditions and it can be found on specifications.
 Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
 In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

Drawings


			Model	Name			
Category	Unit	Capacity (kW)					
		9.0	12.0	14.0	16.0		
1 Phase Model	Outdoor Unit	HU091 U43	HU121 U33	HU141 U33	HU161 U33		
220 ~ 240V, 1Ø, 50Hz	Indoor Unit	HN1616T NB0					
3 Phase Model	Outdoor Unit	-	HU123 U33	HU143 U33	HU163 U33		
380 ~ 415V, 3Ø, 50Hz	Indoor Unit	-		HN1616T NB0			

HU091 U43 [Unit:mm]

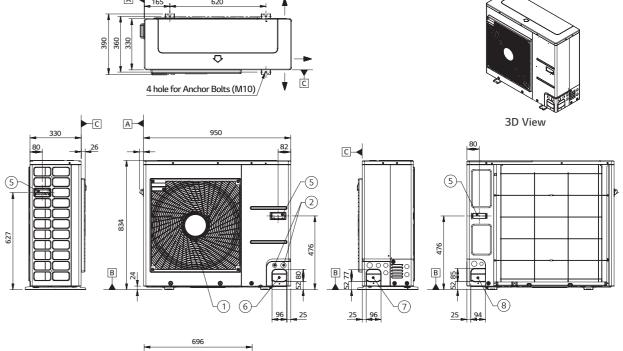



No.	Part Name	Description
1	Air Outlet	-
2	Power and Communication Cable Hole	-
3	Gas Pipe Connection	Flare joint
4	Liquid Pipe Connection	Flare joint
5	Handle	-
6	Pipe Routing Hole (front)	-
7	Pipe Routing Hole (side)	-
8	Pipe Routing Hole (back)	-




THERMAY... R410A IWT (INTEGRATED WATER TANK)


PRODUCT SPECIFICATION


Drawings


HU121 U33 / HU141 U33 / HU161 U33 / HU123 U33 / HU143 U33 / HU163 U33

[Unit:mm]

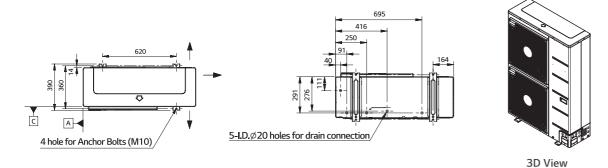


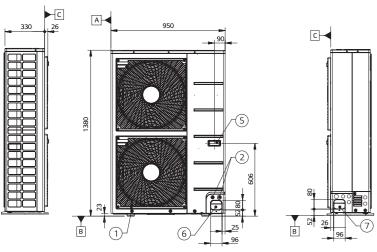







No.	Part Name	Description
1	Air Outlet	-
2	Power and Communication Cable Hole	-
3	Gas Pipe Connection	Flare joint
4	Liquid Pipe Connection	Flare joint
5	Handle	-
6	Pipe Routing Hole (front)	-
7	Pipe Routing Hole (side)	-
8	Pipe Routing Hole (back)	-





Piping Connection Port

HN1616T NB0 [Unit:mm]





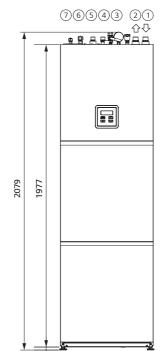


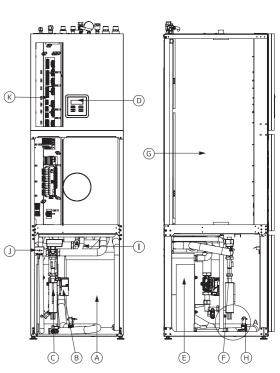

No.	Part Name	No.	Part Name
1	Heating / Cooling Inlet	Α	Buffer Tank
2	Heating/Cooling Outlet	В	Circulating Pump
3	Warm Sanitary		Electric Flow Heater
4	DHW - Circulation	D	TT3000 Controller
5	Cold Sanitary Water - Supply		Condenser
6	Gas Pipe 5/8" - Refrigerant		3 Way Valve
7	Liquid Pipe 3/8" - Refrigerant	G	DHW Tank
8	Mg. Anode	Н	Flow Switch
9	Wiring Connection	-1	Ball Valve
10	Safety Valve, Pressure Gauge, Air Vent	J	Safety Thermostat
		К	Wiring Connection

HIGH TEMPERATURE





THERMA V_{IM}

Excellent Performance & Efficiency







R1 Cascade Wide compressor 2 stage operation heat compression range exchanger (up to 80°C) Black Fin Smart grid heat (energy state)

User Convenience










Easy Installation & Maintenance




^{*} Detailed description for each function is presented on page $26 \sim 43$.

Energy Labeling



THERMA V High Temperature Cycle

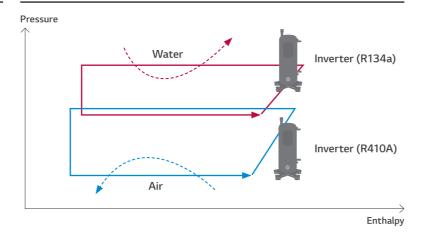

High Temperature Concept

The LG THERMA V High Temperature is a split type unit that consists of a separate indoor and outdoor unit. With cascade 2 stage compression technology, it can supply a high leaving water temperature of up to 80°C, while maintaining high energy efficiency.







Capacity Range (Heating)

High Temperature Model

Capacity Range [kW]	16
Heating Capacity	(16.0)

Operation Range (Heating)






THERMA V... HIGH TEMPERATURE

PRODUCT FEATURES

Cascade 2 Stage Compression Technology

The THERMA V High Temperature unit can produce up to 80°C hot water with high efficiency through cascade 2 stage compression (from R410A to R134a) technology, making it an optimized replacement for a boiler heating system which demands hot water supply.

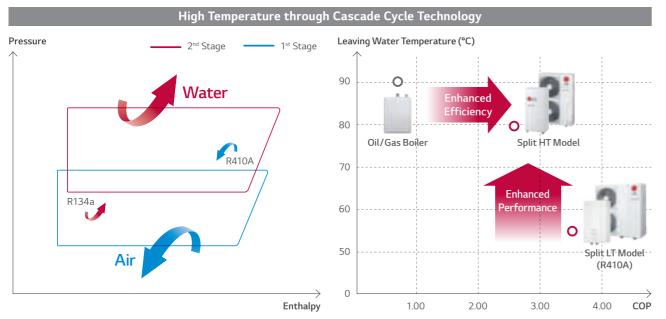


- * Condition for HT model : Outdoor air temp. 18°C, Entering water temp. 70°C
- * Condition for LT model : Outdoor air temp. 18°C, Entering water temp. 55°C

Note

1. OAT : Outdoor Air Temperature, EWT : Entering Water Temperature, LWT : Leaving Water Temperature


High Energy Efficiency

Through the application of an efficient compressor and optimally designed structure, the unit can provide optimized energy savings and therefore, lower operating cost for a faster return on investment.

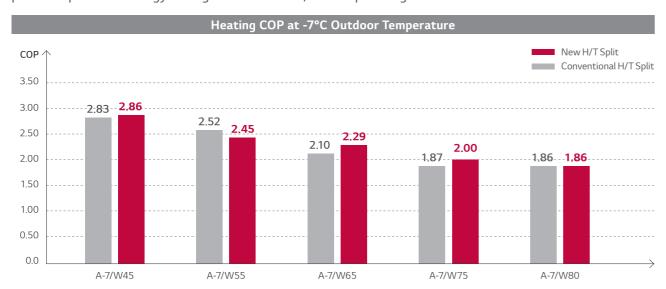


Excellent Performance at LAT

The new THERMA V High Temperature provides excellent heating performance – especially at low ambient temperature. Even at outside temperatures of -7°C and LWT of 80°C, New H/T Split is able to provide 16kW heating capacity improved by 16.8% compared to the previous models.

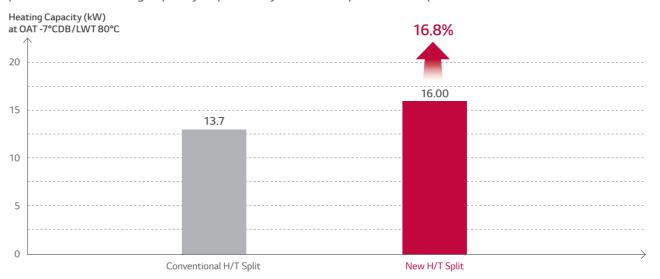


Low Noise Level

Due to the DC inverter's cutting edge technology, the operational noise level of both the indoor and outdoor units have been reduced for optimized comfort.

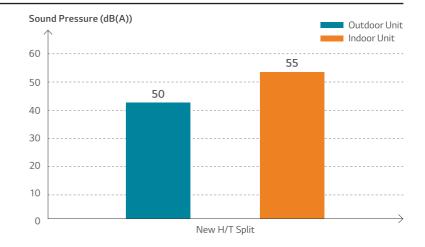

Quick Defrosting

Through the LG-patented R134a compressor controlling technology, the necessary time for the defrost operation has been minimized.

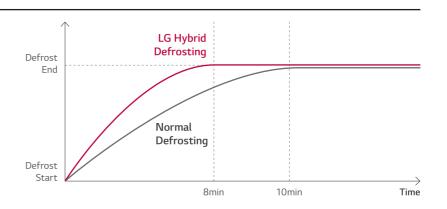

THERMA V... HIGH TEMPERATURE


PRODUCT FEATURES

Suitable for Old Radiator

The LG THERMA V High Temperature product is suitable for houses with poor insulation, an existing radiator heating system, or are required to meet sanitary water regulation needs at high temperatures.



Light Weight

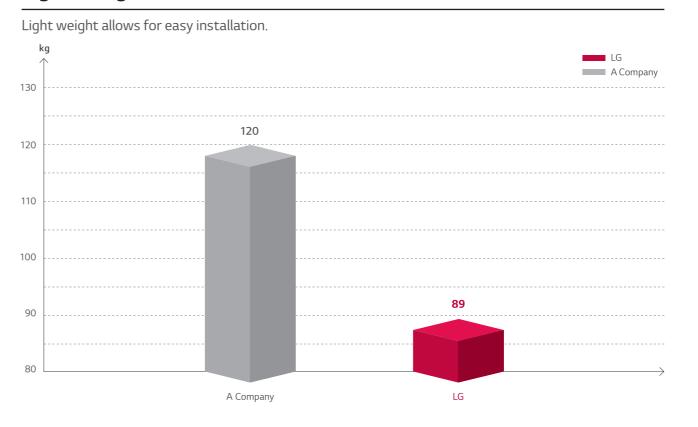

Low Current Level

THERMA V High Temperature can be easily installed without any incurring any additional costs to the electrical connections.



THERMA V. HIGH TEMPERATURE

PRODUCT SPECIFICATION

High Temperature

IDU

HN1610H NK3

ODU HU161HA U33





















Features

- High energy efficiency
- Maximum 80°C LWT
- Only for heating (no cooling)
- Suitable for old radiator
- Black Fin heat exchanger
- LG ThinQ

142

- Excellent performance at low ambient temperature (100% @ -7°C)
- Wide operation range (ambient: -25 ~ 35°C/water side: 25 ~ 80°C)
- Cascade 2 stage compression
- R1 scroll compressor (for outdoor unit)
- Efficient & flexible design
- KEYMARK/MCS/Eurovent certification

Model Line-up

		Model Name				
Category	Unit	Capacity (kW)				
		16.0				
1 Phase Model	Outdoor Unit	HU161HA U33				
220 ~ 240V, 1Ø, 50Hz	Indoor Unit	HN1610H NK3				

Seasonal Energy

Description			Outdoor Unit Indoor Unit	HU161HA U33 HN1610H NK3
	_	SCOP		3.23
	Average	SCUP	-	3.23
Space Heating (according to EN14825) Climate Water Outlet 35°C Average Climate Water		Seasonal Space Heating Efficiency (η _s)	%	126
	Outlet 35°C	Seasonal Space Heating Eff. Class (A+++ to D scale)	-	A+
	SCOP	-	3.01	
		Seasonal Space Heating Efficiency (ηs)	%	117
	Outlet 55°C	Seasonal Space Heating Eff. Class (A+++ to D scale)	-	A+

Nominal Capacity and Nominal Power Input

Description		OAT (DB)	LWT (DB)	Outdoor Unit	HU161HA U33
		OAI (DB)	LVV I (DB)	Indoor Unit	HN1610H NK3
		7°C	35°C		16.00
Nominal Capacity	Heating	7°C	55°C	kW	14.00
		2°C	35°C		16.00
n		7°C	35°C	kW	4.89
Nominal Power Input	Heating	7°C	55°C		5.00
rower input		2°C	35°C		4.92
		7°C	35°C		3.27
COP	Heating	7°C	55°C	W/W	2.78
		2°C	35°C		3.25

Product Specification (Outdoor Unit)

Description			Unit	HU161HA U33
Operation Range (outdoor temp.)	Heating	Min. ~ Max.	°CDB	-25 ~ 35
Compressor	Quantity		EA	1
Compressor	Туре		-	Hermetic Sealed Scroll
	Туре		-	R410A
Refrigerant	GWP (global warr	ning potential)	-	2087.5
Refrigerant	Precharged Amou	nt	g	3,800
	t-CO ₂ eq		-	7.933
	Outer Diameter	Gas	mm (inch)	Ø15.88 (5/8)
	Outer Diameter	Liquid	mm (inch)	Ø9.52 (3/8)
Dining	Length	Standard	m	7.5
Piping Connections		Max.	m	50
Connections	Level Difference	Max.	m	30
	Chargeless-Pipe Length		m	7.5
	Additional Charging Volume		g/m	40
Sound Power Level	Heating	Rated	dB(A)	63
Sound Pressure Level (at 1m)	Heating	Rated	-	55
Dimensions	Unit	WxHxD	mm	950 x 1,380 x 330
Weight	Unit		kg	89.0
	Voltage, Phase, Fr	equency	V, Ø, Hz	220 ~ 240, 1, 50
Power Supply	Rated Running Current		A	11.9
	Recommended Cir	cuit Breaker	А	20
Wiring Connections	Power Cable (incl	uded earth)	mm ² x cores	4.0 x 3C (H07RN-F)

Product Specification (Indoor Unit)

Description			Unit	HN1610H NK3
Operation Range (leaving water)	Heating, DHW Min. ~ Max.		°CDB	25 ~ 80
Compressor	Quantity		EA	1
Compressor	Туре		-	Hermetic Sealed Twin Rotary
	Туре		-	R134a
Defrigarent	GWP (global warming	g potential)	-	1430.0
Refrigerant	Precharged Amount		g	1,800
	t-CO ₂ eq		-	2.574
	Water Circuit	Туре	-	Brazed Plate HEX
Heat Exchanger	Water Circuit	Water Volume	l	1
	Refrigerant Circuit	Туре	-	Brazed Plate HEX
	Water Circuit	Inlet	mm (inch)	Male PT 25.4 (1)
Piping	vvater Circuit	Outlet	mm (inch)	Male PT 25.4 (1)
Connections	D-f-:	Gas	mm (inch)	Ø15.88 (5/8)
	Refrigerant Circuit	Liquid	mm (inch)	Ø9.52 (3/8)
Rated Water Flow Rate (at LWT	35°C)		LPM	46
Sound Power Level	Heating	Rated	dB(A)	58 / 63 ¹⁾
Sound Pressure Level (at 1m)	Heating	Rated	dB(A)	50
Dimensions	Unit	WxHxD	mm	520 x 1,080 x 330
Weight	Unit		kg	84.0
Electrical Specification			Unit	HN1610H NK3
	Voltage, Phase, Frequ	iency	V, Ø, Hz	220 ~ 240, 1, 50
Power Supply	Rated Running Curre	nt	A	9.8
	Recommended Circui	t Breaker	А	25
Wiring Connections	Power Cable (include		mm ² x cores	4.0 x 3C (H07RN-F)
Communication Cable (included earth)		mm ² x cores	1.0 ~ 1.5 x 2C (VCTF-SB)	
Accessory Kit of the Indoor Uni	it		Unit	HN1610H NK3
Remote Controller			-	RS3
Water Tank Temperature	Sensor Size		Ø	7
Sensor with Holder	Resistance		kΩ	5
Strainer	Mesh Size / Material		-	28 mesh / Stainless Steel

- Due to our policy of innovation some specifications may be changed without notification.
 Wiring cable size must comply with the applicable local and national codes. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
 Sound level values are measured at noise measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions
- and values are normally higher in actual operation.

- 4. Performances are based on the following conditions (It is according to EN14511):

 Heating: inlet/outlet water temp. 30°C / 35°C, outdoor temp. 7°CDB / 6°CWB

 Interconnected pipe length is 5m and difference of elevation (outdoor ~ indoor unit) is 0m.

 This product contains fluorinated greenhouse gases.

THERMA V... HIGH TEMPERATURE


PRODUCT SPECIFICATION

Performance Table for Heating Operaion

Maximum Heating Capacity (Including Defrost Effect)

HU161HA U33 + HN1610H NK3

Outdoor	LWT 35°C	LWT 40°C	LWT 45°C	LWT 50°C	LWT 55°C	LWT 60°C	LWT 65°C	LWT 70°C	LWT 75°C	LWT 80°C
Temperature	TC									
-25°C DB	13.50	13.29	13.07	12.86	12.64	12.43	12.21	12.00	-	-
-20°C DB	14.19	14.04	13.88	13.73	13.58	13.42	13.27	13.11	12.96	-
-15°C DB	14.89	14.79	14.70	14.60	14.51	14.41	14.32	14.22	14.10	14.00
-7°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
-4°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
-2°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
2°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
7°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
10°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
15°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
18°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
20°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
35°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00

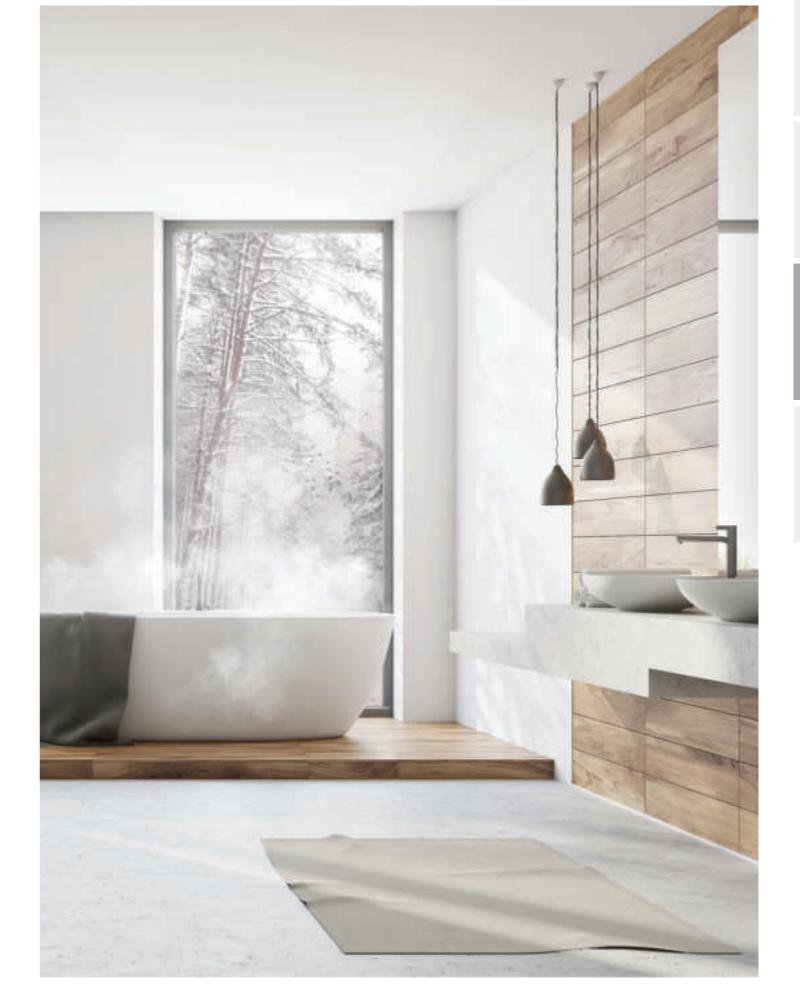

- Note

 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C), LPM: Liters Per Minute (l/min), TC: Total Capacity (kW)

 2. Direct interpolation is permissible. Do not extrapolate.

 3. Measuring procedure follows EN-14511.

 Rated values are based on standard conditions and it can be found on specifications.

 Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.

 In accordance with the test standard (or nations), the rating will vary slightly.


 4. The shaded areas are not guaranteed continuous operation.


THERMA V... HIGH TEMPERATURE

PRODUCT SPECIFICATION


Drawings

		Model Name
Category	Unit	Capacity (kW)
		16.0
1 Phase Model	Outdoor Unit	HU161HA U33
220 ~ 240V, 1Ø, 50Hz	Indoor Unit	HN1610H NK3

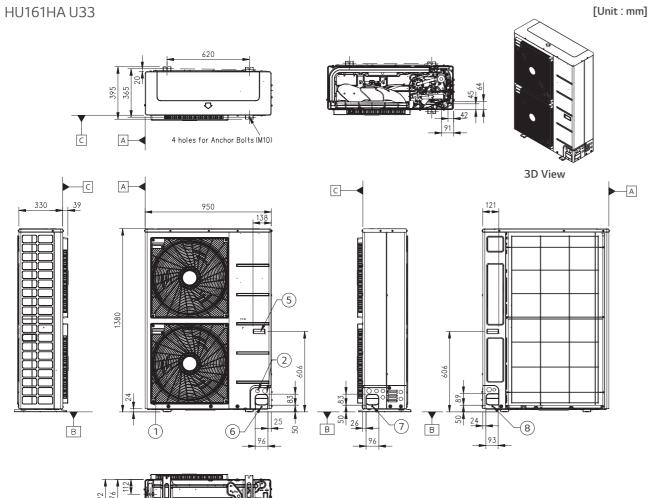





No.	Part Name	Description
1	Air Outlet	-
2	Power and Communication Cable Hole	-
3	Gas Pipe Connection	Flare joint
4	Liquid Pipe Connection	Flare joint
5	Handle	-
6	Pipe Routing Hole (front)	-
7	Pipe Routing Hole (side)	-
8	Pipe Routing Hole (back)	-





Piping Connection Port


HN1610H NK3 [Unit:mm]











No.	Part Name	Description
1	Refrigerant Pipe	Ø9.52 (mm)
2	Refrigerant Pipe	Ø15.88 (mm)
3	Leaving Water Pipe	Male PT 25mm (1 inch)
4	Entering Water Pipe	Male PT 25mm (1 inch)
5	Control Box	PCB and terminal blocks
6	Flow Switch	Minimum operation range at 15LPM
7	Plate Heat Exchanger	Heat exchanger between refrigerant and water
8	Plate Heat Exchanger	Heat exchanger between refrigerant and refrigerant
9	Compressor	EPT525MBA
10	Accumulator	716 cc



THERMA V_{IM}

ACCESSORIES

Accessories Provided by LG

Category	Model Name	Model Number	Figure	Applicable Product	Relevant Function	Purpose	Feature
	Room Temperature Sensor	PQRSTA0	9	All except for R410A IWT	Room Temperature Based Control	To detect room air temperature for room temperature based control	• Max. wire length : 15m
Sensors	2 nd Circuit Thermistor	PRSTAT5K10	0	All except for R410A IWT and High temp.	2 nd Circuit (mixing circuit)	To detect 2 nd circuit temperature when using 2 nd circuit function	• 5kΩ thermistor, 10m
	Domestic Hot Water Sensor	PHRSTA0	0	All except for IWT and High temp. models	Domestic Hot Water Heating	To detect DHW tank temperature	• Included in PHLTA kit
	3 Way Valve	OSHA-3V		All except for IWT models	Domestic Hot Water Heating	To divert water flow between space heating and DHW heating	Size : DN 20 G 1" connection, male threaded
Valves	Thermostatic	OSHA-MV		Regardless of model	Domestic Hot Water Supply	To blend hot water with cold water for ensuring constant, safe shower and bath outlet temp.	• Size : 3/4" DN20 male threaded
	Mixing Valve	OSHA-MV1	Salar				• Size : 1" DN25 male threaded
	Domestic	OSHW-200F	-				• Storage volume : 200L, 300L, 500L
DHW	Hot Water Tank (single coil)	OSHW-300F		All except for IWT models	Domestic	To generate and	Type: Internal double coil Material: Stainless steel Capacity of booster heater: 2.4kW
Tanks	Domestic Hot Water Tank (double coil)	OSHW-300FD		All except for IWT and High temp. models	Hot Water Heating	store domestic hot water	Storage volume: 300L Type: Internal double coil Material: Stainless steel Capacity of booster heater: 2.4kW
		PHLTA (1Ø, split)	0.0				Parts included : DHW tank sensor
	Domestic	PHLTC (3Ø, split)	0	All except for IWT and	Domestic	To operate with	(thermistor), Circuit breaker, Relay
Installation Kits	Hot Water Tank Kit	PHLTB (monobloc)		High temp. models	Hot Water Heating	DHW tank	Parts included: DHW tank sensor (thermistor), Circuit breaker, Relay, Multi harness
	Solar Thermal Kit	PHLLA	10	All except for IWT, Hydrosplit and High temp. models	Solar Thermal Heat Utilization	To operate with solar thermal system	• Length of thermistor: 12m • Size of tube connector (W x H x D): 110 x 55 x 22

Category	Model Name	Model Number	Figure	Applicable Product	Relevant Function	Purpose	Feature
		HA031M E1	-				Heater capacity: 3kW Number of heating coil: 1EA (3.0kW) Size (W x H x D): 210 x 607 x 217 Power: 220 ~ 240V, 1Ø
Installation Kits	Electric Back Up Heater	HA061M E1		R32 Monobloc and R32 Silent Monobloc (HA063M E1 is not applicable for R32 Silent Monobloc)	Capacity Back Up & Emergency Operation	To supplement insufficient capacity	Heater capacity: 6kW Number of heating coil: 2EA (3.0 + 3.0kW) Size (W x H x D): 210 x 607 x 217 Power: 220 ~ 240V, 1Ø
		HA063M E1					Heater capacity: 6kW Number of heating coil: 3EA (2.0 + 2.0 + 2.0kW) Size (W x H x D): 210 x 607 x 217 Power: 380 ~ 415V, 3Ø
	Buffer Tank for Space Heating	OSHB-40KT		R32 IWT	-	To provide the buffer volume of water to the heating circuit	• Volume : 40L • Size (W x H x D) : 518 x 560 x 175
Vessel	Expansion Vessel for DHW	OSHE-12KT		R32 IWT	-	To absorb the volume changes by temperature of water for the DHW circuit	• Volume : 8L • Connection : 3/4" • Max. pressure : 10 bar • Size (W x H x D) : 416 x 238 x 502
	Extension Wire for Wire Remote Controller	PZCWRC1	0	All except for R410A IWT	-	To extend wire between wired remote controller and indoor unit	• Length : 10m
	Extension Cable for Wi-Fi Modem	PWYREW000	S	All except for R410A IWT	Wi-Fi Control via LG ThinQ	To extend wire between WI-Fi modem and indoor unit	• Length : 10m
	2 Remote Control Wire	PZCWRC2		All except for R410A IWT model	2 Remote Control	To connect two remote controller on the one indoor unit	• Length: 0.25m
ETC	TC PHDPB	PHDPB		R32 Split, R410A Split		To collect condensed	
	Drain Pan	PHDPC		R32 Hydrosplit	Cooling Operation	water in indoor unit when cooling operation	-
	Cover Plate	PDC-HK10		R32 Hydrosplit, R32 Split, R32 IWT, R410A Split	-	To fill the blank space of the indoor unit front panel when the remote controller is relocated indoors.	-

153

THERMA V_{IM}

ACCESSORIES

Accessories Provided by LG

Category	Model Name	Model Number	Figure	Applicable Product	Relevant Function	Purpose	Feature
Remote Controller	Wired Remote Controller	PREMTW101	2000	All except for R410A IWT model	2 Remote Control	To control AWHP using two remote controller (additional remote controller)	New modern design 4.3 inch color LCD display Information displayed with simple graphic, icon & text Built-in temperature sensor Size (W x H x D): 120 x 120 x 16 Extension cable (PZCWRC1, 10m) and 2 remote cable (PZCWRC2, 0.25m) are included
	AC Ez Touch	PACEZA000	2 - 1				• 5 inch color display • User-friendly control with iconographic interface (touch screen) • Max. 32 unit control • Total 200 schedule events (weekly / monthly / yearly / exception day) • Operation history • Remote controller lock (all, temp, mode) • PC access supported (IPv6 supported) • DI 1EA (emergency stop only) • Size (W x H x D): 137 x 121 x 25
Central Controller	AC Smart 5	PACS4B000 (Smart 4) PACS5A000 (Smart 5)		All except for R410A IWT model	Centralized Control	To control AWHP using LG central controller	• 10.2 inch color display • User-friendly control with iconographic interface (touch screen) • (Smart 4)_Max. IDU 32, (Smart 5)_Max. IDU 64 • Total 100 schedule events (weekly/monthly/yearly/exception day) • History/operation trend • Interlock with 3 rd party equipment (ACS IO, ACU IO module is needed) • Error alarm by e-mail • Remote controller lock (all, temp, mode) • Map view (visual navigation) • Web access supported with HTML5 (PC, smartphone, tablet) • DI 2EA, DO 2EA • BACnet IP/modbus TCP protocol support • Size (W x H x D): 253.2 x 167.7 x 28.9
	ACP 5	PACP4B000 (ACP4) PACP5A000 (ACP5)	H = 30				Web access controller Max. 128 unit control Total 100 schedule events (weekly/monthly/yearly/exception day) History/operation trend Interlock with 3rd party equipment (ACS IO, ACU IO module is needed) Error alarm by e-mail Remote controller lock (all, temp, mode) Map view (visual navigation) DI 10EA, DO 4EA BACnet IP/modbus TCP protocol support Size (W x H x D): 270 x 155 x 65
Gateway	ACP Lonworks	PLNWKB000	-	All except for R410A IWT model	Centralized Control	To link with AWHP and other existing building control system	Web access controller Max. 64 unit control ACP function included Lonworks protocol support Size (W x H x D): 270 x 155 x 65

Category	Model Name	Model Number	Figure	Applicable Product	Relevant Function	Purpose	Feature
	Modbus RTU Gateway	PMBUSB00A		All except for R410A IWT model		To communicate and control through the central controller (providing modbus RTU connection between AWHP and BMS)	• Modbus RTU slave (RS485) / 9,600 bps • Size (W x H x D): 53.6 x 89.7 x 60.7 • Max. 16 IDUs with single module / Max. 64 IDUs with 4 modules • Power: DC 12V
Gateway	PI485 Gateway	PMNFP14A1	1.00	All except for R410A IWT model	Centralized Control	To communicate and control through the central controller (converting LG protocol to RS485 protocol)	• 1 for each outdoor unit • Power : Supplied by outdoor unit
	PI485 Gateway	PP485B00K	447	R410A IWT		To communicate between outdoor unit and IWT type indoor unit	• 1 for each outdoor unit • Power : Supplied by outdoor unit
	Simple Dry Contact	PDRYCB000	PDRYCB000 +			To connect between the	 1 Set per 1 unit 1 Input contact for turning on/off Input power: 220 - 240V 2 output contacts Operation status - Error status
	Dry Contact for Thermostat	PDRYCB320		All except for R410A IWT model	-	AWHP and external devices to control various functions	1 Set per 1 unit Non voltage or 12 ~ 24V 8 digital input contacts for thermostat - On/off, operation mode, DHW heating Emergency mode, silent mode 2 Output contacts - Operation status
	LG Wi-Fi Modem	PWFMDD200		All except for R410A IWT model	Wi-Fi Control via LG ThinQ	To control AWHP via smartphone	Basic control function On/off, operation mode, set temp DHW heating and set temp Weekly on/off schedule Error status check Frequency: 2.4GHz IEEE 802.11b/g/n supported
ETC	Meter Interface	PENKTH000	6 10	All except for R410A IWT model	Energy Monitoring	To measure production / consumption power	Energy meter interface to monitor Electricity and Heat energy Max. 3 watt
	2 Zone Valve Controller	PZNVVB200	8 18	All except for R410A IWT model	Zone Valve Control	To control individual zone valves with room temperature sensor or room thermostat	Individual temperature setting possible. (to be set through wired remote control in room temperature input mode) Room temperature detection (AI: 2 ports) 3 rd Party thermostat interlock input. (DI: 2 port) Can read one DI or AI for each zone. Maximum number of connections: Max. 4EA (expandable up to 8-zone) Size (W x H x D): 53.6 x 89.7 x 60.7 Power: DC12V for module, AC24V for valve

Note 1. PI485 Gateway (PMNFP14A1) should be installed on outdoor unit to use central controller.

THERMAV

ACCESSORIES

LG Wi-Fi Modem

PWFMDD200 ENCXLEU

Access LG THERMA V anytime and from anywhere with Wi-Fi equipped device. LG's exclusive Home Appliances control app (LG ThinQ) is available.

Simple operation for various functions.

- On/off
- Operation mode selection
- Current temperature
- Set temperature
- On/off reservation scheduling
- Energy monitoring
- ESS monitoring
- Silent mode reservation
- Holiday mode
- Quick DHW heating



Model Name	PWFMDD200		
Size (mm)	46 x 68 x 14		
Interfaceable Products	All THERMA V Line-ups except for R410A IWT		
Connection Type	Indoor Unit 1:1		
Communication Frequency	2.4GHz		
Wireless Standards	IEEE 802.11b/g/n		
Mobile Application LG ThinQ (Android v4.1 (Jellybean) or higher, iPhone iOS 9.0 or higher)			
Optional Extension Cable PWYREW000 (10m extension)			

Note

- 1. Functionality may be different according to each Indoor model.
- User interface of application shall be revised for its design and contents improvement.
- Application is optimized for smartphone use, so it may not be well functioning with tablet devices.
 For the compatibility with indoor unit, please contact regional office.

Domestic Hot Water Tank

OSHW-200F AEU OSHW-300F AEU OSHW-300FD AEU



Double Coil

Single Coil

Domestic Hot Water Tank		Unit	OSHW-200F	OSHW-300F	OSHW-500F	OSHW-300FD
	Water Volume	l	200	300	500	300
	Diameter	mm	640	640	640	640
General	Height	mm	1,350	1,850	1,900	1,850
Characteristics	Empty Weight	Kg	61	100	146	106
	Tank Materials	-	STS:F18	STS: F18	STS:F18	STS:F18
	Color	-	Grey	Grey	Grey	Grey
C	Additional Electric Heater	W	2,400	2,400	2,400	2,400
Specification of Electric Back up	Power Supply	V, Ø, Hz	230, 1, 50 (60)	230, 1, 50 (60)	230, 1, 50 (60)	230, 1, 50 (60)
Licetife Buck up	Adjustable Thermostat	°C	0 ~ 90	0 ~ 90	0 ~ 90	0 ~ 90
	Exchanger Type	-	Single	Single	Single	Double
Specification of	Material Exchanger	-	STS: F18	STS: F18	STS: F18	STS:F18
Heat Exchanger	Maximum Water Temp.	°C	90	90	90	90
	Coil Surface	m ²	2.3	3.1	4.8	3.1 + 0.97
	Heat Pump Inlet	inch	1 BSP female	1 BSP female	1 ¼ BSP female	¾ BSP female (upper coil)
	Heat Pump Outlet	inch	1 BSP female	1 BSP female	1 ¼ BSP female	¾ BSP female (upper coil)
Water Connections	Solar Inlet	inch	-	-	-	1 BSP Female (lower coil)
	Solar Outlet	inch	-	-	-	1 BSP Female (lower coil)
	City Water Inlet	inch	¾ BSP male	¾ BSP male	1 BSP male	¾ BSP male
	Hot Water Outlet	inch	¾ BSP female	1 BSP female	1 BSP female	1 BSP female
Energy Efficiency Class	s (A+ to F scale)	-	В	В	В	В
Standing Heat Loss		W	61	70	83	70

Mandatory Optional Accessories					
Domestic Hot Water Tank Installation Kit	PHLTA (1Ø, split), PHLTB (monobloc), PHLTC (3Ø, split)				
Optional Accessories					
Thermostatic Mixing Valve (3/4" DN20)	OSHA-MV				
Thermostatic Mixing Valve (1" DN25)	OSHA-MV1				
3 Way Valve	OSHA-3V				

THERMA V.

ACCESSORIES

Combined Test with DHW Tank

LG has conducted a combination test of THERMA V with DHW tanks in accordance with EN16147 and obtained an ErP label for packages in order to cope with European nZEB regulations.

- R32 Monobloc (5, 7, 9kW) + OSHW-200F
- R32 Monobloc (12, 14, 16kW) + OSHW-200F
- R32 Monobloc (5, 7, 9kW) + OSHW-300F
- R32 Split Hydro Box (5, 7, 9kW) + OSHW-200F



	AWHP	R32 Split (5,7,9kW)	R32 Monobloc (5,7,9kW)	R32 Monobloc (12, 14, 16kW)	R32 Monobloc (5,7,9kW)
Model	IDU	HN0916M NK4	HM051M U43 HM071M U43 HM091M U43		
	ODU	HU051MR U44 HU071MR U44 HU091MR U44		HM121M U33 HM141M U33 HM161M U33	HM051M U43 HM071M U43 HM091M U43
	Tank	OSHW-200F AEU	OSHW-200F AEU	OSHW-200F AEU	OSHW-300F AEU
Declared Load Profile		L	L	L	XL
Average Climate	Grade	A+	A+	А	A+
	Efficiency	118%	122%	109%	134%
	Annual Energy Consumption	865kWh	839kWh	940kWh	1,254kWh
Energy Label		ENERG © © O O O O O O O O O O O O O O O O O	ENERGY TO THE PROPERTY OF THE	ENERG © (1) (5) LG HM161M -/ OSHW-200F 20 (6) LG HM161M -/ OSHW-200F 20 (7) LG HM161M -/ OSHW-200F 20 (8) LG HM161M -/ OSHW-200F 20 (9) LG HM161M -/ OSHW-200F 20 (1) LG HM161M -/ OSHW-200F 20 (2) LG HM161M -/ OSHW-200F 20 (3) LG HM161M -/ OSHW-200F 20 (4) LG HM161M -/ OSHW-200F 20 (4) LG HM161M -/ OSHW-200F 20 (5) LG HM161M -/ OSHW-200F 20 (6) LG HM161M -/ OSHW-200F 20 (6) LG HM161M -/ OSHW-200F 20 (7) LG HM161M -/ OSHW-200F 20 (8) LG HM161M -/ OSHW-20 (8) LG HM161M	ENERG