

LG SMART INVERTER

COMMERCIAL AIR CONDITIONERS



LG Electronics

<http://www.lg.com/global/business>
<http://partner.lge.com/global>
<http://blog.lghvacstory.com/>

Copyright © 2019 LG Electronics. All rights reserved.

Distributed by



CONTENTS




What is Inverter?	04	
Why LG Smart Inverter?	05	
Line up	08	
Core benefit of LG Smart Inverter Single Split	12	
• The Evolution of LG Technology	• LG Smart Technology	• Energy Saving
• Comfort	• Reliability	• Convenience

LG Smart Inverter Single Split	26	
• Ceiling Mounted Cassette	• Ceiling Concealed Duct	• Ceiling Suspended Unit
• Floor Standing Unit	• Single Package	
Control Solution	66	

WHAT IS INVERTER?

Traditional compressors normally cease operation once the set temperature has been reached, then start again when the room gets warmer. This results in inefficient energy usage that increases energy bills. LG's Smart Inverter Single Split air conditioners on the other hand, operate much more efficiently, slowly decreasing and increasing output depending on the temperature outside and inside. This ultimately improves energy efficiency, as the air conditioner is able to control operational capacity.


The Advantages of Inverter Control

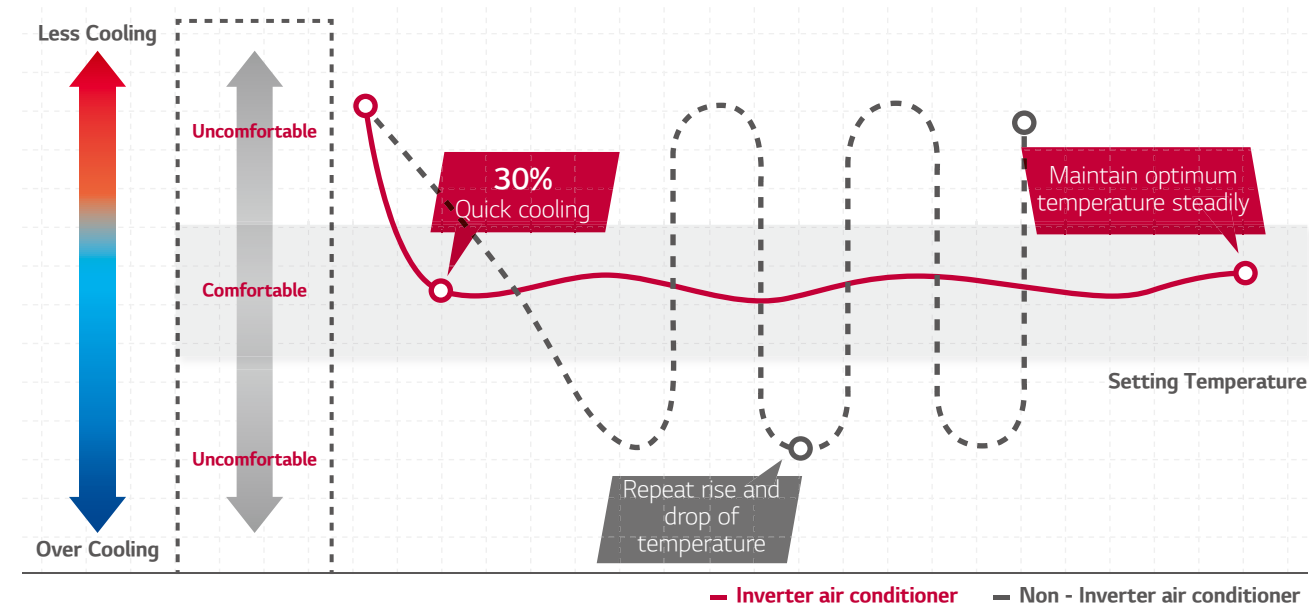


Benefit of Inverter compressor

Inverter compressor maximizes energy efficiency, by adjusting energy supply as required.

Constant Speed Compressor

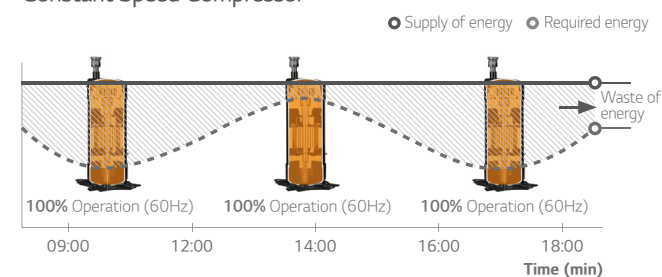

Inverter Compressor

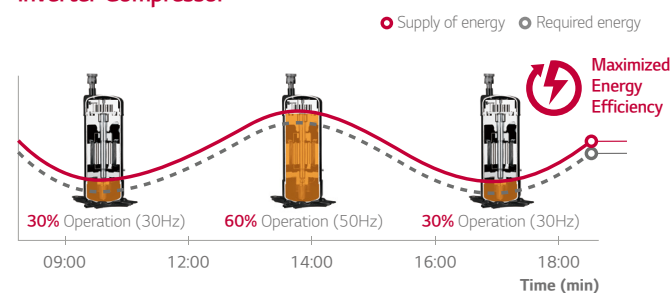


Brain

Non inverter running at constant-speed has only two choices ; RUN or STOP. It runs at single speed without judging the ambient conditions. In contrast, Inverter operating at variable speed, can adjust its pace in the most efficient way.




Dimmable lamp

Constant speed runs only On / Off operation, while variable speed adjusts its frequency upon external conditions, just like dimmable lighting can be controlled its brightness by ambient light.

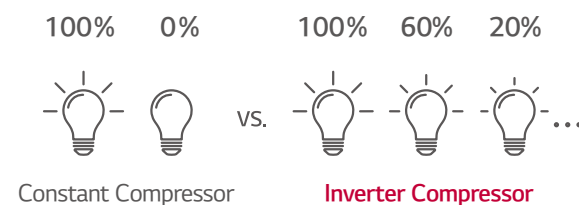

WHY LG SMART INVERTER?

LG Inverter technology is applied to various electronics including refrigerators and washing machines which continuously receive global attention. Their best quality is the excellent level of technology provided by LG, a reputable electronic provider. LG is also known for its comprehensive HVAC provider while continuing innovation in technology. LG's latest Smart Inverter Single Split solutions are all equipped with the company's advanced Smart Inverter technology.

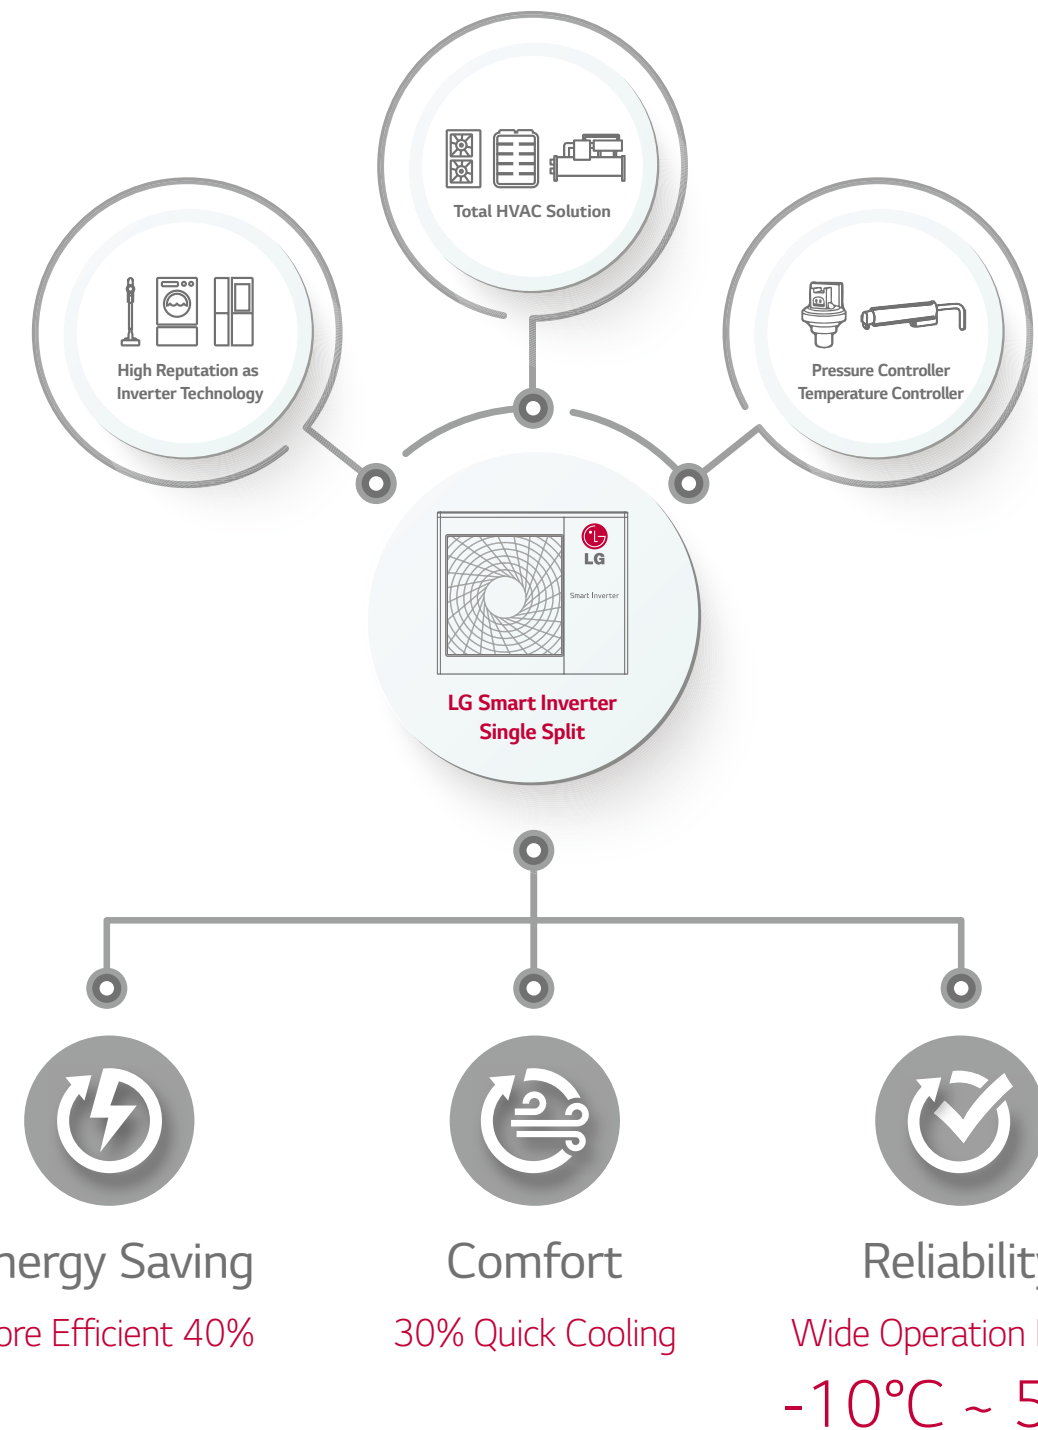

※ Specifications may vary for each model.

HIGH / STANDARD SMART INVERTER SINGLE SPLIT


- Ceiling Mounted Cassette
- Ceiling Concealed Duct
- Ceiling Suspended Unit
- Floor Standing Unit
- Single Package



SMART INVERTER SINGLE SPLIT - HIGH EFFICIENCY

COOLING ONLY

CEILING CASSETTE						
						
kBtu / kW	18 / 5.3	24 / 7.0	30 / 8.8	36 / 10.6	48 / 14.1	54 / 15.8
Indoor Model Name	ATNQ18GPLT1	ATNQ24GPLT1	ATNQ30GPLT1	ATNQ36GNLT1	ATNQ48GMLT1	ATNQ54GMLT1
Outdoor Model Name	ATUQ18GPLT1	ATUQ24GPLT1	ATUQ30GPLT1	ATUQ36GNLT1	ATUQ48GMLT1	ATUQ54GMLT1


CEILING CONCEALED DUCT (MIDDLE STATIC)						
						
kBtu / kW	18 / 5.3	24 / 7.0	30 / 8.8	36 / 10.6	48 / 14.1	54 / 15.8
Indoor Model Name	ABNQ18GM1T1	ABNQ24GM1T1	ABNQ30GM1T1	ABNQ36GM3T1	ABNQ48GM3T1	ABNQ54GM3T1
Outdoor Model Name	ABUQ18GM1T1	ABUQ24GM1T1	ABUQ30GM1T1	ABUQ36GM3T1	ABUQ48GM3T1	ABUQ54GM3T1

CEILING SUSPENDED						
						
kBtu / kW	18 / 5.3	24 / 7.0	30 / 8.8	36 / 10.6	48 / 14.1	54 / 15.8
Indoor Model Name	AVNQ18GM1T1	AVNQ24GM1T1	AVNQ30GM1T1	AVNQ36GM2T1	AVNQ48GM2T1	AVNQ54GM2T1
Outdoor Model Name	AVUQ18GM1T1	AVUQ24GM1T1	AVUQ30GM1T1	AVUQ36GM2T1	AVUQ48GM2T1	AVUQ54GM2T1

SINGLE PACKAGE				
Capacity (RT)	3, 4, 5 RT	6.5, 7.5 RT	10, 12.5 RT	15, 17.5, 20, 25 RT
Single Package				
Model Name	AK-Q036GH50 AK-Q048GH50 AK-Q060GH50	AK-Q0788C01 AK-Q0908C01	AK-Q1208C01 AK-Q1508C01	AK-Q1808C01 AK-Q2108C01 AK-Q2408C01 AK-Q3008C01

HEAT PUMP

CEILING CASSETTE						
						
kBtu / kW	18 / 5.3	24 / 7.0	30 / 8.8	36 / 10.6	48 / 14.1	54 / 15.8
Indoor Model Name	ATNW18GPLT1	ATNW24GPLT1	ATNW30GPLT1	ATNW36GNLT1	ATNW48GMLT1	ATNW54GMLT1
Outdoor Model Name	ATUW18GPLT1	ATUW24GPLT1	ATUW30GPLT1	ATUW36GNLT1	ATUW48GMLT1	ATUW54GMLT1

CEILING CONCEALED DUCT (MIDDLE STATIC)						
						
kBtu / kW	18 / 5.3	24 / 7.0	30 / 8.8	36 / 10.6	48 / 14.1	54 / 15.8
Indoor Model Name	ABNW18GM1T1	ABNW24GM1T1	ABNW30GM1T1	ABNW36GM3T1	ABNW48GM3T1	ABNW54GM3T1
Outdoor Model Name	ABUW18GM1T1	ABUW24GM1T1	ABUW30GM1T1	ABUW36GM3T1	ABUW48GM3T1	ABUW54GM3T1

CEILING SUSPENDED						
						
kBtu / kW	18 / 5.3	24 / 7.0	30 / 8.8	36 / 10.6	48 / 14.1	54 / 15.8
Indoor Model Name	AVNW18GM1T1	AVNW24GM1T1	AVNW30GM1T1	AVNW36GM2T1	AVNW48GM2T1	AVNW54GM2T1
Outdoor Model Name	AVUW18GM1T1	AVUW24GM1T1	AVUW30GM1T1	AVUW36GM2T1	AVUW48GM2T1	AVUW54GM2T1

FLOOR STANDING						
						
kBtu / kW				36 / 10.6	48 / 14.1	96 / 28.2
Indoor Model Name				APNW36GT3S1	APNQ50LT3E0* /APNW50GT3E0 /APNW50LT3E0	APNW100LFT0
Outdoor Model Name				APUW36GT3S1	APUQ50LT3E0* /APUW50GT3E0 /APUW50LT3E0	APUW100LFT0

SMART INVERTER SINGLE SPLIT - STANDARD

HEAT PUMP (1Phase, 220 - 240V / 50Hz)

CEILING CASSETTE						
						
kBtu / kW	18 / 5.3	24 / 7.0	30 / 8.8	36 / 10.6	48 / 14.1	54 / 15.8
Indoor Model Name	ATNW18GPLS1	ATNW24GPLS1	ATNW30GPLS1	ATNW36GMLS1	ATNW48GMLS1	ATNW54GMLS1
Outdoor Model Name	ATUW18GPLS1	ATUW24GPLS1	ATUW30GPLS1	ATUW36GMLS1	ATUW48GMLS1	ATUW54GMLS1

CEILING CONCEALED DUCT (MIDDLE STATIC)						
						
kBtu / kW	18 / 5.3	24 / 7.0	30 / 8.8	36 / 10.6	48 / 14.1	54 / 15.8
Indoor Model Name	ABNW18GM1S1	ABNW24GM1S1	ABNW30GM1S1	ABNW36GM2S1	ABNW48GM3S1	ABNW54GM3S1
Outdoor Model Name	ABUW18GM1S1	ABUW24GM1S1	ABUW30GM1S1	ABUW36GM2S1	ABUW48GM3S1	ABUW54GM3S1

FLOOR STANDING						
						
kBtu / kW				36 / 10.6	48 / 14.1	
Indoor Model Name				APNW36GT3S1	APNW48GT3S1	
Outdoor Model Name				APUW36GT3S1	APUW48GT3S1	

HEAT PUMP (3Phase, 380 - 410V / 50Hz)

CEILING CASSETTE						
						
kBtu / kW					48 / 14.1	54 / 15.8
Indoor Model Name					ATNW48MLS2	ATNW54MLS2
Outdoor Model Name					ATUW48MLS2	ATUW54MLS2


CEILING CONCEALED DUCT (MIDDLE STATIC)						
						
kBtu / kW					50 / 14.7	60 / 17.6
Indoor Model Name					ABNW50LM3S1	ABNW60LM3S1
Outdoor Model Name					ABUW50LM3S1	ABUW60LM3S1

FLOOR STANDING						
						
kBtu / kW					48 / 14.1	
Indoor Model Name					APNW48LT3S1	
Outdoor Model Name					APUW48LT3S1	

THE EVOLUTION OF LG TECHNOLOGY

REVOLUTIONARY SCROLL COMPRESSOR

R1 Compressor

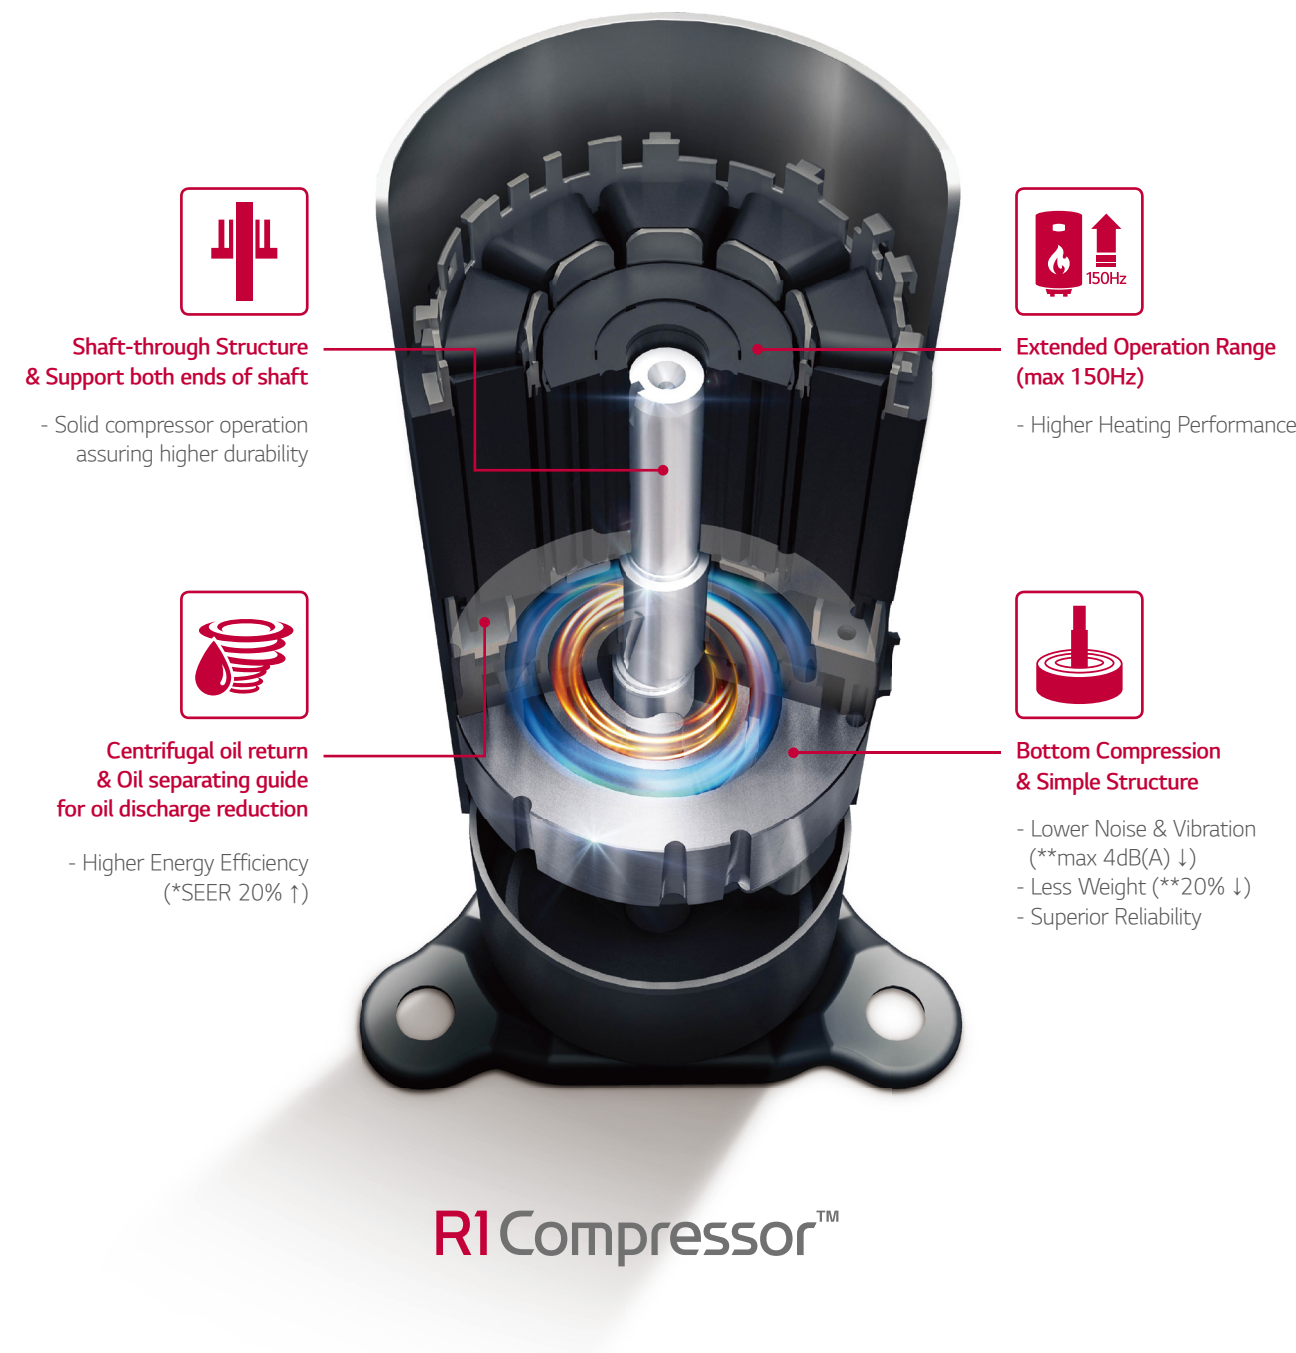


R1 Compressor™

* LG Internal test result, Based on single split 10 kW Cassette
 ** LG Internal test result, Based on conventional compressor (Rotary type GPT442M)

INVERTER COMPRESSOR

High-efficiency inverter compressor developed for generations.

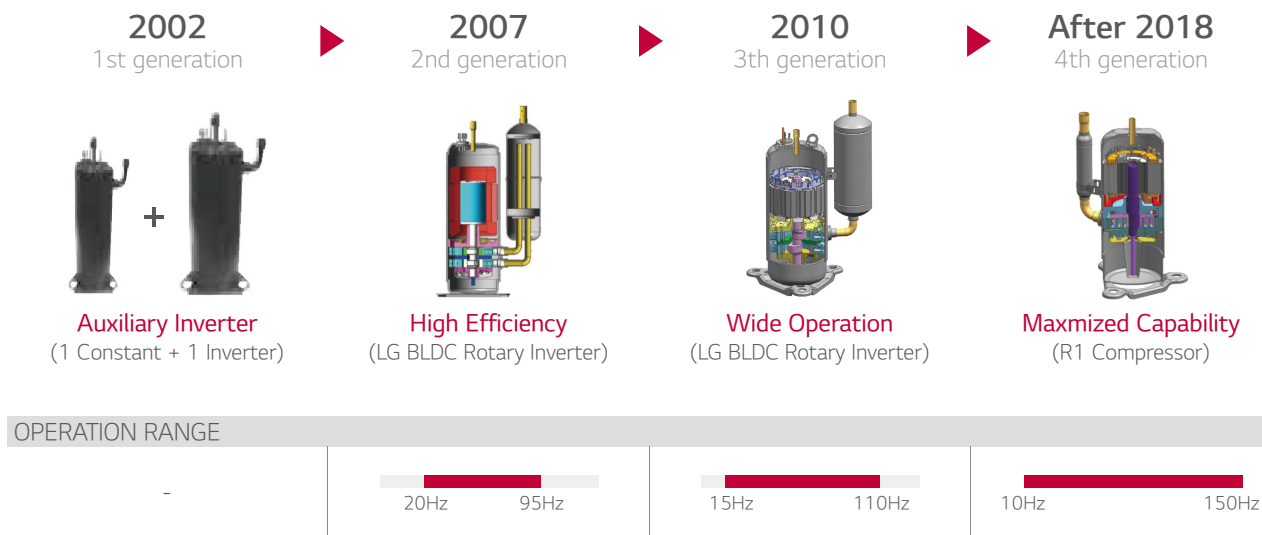


※ All the contents in this material is based on LG single split model.

REVOLUTIONARY SCROLL COMPRESSOR

Revolutionary Scroll Compressor is applied for high-efficiency and reliability. This type of compressor is more advanced compared to the conventional one. especially tilting motion of scroll has been improved. Further, the operation range is improved compared to the conventional type.

- Scroll compressor with simple structure
- Low noise (high speed possible)
- 20% weight reduction (vs. conventional compressor)
- High efficiency (low load at low speed / total efficiency)
- Improved Tilting Motion of scroll

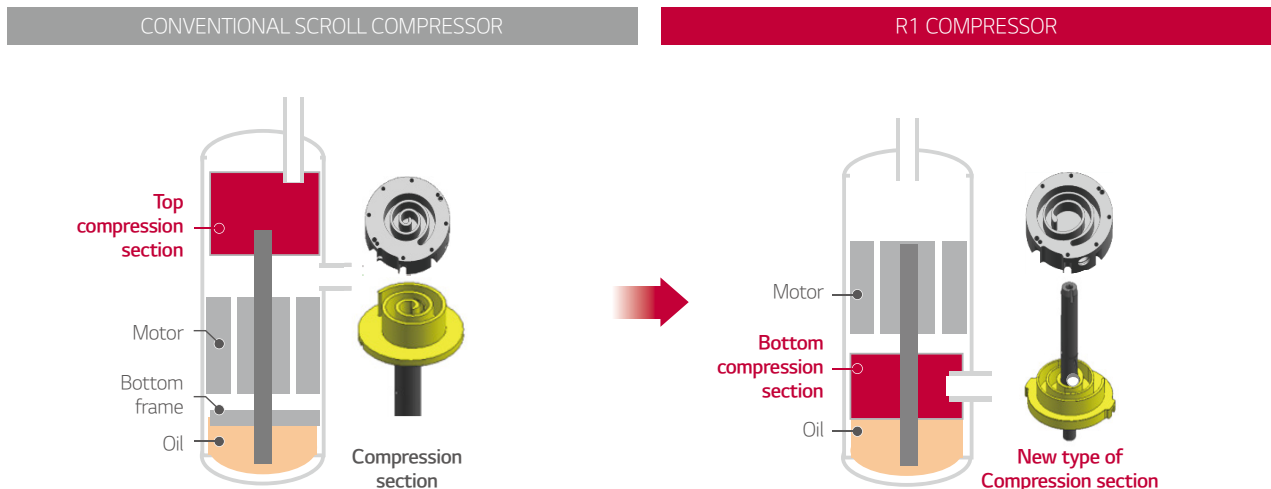


※ Refer to each model PDB for applicable models.

LG SMART TECHNOLOGY

POWER COOLING AT THE LONG PIPE

It has capacity of 10% higher more than constant model at the 50m pipe length.

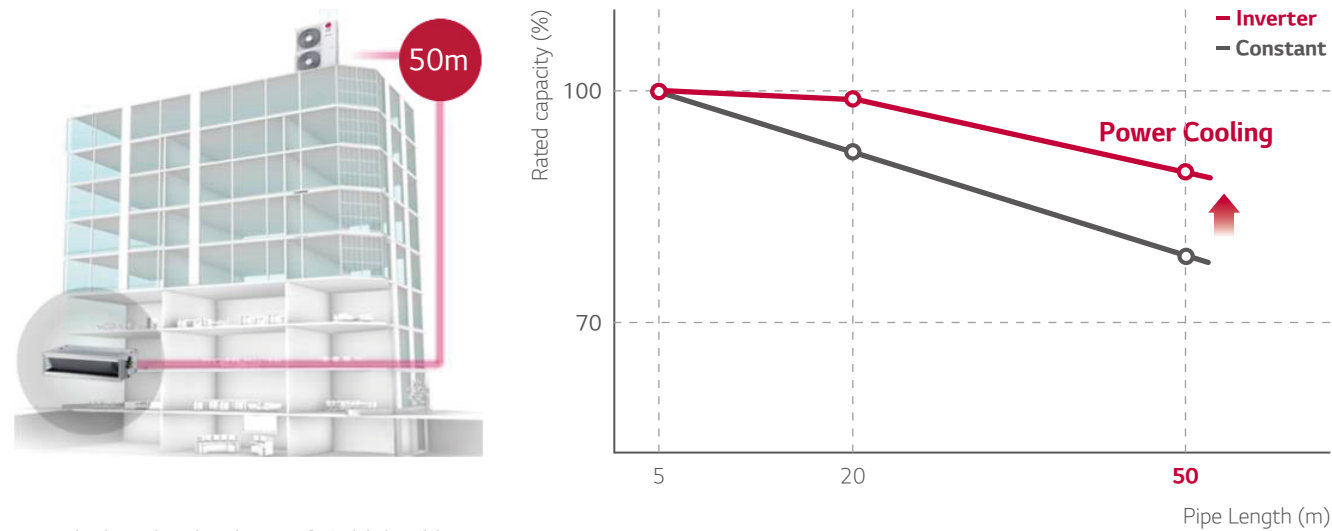

※ The data is based on the PDB of LG global model.
 ※ Test condition (Temperature) : 27 / 35 °C (Indoor / Outdoor)

COMFORT COOLING WITH HUMIDITY SENSOR

'Comfort Cooling' is a function that changes evaporation temperature according to temperature & humidity.

Conventional model

Temperature sensor

LG Single Split

Temperature sensor + Humidity sensor

Comfortable and power saving control based on indoor humidity**

Display Humidity

Wired Remote Controller
Standard III
(Accessory)

Display Temperature

Max. 18% Energy Saving*

* Test condition :
 - Indoor Temp. 27 °C (DB) / 26.4 °C (WB)
 - Outdoor Temp. 35 °C (DB) / 24 °C (WB)
 - Applied model : AT-*18GPLT1


KTL Test Report (시험성적서)

** To apply humidity sensor, new remote controller, PREMTB100 or PREMTBB10 is needed

COMFORT COOLING WITH HUMIDITY SENSOR

'Comfort Cooling' is a function that changes evaporation temperature according to temperature & humidity.

Dual Sensing Control - Dry Summer

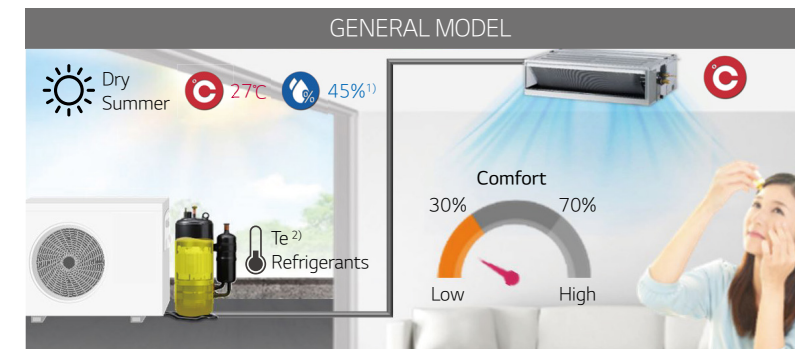

Uncomfortable Environment

Excessive latent heat elimination regardless of humidity

Waste Energy

Eliminate latent heat unnecessarily

Comfortable Environment

By making the room less dry


Increased Energy Efficiency

Provide optimized cooling and save energy considering humidity

- Humidity Condition : Low (< 30%), Standard (30~70%)

1) Indoor Condition
 2) Evaporation Temperature

Dual Sensing Control - Wet Summer

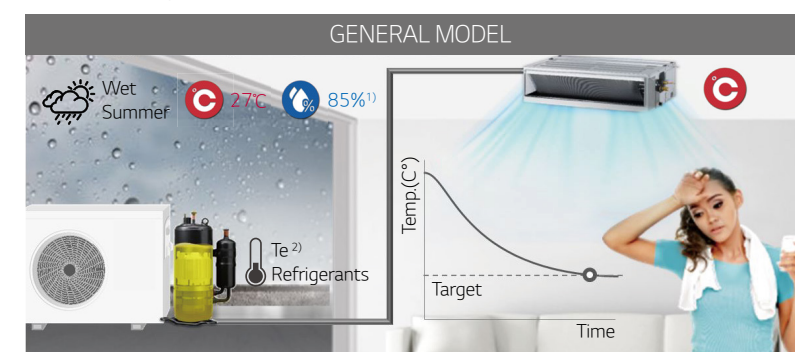

Uncomfortable Environment

General latent heat elimination regardless of humidity


Comfortable Environment

With quick latent heat elimination by sensing humidity

1) Indoor Condition
 2) Evaporation Temperature

ENERGY SAVING


BENEFIT OF PARTIAL LOAD PERFORMANCE

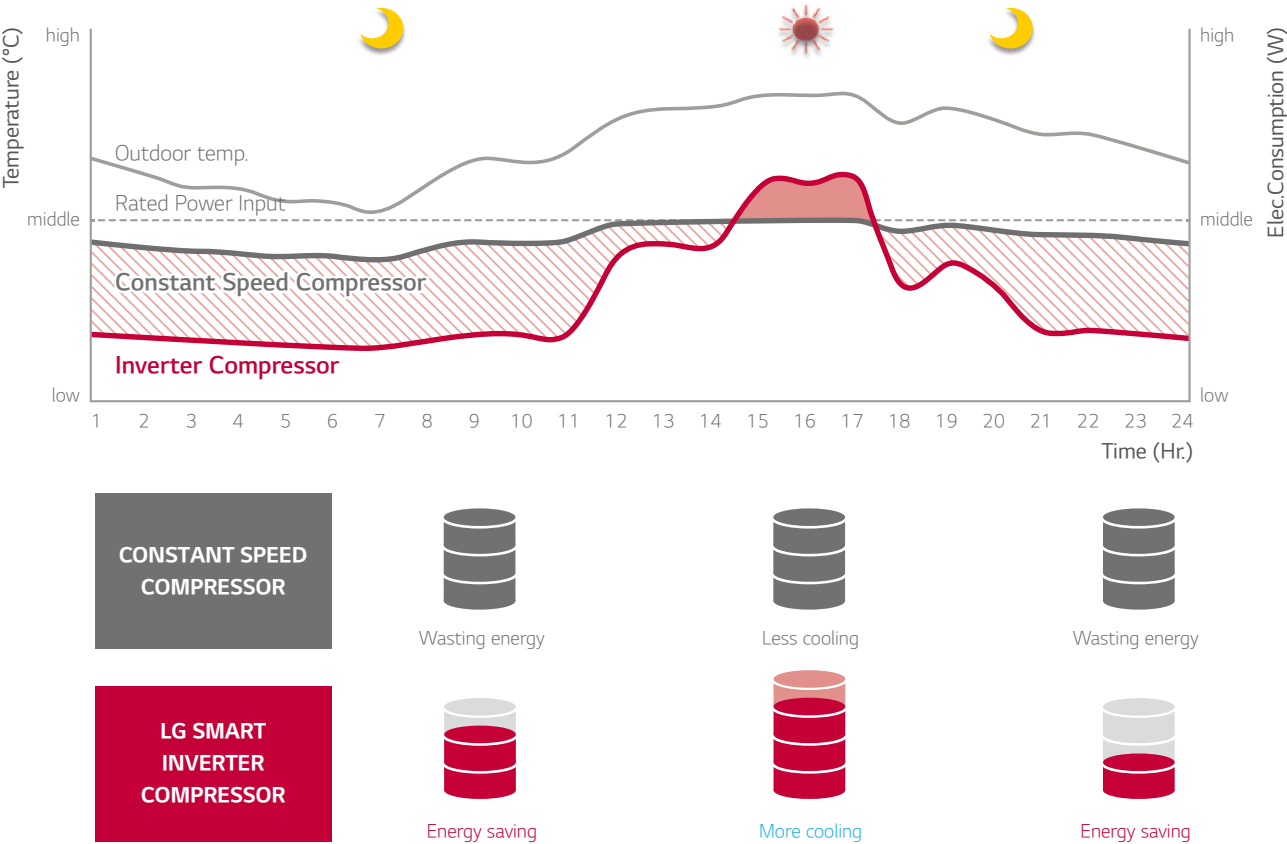


POWERFUL BLDC (BRUSHLESS DIRECT CURRENT MOTOR) COMPRESSOR

LG air conditioners are equipped with a BLDC Inverter Twin Rotary Compressor that uses a neodymium magnetic core. The compressor has high efficiency and superior reliability, because it is excellent in controlling the operating speed depending on the load. The compressor has improved efficiency compared to standard AC inverter products and optimized for changes of outdoor load. Especially it is optimized for seasonal efficiency.

Operation Range

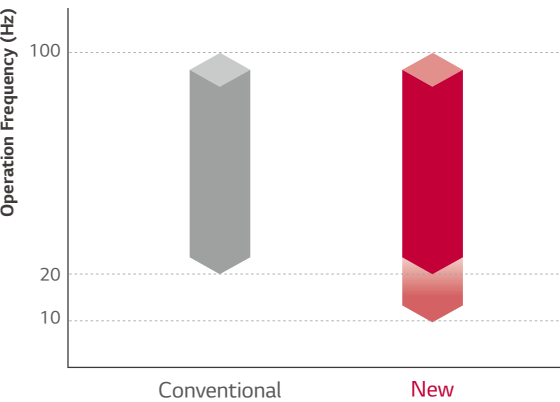

Motor Efficiency


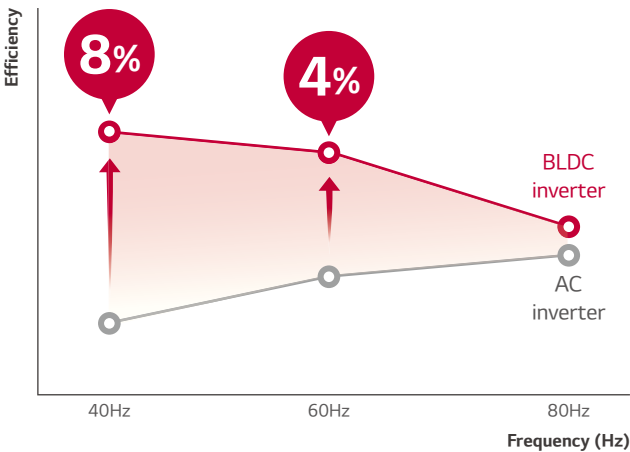


ENHANCED HEAT EXCHANGE BY WIDE LOUVER PLUS FIN

Wide Louver Plus fin technology increases 11% of full load heating performance and 6% of COP compared to conventional fin. It can slow down frosting of heat exchanger and postpone the start of defrosting operation.

Heating Operation at Defrost Condition

It can slow down frosting of heat exchanger and postpone the start of defrosting operation.

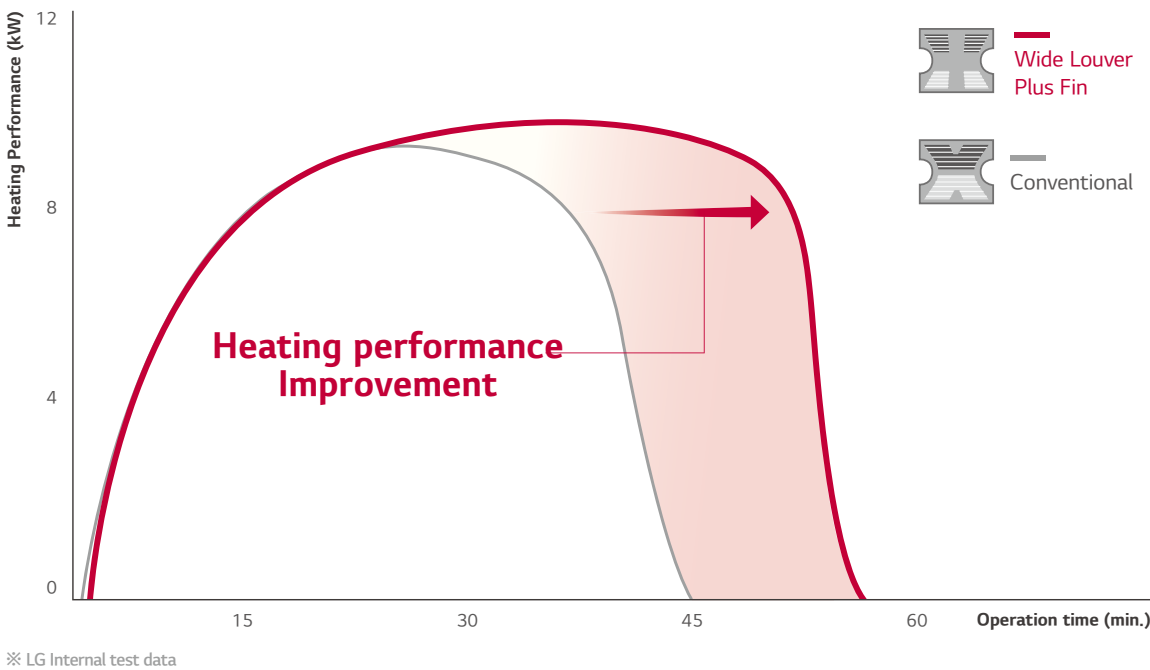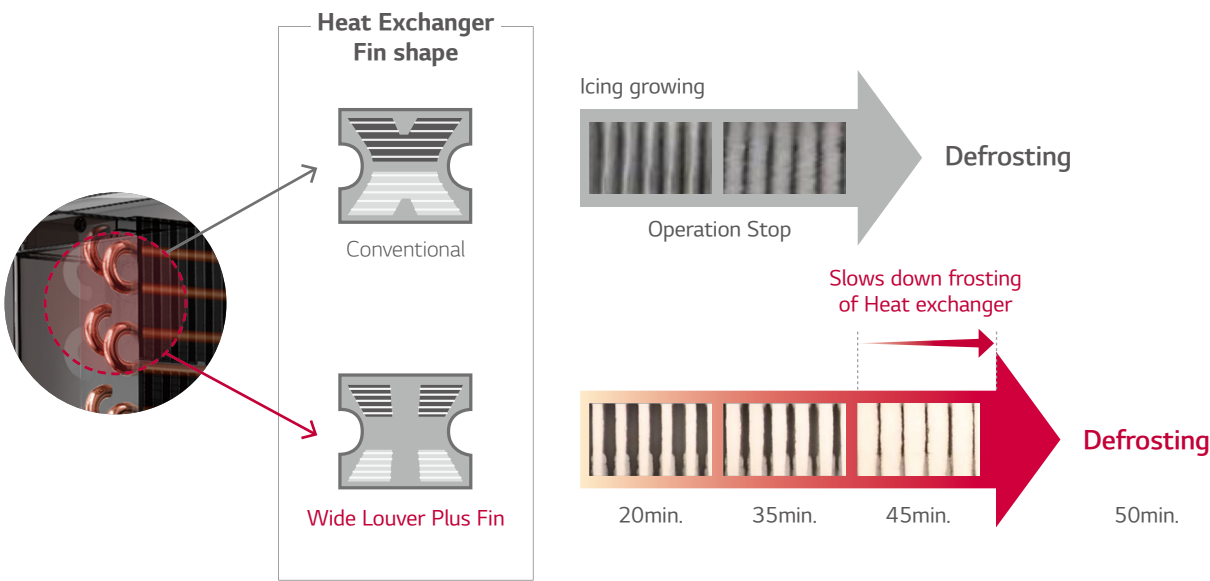

COMFORT

QUICK COOLING

At the same condition, the inverter reaches the set temperature about 30% faster than the constant speed.

SMART SENSORS


Temperature Sensor

+


Pressure Sensor

+

Sensing and ready for operation


▼

Quick and reliable operation



LOW NOISE

Inverter makes lower noise than constant speed due to adjustable frequency according to the load.

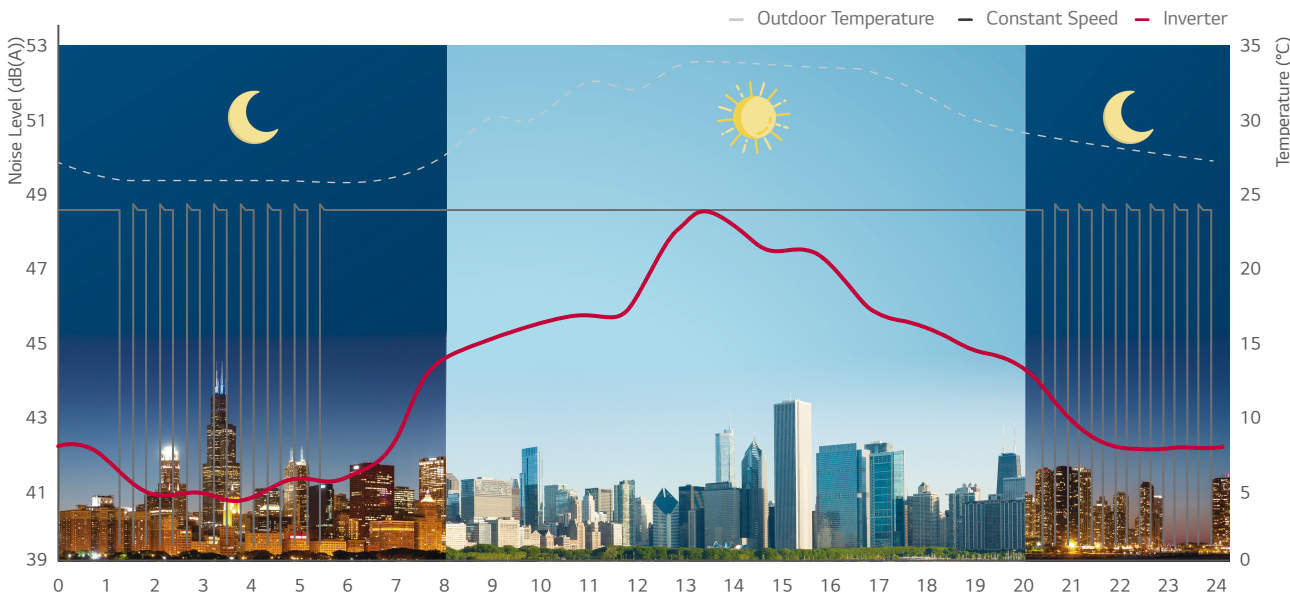


※ Noise level in residential environment : 60dB(A) : Normal conversation, 50dB(A) : office, 40dB(A) : Livingroom
※ This result can be different depending on actual environment.
※ The value of noise level is based on "A*UW18G**T2"


OPTIMUM COOLING

When indoor temperature reaches near to the target temperature, LG Smart Inverter adjusts its discharge air temperature to prevent the indoor from being overcooled.


CONSTANT SPEED COMPRESSOR

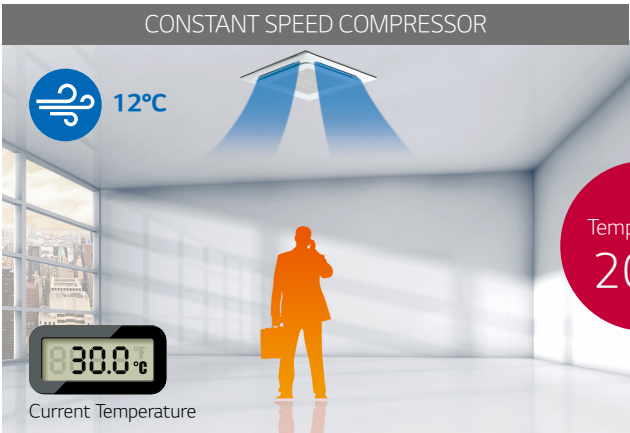


↓

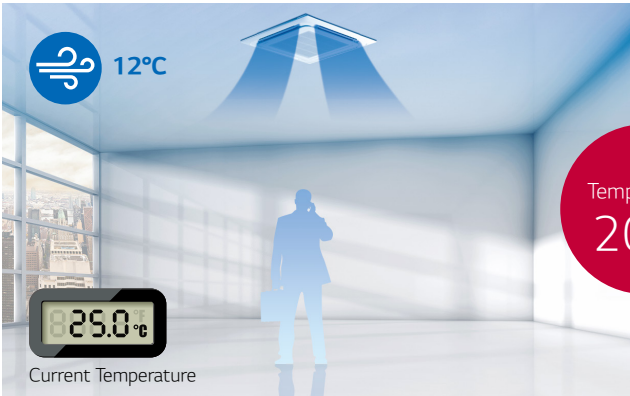

↓

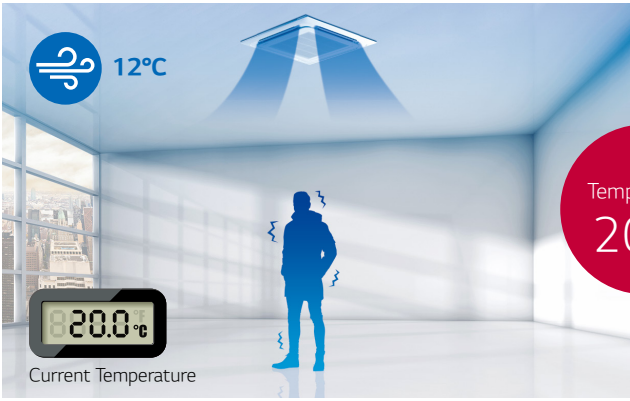

SMART INVERTER COMPRESSOR

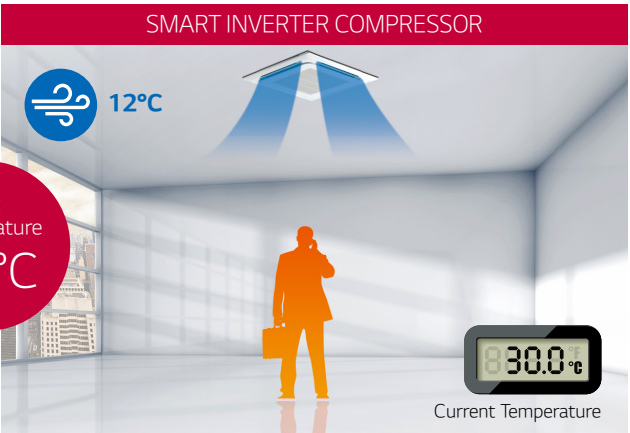

↓



↓




18

19


RELIABILITY

INVERTER CONTROL

Smart sensors make quick and precise cooling possible. (Same sensor with Multi V)

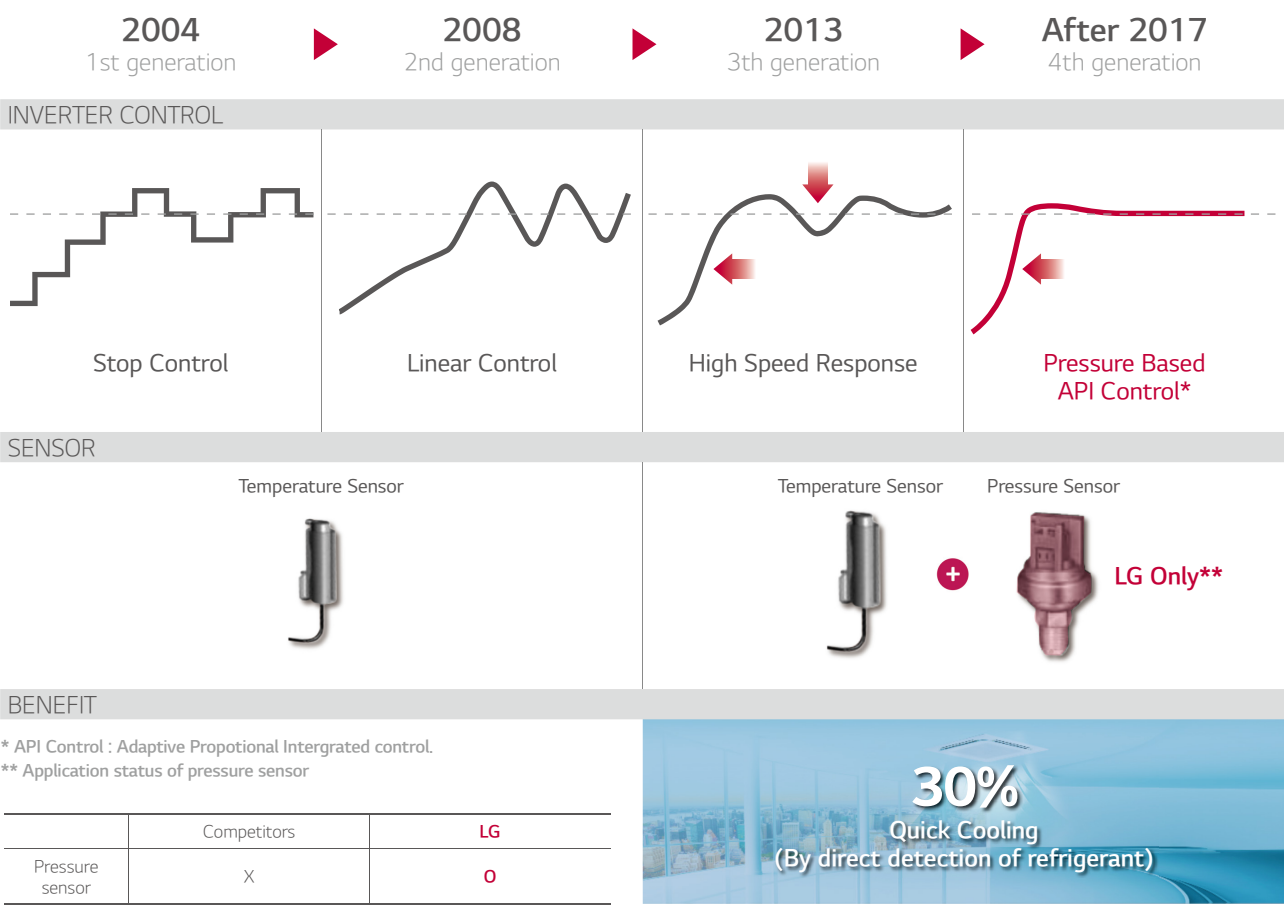


QUICK OPERATING RESPONSE

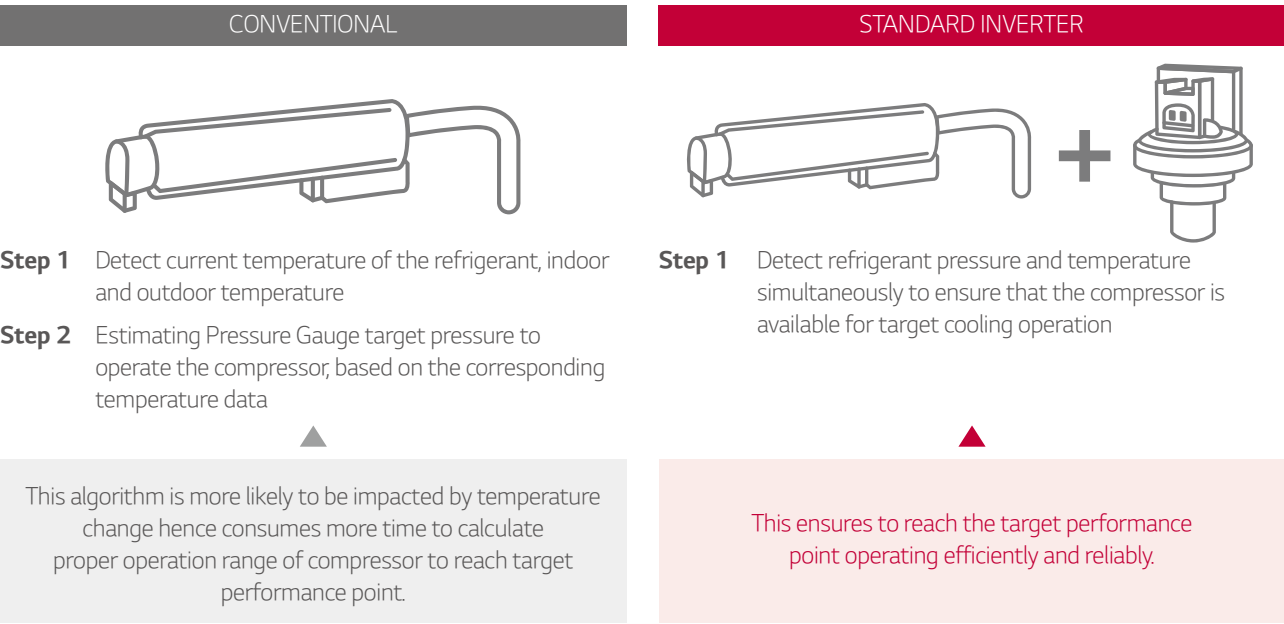


WIDE OPERATION RANGE

At the same condition, the inverter reaches the set temperature about 30% faster than the constant speed.

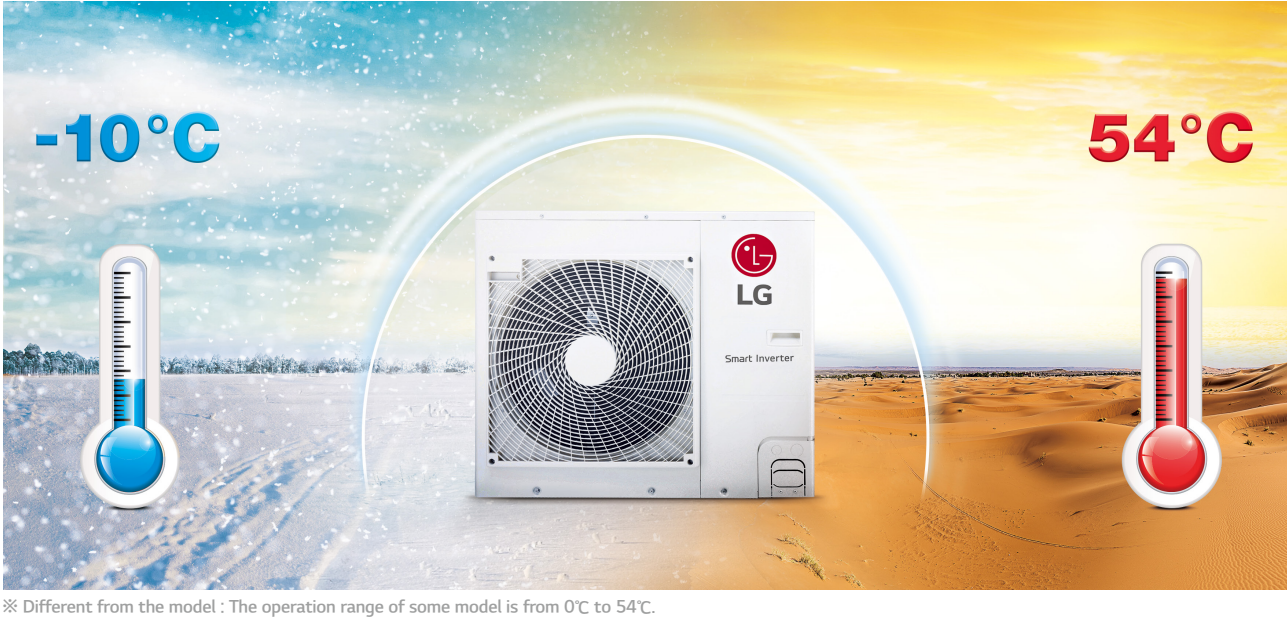


HIGH AND LOW VOLTAGE PROTECTION

Below low voltage limit, inverter compressor reduces frequency(Hz) and boost DC voltage, over high voltage limit, cuts off the relay to prevent damage of DC capacitor.

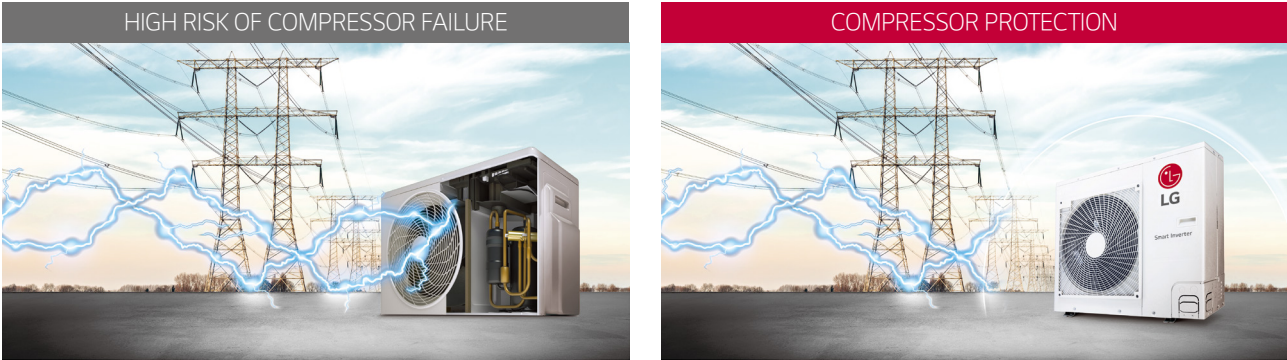

CORROSION RESISTANT HEAT EXCHANGER

The gold-colored special coating on the fin of the heat exchanger prevents corrosion, extending the life of the unit.

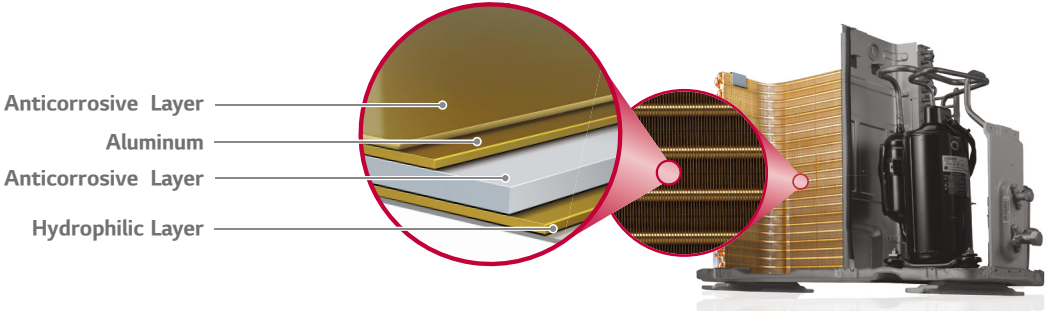

CONVENIENCE

SMART ThinQ

Control your air conditioners via using the smart internet devices as Android or iOS based smartphones.



Simple operation for various functions

- On / Off
 - Vane Control
- Mode Selection
 - Reservation
- Current temperature
 - Energy Monitoring
- Set temperature
 - Filter Management

※ Search “LG Smart ThinQ” on Google market or Appstore then download the app.
※ Wi-Fi modem (PWFMD200) is required by option.

SIMs MODULE

Monitor the status of your air conditioner and diagnose problems by conneting it to a smartphone via a SIMs Module.



- Easy Monitoring**

Diagnose problems anytime, anywhere with a SIMs Module.
- Easy Diagnosis & Quick Response**

Easily monitor IDU / ODU and diagnose problems. Save and review diagnostic data.

Main

- Current outdoor temperature
- Indoor temperature
- Inverter comp frequency
- Operating opening
- Error code / Frequency limits Indoor
- Outdoor fan speed

Outdoor Unit

- Frequency / Fan RPM
- DC Link / Input Current
- Input Voltage
- EEV operation mode
- Restart timer
- Compressor mode / EEV opening

Indoor Unit

- Indoor Unit Capacity / Operation Mode
- THM mode / REM mode
- FAN operating condition / EEV opening
- Room Temperature / Suction Temperature
- Intermediate Temperature
- Exit Temperature


Chart

- Room Temperature
- Heat exchanger pipe temperature
- Compressor discharge temperature
- Frequency / Outdoor temperature
- Compressor suction temperature
- Electric current / Voltage

※ Search “LG SIMs” on Google market or Appstore then download the app.

SIMPLE PUMP DOWN


Simple pump down provides easy maintenance and save the service time.

MANUAL PUMP DOWN		SIMPLE PUMP DOWN (LG INVERTER)	
Time consuming and inconvenience Conduct the pump down by setting at outdoor unit and indoor unit respectively		Save time and simple maintenance Start pump down simply by setting dip switch on PCB in outdoor unit	
Imprecise pump down Assuming ref. amount empirically		Precise pump down (LED signal) Measuring ref. amount by pressure sensor and alarm LED signal	
Action	Setting by	Action	Setting by
Cooling operation start by Indoor remote controller	IDU	Dip switch On 	ODU
Vapor pipe valve closed assuming ref. amount in person	ODU	Vapor Pipe valve closed after checking LED signal	ODU

※ Pump down : When an outdoor or indoor unit malfunctions, this function collects its refrigerant inside outdoor unit before servicing.

WEEKLY PROGRAM

You can allot 2 reservations for one day, and up to 14 reservations for a week.

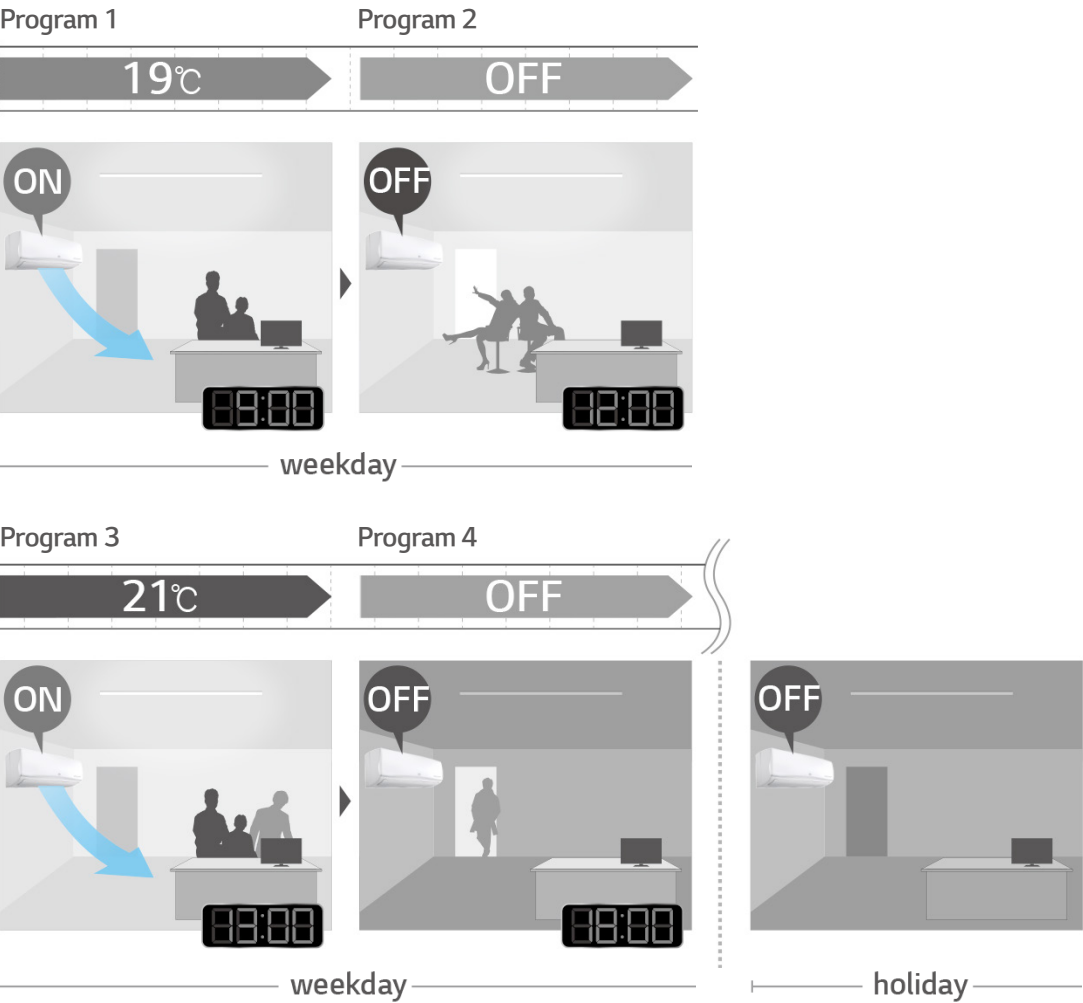


CONVENIENCE


FORCED COOLING OPERATION

This function allows the refrigerant to be recharged or pumped down, regardless of the indoor temperature.
Note that this function can be used when indoor units are being moved or repaired.


RECHARGING

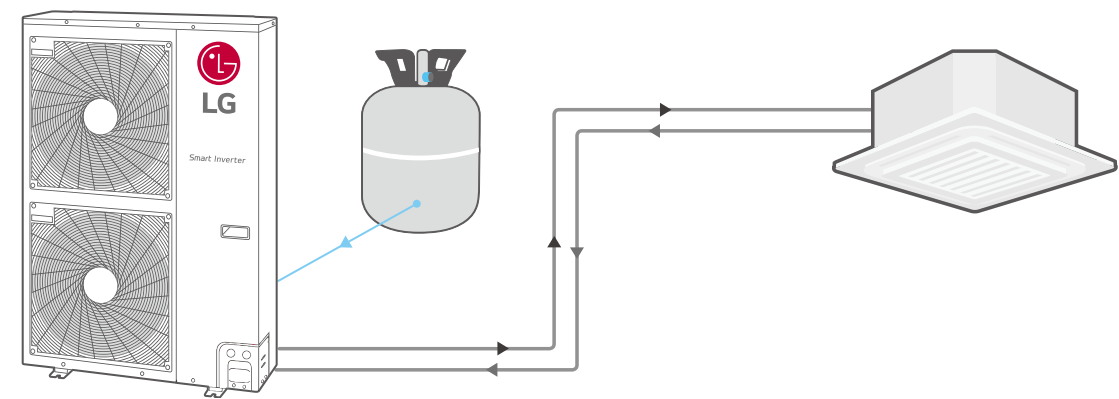

PUMP DOWN

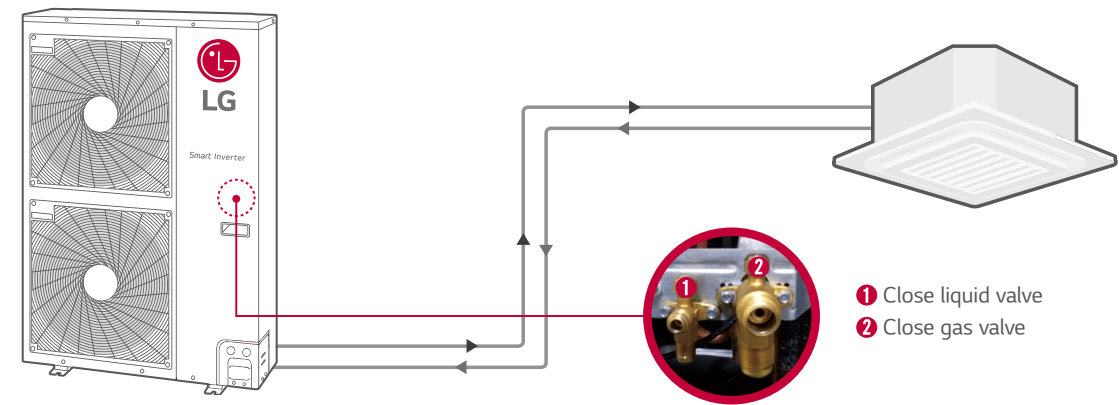

HUMAN DETECTION SENSOR & HUMIDITY SENSOR

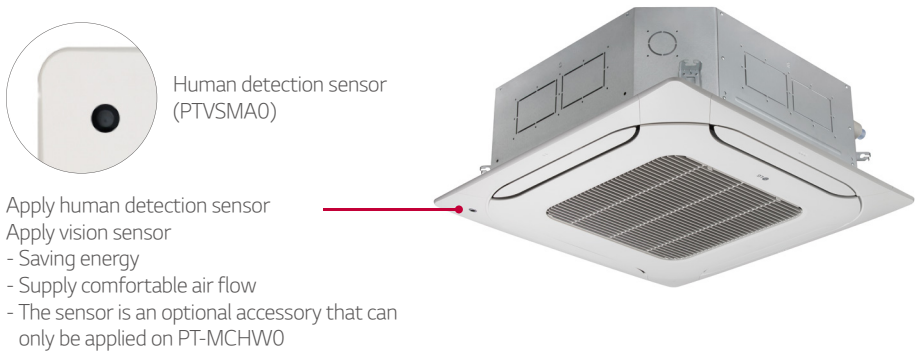


Detection

Motion sensors detect the activity of people per 10seconds



Detection range

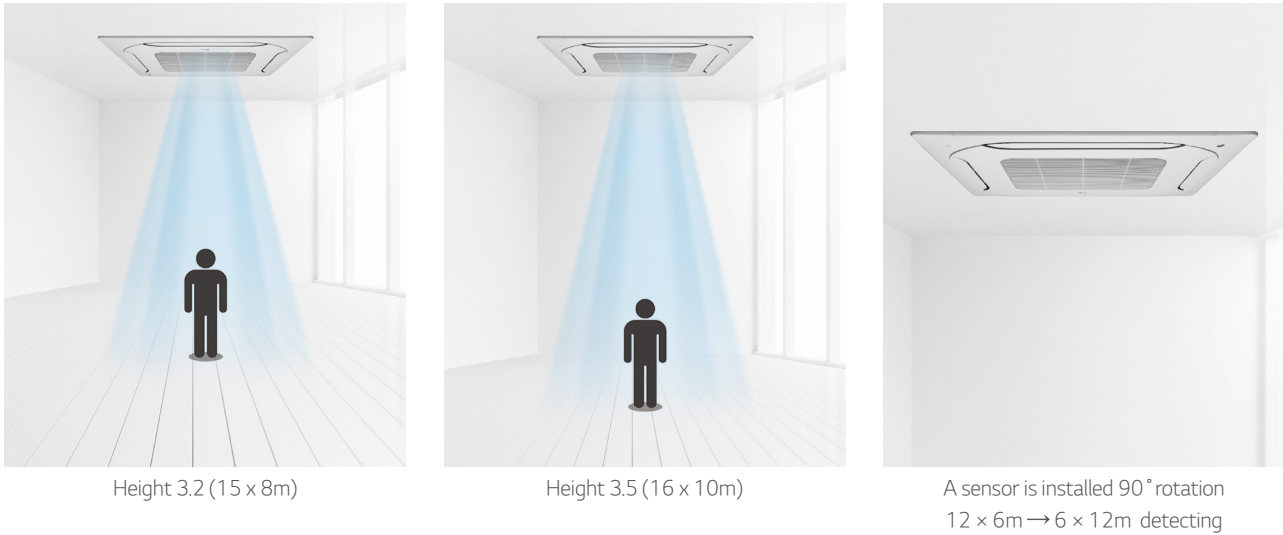

CEILING MOUNTED CASSETTE



STYLISH DESIGN PANEL

New 4 way cassette panel adapted a unibody shape that matches with the ceiling.


Interior fit



Lineless surface



Detachable corner

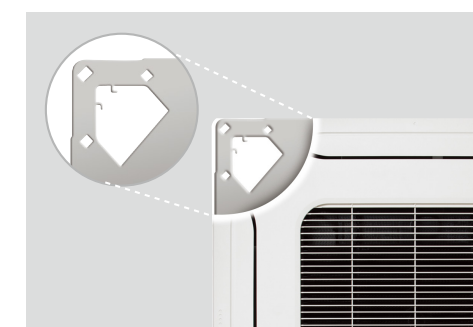


reddot design award


※ Old Panel : PT-UMC1 / New Panel : PT-MCHW0

COMPACT SIZE

Slim & compact design not only saves space but also reduces installation costs.
It's designed to suit most of building designs and fit into various spaces.

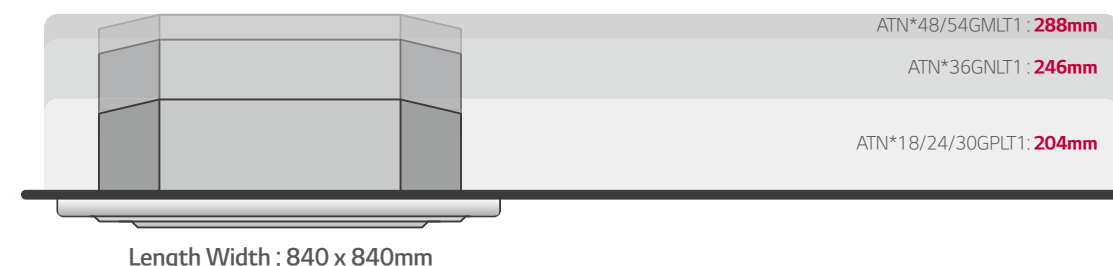

Conventional




LG

CEILING MOUNTED CASSETTE


INDEPENDENT VANE OPERATION

The independent vane operation feature uses separate motors, making it possible to control all four vanes independently.

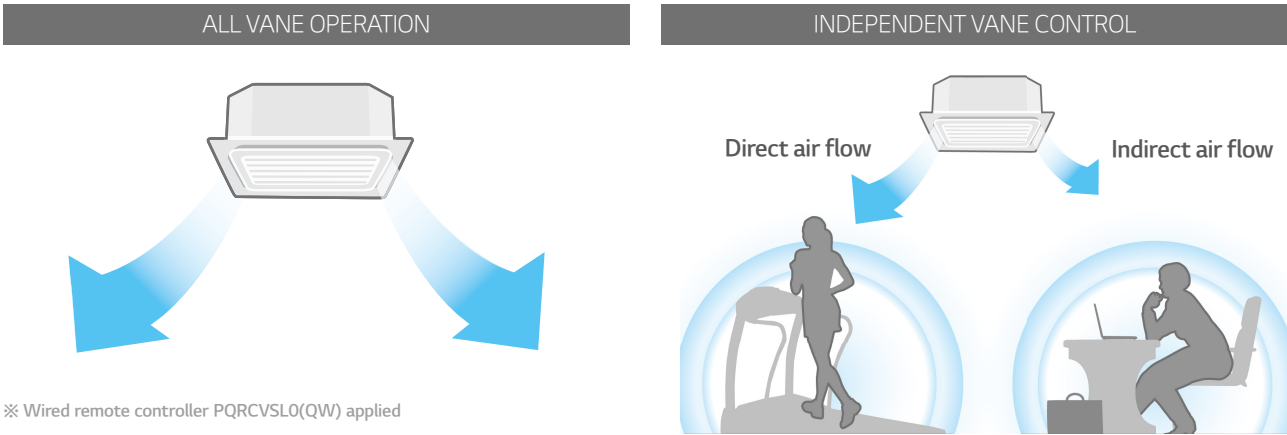


PREVENT CEILING POLLUTION

Coanda design of air outlet can prevent contamination of ceiling.

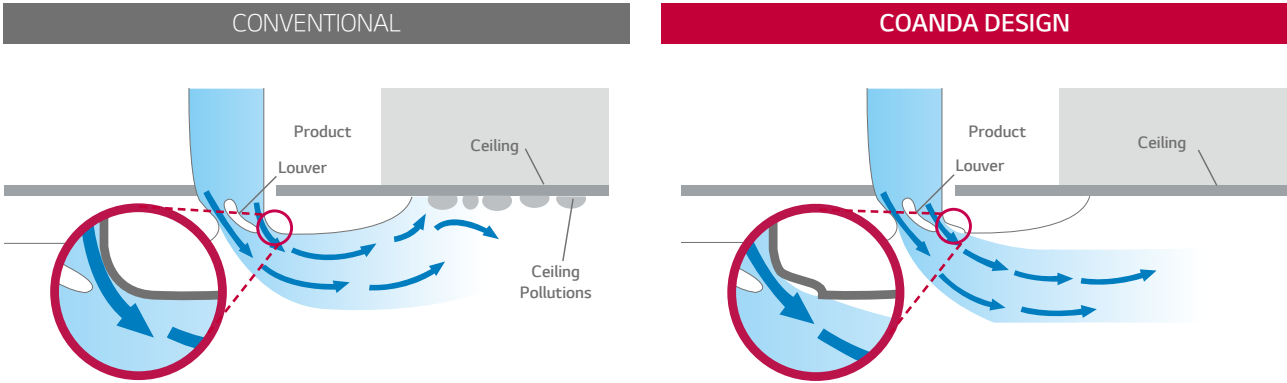


HIGH CEILING MODE

Airflow in a space with a 4.2m ceiling height is possible with this indoor unit. Further, air flow can be strengthened by adjusting the fan speed.

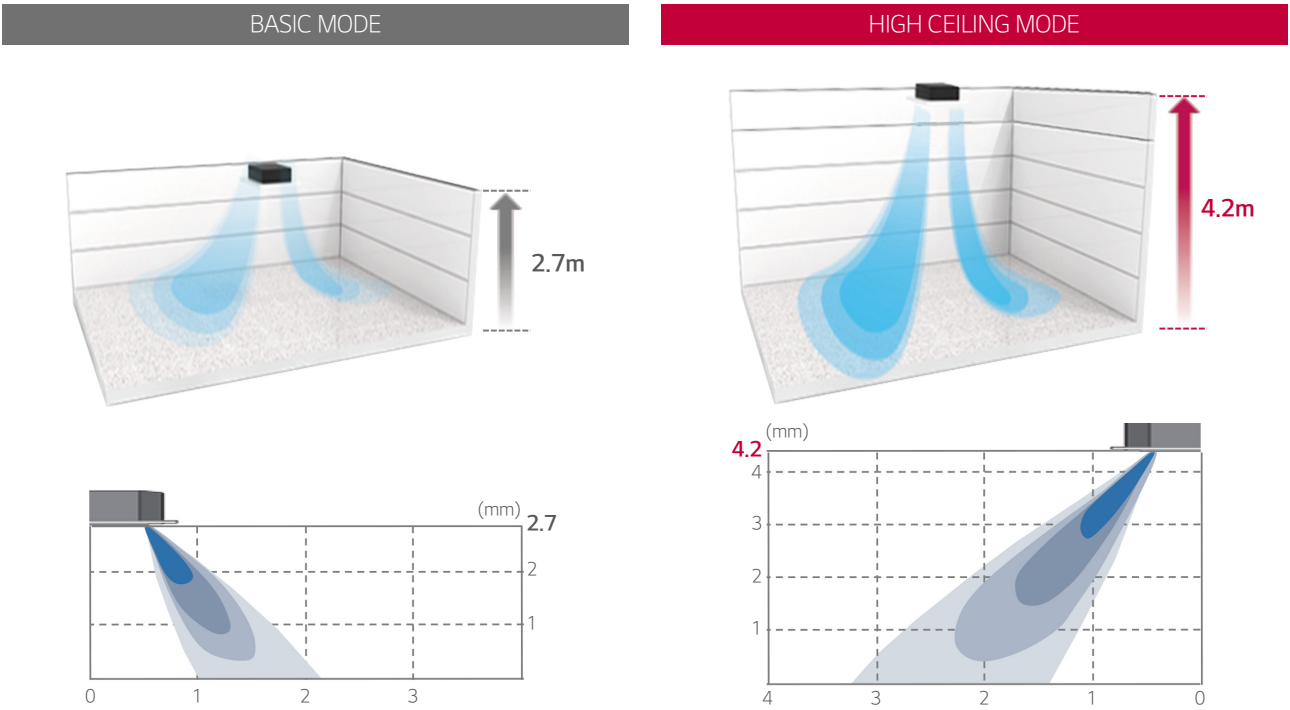


CONVENIENT PANEL INSTALLATION

The detachable corner design makes it easy to adjust the hanger during installation and to check for leakages in the drain connection pipe. And it is easy to install the panel to the body, using the button type panel design.

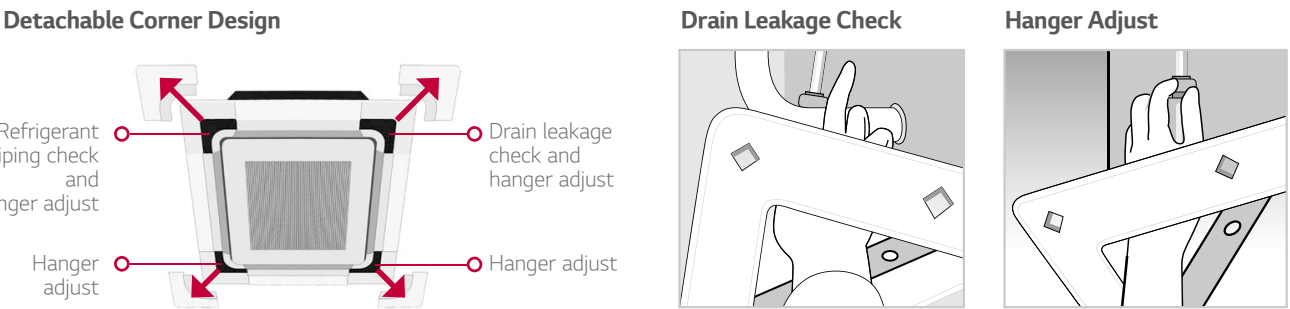

It is easy to install the panel to the body, using the button type panel design.

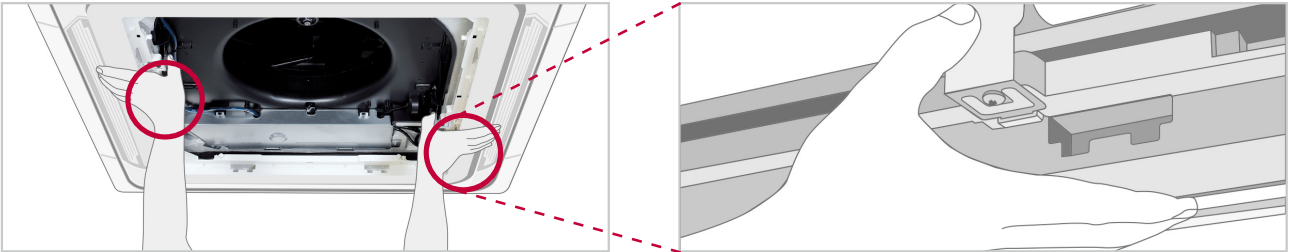

SPECIFICATIONS

CEILING MOUNTED CASSETTE - HIGH EFFICIENCY (INVERTER / 1 PHASE)



ATUQ18GPLT1 / ATUQ24GPLT1 / ATUQ30GPLT1 / ATUQ36GNLT1 / ATUQ48GMLT1 / ATUQ54GMLT1



COOLING ONLY

Combination			Outdoor unit		Unit	ATUQ18GPLT1	ATUQ24GPLT1
			Indoor unit			ATNQ18GPLT1	ATNQ24GPLT1
Cooling Capacity ¹			Min. ~ Rated ~ Max.	kW	2.1-5.27-5.86	2.81-7.03-8.2	
				Btu/h	7200-18000-20000	9600-24000-28000	
Cooling Capacity ²			Min. ~ Rated ~ Max.	kW	4.53	5.86	
				Btu/h	15,450	20,000	
Power Input	Cooling ¹	Rated	kW	1.55	2.06		
	Cooling ²	Rated	kW	1.71	2.25		
EER / COP			W/W	3.4	3.41		
Outdoor			Unit	ATUQ18GPLT1	ATUQ24GPLT1		
Power Supply			V , Ø , Hz	220-240, 1, 50	220-240, 1, 50		
Power Supply Cable (included Earth)			No. × mm²	3C × 2.5	3C × 2.5		
Casing Color			-	Warm Gray	Warm Gray		
Dimensions	Net	W × H × D	mm	770 × 545 × 288	870 × 650 × 330		
Weight	Net		kg	34.3	43.3		
Compressor	Type		-	Twin Rotary	Twin Rotary		
Refrigerant	Type		-	R410A	R410A		
Fan Motor	Type			BLDC	BLDC		
Sound Pressure Level	Cooling	Rated	dB(A)	49	50		
Piping Connections	Liquid	Outer Dia.	mm (inch)	Ø 6.35 (1/4)	Ø 9.52 (3/8)		
	Gas	Outer Dia.	mm (inch)	Ø 12.7 (1/2)	Ø 15.88 (5/8)		
Piping Length		Rated	m	5	5		
		Max.	m	30	50		
Maximum Height Difference (ODU ~ IDU)		Max.	m	15	30		
Indoor			Unit	ATNQ18GPLT1	ATNQ24GPLT1		
Panel Name				PT-UMC1 / PT-MCHW0 *	PT-UMC1 / PT-MCHW0 *		
Power Supply			V , Ø , Hz	220-240, 1, 50	220-240, 1, 50		
Dimensions	Net	W × H × D	mm	840 × 204 × 840	840 × 204 × 840		
	Decoration Panel	W × H × D	mm	950 × 25 × 950	950 × 25 × 950		
Weight	Net		kg	19.6	20.5		
Air Flow Rate		H / M / L	m³/min	17.0 / 15.0 / 13.0	17.0 / 15.0 / 13.0		
Fan Motor	Type			BLDC	BLDC		
Safety Device				Fuse	Fuse		
Sound Pressure Level		H / M / L	dB(A)	36 / 34 / 32	38 / 36 / 34		

* Old Panel : PT-UMC1 / New Panel : PT-MCHW0

Notes
- Cooling ¹⁾ : Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB
- Cooling ²⁾ : Indoor Temperature 29°C (84.2°F) DB / 19°C (66.2°F) WB, Outdoor Temperature 46°C (114.8°F) DB / 24°C (75.2°F) WB

COOLING ONLY

ATUQ30GPLT1	ATUQ36GNLT1	ATUQ48GMLT1	ATUQ54GMLT1
ATNQ30GPLT1	ATNQ36GNLT1	ATNQ48GMLT1	ATNQ54GMLT1
3.44~8.2~9.38	4.7~9.99~11.13	5.392~13.48~15.53	6.328~15.82~16.7
11760~28000~32000	16030~34100~38000	18400~46000~53000	21600~54000~57000
7.38	8.49	11.45	12.34
25,200	28,980	39,100	42,120
2.41	2.93	3.96	5.39
3.02	3.44	4.66	5.40
3.4	3.41	3.4	2.94
ATUQ30GPLT1	ATUQ36GNLT1	ATUQ48GMLT1	ATUQ54GMLT1
220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50
3C × 2.5	3C × 2.5	3C × 6.0	3C × 6.0
Warm Gray	Warm Gray	Warm Gray	Warm Gray
950 × 834 × 330	950 × 834 × 330	950 × 1,380 × 330	950 × 1,380 × 330
59.1	59.1	89.5	89.5
Twin Rotary	Twin Rotary	LG Inverter Scroll	LG Inverter Scroll
R410A	R410A	R410A	R410A
BLDC	BLDC	BLDC	BLDC
51	51	55	55
Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 9.52 (3/8)
Ø 15.88 (5/8)	Ø 15.88 (5/8)	Ø 19.05 (3/4)	Ø 19.05 (3/4)
5	5	5	5
50	50	75	75
30	30	30	30
ATNQ30GPLT1	ATNQ36GNLT1	ATNQ48GMLT1	ATNQ54GMLT1
PT-UMC1 / PT-MCHW0 *	PT-UMC1 / PT-MCHW0 *	PT-UMC1 / PT-MCHW0 *	PT-UMC1 / PT-MCHW0 *
220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50
840 × 204 × 840	840 × 246 × 840	840 × 288 × 840	840 × 288 × 840
950 × 25 × 950	950 × 25 × 950	950 × 25 × 950	950 × 25 × 950
20.5	23.3	25.5	25.5
19.0 / 17.0 / 15.0	23.0 / 21.0 / 19.0	32.0 / 30.0 / 28.0	32.0 / 30.0 / 28.0
BLDC	BLDC	BLDC	BLDC
Fuse	Fuse	Fuse	Fuse
41 / 38 / 36	42 / 40 / 38	44 / 42 / 40	44 / 42 / 40

SPECIFICATIONS

CEILING MOUNTED CASSETTE - HIGH EFFICIENCY (INVERTER / 1 PHASE)



ATUW18GPLT1 / ATUW24GPLT1 / ATUW30GPLT1 / ATUW36GNLT1 / ATUW48GMLT1 / ATUW54GMLT1



HEAT PUMP

Combination			Outdoor unit		Unit	ATUW18GPLT1	ATUW24GPLT1
			Indoor unit			ATNW18GPLT1	ATNW24GPLT1
Cooling Capacity ¹			Min. ~ Rated ~ Max.	kW	2.1-5.27-5.86	2.81-7.03-8.2	
				Btu/h	7200-18000-20000	9600-24000-28000	
Cooling Capacity ²			Min. ~ Rated ~ Max.	kW	4.53	5.86	
				Btu/h	15450	20000	
Heating Capacity ¹			Min. ~ Rated ~ Max.	kW	2.1-5.27-6.1	2.8-7.03-8.2	
				Btu/h	7200-18000-21000	9600-24000-28000	
Power Input	Cooling ¹	Rated	kW	1.55	2.06		
	Cooling ²	Rated	kW	1.71	2.25		
	Heating ¹	Rated	kW	1.50	2.05		
EER / COP				W/W	3.4/3.51	3.41/3.43	
Outdoor				Unit	ATUW18GPLT1	ATUW24GPLT1	
Power Supply				V , Ø , Hz	220 - 240, 1, 50	220 - 240, 1, 50	
Power Supply Cable (included Earth)				No. × mm²	3C × 2.5	3C × 2.5	
Casing Color				-	Warm Gray	Warm Gray	
Dimensions	Net	W × H × D	mm	770 × 545 × 288	870 × 650 × 330		
Weight	Net		kg	35.2	45.5		
Compressor	Type		-	Twin Rotary	Twin Rotary		
Fan Motor	Type			BLDC	BLDC		
Sound Pressure Level	Cooling	Rated	dB(A)	49	50		
	Heating	Rated	dB(A)	52	52		
Piping Connections	Liquid	Outer Dia.	mm (inch)	Ø 6.35 (1/4)	Ø 9.52 (3/8)		
	Gas	Outer Dia.	mm (inch)	Ø 12.7 (1/2)	Ø 15.88 (5/8)		
Piping Length		Rated	m	5	5		
		Max.	m	30	50		
Maximum Height Difference (ODU ~ IDU)		Max.	m	15	30		
Indoor				Unit	ATNW18GPLT1	ATNW24GPLT1	
Panel Name					PT-UMC1 / PT-MCHW0 *	PT-UMC1 / PT-MCHW0 *	
Power Supply				V , Ø , Hz	220-240, 1, 50	220-240, 1, 50	
Dimensions	Net	W × H × D	mm	840 × 204 × 840	840 × 204 × 840		
	Decoration Panel	W × H × D	mm	950 × 25 × 950	950 × 25 × 950		
Weight	Net		kg	19.6	20.5		
Air Flow Rate		H / M / L	m³/min	17.0 / 15.0 / 13.0	17.0 / 15.0 / 13.0		
Fan Motor	Type			BLDC	BLDC		
Safety Device					Fuse	Fuse	
Sound Pressure Level		H / M / L	dB(A)	36 / 34 / 32	38 / 36 / 34		

* Old Panel : PT-UMC1 / New Panel : PT-MCHWO

Notes
- Cooling ¹⁾ : Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB
- Cooling ²⁾ : Indoor Temperature 29°C (84.2°F) DB / 19°C (66.2°F) WB, Outdoor Temperature 46°C (114.8°F) DB / 24°C (75.2°F) WB
- Heating Temperature : Indoor 20°C (68°F) DB / 15°C (59°F) WB, Outdoor 7°C (44.6°F) DB / 6°C (42.8°F) WB

HEAT PUMP

ATUW30GPLT1	ATUW36GNLT1	ATUW48GMLT1	ATUW54GMLT1
ATNW30GPLT1	ATNW36GNLT1	ATNW48GMLT1	ATNW54GMLT1
3.44~8.2~9.38	4.7~9.99~11.13	5.39~13.48~15.53	6.33~15.82~16.7
11760~28000~32000	16030~34100~38000	18400~46000~53000	21600~54000~57000
7.38	8.49	11.45	12.34
25200	28980	39100	42120
3.28~8.2~9.09	4.0~9.99~10.84	5.62~14.06~15.8	6.56~16.41~17.6
11200~28000~31000	13640~34100~37000	19200~48000~54000	22400~56000~60000
2.41	2.93	3.96	5.39
3.02	3.44	4.66	5.40
2.33	2.84	4.00	5.09
3.4/3.52	3.41/3.52	3.4/3.52	2.94/3.22
ATUW30GPLT1	ATUW36GNLT1	ATUW48GMLT1	ATUW54GMLT1
220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50
3C × 2.5	3C × 2.5	3C × 6.0	3C × 6.0
Warm Gray	Warm Gray	Warm Gray	Warm Gray
950 × 834 × 330	950 × 834 × 330	950 × 1,380 × 330	950 × 1,380 × 330
60.8	60.8	90.2	90.2
Twin Rotary	Twin Rotary	LG Inverter Scroll	LG Inverter Scroll
BLDC	BLDC	BLDC	BLDC
51	51	55	55
53	53	57	57
Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 9.52 (3/8)
Ø 15.88 (5/8)	Ø 15.88 (5/8)	Ø 19.05 (3/4)	Ø 19.05 (3/4)
5	5	5	5
50	50	75	75
30	30	30	30
ATNW30GPLT1	ATNW36GNLT1	ATNW48GMLT1	ATNW54GMLT1
PT-UMC1 / PT-MCHWO *	PT-UMC1 / PT-MCHWO *	PT-UMC1 / PT-MCHWO *	PT-UMC1 / PT-MCHWO *
220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50
840 × 204 × 840	840 × 246 × 840	840 × 288 × 840	840 × 288 × 840
950 × 25 × 950	950 × 25 × 950	950 × 25 × 950	950 × 25 × 950
20.5	23.3	25.5	25.5
19.0 / 17.0 / 15.0	23.0 / 21.0 / 19.0	32.0 / 30.0 / 28.0	32.0 / 30.0 / 28.0
BLDC	BLDC	BLDC	BLDC
Fuse	Fuse	Fuse	Fuse
41 / 38 / 36	42 / 40 / 38	44 / 42 / 40	44 / 42 / 40

SPECIFICATIONS

CEILING MOUNTED CASSETTE - STANDARD (INVERTER / 1PHASE)



HEAT PUMP

Combination		Outdoor unit		Unit	ATUW18GPLS1	ATUW24GPLS1	ATUW30GPLS1
		Indoor unit			ATNW18GPLS1	ATNW24GPLS1	ATNW30GPLS1
Capacity	Cooling ¹	Min. ~ Rated ~ Max.	kW	1.8 ~ 5.2 ~ 5.5	2.8 ~ 7.0 ~ 8.1	3.0 ~ 7.8 ~ 8.4	
		Min. ~ Rated ~ Max.	Btu/h	6,100 ~ 17,700 ~ 18,800	9,600 ~ 23,900 ~ 27,600	10,200 ~ 26,600 ~ 28,700	
	Cooling ²	Rated	kW	4.20	5.75	6.40	
		Rated	Btu/h	14,300	19,600	21,800	
	Heating	Min. ~ Rated ~ Max.	kW	1.9 ~ 5.3 ~ 5.8	3.0 ~ 7.6 ~ 8.6	3.2 ~ 8.4 ~ 8.8	
		Min. ~ Rated ~ Max.	Btu/h	6,500 ~ 18,100 ~ 19,800	10,200 ~ 25,900 ~ 29,300	10,900 ~ 28,700 ~ 30,000	
Power Input	Cooling ¹	Rated	kW	1.62	2.33	2.59	
	Cooling ²	Rated	kW	1.75	2.60	3.15	
	Heating	Rated	kW	1.56	2.24	2.77	
EER / COP	Cooling ¹ / Heating		W / W	3.21 / 3.41	3.01 / 3.40	3.01 / 3.01	
Outdoor Unit					ATUW18GPLS1	ATUW24GPLS1	ATUW30GPLS1
Power Supply			V , Ø , Hz	220-240 , 1 , 50	220-240 , 1 , 50	220-240 , 1 , 50	
Power Supply Cable (included Earth)			No.x mm² (AWG)	3C × 2.5 (12)	3C × 2.5 (12)	3C × 2.5 (12)	
Casing Color			-	Warm Gray	Warm Gray	Warm Gray	
Dimensions		W x H x D	mm	770 × 545 × 288	870 × 650 × 330	870 × 650 × 330	
Net Weight		Body	kg (lbs)	35.5 (78.3)	44.8 (98.8)	44.8 (98.8)	
Compressor	Type		-	Twin Rotary	Twin Rotary	Twin Rotary	
Refrigerant	Type		-	R410A	R410A	R410A	
Fan Motor	Type		-	BLDC	BLDC	BLDC	
Sound Pressure Level	Cooling	Rated	dB(A)	53	55	55	
	Heating	Rated	dB(A)	54	56	56	
Piping Connections	Liquid	Outer Dia.	mm (inch)	Ø 6.35 (1/4)	Ø 9.52 (3/8)	Ø 9.52 (3/8)	
	Gas	Outer Dia.	mm (inch)	Ø 12.7 (1/2)	Ø 15.88 (5/8)	Ø 15.88 (5/8)	
Piping Length		Max.	m (ft)	25 (82.0)	30 (98.4)	30 (98.4)	
Maximum Height Difference	Outdoor Unit - Indoor Unit	Max.	m (ft)	15 (49.2)	30 (98.4)	30 (98.4)	
Indoor			Unit	ATNW18GPLS1	ATNW24GPLS1	ATNW30GPLS1	
Panel Name				PT-UMC1	PT-UMC1	PT-UMC1	
Power Supply			V,Ø, Hz	220-240 , 1 , 50	220-240 , 1 , 50	220-240 , 1 , 50	
Dimensions	Body	W x H x D	mm	840 × 204 × 840	840 × 204 × 840	840 × 204 × 840	
Net Weight			kg (lbs)	21 (46.3)	21 (46.3)	21 (46.3)	
Air Flow Rate		H / M / L	m³/min	16.5 / 14.5 / 13.0	17.0 / 15.0 / 13.0	19.0 / 17.0 / 15.0	
Fan Motor	Type		-	BLDC	BLDC	BLDC	
Sound Pressure Level	Cooling	H / M / L	dB(A)	38 / 36 / 34	40 / 38 / 36	42 / 39 / 37	
	Heating	H / M / L	dB(A)	38 / 36 / 34	40 / 38 / 36	42 / 39 / 37	
Safety Devices			-	Fuse	Fuse	Fuse	

Notes

- Cooling ¹⁾ : Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB

- Cooling ²⁾ : Indoor Temperature 29°C (84.2°F) DB / 19°C (66.2°F) WB, Outdoor Temperature 46°C (114.8°F) DB / 24°C (75.2°F) WB

- Heating Temperature : Indoor 20°C (68°F) DB / 15°C (59°F) WB, Outdoor 7°C (44.6°F) DB / 6°C (42.8°F) WB

ATUW18GPLS1 / ATUW24GPLS1 / ATUW30GPLS1 / ATUW36GMLS1 / ATUW48GMLS1 / ATUW54GMLS1 / ATUW48LMLS2 / ATUW54LMLS2



HEAT PUMP


ATUW36GMLS1	ATUW48GMLS1	ATUW54GMLS1	ATUW48LMLS2	ATUW54LMLS2
ATNW36GMLS1	ATNW48GMLS1	ATNW54GMLS1	ATNW48LMLS2	ATNW54LMLS2
4.0 ~ 10.5 ~ 11.0	5.6 ~ 14.0 ~ 15.0	6.0 ~ 15.0 ~ 16.0	5.6 ~ 14.0 ~ 15.0	6.0 ~ 15.0 ~ 16.0
13,600 ~ 35,800 ~ 37,500	19,100 ~ 47,800 ~ 51,200	20,500 ~ 51,200 ~ 54,600	19,100 ~ 47,800 ~ 51,200	20,500 ~ 51,200 ~ 54,600
8.70	12.10	12.40	12.10	12.40
29,700	41,300	42,300	41,300	42,300
4.3 ~ 11.2 ~ 11.7	6.1 ~ 15.3 ~ 16.5	6.8 ~ 16.9 ~ 18.2	6.1 ~ 15.3 ~ 16.5	6.8 ~ 16.9 ~ 18.2
14,700 ~ 38,200 ~ 39,900	20,800 ~ 52,200 ~ 56,300	23,200 ~ 57,700 ~ 62,100	20,800 ~ 52,200 ~ 56,300	23,200 ~ 57,700 ~ 62,100
3.49	4.38	4.95	4.38	4.95
3.50	5.14	5.25	5.14	5.25
3.19	4.49	5.45	4.49	5.45
3.00 / 3.51	3.20 / 3.41	3.03 / 3.10	3.20 / 3.41	3.03 / 3.10
ATUW36GMLS1	ATUW48GMLS1	ATUW54GMLS1	ATUW48LMLS2	ATUW54LMLS2
220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	380-415, 3, 50	380-415, 3, 50
3C x 2.5 (12)	3C x 6.0 (10)	3C x 6.0 (10)	5C x 2.5 (12)	5C x 2.5 (12)
Warm Gray	Warm Gray	Warm Gray	Warm Gray	Warm Gray
950 x 834 x 330	950 x 1,380 x 330	950 x 1,380 x 330	950 x 1,380 x 330	950 x 1,380 x 330
58.0 (127.9)	90.0 (198.4)	90.0 (198.4)	90.0 (198.4)	90.0 (198.4)
Twin Rotary	Twin Rotary	Twin Rotary	Twin Rotary	Twin Rotary
R410A	R410A	R410A	R410A	R410A
BLDC	BLDC	BLDC	BLDC	BLDC
56	55	55	55	55
58	57	57	57	57
Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 9.52 (3/8)
Ø 15.88 (5/8)	Ø 19.05 (3/4)	Ø 19.05 (3/4)	Ø 19.05 (3/4)	Ø 19.05 (3/4)
40 (131.2)	50 (164.0)	50 (164.0)	50 (164.0)	50 (164.0)
30 (98.4)	30 (98.4)	30 (98.4)	30 (98.4)	30 (98.4)
ATNW36GMLS1	ATNW48GMLS1	ATNW54GMLS1	ATNW48LMLS2	ATNW54LMLS2
PT-UMC1	PT-UMC1	PT-UMC1	PT-UMC1	PT-UMC1
220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50
840 x 288 x 840	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840
28 (61.7)	28 (61.7)	28 (61.7)	28 (61.7)	28 (61.7)
28.5 / 24.5 / 21.0	32.0 / 30.0 / 27.5	32.0 / 30.0 / 27.5	32.0 / 30.0 / 27.5	32.0 / 30.0 / 27.5
BLDC	BLDC	BLDC	BLDC	BLDC
48 / 46 / 44	52 / 51 / 48	52 / 51 / 48	52 / 51 / 48	52 / 51 / 48
48 / 46 / 44	52 / 51 / 48	52 / 51 / 48	52 / 51 / 48	52 / 51 / 48
Fuse	Fuse	Fuse	Fuse	Fuse

CEILING CONCEALED DUCT




E.S.P. (EXTERNAL STATIC PRESSURE) CONTROL

This function easily controls volume of the air by a remote controller. The BLDC motor can control fan speed and air volume regardless of the external static pressure. Additional accessories are not required to control air flow.

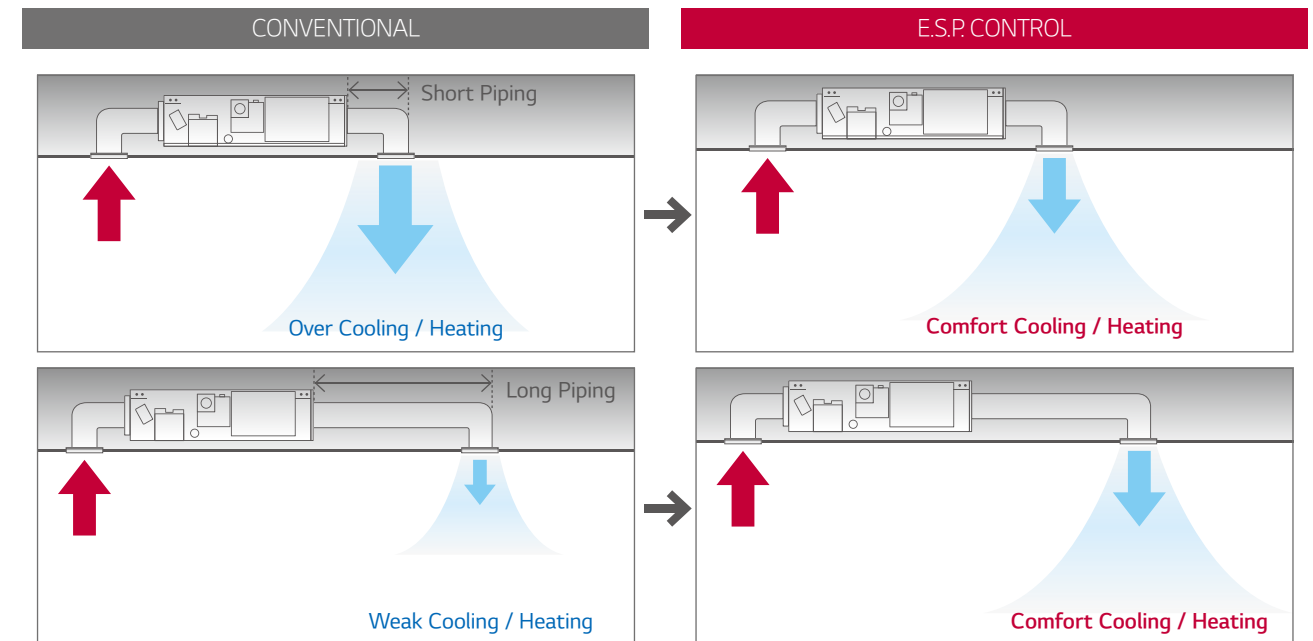

MAXIMIZED E.S.P. (EXTERNAL STATIC PRESSURE)


With new indoor tool, connectable duct length is more longer than current running unit due to the maximum E.S.P. is improved. Noise level also decreased about 14%

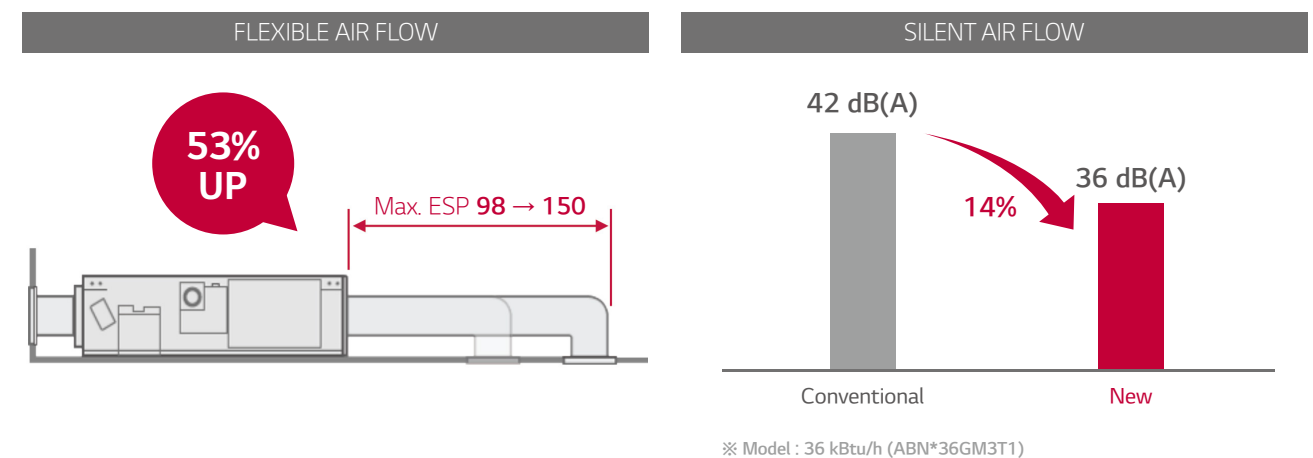

CEILING CONCEALED DUCT

TWO THERMISTORS CONTROL

The indoor temperature can be checked using the thermistors in the remote controller as well as from the indoor unit. There may be a significant difference between ceiling and floor air temperature. Two thermistors can optimise indoor air temperature for a more comfortable environment.

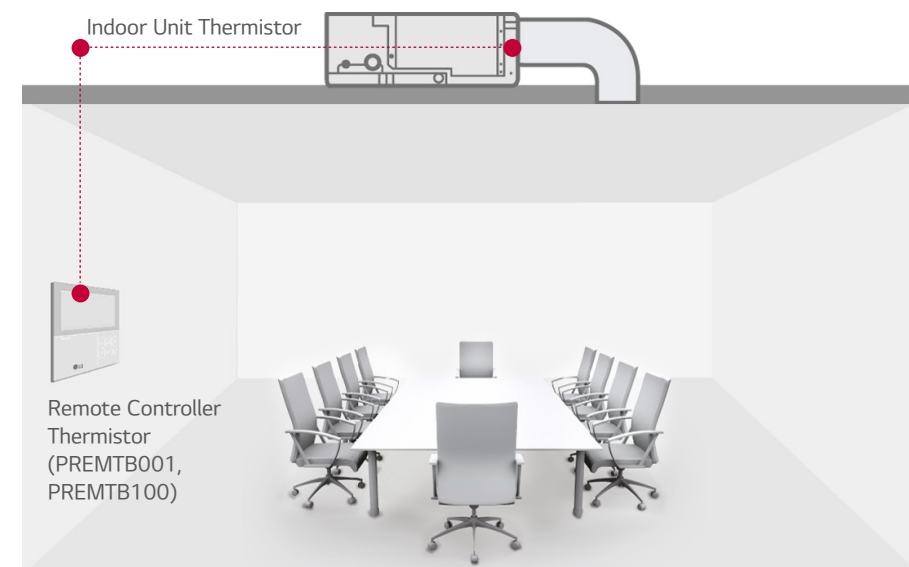


Compares temperatures sensed from different positions, and automatically selects the optimum temperature for users

OPERATION FOR MULTIPLE ROOMS

Using a spiral duct (Embedded or flexible type) and stream chamber, it is possible to operate cooling / heating for several rooms simultaneously. Also, zone control is available with zone controller accessory (ABZCA)

Zone control features


- Controls different zones (up to 4 zones) by external thermostat (AC 24V)
- Maintain proper air volume of each zone
- Auto variation of dampers
- Auto control of fan speed and On / Off operation

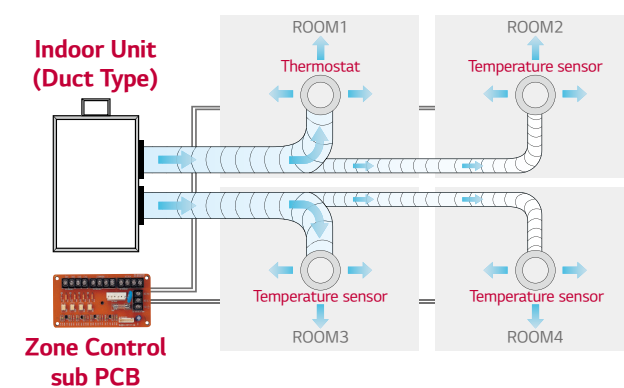

※ This function is not applicable in all countries.


MINIMIZED HEIGHT

New mid-static ducts provide ideal solution for installation in limited space.

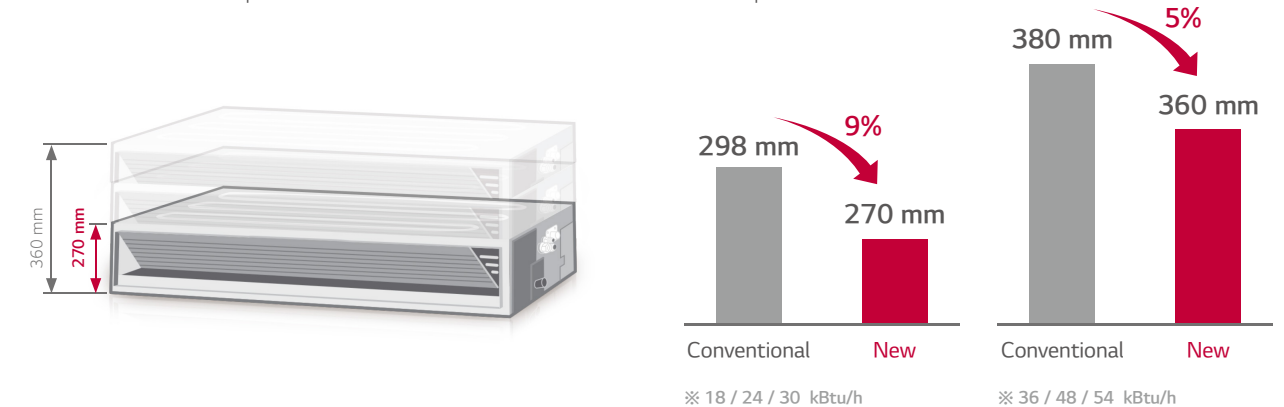


HIGH HEAD DRAIN PUMP

High head drain pump automatically drains water up to a height of 200mm of drain-head height. It provides the perfect solution for draining of water. (Standard Inverter : Accessory (ABDPG) / Low-Static Duct : Included)

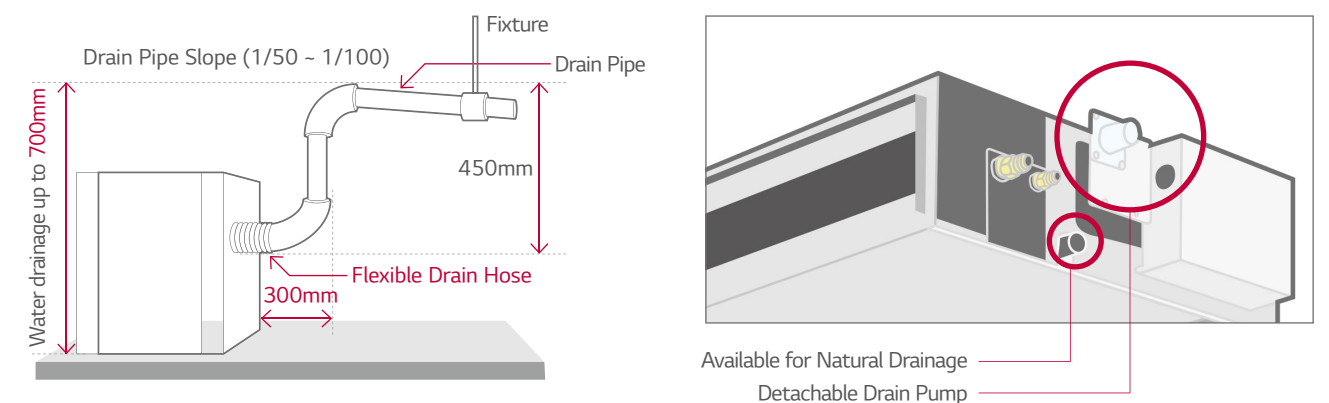

EASY SERVICE & MAINTENANCE

Users are not required to disassemble the whole panel for maintenance; since panel is divided into 2 components; one for heat exchanger and the other for fan/motor. The user can easily detach and re-attach the filter in the available limited space.

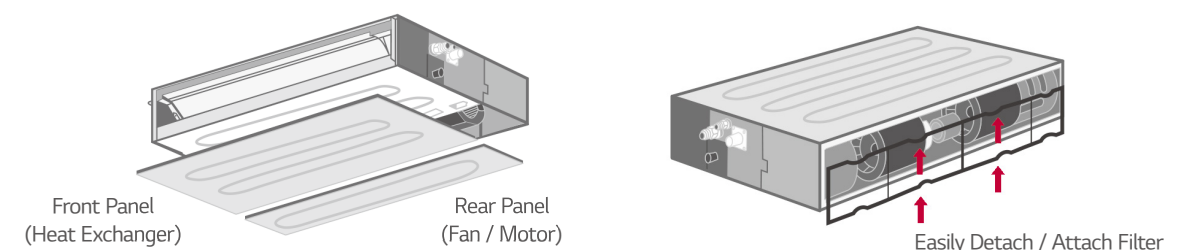

SPECIFICATIONS

CEILING CONCEALED DUCT - **HIGH EFFICIENCY** (INVERTER / 1 PHASE)



ABUQ18GM1T1 / ABUQ24GM1T1 / ABUQ30GM1T1 / ABUQ36GM3T1 / ABUQ48GM3T1 / ABUQ54GM3T1



COOLING ONLY

Combination		Outdoor unit		Unit	ABUQ18GM1T1	ABUQ24GM1T1
		Indoor unit			ABNQ18GM1T1	ABNQ24GM1T1
Cooling Capacity ¹⁾		Min. ~ Rated ~ Max.	kW	2.1-5.27-5.86	2.81-7.03-7.91	
			Btu/h	7200-18000-20000	9600-24000-27000	
Cooling Capacity ²⁾		Min. ~ Rated ~ Max.	kW	4.53	5.86	
			Btu/h	15,480	20,000	
Power Input	Cooling ¹⁾	Rated	kW	1.55	2.06	
	Cooling ²⁾	Rated	kW	1.72	2.32	
EER / COP			W/W	3.4	3.41	
Outdoor			Unit	ABUQ18GM1T1	ABUQ24GM1T1	
Power Supply			V , Ø , Hz	220-240, 1, 50	220-240, 1, 50	
Power Supply Cable (included Earth)			No. × mm²	3C × 2.5	3C × 2.5	
Casing Color			-	Warm Gray	Warm Gray	
Dimensions	Net	W × H × D	mm	770 × 545 × 288	870 × 650 × 330	
Weight	Net		kg	34.3	43.3	
Compressor	Type		-	Twin Rotary	Twin Rotary	
Refrigerant	Type		-	R410A	R410A	
Fan Motor	Type		-	BLDC	BLDC	
Sound Pressure Level	Cooling	Rated	dB(A)	49	50	
Piping Connections	Liquid	Outer Dia.	mm (inch)	Ø 6.35 (1/4)	Ø 9.52 (3/8)	
	Gas	Outer Dia.	mm (inch)	Ø 12.7 (1/2)	Ø 15.88 (5/8)	
Piping Length		Rated	m	5	5	
		Max.	m	30	50	
Maximum Height Difference (ODU ~ IDU)		Max.	m	15	30	
Indoor			Unit	ABNQ18GM1T1	ABNQ24GM1T1	
Type			-	Ceiling Concealed Duct-Mid. Pressure		
Power Supply			V , Ø , Hz	220-240, 1, 50	220-240, 1, 50	
Dimensions	Net	W × H × D	mm	900 × 270 × 700	900 × 270 × 700	
Weight	Net		kg	23.8	25.3	
Air Flow Rate		H / M / L	m³/min	16.5 / 14.5 / 13.0	18.0 / 16.5 / 14.5	
		Max	m³/min	23.8	23.8	
External static pressure	High Mode_Factory Set		Pa (mmAq)	6	6	
Fan Motor	Type		-	BLDC	BLDC	
Safety Device			-	Fuse	Fuse	
Sound Pressure Level		H / M / L	dB(A)	34 / 32 / 30	37 / 35 / 32	

Notes
- Cooling ¹⁾ : Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB
- Cooling ²⁾ : Indoor Temperature 29°C (84.2°F) DB / 19°C (66.2°F) WB, Outdoor Temperature 46°C (114.8°F) DB / 24°C (75.2°F) WB

COOLING ONLY

ABUQ30GM1T1	ABUQ36GM3T1	ABUQ48GM3T1	ABUQ54GM3T1
ABNQ30GM1T1	ABNQ36GM3T1	ABNQ48GM3T1	ABNQ54GM3T1
3.36~8.2~9.96	4.7~9.99~11.13	5.392~13.48~15.53	6.328~15.82~16.7
11480~28000~34000	16030~34100~38000	18400~46000~53000	21600~54000~57000
7.05	8.49	11.59	12.66
24,080	28,980	39,560	43,200
2.41	2.93	3.96	5.39
2.74	3.24	4.27	5.07
3.4	3.41	3.4	2.94
ABUQ30GM1T1	ABUQ36GM3T1	ABUQ48GM3T1	ABUQ54GM3T1
220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50
3C × 2.5	3C × 2.5	3C × 6.0	3C × 6.0
Warm Gray	Warm Gray	Warm Gray	Warm Gray
950 × 834 × 330	950 × 834 × 330	950 × 1,380 × 330	950 × 1,380 × 330
59.1	59.1	89.5	89.5
Twin Rotary	Twin Rotary	LG Inverter Scroll	LG Inverter Scroll
R410A	R410A	R410A	R410A
BLDC	BLDC	BLDC	BLDC
51	51	55	55
Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 9.52 (3/8)
Ø 15.88 (5/8)	Ø 15.88 (5/8)	Ø 19.05 (3/4)	Ø 19.05 (3/4)
5	5	5	5
50	50	75	75
30	30	30	30
ABNQ30GM1T1	ABNQ36GM3T1	ABNQ48GM3T1	ABNQ54GM3T1
Ceiling Concealed Duct-Mid. Pressure			
220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50
900 × 270 × 700	1,250 × 360 × 700	1,250 × 360 × 700	1,250 × 360 × 700
25.3	37.5	43.5	43.5
22.0 / 20.0 / 18.0	30.0 / 25.0 / 20.0	40.0 / 34.0 / 28.0	50.0 / 45.0 / 40.0
25.9	41.0	58.8	58.8
6	6	6	6
BLDC	BLDC	BLDC	BLDC
Fuse	Fuse	Fuse	Fuse
37 / 35 / 34	36 / 33 / 31	38 / 36 / 34	46 / 44 / 42

SPECIFICATIONS

CEILING CONCEALED DUCT - HIGH EFFICIENCY (INVERTER / 1 PHASE)



HEAT PUMP

Combination		Outdoor unit		Unit	ABUW18GM1T1	ABUW24GM1T1
		Indoor unit			ABNW18GM1T1	ABNW24GM1T1
Cooling Capacity ¹⁾		Min. ~ Rated ~ Max.	kW	2.1-5.27-5.86	2.81-7.03-7.91	
			Btu/h	7200-18000-20000	9600-24000-27000	
Cooling Capacity ²⁾		Min. ~ Rated ~ Max.	kW	4.53	5.86	
			Btu/h	15480	20000	
Heating Capacity ¹⁾		Min. ~ Rated ~ Max.	kW	2.1-5.27-6.1	2.8-7.03-8.2	
			Btu/h	7200-18000-21000	9600-24000-28000	
Power Input	Cooling ¹⁾	Rated	kW	1.55	2.06	
	Cooling ²⁾	Rated	kW	1.72	2.32	
	Heating ¹⁾	Rated	kW	1.50	2.05	
EER / COP			W/W	3.4/3.51	3.41/3.43	
Outdoor			Unit	ABUW18GM1T1	ABUW24GM1T1	
Power Supply			V , Ø , Hz	220-240, 1, 50	220-240, 1, 50	
Power Supply Cable (included Earth)			No. × mm²	3C × 2.5	3C × 2.5	
Casing Color			-	Warm Gray	Warm Gray	
Dimensions	Net	W × H × D	mm	770 × 545 × 288	870 × 650 × 330	
Weight	Net		kg	35.2	45.5	
Compressor	Type		-	Twin Rotary	Twin Rotary	
Refrigerant	Type		-	R410A	R410A	
Fan	Air Flow Rate	Rated	m³/min × No.	28 × 1	50 × 1	
Fan Motor	Type		-	BLDC	BLDC	
Sound Pressure Level	Cooling	Rated	dB(A)	49	50	
	Heating	Rated	dB(A)	52	52	
Piping Connections	Liquid	Outer Dia.	mm (inch)	Ø 6.35 (1/4)	Ø 9.52 (3/8)	
	Gas	Outer Dia.	mm (inch)	Ø 12.7 (1/2)	Ø 15.88 (5/8)	
Piping Length		Rated	m	5	5	
		Max.	m	30	50	
Maximum Height Difference (ODU ~ IDU)		Max.	m	15	30	
Indoor			Unit	ABNW18GM1T1	ABNW24GM1T1	
Type			-	Ceiling Concealed Duct-Mid. Pressure		
Power Supply			V , Ø , Hz	220-240, 1, 50	220-240, 1, 50	
Dimensions	Net	W × H × D	mm	900 × 270 × 700	900 × 270 × 700	
Weight	Net		kg	23.8	25.3	
Air Flow Rate		H / M / L	m³/min	16.5 / 14.5 / 13.0	18.0 / 16.5 / 14.5	
		Max	m³/min	23.8	23.8	
Fan Motor	Type		-	6	6	
External static pressure	High Mode_Factory Set		Pa (mmAq)	BLDC	BLDC	
Safety Device			-	Fuse	Fuse	
Sound Pressure Level		H / M / L	dB(A)	34 / 32 / 30	37 / 35 / 32	

Notes
- Cooling¹⁾ : Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB
- Cooling²⁾ : Indoor Temperature 29°C (84.2°F) DB / 19°C (66.2°F) WB, Outdoor Temperature 46°C (114.8°F) DB / 24°C (75.2°F) WB
- Heating Temperature : Indoor 20°C (68°F) DB / 15°C (59°F) WB, Outdoor 7°C (44.6°F) DB / 6°C (42.8°F) WB

ABUW18GM1T1 / ABUW24GM1T1 / ABUW30GM1T1 / ABUW36GM3T1 / ABUW48GM3T1 / ABUW54GM3T1



HEAT PUMP

ABUW30GM1T1	ABUW36GM3T1	ABUW48GM3T1	ABUW54GM3T1
ABNW30GM1T1	ABNW36GM3T1	ABNW48GM3T1	ABNW54GM3T1
3.36~8.2~9.96	4.7~9.99~11.13	5.39~13.48~15.53	6.33~15.82~16.7
11480~28000~34000	16030~34100~38000	18400~46000~53000	21600~54000~57000
7.05	8.49	11.59	12.66
24080	28980	39560	43200
3.28~8.2~9.09	3.75~9.38~10.26	5.62~14.06~15.8	6.56~16.41~17.6
11200~28000~31000	12800~32000~35000	19200~48000~54000	22400~56000~60000
2.41	2.93	3.96	5.39
2.74	3.24	4.27	5.07
2.55	2.46	4.00	4.61
3.4/3.22	3.41/3.81	3.4/3.52	2.94/3.56
ABUW30GM1T1	ABUW36GM3T1	ABUW48GM3T1	ABUW54GM3T1
220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50
3C × 2.5	3C × 2.5	3C × 6.0	3C × 6.0
Warm Gray	Warm Gray	Warm Gray	Warm Gray
950 × 834 × 330	950 × 834 × 330	950 × 1,380 × 330	950 × 1,380 × 330
60.8	60.8	90.2	90.2
Twin Rotary	Twin Rotary	LG Inverter Scroll	LG Inverter Scroll
R410A	R410A	R410A	R410A
60 × 1	60 × 1	60 × 2	60 × 2
BLDC	BLDC	BLDC	BLDC
51	51	55	55
53	53	57	57
Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 9.52 (3/8)
Ø 15.88 (5/8)	Ø 15.88 (5/8)	Ø 19.05 (3/4)	Ø 19.05 (3/4)
5	5	5	5
50	50	75	75
30	30	30	30
ABNW30GM1T1	ABNW36GM3T1	ABNW48GM3T1	ABNW54GM3T1
Ceiling Concealed Duct-Mid. Pressure			
220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50
900 × 270 × 700	1,250 × 360 × 700	1,250 × 360 × 700	1,250 × 360 × 700
25.3	37.5	43.5	43.5
22.0 / 20.0 / 18.0	30.0 / 25.0 / 20.0	40.0 / 34.0 / 28.0	50.0 / 45.0 / 40.0
25.9	41.0	58.8	58.8
6	6	6	6
BLDC	BLDC	BLDC	BLDC
Fuse	Fuse	Fuse	Fuse
37 / 35 / 34	36 / 33 / 31	38 / 36 / 34	46 / 44 / 42

SPECIFICATIONS

CEILING CONCEALED DUCT - STANDARD (INVERTER / 1PHASE)



HEAT PUMP

Combination	Outdoor unit		Unit	ABUW18GM1S1	ABUW24GM1S1	ABUW30GM1S1
	Indoor unit			ABNW18GM1S1	ABNW24GM1S1	ABNW30GM1S1
Capacity	Cooling ¹⁾	Min. ~ Rated ~ Max.	kW	1.8 ~ 5.2 ~ 5.5	2.8 ~ 7.0 ~ 8.1	3.0 ~ 7.8 ~ 8.5
		Min. ~ Rated ~ Max.	Btu/h	6,100 ~ 17,700 ~ 18,800	9,600 ~ 23,900 ~ 27,600	10,200 ~ 26,600 ~ 29,000
	Cooling ²⁾	Rated	kW	4.20	5.75	6.50
		Rated	Btu/h	14,300	19,600	22,200
	Heating	Min. ~ Rated ~ Max.	kW	1.9 ~ 5.3 ~ 6.1	3.0 ~ 7.6 ~ 8.7	3.2 ~ 8.0 ~ 9.0
		Min. ~ Rated ~ Max.	Btu/h	6,500 ~ 18,100 ~ 20,800	10,200 ~ 25,900 ~ 29,700	10,900 ~ 28,700 ~ 30,700
Power Input	Cooling ¹⁾	Rated	kW	1.70	2.33	2.59
	Cooling ²⁾	Rated	kW	1.75	2.65	3.15
	Heating ¹⁾	Rated	kW	1.65	2.30	2.65
EER / COP	Cooling ¹⁾ / Heating		W/W	3.06 / 3.21	3.01 / 3.30	3.01 / 3.01
Outdoor			Unit	ABUW18GM1S1	ABUW24GM1S1	ABUW30GM1S1
Power Supply			V, Ø, Hz	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50
Power Supply Cable (included Earth)			No. × mm ²	3C × 2.5 (12)	3C × 2.5 (12)	3C × 2.5 (12)
Casing Color			-	Warm Gray	Warm Gray	Warm Gray
Dimensions	Net	W × H × D	mm	770 × 545 × 288	870 × 650 × 330	870 × 650 × 330
Net Weight			kg	35.5 (78.3)	44.8 (98.8)	44.8 (98.8)
Compressor	Type		-	Twin Rotary	Twin Rotary	Twin Rotary
Refrigerant	Type		-	R410A	R410A	R410A
Fan	Air Flow Rate	Rated	m ³ /min × No.	28 × 1	50 × 1	50 × 1
Fan Motor	Type		-	BLDC	BLDC	BLDC
Sound Pressure Level	Cooling	Rated	dB(A)	53	55	55
	Heating	Rated	dB(A)	54	56	56
Piping Connections	Liquid	Outer Dia.	mm (inch)	Ø 6.35 (1/4)	Ø 9.52 (3/8)	Ø 9.52 (3/8)
	Gas	Outer Dia.	mm (inch)	Ø 12.7 (1/2)	Ø 15.88 (5/8)	Ø 15.88 (5/8)
Piping Length	Max.		m	25 (82.0)	30 (98.4)	30 (98.4)
Maximum Height Difference (ODU - IDU)	Max.		m	15 (49.2)	30 (98.4)	30 (98.4)
Indoor			Unit	ABNW18GM1S1	ABNW24GM1S1	ABNW30GM1S1
Power Supply			V, Ø, Hz	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50
Dimensions	Net	W × H × D	mm	900 × 270 × 700	900 × 270 × 700	900 × 270 × 700
Net Weight			kg	23.8 (52.5)	24.2 (53.4)	25.3 (55.8)
Fan	Air Flow Rate	H / M / L	m ³ /min	16.5 / 14.5 / 13.0	18.0 / 16.5 / 14.5	22.0 / 20.0 / 18.0
Fan Motor	Type		-	BLDC	BLDC	BLDC
External static pressure	High Mode_Factory Set		-	58.8 (6)	58.8 (6)	58.8 (6)
Sound Pressure Level	Cooling	Rated	dB(A)	36 / 34 / 32	37 / 36 / 34	39 / 37 / 36
	Heating	Rated	dB(A)	36 / 34 / 32	37 / 36 / 34	39 / 37 / 36

Notes
- Cooling ¹⁾ : Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB
- Cooling ²⁾ : Indoor Temperature 29°C (84.2°F) DB / 19°C (66.2°F) WB, Outdoor Temperature 46°C (114.8°F) DB / 24°C (75.2°F) WB
- Heating Temperature : Indoor 20°C (68°F) DB / 15°C (59°F) WB, Outdoor 7°C (44.6°F) DB / 6°C (42.8°F) WB

ABUW18GM1S1 / ABUW24GM1S1 / ABUW30GM1S1 / ABUW36GM2S1 / ABUW48GM3S1 /
ABUW54GM3S1 / ABUW50LM3S1 / ABUW60LM3S1



ABUW18GM1S1
ABUW24GM1S1
ABUW30GM1S1
ABUW36GM2S1
ABUW48GM3S1
ABUW54GM3S1
ABUW50LM3S1
ABUW60LM3S1

HEAT PUMP

ABUW36GM2S1	ABUW48GM3S1	ABUW54GM3S1	ABUW50LM3S1	ABUW60LM3S1
ABNW36GM2S1	ABNW48GM3S1	ABNW54GM3S1	ABNW50LM3S1	ABNW60LM3S1
3.6 ~ 9.5 ~ 10.5	5.6 ~ 14.1 ~ 15.1	6.3 ~ 15.6 ~ 16.8	5.6 ~ 14.1 ~ 15.1	6.3 ~ 15.8 ~ 16.8
12,300 ~ 32,400 ~ 35,800	19,100 ~ 48,100 ~ 51,500	21,500 ~ 53,200 ~ 57,300	19,100 ~ 48,100 ~ 51,500	21,500 ~ 53,900 ~ 57,300
7.80	12.00	13.40	12.00	13.40
26,600	40,900	45,700	40,900	45,700
4.0 ~ 10.5 ~ 11.5	6.3 ~ 15.8 ~ 16.8	6.8 ~ 17 ~ 18.2	6.3 ~ 15.8 ~ 16.8	6.8 ~ 17 ~ 18.2
13,600 ~ 35,800 ~ 39,200	21,500 ~ 53,900 ~ 57,300	23,200 ~ 58,000 ~ 62,100	21,500 ~ 53,900 ~ 57,300	23,200 ~ 58,000 ~ 62,100
3.16	4.39	5.19	4.39	5.21
3.16	4.85	5.69	4.85	5.69
3.08	4.63	4.86	4.63	4.86
3.01 / 3.41	3.21 / 3.41	3.01 / 3.50	3.21 / 3.41	3.03 / 3.50
ABUW36GM2S1	ABUW48GM3S1	ABUW54GM3S1	ABUW50LM3S1	ABUW60LM3S1
220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	380-415, 3, 50	380-415, 3, 50
3C × 2.5 (12)	3C × 6.0 (10)	3C × 6.0 (10)	5C × 2.5 (12)	5C × 2.5 (12)
Warm Gray	Warm Gray	Warm Gray	Warm Gray	Warm Gray
950 × 834 × 330	950 × 1,380 × 330	950 × 1,380 × 330	950 × 1,380 × 330	950 × 1,380 × 330
58.0 (127.9)	90.0 (198.4)	90.0 (198.4)	90.0 (198.4)	90.0 (198.4)
Twin Rotary	Twin Rotary	Twin Rotary	Twin Rotary	Twin Rotary
R410A	R410A	R410A	R410A	R410A
58 × 1	58 × 2	58 × 2	58 × 2	58 × 2
BLDC	BLDC	BLDC	BLDC	BLDC
56	55	55	55	55
58	57	57	57	57
Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 9.52 (3/8)
Ø 15.88 (5/8)	Ø 19.05 (3/4)	Ø 19.05 (3/4)	Ø 19.05 (3/4)	Ø 19.05 (3/4)
40 (131.2)	50 (164.0)	50 (164.0)	50 (164.0)	50 (164.0)
30 (98.4)	30 (98.4)	30 (98.4)	30 (98.4)	30 (98.4)
ABNW36GM2S1	ABNW48GM3S1	ABNW54GM3S1	ABNW50LM3S1	ABNW60LM3S1
220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50
1,250 × 270 × 700	1,250 × 360 × 700	1,250 × 360 × 700	1,250 × 360 × 700	1,250 × 360 × 700
36.0 (79.4)	42.3 (93.3)	42.3 (93.3)	42.3 (93.3)	42.3 (93.3)
32.0 / 28.0 / 24.0	40.0 / 34.0 / 28.0	50.0 / 45.0 / 40.0	40.0 / 34.0 / 28.0	50.0 / 45.0 / 40.0
BLDC	BLDC	BLDC	BLDC	BLDC
58.8 (6)	58.8 (6)	58.8 (6)	58.8 (6)	58.8 (6)
38 / 36 / 35	41 / 39 / 37	44 / 42 / 41	41 / 39 / 37	44 / 42 / 41
38 / 36 / 35	41 / 39 / 37	44 / 42 / 41	41 / 39 / 37	44 / 42 / 41

CEILING SUSPENDED UNIT




IF WINNING DESIGN

With its stunning V-shaped design and black vane, LG's new ceiling-suspended air conditioner exudes modern elegance appropriate for any space.



Black Vane

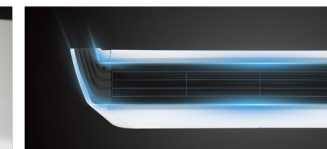

V-Shaped Design

LARGE CAPACITY

An enlarged outlet space optimized the air flow path and improved heat exchanger's performance. It 30 percent faster cooling enable quick & wide cooling.


CONVENTIONAL



NEW LG



115% ENLARGED



105% ENLARGED


15M LONG AIR FLOW

The powerful air speed and high volume features enhance the flow of air to reach up to 15m away from the air conditioner.



ONE TOUCH FILTER CHANGING


An easy In / Out filter structure as well as a simplified two-piece filter, which slides out for easy cleaning and maintenance.

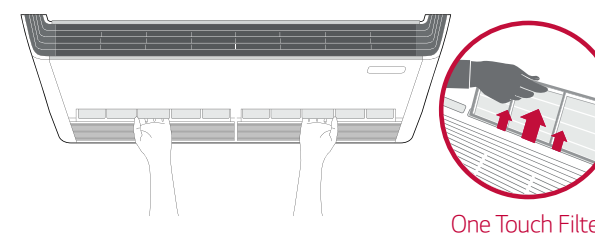

One Touch Filter

EASY INSTALLATION

Installation speed and ease are improved by reducing the total number of screws and placing them on the easily accessible front panel.

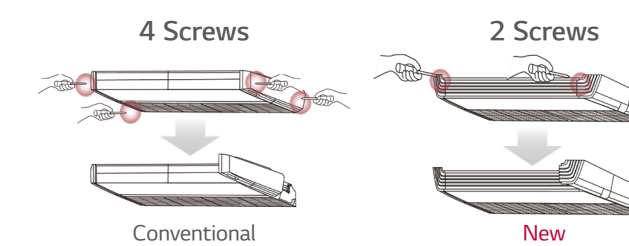

Conventional

New

SPECIFICATIONS

CEILING SUSPENDED UNIT - HIGH EFFICIENCY (INVERTER / 1PHASE)

AVUQ18GM1T1 / AVUQ24GM1T1 / AVUQ30GM1T1 / AVUQ36GM2T1 / AVUQ48GM2T1 / AVUQ54GM2T1



COOLING ONLY

Combination		Outdoor unit		Unit	AVUQ18GM1T1	AVUQ24GM1T1
		Indoor unit			AVNQ18GM1T1	AVNQ24GM1T1
Cooling Capacity ¹⁾		Min. ~ Rated ~ Max.	kW	2.1-5.27-5.86	2.81-7.03-7.91	
			Btu/h	7200-18000-20000	9600-24000-27000	
Cooling Capacity ²⁾		Min. ~ Rated ~ Max.	kW	4.37	6.04	
			Btu/h	14,900	20,610	
Power Input	Cooling ¹⁾	Rated	kW	1.55	2.06	
	Cooling ²⁾	Rated	kW	1.73	2.38	
EER / COP			W/W	3.4	3.41	
Outdoor			Unit	AVUQ18GM1T1	AVUQ24GM1T1	
Power Supply			V , Ø , Hz	220-240, 1, 50	220-240, 1, 50	
Power Supply Cable (included Earth)			No. × mm ²	3C × 2.5	3C × 2.5	
Dimensions	Net	W × H × D	mm	770 × 545 × 288	870 × 650 × 330	
Weight	Net		kg	34.3	43.3	
Compressor	Type		-	Twin Rotary	Twin Rotary	
Refrigerant	Type		-	R410A	R410A	
Fan	Air Flow Rate	Rated	m³/min × No.	28 × 1	50 × 1	
		Rated	ft³/min × No.	989 × 1	1,766 × 1	
Fan Motor	Type		-	BLDC	BLDC	
Sound Pressure Level	Cooling	Rated	dB(A)	49	50	
Piping Connections	Liquid	Outer Dia.	mm (inch)	Ø 6.35 (1/4)	Ø 9.52 (3/8)	
	Gas	Outer Dia.	mm (inch)	Ø 12.7 (1/2)	Ø 15.88 (5/8)	
Piping Length		Rated	m	5	5	
		Max.	m	30	50	
Maximum Height Difference (ODU ~ IDU)		Max.	m	15	30	
Indoor			Unit	AVNQ18GM1T1	AVNQ24GM1T1	
Type			-	Ceiling Suspended Unit		
Power Supply			V , Ø , Hz	220-240, 1, 50	220-240, 1, 50	
Dimensions	Net	W × H × D	mm	1,200 × 235 × 690	1,200 × 235 × 690	
Weight	Net		kg	27.3	28.0	
Air Flow Rate		H / M / L	m³/min	13.0 / 12.0 / 11.0	16.5 / 15.0 / 14.0	
Fan Motor	Type		-	BLDC	BLDC	
Sound Pressure Level		H / M / L	dB(A)	40 / 38 / 37	44 / 43 / 41	

Notes
- Cooling ¹⁾ : Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB
- Cooling ²⁾ : Indoor Temperature 29°C (84.2°F) DB / 19°C (66.2°F) WB, Outdoor Temperature 46°C (114.8°F) DB / 24°C (75.2°F) WB

COOLING ONLY

AVUQ30GM1T1	AVUQ36GM2T1	AVUQ48GM2T1	AVUQ54GM2T1
AVNQ30GM1T1	AVNQ36GM2T1	AVNQ48GM2T1	AVNQ54GM2T1
3.36~8.2~10.26	4.46~9.49~11.13	5.392~13.48~15.53	6.328~15.82~16.7
11480~28000~35000	15230~32400~38000	18400~46000~53000	21600~54000~57000
7.05	8.16	10.51	12.66
24,080	27,860	35,880	43,200
2.41	2.79	3.96	5.39
2.85	3.23	4.10	5.00
3.4	3.4	3.4	2.94
AVUQ30GM1T1	AVUQ36GM2T1	AVUQ48GM2T1	AVUQ54GM2T1
220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50
3C × 2.5	3C × 2.5	3C × 6.0	3C × 6.0
950 × 834 × 330	950 × 834 × 330	950 × 1,380 × 330	950 × 1,380 × 330
59.1	59.1	89.5	89.5
Twin Rotary	Twin Rotary	LG Inverter Scroll	LG Inverter Scroll
R410A	R410A	R410A	R410A
60 × 1	60 × 1	60 × 2	60 × 2
2,119 × 1	2,119 × 1	2,119 × 2	2,119 × 2
BLDC	BLDC	BLDC	BLDC
51	51	55	55
Ø 9.52(3/8)	Ø 9.52(3/8)	Ø 9.52 (3/8)	Ø 9.52 (3/8)
Ø 15.88 (5/8)	Ø 15.88 (5/8)	Ø 19.05 (3/4)	Ø 19.05 (3/4)
5	5	5	5
50	50	75	75
30	30	30	30
AVNQ30GM1T1	AVNQ36GM2T1	AVNQ48GM2T1	AVNQ54GM2T1
Ceiling Suspended Unit			
220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50
1,200 × 235 × 690	1,600 × 235 × 690	1,600 × 235 × 690	1,600 × 235 × 690
28.0	36.5	36.5	36.5
20.0 / 18.0 / 16.0	28.0 / 24.0 / 20.0	30.0 / 25.0 / 20.0	30.0 / 25.0 / 20.0
BLDC	BLDC	BLDC	BLDC
47 / 45 / 42	44 / 41 / 38	46 / 42 / 38	46 / 42 / 38

SPECIFICATIONS

CEILING SUSPENDED UNIT - HIGH EFFICIENCY (INVERTER / 1PHASE)



AVUW18GM1T1 / AVUW24GM1T1 / AVUW30GM1T1 / AVUW36GM2T1 / AVUW48GM2T1 / AVUW54GM2T1



HEAT PUMP

Combination		Outdoor unit		Unit	AVUW18GM1T1	AVUW24GM1T1
		Indoor unit			AVNW18GM1T1	AVNW24GM1T1
Cooling Capacity ¹⁾		Min. ~ Rated ~ Max.	kW	2.1-5.27-5.86	2.81-7.03-7.91	
			Btu/h	7200-18000-20000	9600-24000-27000	
Cooling Capacity ²⁾		Min. ~ Rated ~ Max.	kW	4.37	6.04	
			Btu/h	14900	20610	
Heating Capacity ¹⁾		Min. ~ Rated ~ Max.	kW	2.22-5.56-6.1	2.8-7.03-8.2	
			Btu/h	7600-19000-21000	9600-24000-28000	
Power Input	Cooling ¹⁾	Rated	kW	1.55	2.06	
	Cooling ²⁾	Rated	kW	1.73	2.38	
	Heating ¹⁾	Rated	kW	1.62	2.05	
EER / COP			W/W	3.4/3.43	3.41/3.43	
Outdoor			Unit	AVUW18GM1T1	AVUW24GM1T1	
Power Supply			V, Ø, Hz	220-240, 1, 50	220-240, 1, 50	
Power Supply Cable (included Earth)			No. × mm ²	3C × 2.5	3C × 2.5	
Dimensions	Net	W × H × D	mm	770 × 545 × 288	870 × 650 × 330	
Weight	Net		kg	35.2	45.5	
Compressor	Type		-	Twin Rotary	Twin Rotary	
Refrigerant	Type		-	R410A	R410A	
Fan Motor	Type		-	BLDC	BLDC	
Sound Pressure Level	Cooling	Rated	dB(A)	49	50	
	Heating	Rated	dB(A)	52	52	
Piping Connections	Liquid	Outer Dia.	mm (inch)	Ø 6.35(1/4)	Ø 9.52(3/8)	
	Gas	Outer Dia.	mm (inch)	Ø 12.7(1/2)	Ø 15.88 (5/8)	
Piping Length		Rated	m	5	5	
		Max.	m	30	50	
Maximum Height Difference (ODU - IDU)		Max.	m	15	30	
Indoor			Unit	ABNW18GM1T1	ABNW24GM1T1	
Type			-	Ceiling Suspended Unit		
Power Supply			V, Ø, Hz	220-240, 1, 50	220-240, 1, 50	
Dimensions	Net	W × H × D	mm	1,200 × 235 × 690	1,200 × 235 × 690	
Weight	Net		kg	27.3	28.0	
Air Flow Rate		H / M / L	m ³ /min	13.0 / 12.0 / 11.0	16.5 / 15.0 / 14.0	
Fan Motor	Type		-	BLDC	BLDC	
Sound Pressure Level		H / M / L	dB(A)	40 / 38 / 37	44 / 43 / 41	

Notes
- Cooling ¹⁾ : Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB
- Cooling ²⁾ : Indoor Temperature 29°C (84.2°F) DB / 19°C (66.2°F) WB, Outdoor Temperature 46°C (114.8°F) DB / 24°C (75.2°F) WB
- Heating Temperature : Indoor 20°C (68°F) DB / 15°C (59°F) WB, Outdoor 7°C (44.6°F) DB / 6°C (42.8°F) WB

HEAT PUMP

AVUW30GM1T1	AVUW36GM2T1	AVUW48GM2T1	AVUW54GM2T1
AVNW30GM1T1	AVNW36GM2T1	AVNW48GM2T1	AVNW54GM2T1
3.36~8.2~10.26	4.46~9.49~11.13	5.39~13.48~15.53	6.33~15.82~16.7
11480~28000~35000	15230~32400~38000	18400~46000~53000	21600~54000~57000
7.05	8.16	10.51	12.66
24080	27860	35880	43200
3.28~8.2~9.09	3.8~9.49~10.84	5.62~14.06~15.8	6.56~16.41~17.6
11200~28000~31000	12960~32400~37000	19200~48000~54000	22400~56000~60000
2.41	2.79	3.96	5.39
2.85	3.23	4.10	5.00
2.33	2.70	4.00	5.09
3.4/3.52	3.4/3.51	3.4/3.52	2.94/3.22
AVUW30GM1T1	AVUW36GM2T1	AVUW48GM2T1	AVUW54GM2T1
220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50
3C × 2.5	3C × 2.5	3C × 6.0	3C × 6.0
950 × 834 × 330	950 × 834 × 330	950 × 1,380 × 330	950 × 1,380 × 330
60.8	60.8	90.2	90.2
Twin Rotary	Twin Rotary	LG Inverter Scroll	LG Inverter Scroll
R410A	R410A	R410A	R410A
BLDC	BLDC	BLDC	BLDC
51	51	55	55
53	53	57	57
Ø 9.52(3/8)	Ø 9.52(3/8)	Ø 9.52 (3/8)	Ø 9.52 (3/8)
Ø 15.88 (5/8)	Ø 15.88 (5/8)	Ø 19.05 (3/4)	Ø 19.05 (3/4)
5	5	5	5
50	50	75	75
30	30	30	30
AVNW30GM1T1	AVNW36GM2T1	AVNW48GM2T1	AVNW54GM2T1
Ceiling Suspended Unit			
220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50
1,200 × 235 × 690	1,600 × 235 × 690	1,600 × 235 × 690	1,600 × 235 × 690
28.0	36.5	36.5	36.5
20.0 / 18.0 / 16.0	28.0 / 24.0 / 20.0	30.0 / 25.0 / 20.0	30.0 / 25.0 / 20.0
BLDC	BLDC	BLDC	BLDC
47 / 45 / 42	44 / 41 / 38	46 / 42 / 38	46 / 42 / 38

FLOOR STANDING UNIT




STYLISH DESIGN

The new LG floor standing air conditioner is ideal for modern interiors in your office or restaurant.



EXCELLENT COOLING PERFORMANCE

Power cooling function provides the optimal airflow angle, guaranteeing a faster and higher cooling performance.

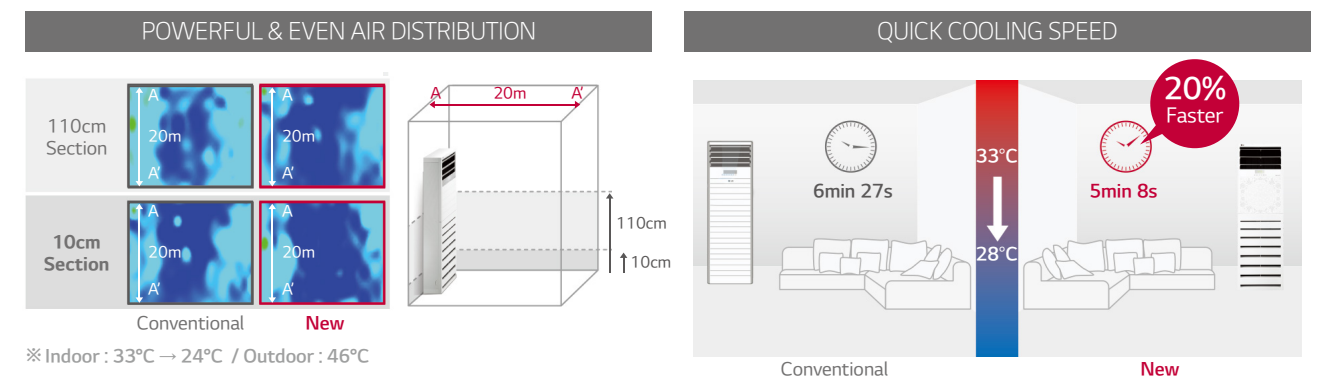

POWERFUL AIRFLOW

The new LG floor standing air conditioner is efficient for using in large areas due to its powerful cooling and heating operation. The powerful air speed and volume means the air flow can reach up to 20m away from the air conditioner.



SPECIFICATIONS

FLOOR STANDING UNIT - HIGH EFFICIENCY



APUQ50LT3E0 (Cooling Only) / APUW36GT3S1 / APUW50GT3E0 / APUW50LT3E0 / APUW100LFT0



COOLING ONLY

Combination	Outdoor unit		Unit	APUQ50LT3E0
	Indoor unit			APNQ50LT3E0
Capacity	Cooling ¹⁾	Min. ~ Rated ~ Max.	kW	13.51
		Min. ~ Rated ~ Max.	Btu/h	46,100
	Cooling ²⁾	Rated	kW	11.72
		Rated	Btu/h	40,000
	Heating	Min. ~ Rated ~ Max.	kW	-
		Min. ~ Rated ~ Max.	Btu/h	-
Power Input	Cooling ¹⁾	Rated	kW	3.88
	Cooling ²⁾	Rated	kW	4.65
	Heating ¹⁾	Rated	kW	-
EER / COP	Cooling ¹⁾ / Heating		W/W	-
Outdoor			Unit	APUQ50LT3E0
Power Supply			V, Ø, Hz	380-415, 3, 50
Power Supply Cable (included Earth)			No. × mm²	5C × 2.5
Casing Color			-	Warm Gray
Dimensions	Net	W × H × D	mm	950 × 1,380 × 330
Net Weight		Body	kg	89.0 (196.2)
Compressor	Type		-	Twin Rotary
Refrigerant	Type		-	R410A
Fan Motor	Type		-	BLDC
Sound Pressure Level	Cooling	Rated	dB(A)	62
	Heating	Rated	dB(A)	-
Piping Connections	Liquid	Outer Dia.	mm (inch)	Ø9.52 (3/8)
	Gas	Outer Dia.	mm (inch)	Ø19.05 (3/4)
Piping Length		Max.	m	30 (98.4)
Maximum Height Difference (ODU ~ IDU)		Max.	m	20 (65.6)
Indoor			Unit	APNQ50LT3E0
Power Supply			V, Ø, Hz	220-240, 1, 50
				220, 1, 60
Dimensions	Body	W × H × D	mm	590 × 1,840 × 440
		W × H × D	inch	23-7/32 × 72-7/16 × 17-5/16
Net Weight			kg (lbs)	47 (103.6)
Fan	Air Flow Rate	SH / H / M / L	m³/min	37 / 33 / 28 / 24
Fan Motor	Type		-	BLDC
Sound Pressure Level	Cooling	SH / H / M / L	dB(A)	54 / 51 / 49 / 47
	Heating	SH / H / M / L	dB(A)	-

Notes
- Cooling ¹⁾ : Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB
- Heating Temperature : Indoor 20°C (68°F) DB / 15°C (59°F) WB, Outdoor 7°C (44.6°F) DB / 6°C (42.8°F) WB

HEAT PUMP

APUW36GT3S1	APUW50GT3E0	APUW50LT3E0	APNW100LFT0
APNW36GT3S1	APNW50GT3E0	APNW50LT3E0	APUW100LFT0
3.8 ~ 10.0 ~ 10.6	5.6 ~ 13.51 ~ 15.5	5.6 ~ 13.51 ~ 15.5	28.43
13,000 ~ 34,100 ~ 36,200	19,100 ~ 46,100 ~ 52,900	19,100 ~ 46,100 ~ 52,900	97,000
8.10	11.72	11.72	22.57
27,600	40,000	40,000	77,000
4.1 ~ 10.8 ~ 11.5	6.2 ~ 14.65 ~ 16.7	6.2 ~ 14.65 ~ 16.7	28.72
14,000 ~ 36,800 ~ 39,200	21,200 ~ 50,000 ~ 57,000	21,200 ~ 50,000 ~ 57,000	98,000
3.32	3.88	3.88	11.20
3.27	4.65	4.65	10.80
3.17	4.15	4.15	10.50
3.01 / 3.41	3.48 / 3.53	3.48 / 3.53	2.54 / 2.74
APUW36GT3S1	APUW50GT3E0	APUW50LT3E0	APUW100LFT0
220-240, 1, 50	220-240, 1, 50	380-415, 3, 50	380-415, 3, 50
3C × 2.5 (12)	3C × 6.0	5C × 2.5	5C × 6.0
Warm Gray	Warm Gray	Warm Gray	-
950 × 834 × 330	950 × 1,380 × 330	950 × 1,380 × 330	1,090 × 1,625 × 380
58.0 (127.9)	93.5 (206.1)	93.5 (206.1)	153 (337.3)
Twin Rotary	Twin Rotary	Twin Rotary	BLDC INV Scroll
R410A	R410A	R410A	R410A
BLDC	BLDC	BLDC	BLDC
56	62	62	60
58	62	62	60
Ø 9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
Ø 15.88 (5/8)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø 22.2 (7/8)
40 (131.2)	5 (16.4) / 30 (98.4)	5 (16.4) / 30 (98.4)	50 (164.04)
30 (98.4)	20 (65.6)	20 (65.6)	30 (98.43)
APNW36GT3S1	APNW50GT3E0	APNW50LT3E0	APNW100LFT0
220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	380-415, 3, 50
220 , 1 , 60	220 , 1 , 60	220 , 1 , 60	1,050 × 1,880 × 495
590 × 1,840 × 440	590 × 1,840 × 440	590 × 1,840 × 440	41-1/4 × 74-7/16 × 19-1/8
23-7/32 × 72-7/16 x 18-1/8	23-7/32 × 72-7/16 × 17-5/16	23-7/32 × 72-7/16 × 17-5/16	113 (249)
47 (103.6)	47 (103.6)	47 (103.6)	68 / 61 / - / 50
37.0 / 33.0 / 30.0 / 26.0	38 / 33 / 28 / 24	38 / 33 / 28 / 24	BLDC
BLDC	BLDC	BLDC	60 / 57 / - / 53
55 / 52 / 49 / 47	55 / 52 / 49 / 47	55 / 52 / 49 / 47	-
55 / 52 / 49 / 47	55 / 52 / 49 / 47	55 / 52 / 49 / 47	380-415, 3, 50

SPECIFICATIONS

FLOOR STANDING UNIT - STANDARD



APUW36GT3S1 / APUW48GT3S1 / APUW48LT3S1



HEAT PUMP

Combination	Outdoor unit		Unit	APUW36GT3S1
	Indoor unit			APNW36GT3S1
Capacity	Cooling ¹⁾	Min. ~ Rated ~ Max.	kW	3.8 ~ 10.0 ~ 10.6
		Min. ~ Rated ~ Max.	Btu/h	13,000 ~ 34,100 ~ 36,200
	Cooling ²⁾	Rated	kW	8.10
		Rated	Btu/h	27,600
	Heating	Min. ~ Rated ~ Max.	kW	4.1 ~ 10.8 ~ 11.5
		Min. ~ Rated ~ Max.	Btu/h	14,000 ~ 36,800 ~ 39,200
Power Input	Cooling ¹⁾	Rated	kW	3.32
	Cooling ²⁾	Rated	kW	3.27
	Heating ¹⁾	Rated	kW	3.17
EER / COP	Cooling ¹⁾ / Heating		W/W	3.01 / 3.41
Outdoor			Unit	APUW36GT3S1
Power Supply			V , Ø , Hz	220-240 , 1 , 50
Power Supply Cable (included Earth)			No. × mm²	3C × 2.5 (12)
Casing Color			-	Warm Gray
Dimensions	Net	W × H × D	mm	950 × 834 × 330
Net Weight		Body	kg	58.0 (127.9)
Compressor	Type	-		Twin Rotary
Refrigerant	Type	-		R410A
Fan Motor	Type	-		BLDC
Sound Pressure Level	Cooling	Rated	dB(A)	56
	Heating	Rated	dB(A)	58
Piping Connections	Liquid	Outer Dia.	mm (inch)	Ø 9.52 (3/8)
	Gas	Outer Dia.	mm (inch)	Ø 15.88 (5/8)
Piping Length		Max.	m	40 (131.2)
Maximum Height Difference (ODU ~ IDU)		Max.	m	30 (98.4)
Indoor			Unit	APNW36GT3S1
Power Supply			V , Ø , Hz	220-240 , 1 , 50
				220 , 1 , 60
Dimensions	Body	W × H × D	mm	590 × 1,840 × 440
		W × H × D	inch	23-7/32 × 72-7/16 × 18-1/8
Net Weight			kg (lbs)	47 (103.6)
Fan	Air Flow Rate	SH / H / M / L	m³/min	37.0 / 33.0 / 30.0 / 26.0
Fan Motor	Type	-		BLDC
Sound Pressure Level	Cooling	SH / H / M / L	dB(A)	55 / 52 / 49 / 47
	Heating	SH / H / M / L	dB(A)	55 / 52 / 49 / 47

Notes
- Cooling ¹⁾ : Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB
- Cooling ²⁾ : Indoor Temperature 29°C (84.2°F) DB / 19°C (66.2°F) WB, Outdoor Temperature 46°C (114.8°F) DB / 24°C (75.2°F) WB
- Heating Temperature : Indoor 20°C (68°F) DB / 15°C (59°F) WB, Outdoor 7°C (44.6°F) DB / 6°C (42.8°F) WB


APUW48GT3S1	APUW48LT3S1
APNW48GT3S1	APNW48LT3S1
5.6 ~ 14.1 ~ 15.5	5.6 ~ 14.1 ~ 15.5
19,100 ~ 48,100 ~ 52,900	19,100 ~ 48,100 ~ 52,900
12.20	12.20
41,600	41,600
6.2 ~ 15.5 ~ 16.5	6.2 ~ 15.5 ~ 16.5
21,200 ~ 52,900 ~ 56,300	21,200 ~ 52,900 ~ 56,300
4650.00	4650.00
5100.00	5100.00
4550.00	4550.00
3.03 / 3.41	3.03 / 3.41
APUW48GT3S1	APUW48LT3S1
220-240 , 1 , 50	220-240 , 1 , 50
3C × 6.0 (10)	5C × 2.5 (12)
Warm Gray	Warm Gray
950 × 1,380 × 330	950 × 1,380 × 330
90.0 (198.4)	90.0 (198.4)
Twin Rotary	Twin Rotary
R410A	R410A
BLDC	BLDC
55	55
57	57
Ø 9.52 (3/8)	Ø 9.52 (3/8)
Ø 19.05 (3/4)	Ø 19.05 (3/4)
50 (164.0)	50 (164.0)
30 (98.4)	30 (98.4)
APNW48GT3S1	APNW48LT3S1
220-240 , 1 , 50	220-240 , 1 , 50
220 , 1 , 60	220 , 1 , 60
590 × 1,840 × 440	590 × 1,840 × 440
23-7/32 × 72-7/16 × 18-1/8	23-7/32 × 72-7/16 × 18-1/8
47 (103.6)	47 (103.6)
38.0 / 33.0 / 28.0 / 24.0	38.0 / 33.0 / 28.0 / 24.0
BLDC	BLDC
55 / 52 / 49 / 47	55 / 52 / 49 / 47
55 / 52 / 49 / 47	55 / 52 / 49 / 47

SINGLE PACKAGE




ADVANCED KEY COMPONENTS FOR HIGH ENERGY EFFICIENCY

High energy efficiency with LG's cutting-edge core components and Inverter leading technology.

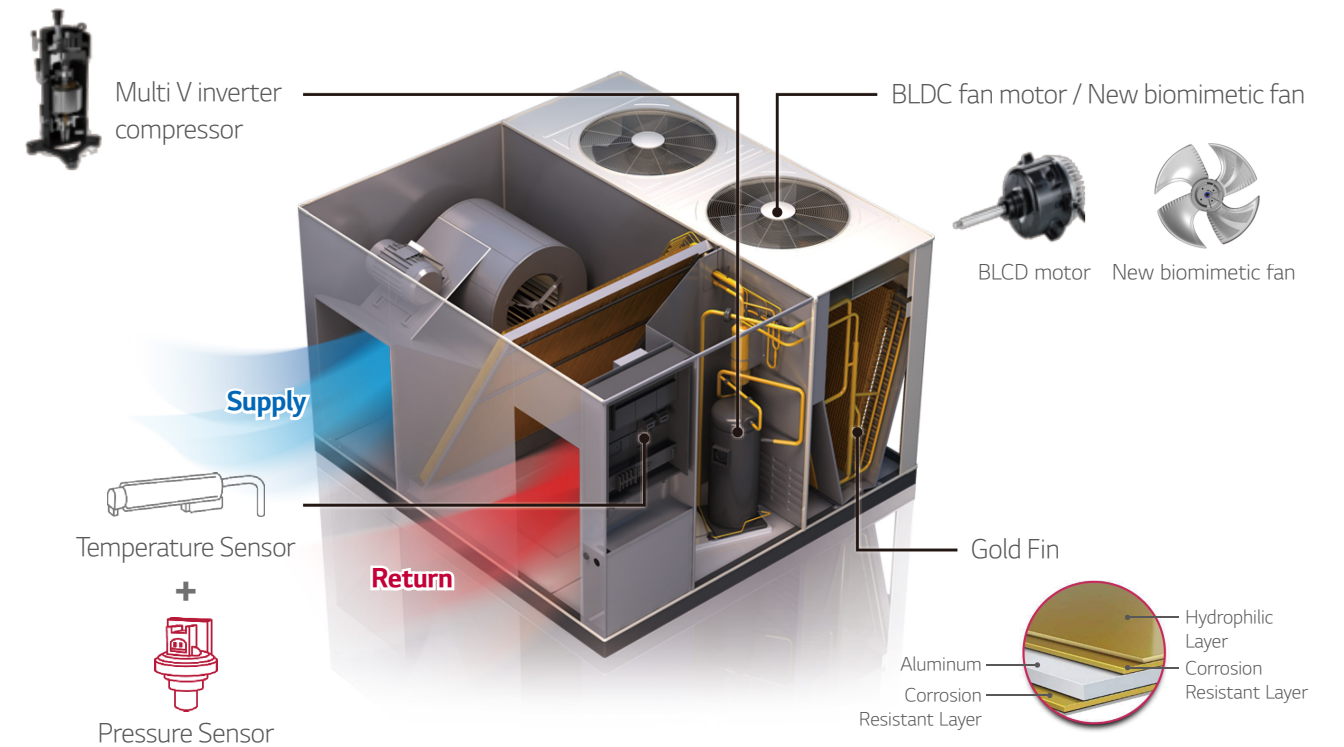

RELIABLE PERFORMANCE

Field tests in extreme (tropical) conditions are being conducted without failure over a year.

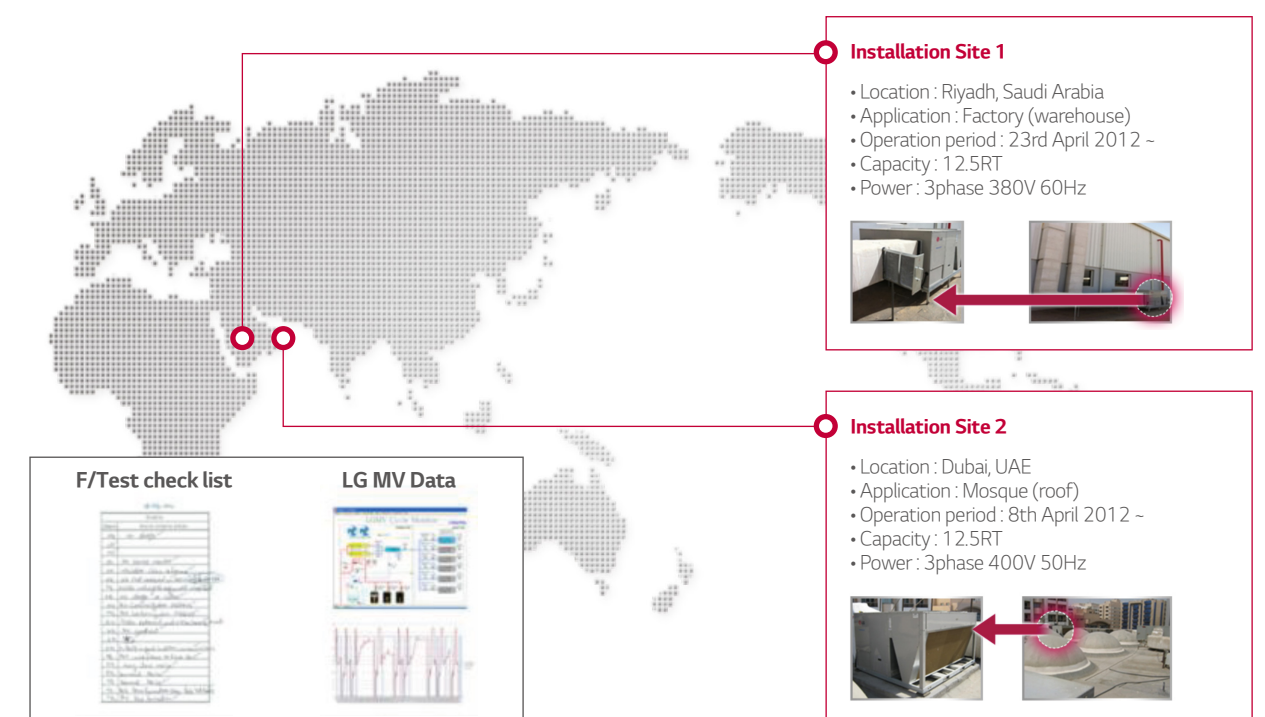


※ Structure / Performance / Noise / Installation / Dew formation.....

SINGLE PACKAGE

ANNUAL ENERGY SAVINGS


Target low pressure will be adjusted according to cooling load. LG provide energy saving by preventing On / Off operation with inverter technology.

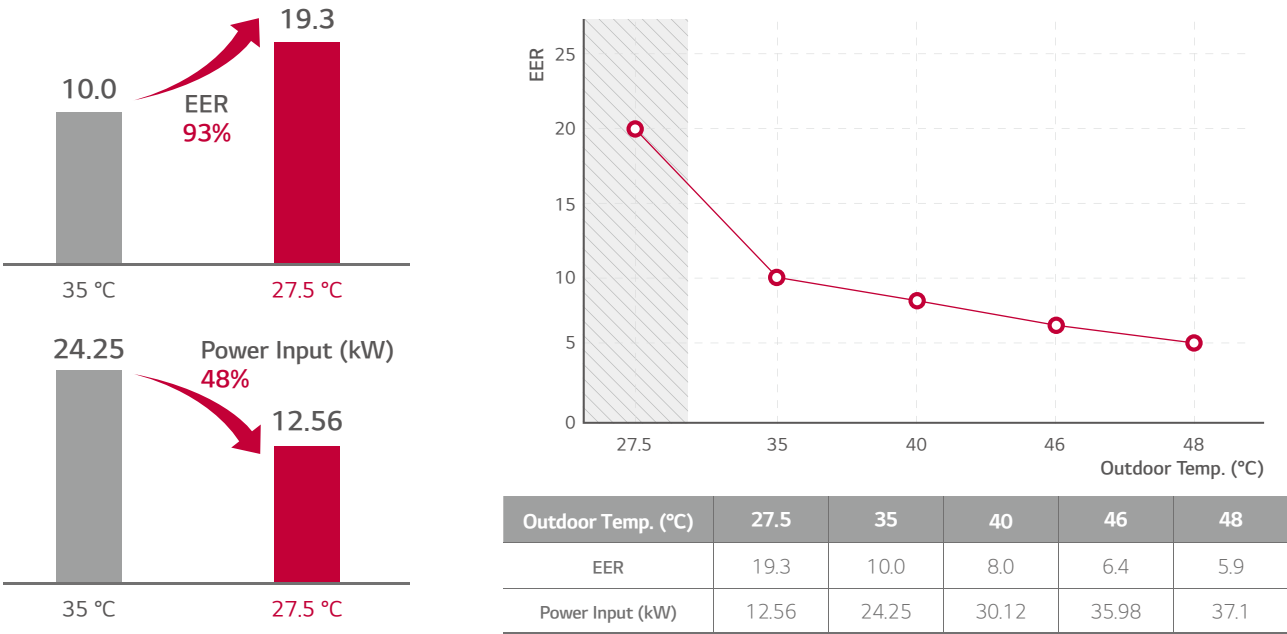

※ Model : LG AK-Q300DC01

BENEFITS FOR CUSTOMER

Daily Energy Saving ratio compared to constant model (April 40%, Aug 20%)
→ KSA, Madinah, real temperature based, LG DUAL Inverter elec. consumption simulation

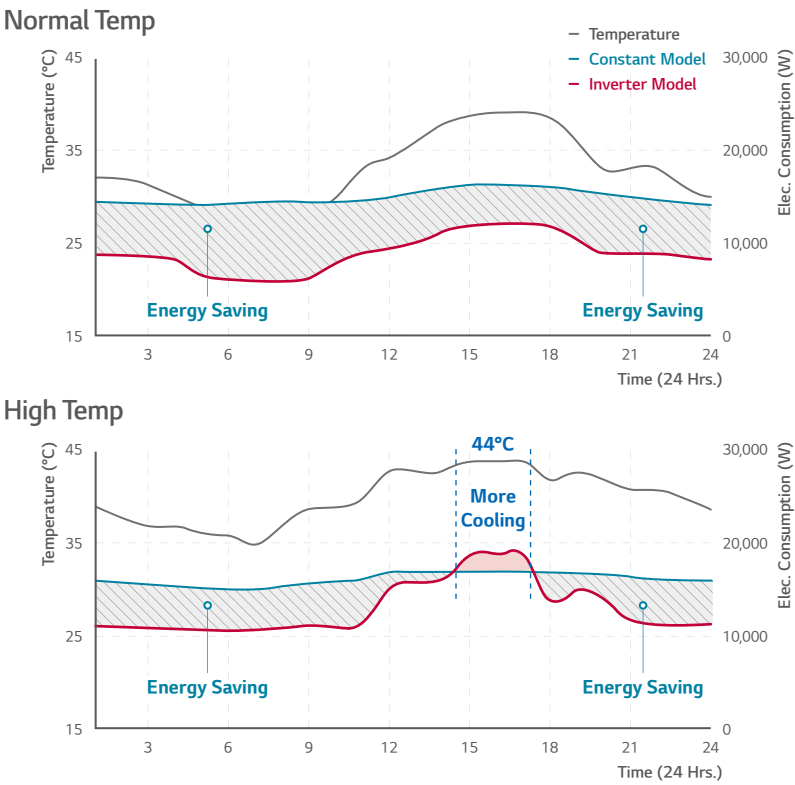


		Apr		Aug	
		Outside Temp (°C)	Elec. Consumption (W)	Outside Temp (°C)	Elec. Consumption (W)
Time	3:00 AM	31	1429	37	1563
	6:00 AM	28	1412	36	1540
Time	9:00 AM	28	1412	39	1607
	12:00 PM	34	1496	43	1699
Time	3:00 PM	39	1607	44	1723
	6:00 PM	39	1607	42	1674
Time	9:00 PM	33	1473	41	1652
	12:00 AM	30	1406	39	1607

※ Data: Weather Underground, Inc.


COMPACT SIZE

Easy transportation and less space for installation.

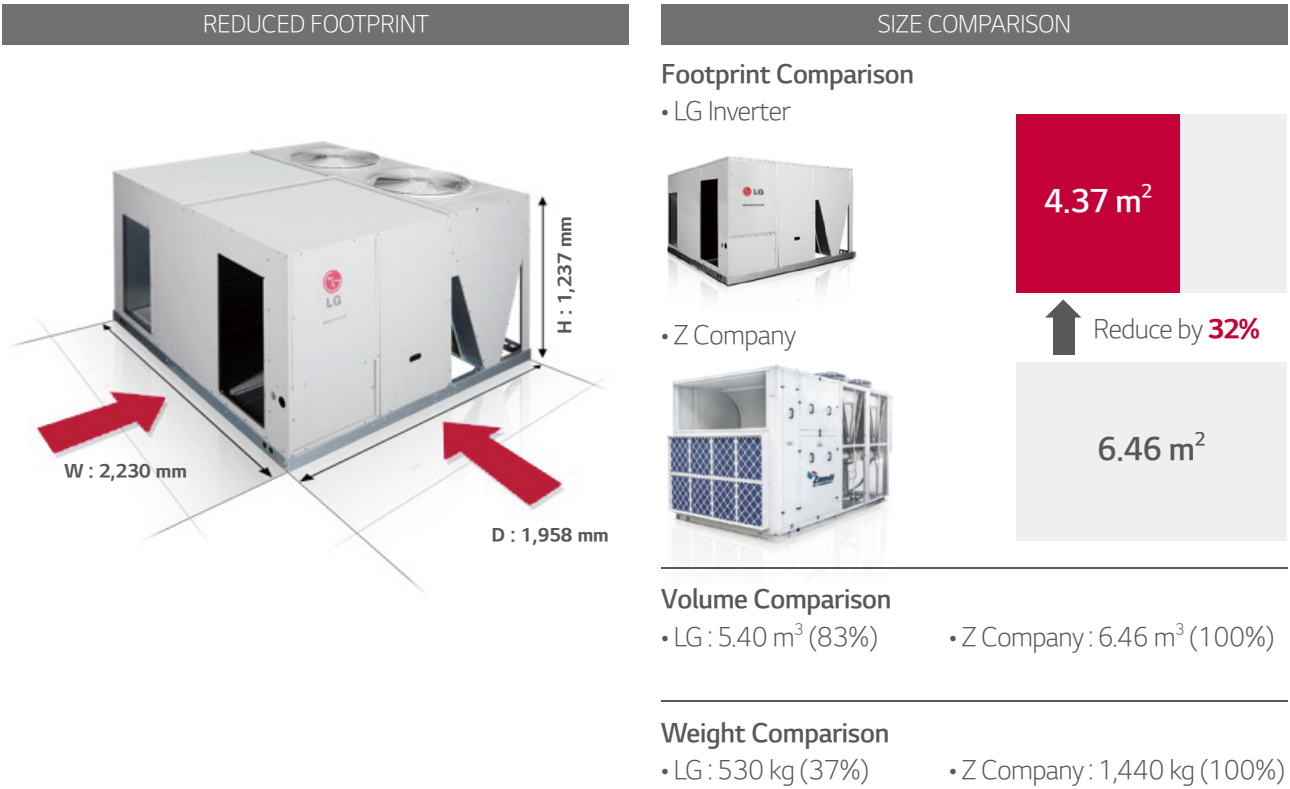

AUTOMATIC TEST RUN

Easy and fast automatic test run saves time during the final stage of installation.

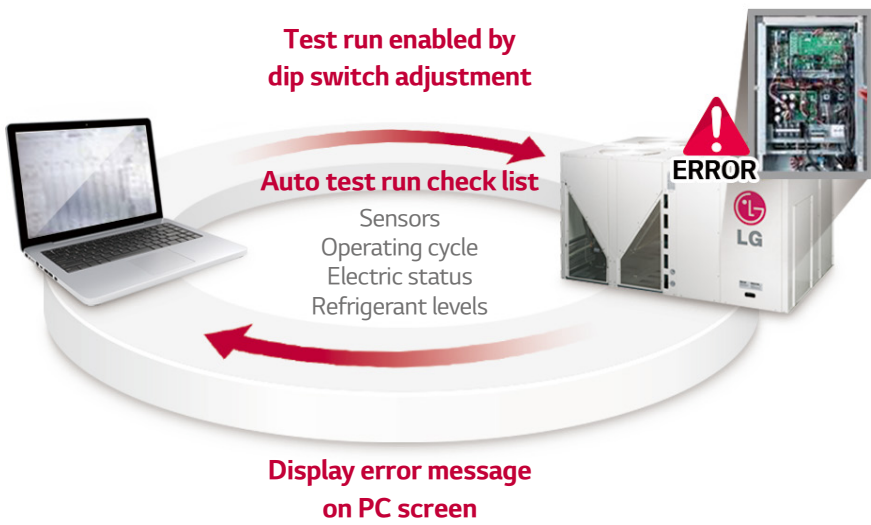

SPECIFICATIONS

SINGLE PACKAGE



Nominal Capacity			RT	3	4	5
Model Name			-	AK-Q036GH50	AK-Q048GH50	AK-Q060GH50
Cooling Capacity	Net Capacity		kW	10.26	13.63	17.35
			kcal/h	8,820	11,718	14,918
			Btu/h	35,000	46,500	59,200
	Gross Capacity		kW	10.6	14.1	17.6
			kcal/h	9,072	12,096	15,120
			Btu/h	36,000	48,000	60,000
EER		Btu / Wh	13.01	12.05	11.61	
Power Input	Cooling	kW	2.69	3.86	5.1	
Power Supply			V, Ø, Hz	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50
			V, Ø, Hz	220, 1, 60	220, 1, 60	220, 1, 60
Indoor Coil	Fin Type		-	Wide Louver Plus	Wide Louver Plus	Wide Louver Plus
	Tube Size	Outer Dia.	mm (inch)	7.0 (9/32)	7.0 (9/32)	7.0 (9/32)
	(Row × Column × Fins per inch) × No.		-	(3 × 46 × 17) × 1	(3 × 46 × 17) × 1	(3 × 46 × 17) × 1
	Face Area		m² (ft²)	0.53 (5.71)	0.53 (5.71)	0.53 (5.71)
Indoor Fan	Type		-	Centrifugal Blower Fan	Centrifugal Blower Fan	Centrifugal Blower Fan
	Diameter		mm (inch)	285 (11.2)	285 (11.2)	285 (11.2)
	Motor Output		W × No.	257W × 1	339W × 1	350W × 1
	Air Flow Rate	Nominal	m³/min	34	45.3	49.8
		Nominal	ft³/min	1,200	1,600	1,760
	Drive type		-	Direct	Direct	Direct
Compressor (#1, A Cycle)	Type		-	BLDC INV Twin Rotary	BLDC INV Twin Rotary	BLDC INV Twin Rotary
	Motor Output		W × No.	4,000 × 1	4,000 × 1	4,000 × 1
	Oil Type		-	FVC68D	FVC68D	FVC68D
	Oil Charge		cc × No.	1,300 × 1	1,300 × 1	1,300 × 1
Compressor (#2, B Cycle)	Type		-	-	-	-
	Motor Output		W × No.	-	-	-
	Oil Type		-	-	-	-
	Oil Charge		cc × No.	-	-	-
Outdoor Coil	Fin Type		-	-	-	-
	Tube Size	Outer Dia.	mm (inch)	7 (9/32)	7 (9/32)	7 (9/32)
	(Row × Column × Fins per inch) × No.		-	(2 × 44 × 17) × 1	(2 × 44 × 17) × 1	(2 × 44 × 17) × 1
	Face Area		m² (ft²)	1.33 (14.28)	1.33 (14.28)	1.33 (14.28)
Outdoor Fan	Type		-	Propeller	Propeller	Propeller
	Diameter		mm (inch)	460 (18.11)	460 (18.11)	460 (18.11)
	Motor Output		W × No.	124.2 × 2	124.2 × 2	124.2 × 2
	Air Flow Rate	m³/min × No.	-	-	-	-
		ft³/min × No.	-	-	-	-
	Drive		-	BLDC Inverter	BLDC Inverter	BLDC Inverter
Discharge Direction			-	Top	Top	Top
Dehumidification rate			ℓ/h	2.23	3.47	5.58
Drain Connection Size			-	Male NPT 3/4	Male NPT 3/4	Male NPT 3/4
Refrigerant	Refrigerant name		-	R410A	R410A	R410A
	Precharged Amount	A-Circuit	kg	3.6	3.6	3.6
		B-Circuit	kg	-	-	-
	Control		-	EEV	EEV	EEV
Dimensions (W × H × D)			mm	1,280 × 1,065 × 1,110	1,280 × 1,065 × 1,110	1,280 × 1,065 × 1,110
			inch	50-13 / 32 × 41-29 / 32 × 43-23 / 32	50-13 / 32 × 41-29 / 32 × 43-23 / 32	50-13 / 32 × 41-29 / 32 × 43-23 / 32
Net Weight			kg (lbs)	174	174	174
Sound pressure levels	Cooling		dB(A)	75	75	75
Operation Range (Outdoor Temperature)	Cooling	Min. - Max.	°CDB (°FDB)	-5 ~ 54 (23.0 ~ 129.2)	-5 ~ 54 (23.0 ~ 129.2)	-5 ~ 54 (23.0 ~ 129.2)



Nominal Capacity			RT	6.5	7.5
Model Name			-	AK-Q0788C01	AK-Q0908C01
Cooling Capacity	Net Capacity		kW	22.9	26.4
			kcal/h	19,700	22,700
			Btu/h	78,000	90,000
	Gross Capacity		kW	24.0	27.5
			kcal/h	20,700	23,700
			Btu/h	82,000	94,000
EER		Btu / Wh	12.8	11.8	
Power Input	Cooling		kW	6.09	7.62
Power Supply			V, Ø, Hz	380-415, 3, 50	380-415, 3, 50
Indoor Coil	Fin Type		-	LG Louver	LG Louver
	Tube Size	Outer Dia.	mm (inch)	9.52 (3/8)	9.52 (3/8)
	(Row × Column × Fins per inch) × No.		-	(4 × 36 × 16)	(4 × 36 × 16)
	Length		mm (inch)	916 (36-1/8)	916 (36-1/8)
Face Area		m² (ft²)	0.84 (9.02)	0.84 (9.02)	
Indoor Fan	Type		-	Sirocco Fan	Sirocco Fan
	Diameter		mm (inch)	331.6 (13.1)	331.6 (13.1)
	Motor Output		Hp	1.5	1.5
	Air Flow Rate	Nominal	m³/min	73.6	85.0
		Nominal	ft³/min	2,600	3,000
	Drive type		-	Belt	Belt
Compressor (#1, A Cycle)	Type		-	HSS DC SCROLL	HSS DC SCROLL
	Motor Output		W × No.	5,300 × 1	5,300 × 1
	Oil Type		-	FVC68D	FVC68D
	Oil Charge		cc × No.	1,200 × 1	1,200 × 1
Compressor (#2, B Cycle)	Type		-	-	-
	Motor Output		W × No.	-	-
	Oil Type		-	-	-
	Oil Charge		cc × No.	-	-
Outdoor Coil	Fin Type		-	Wide Louver Plus(Gold)	Wide Louver Plus(Gold)
	Tube Size	Outer Dia.	mm (inch)	7.0 (9/32)	7.0 (9/32)
	(Row × Column × Fins per inch) × No.		-	(3 × 44 × 14)	(3 × 44 × 14)
	Face Area		m² (ft²)	2.08 (22.38)	2.08 (22.38)
Outdoor Fan	Type		-	Propeller Fan	Propeller Fan
	Diameter		mm (inch)	680 (26-25/32)	680 (26-25/32)
	Motor Output		W × No.	1,200 × 1	1,200 × 1
	Air Flow Rate	m³/min × No.	-	105 × 1	105 × 1
		ft³/min × No.	-	3,700 × 1	3,700 × 1
	Drive		-	BLDC Inverter	BLDC Inverter
Discharge Direction		-	Top	Top	
Dehumidification rate			ℓ/h	8.5	9.9
Drain Connection Size			-	Male NPT 3/4	Male NPT 3/4
Refrigerant	Refrigerant name		-	R410A	R410A
	Precharged Amount	A-Circuit	kg	6.9	6.9
		B-Circuit	kg	-	-
	Control		-	Electronic Expansion Valve	Electronic Expansion Valve
Dimensions (W × H × D)			mm	2,250 × 1,106 × 1,130	2,250 × 1,106 × 1,130
			inch	88-19 / 32 × 43-17 / 32 × 44-1 / 2	88-19 / 32 × 43-17 / 32 × 44-1 / 2
Net Weight			kg (lbs)	340 (750)	340 (750)
Sound pressure levels	Cooling		dB (A)	70	70
Operation Range (Outdoor Temperature)	Cooling	Min. ~ Max.	°CDB (°FDB)	-5 ~ 54 (23.0 ~ 129.2)	-5 ~ 54 (23.0 ~ 129.2)

SPECIFICATIONS

SINGLE PACKAGE




Nominal Capacity			RT	10	12.5
Model Name			-	AK-Q1208C01	AK-Q1508C01
Cooling Capacity	Net Capacity		kW	35.2	39.9
			kcal/h	30,240	34,271
			Btu/h	120,000	136,000
	Gross Capacity		kW	37.5	42.8
			kcal/h	32,255	36,791
			Btu/h	128,000	146,000
EER		Btu / Wh	11.6	11.6	
Power Input	Cooling	kW	10.34	11.72	
Power Supply			V, Ø, Hz	380-415, 3 , 50	380-415, 3 , 50
Indoor Coil	Fin Type		-	LG Louver	LG Louver
	Tube Size	Outer Dia.	mm (inch)	9.52 (3/8)	9.52 (3/8)
	(Row × Column × Fins per inch) × No.		-	(4 × 22 × 16) × 2	(4 × 22 × 16) × 2
	Length		mm (inch)	1,300 (51-6/32)	1,300 (51-6/32)
	Face Area		m² (ft²)	1.45(15.61)	1.45 (15.61)
Indoor Fan	Type		-	Sirocco Fan	Sirocco Fan
	Diameter		mm (inch)	380 (15)	380 (15)
	Motor Output		Hp	3.0	3.0
	Air Flow Rate	Nominal	m³/min	113.3	141.6
		Nominal	ft³/min	4,000	5,000
	Drive type		-	Belt	Belt
Compressor (#1, A Cycle)	Type		-	HSS DC SCROLL	HSS DC SCROLL
	Motor Output		W × No.	5,300 × 1	5,300 × 1
	Oil Type		-	FVC68D	FVC68D
	Oil Charge		cc × No.	1,200 × 1	1,200 × 1
Compressor (#2, B Cycle)	Type		-	-	-
	Motor Output		W × No.	-	-
	Oil Type		-	-	-
	Oil Charge		cc × No.	-	-
Outdoor Coil	Fin Type		-	Wide Louver Plus(Gold)	Wide Louver Plus (Gold)
	Tube Size	Outer Dia.	mm (inch)	7 (9/32)	7 (9/32)
	(Row × Column × Fins per inch) × No.		-	(3 × 42 × 14) × 2	(3 × 42 × 14) × 2
	Face Area		m² (ft²)	3.53 (37.99)	3.53 (37.99)
Outdoor Fan	Type		-	Propeller Fan	Propeller Fan
	Diameter		mm (inch)	680 (26-25/32)	680 (26-25/32)
	Motor Output		W × No.	1,500 × 2	1,500 × 2
	Air Flow Rate		m³/min × No.	105 × 2	105 × 2
			ft³/min × No.	3,700 × 2	3,700 × 2
	Drive		-	BLDC Inverter	BLDC Inverter
Dehumidification rate			ℓ/h	13.8	15.6
Drain Connection Size			-	Male NPT 1	Male NPT 1
Refrigerant	Refrigerant name		-	R410A	R410A
	Precharged Amount	A-Circuit	kg	13.0	13.0
		B-Circuit	kg	-	-
	Control		-	Electronic Expansion Valve	Electronic Expansion Valve
Dimensions (W × H × D)			mm	2,230 × 1,237 × 1,958	2,230 × 1,237 × 1,958
			inch	87-25 / 32 × 48-11 / 16 × 77-3 / 32	87-25 / 32 × 48-11 / 16 × 77-3 / 32
Net Weight			kg (lbs)	530 (1,168)	530 (1,168)
Sound pressure levels	Cooling		dB (A)	75	75
Operation Range (Outdoor Temperature)	Cooling	Min. - Max.	°CDB (°FDB)	-5 ~ 54 (23.0 ~ 129.2)	-5 ~ 54 (23.0 ~ 129.2)



Nominal Capacity			RT	15	17.5	20	25
Model Name			-	AK-Q1808C01	AK-Q2108C01	AK-Q2408C01	AK-Q3008C01
Cooling Capacity	Net Capacity		kW	52.8	61.5	70.6	80.9
			kcal/h	45,359	52,919	60,700	69,600
			Btu/h	180,000	210,000	241,000	276,000
	Gross Capacity		kW	54.2	64.2	73.6	85.0
			kcal/h	46,619	55,187	63,300	73,100
			Btu/h	185,000	219,000	251,000	290,000
EER		Btu / Wh	11.6	12.8	11.2	10.5	
Power Input		Cooling	kW	15.50	16.40	21.50	26.20
Power Supply			V, Ø, Hz	380-415, 3, 50	380-415, 3, 50	380-415, 3, 50	380-415, 3, 50
Indoor Coil	Fin Type		-	LG Louver	LG Louver	LG Louver	LG Louver
	Tube Size	Outer Dia.	mm (inch)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)
	(Row × Column × Fins per inch) × No.		-	(3 × 24 × 16) × 2	(3 × 24 × 16) × 2	(3 × 24 × 16) × 2	(3 × 24 × 16) × 2
	Length		mm (inch)	1,785 (70-9/32)	1,785 (70-9/32)	1,785 (70-9/32)	1,785 (70-9/32)
	Face Area		m² (ft²)	2.18 (23.47)	2.18 (23.47)	2.18 (23.47)	2.18 (23.47)
Indoor Fan	Type		-	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan
	Diameter		mm (inch)	457.2 (18)	457.2 (18)	457.2 (18)	457.2 (18)
	Motor Output		Hp	5.0	5.0	5.0	7.5
	Air Flow Rate	Nominal	m³/min	169.9	198.2	226.5	283.2
		Nominal	ft³/min	6,000	7,000	8,000	10,000
	Drive type		-	Belt	Belt	Belt	Belt
Compressor (#1, A Cycle)	Type		-	HSS DC SCROLL	HSS DC SCROLL	HSS DC SCROLL	HSS DC SCROLL
	Motor Output		W × No.	4,200 × 1	5,300 × 1	5,300 × 1	5,300 × 1
	Oil Type		-	FVC68D	FVC68D	FVC68D	FVC68D
	Oil Charge		cc × No.	1,200 × 1	1,400 × 1	1,400 × 1	1,400 × 1
Compressor (#2, B Cycle)	Type		-	HSS DC SCROLL	HSS DC SCROLL	HSS DC SCROLL	HSS DC SCROLL
	Motor Output		W × No.	4,200 × 1	5,300 × 1	5,300 × 1	5,300 × 1
	Oil Type		-	FVC68D	FVC68D	FVC68D	FVC68D
	Oil Charge		cc × No.	1,200 × 1	1,400 × 1	1,400 × 1	1,400 × 1
Outdoor Coil	Fin Type		-	Wide Louver Plus (Gold)	Wide Louver Plus (Gold)	Wide Louver Plus (Gold)	Wide Louver Plus (Gold)
	Tube Size	Outer Dia.	mm (inch)	7.0 (9/32)	7.0 (9/32)	7.0 (9/32)	7.0 (9/32)
	(Row × Column × Fins per inch) × No.		-	(2 × 42 × 14) × 4	(3 × 42 × 14) × 4	(3 × 42 × 14) × 4	(3 × 42 × 14) × 4
	Face Area		m² (ft²)	7.06 (75.99)	7.06 (75.99)	7.06 (75.99)	7.06 (75.99)
Outdoor Fan	Type		-	Propeller Fan	Propeller Fan	Propeller Fan	Propeller Fan
	Diameter		mm (inch)	680 (26-25/32)	680 (26-25/32)	680 (26-25/32)	680 (26-25/32)
	Motor Output		W × No.	900 × 4	900 × 4	900 × 4	900 × 4
	Air Flow Rate		m³/min × No.	105 × 4	105 × 4	105 × 4	105 × 4
			ft³/min × No.	3,700 × 4	3,700 × 4	3,700 × 4	3,700 × 4
	Drive		-	BLDC Inverter	BLDC Inverter	BLDC Inverter	BLDC Inverter
Discharge Direction			-	Top	Top	Top	Top
Dehumidification rate			ℓ/h	20.7	24.2	26.18	29.82
Drain Connection Size			-	Male NPT 1	Male NPT 1	Male NPT 1	Male NPT 1
Refrigerant	Refrigerant name		-	R410A	R410A	R410A	R410A
	Precharged Amount	A-Circuit	kg	9.0	12.0	12.0	12.0
		B-Circuit	kg	9.0	12.0	12.0	12.0
	Control		-	Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve
Dimensions (W × H × D)			mm	2,230 × 1,242 × 3,520	2,230 × 1,242 × 3,520	2,230 × 1,242 × 3,520	2,230 × 1,242 × 3,520
			inch	87-25 / 32 × 48-29 / 32 × 138-19 / 32	87-25 / 32 × 48-29 / 32 × 138-19 / 32	87-25 / 32 × 48-29 / 32 × 138-19 / 32	87-25 / 32 × 48-29 / 32 × 138-19 / 32
Net Weight			kg (lbs)	850 (2,094)	900 (1,984)	950 (2,094)	950 (2,094)
Sound pressure levels	Cooling		dB (A)	85	85	85	85
Operation Range (Outdoor Temperature)	Cooling	Min. ~ Max.	°CDB (°FDB)	-5 ~ 54 (23.0 ~ 129.2)	-5 ~ 54 (23.0 ~ 129.2)	-5 ~ 54 (23.0 ~ 129.2)	-5 ~ 54 (23.0 ~ 129.2)

CONTROL SOLUTION

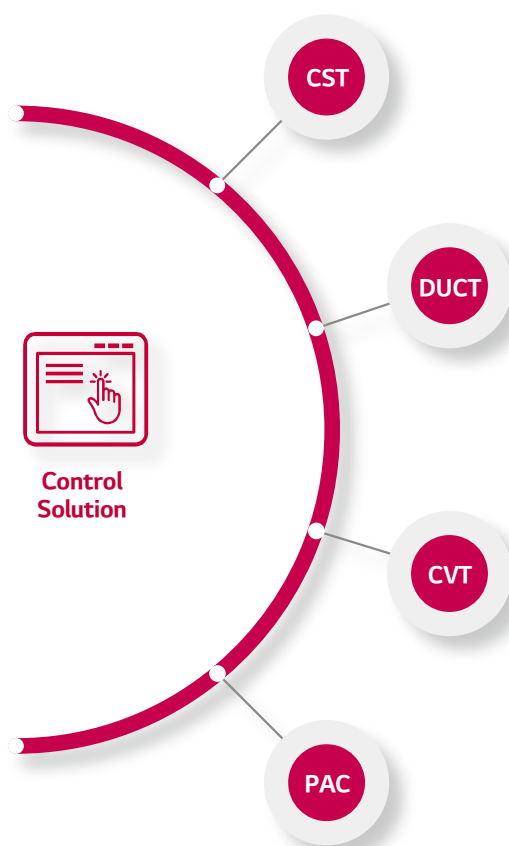

CENTRAL CONTROL SOLUTION



- 5" Touch controller
- PI485GW required
- Individual controller Lock
- Yearly schedule
- Max 64 Indoor unit

INDIVIDUAL CONTROLLER



- 4.3" color display with a modern design
- Soft touch button
- Yearly schedule

DRY CONTACT SOLUTION



- 1 or 2 contact input
- With 3rd Party Thermostat
- With Automation system

CONTROLLER LINE-UP

Smart management for a variety of usages.

CENTRAL CONTROLLER



ACP 5

- Max. 256 unit
- PC, Smartphone, Tablet Control
- Yearly schedule
- BACnet / Modbus Gateway
- Individual controller Lock
- Operation log
- Floor map view



AC Smart 5

- Max. 128 unit
- 10.2" touch
- Yearly schedule
- BACnet / Modbus Gateway
- Individual controller Lock
- Operation log
- Floor map view



AC Ez touch

- Max. 64 unit
- 5" touch
- Yearly schedule
- Individual controller Lock
- Operation log

BMS PROTOCOL GATEWAY




LonWorks

INDIVIDUAL CONTROLLER



Standard II




Standard III
(4.3" color)



Premium
(5" touch color)



Wireless




LG Wi-Fi MODEM

ETC. ACCESSORIES



Dry Contact



PI485GW