


31-inch **12MP** Diagnostic Monitor

31HN713D-K

Optimized Display for Breast Imaging

12MP IPS Panel | Multi-resolution Mode (12 / 6MP)

With a 31-inch screen and 12MP resolution, the 31HN713D-K can replace the two 5MP monitor set-up common for diagnostic mammography. IPS and a wide viewing angle ensure that medical images divided into multiple windows can be viewed clearly from any angle with minimal color distortion. Also, Multi-resolution Mode allows users to change between 6MP and 12MP resolution for a more accurate view of medical images.

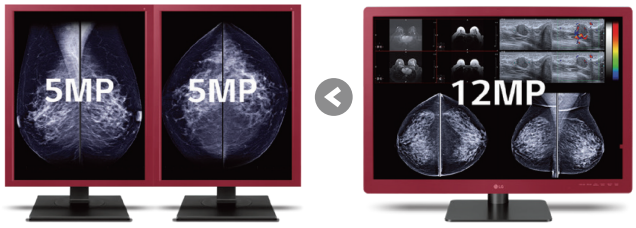

Internal Front Sensor for Calibration

The front-sensor allows for automatic, self-calibration without the need for additional measuring equipment. It improves the quality and consistency of medical images that are displayed by maintaining accurate values. HW calibration with a front sensor increases productivity and efficiency while reducing the need for additional operating costs or manpower.

Focus View Mode | Pathology Mode

The Focus View Mode function allows you to review specific parts of a medical image more closely. Using just your mouse and keyboard you can quickly select and focus on areas of concern while darkening the rest of the screen. Interpretation and diagnosis are also made easier by adjusting the brightness and grayscale tones within the area of focus. Additionally, with Pathology Mode, the 31HN713D-K reproduces the same accurate detail and color shown directly under a microscope, enabling medical professionals to make more accurate diagnoses.




Streamlined and Efficient Workflow

Streamlined Multi-PC Control

With 2PBP and a built-in KVM switch, users can efficiently manage two PCs on a single display. Two USB upstream ports allow a single keyboard and mouse to control connected PCs, helping simplify the workspace and workflow.

Dual Controller & KVM


When using two PCs, you can control both with a single keyboard and mouse.

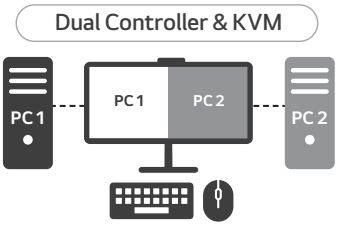




6 Hot Keys

The 31HN713D-K's 6 Hot Keys make changing between screen modes easier and more intuitive than operation through an OnScreen menu.
The 6 Hot Keys are much faster and easier to operate while working, allowing you to change mode, screen resolution, and lighting settings all without disrupting your workflow.

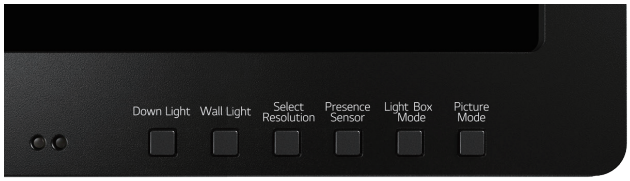

Presence Sensor


The 31HN713D-K features a Presence Sensor that automatically turns off the display when no motion is detected. This reduces power consumption when not in use and eliminates the hassle of manually turning the display on and off. Additionally, it ensures that patient information and other sensitive data is not exposed, improving security and ensuring minimal disruptions to the workflow for optimal efficiency.

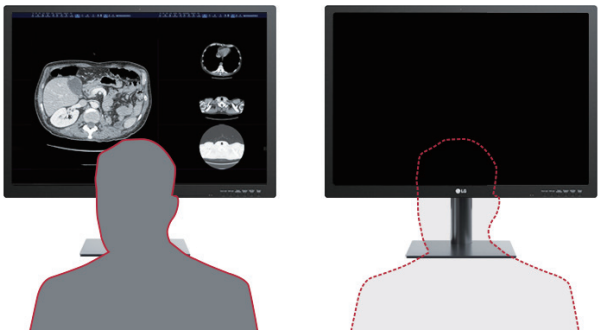

Supports DP and USB Interfaces

Dual DisplayPort inputs and multiple USB ports provide flexible connectivity for multiple PCs and peripherals, supporting an efficient working environment.
Dual DisplayPort inputs


· 2 USB upstream / 3 USB downstream ports
· Flexible connectivity for multiple devices

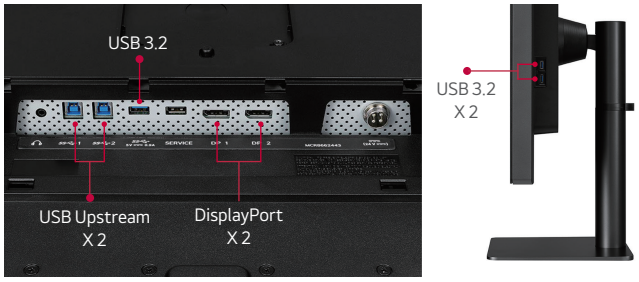

Optimized Design for User Comfort

Lightweight | One-click Stand | Ergonomic Stand

The One-click Stand and ultra-lightweight body make installing the 31HN713D-K simple.
The ergonomically designed stand allows users to freely adjust the tilt, height, and swivel, reducing chronic pain caused by long hours of work.

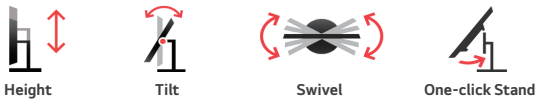

Lighting (Down / Wall Light) | Auto Luminance Sensor

Down and Wall Lighting Modes reduce the contrast between the monitor and ambient lighting conditions, allowing you to work comfortably without having to adjust the lighting to view paper documents in the darkroom. Additionally, the Auto Luminance Sensor ensures screen brightness is always optimized for the ambient lighting, reducing eye strain caused by a difference in screen and ambient light.




* All images are shown for illustrative purposes only and may vary from the actual product / usage.

31-inch **12MP Diagnostic Monitor**

31HN713D-K

Specification

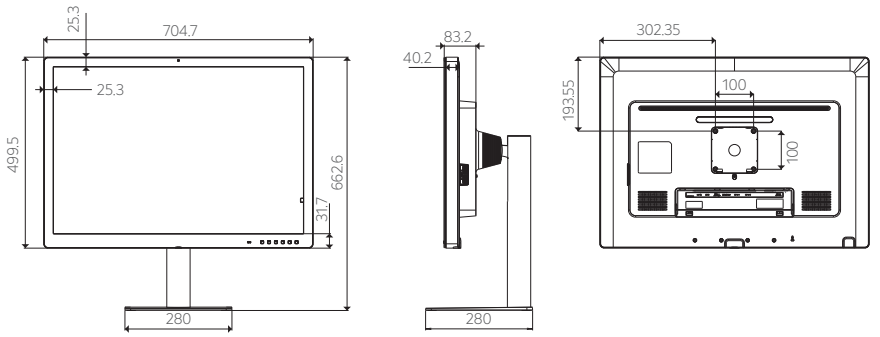		31HN713D-K
Model		
Panel	Panel Type	IPS
	Inch (Aspect Ratio)	31-inch (3 : 2)
	Resolution	12MP (4,200 x 2,800)
	Surface Treatment	Anti-glare, 3H
	Color Gamut (Typ.)	sRGB over 97% (Coverage)
	Viewing Angle (CR≥10)	178° (Right / Left), 178° (Up / Down)
	Brightness (Typ.)	1,200 cd/m²
	Contrast Ratio (Typ.)	1,500 : 1
	Response Time (GTG*)	14 ms (Off-setting), 5 ms (Faster-setting)
Feature	DICOM Compliant	Yes
	HW Calibration	Yes (LG Calibration Studio Medical)
	Display Mode	Multi-resolution Mode (12 / 6MP), Focus View Mode, Light Box Mode, Pathology Mode
	Super Resolution+	Yes
Video Signals	Input Terminals	DisplayPort x 2
Connectivity	USB	USB 3.0 1 Upstream, 3 Downstream
Power	AC Input	100-240 Vac, 50/60 Hz
	Power Consumption (Max.)	180 W
	Power Consumption (DC Off)	Less than 0.3 W
Certifications & Standards		IEC (IEC 60601-1 / IEC 60601-1-2), EN (EN 60601-1 / EN 60601-1-2), cUL (ANSI/AAMI ES 60601-1, CSA CAN / CSA-C22.2 NO. 60601-1), FCC Part 15 Class A, ICES-003 Class A, FDA 510 (k) Class II, RoHS, REACH, WEEE
User Convenience	PBP / Dual Controller	Yes (2PBP) / Yes
	Text Mode / Flicker Safe	Yes / Yes
	Lighting	Yes (Down / Wall)
	Hot Key	Yes (6 Keys - Lighting / Select Resolution / Presence Sensor / Light Box Mode / Picture Mode)
	Presence Sensor	Yes
	Auto Luminance Sensor	Yes
Physical Specifications	Weight (with stand)	14.0 kg (30.9 lb)
	Weight (without stand)	10.7 kg (23.6 lb)
	Adjustable Stand	Tilt : -5° ~ 15°, Swivel : ±15°, Height : 110 mm

* GTG : Gray to gray response time

** Specifications may vary by region and all features, standards, and other product specifications are subject to change without notice or obligation.

LG Electronics Inc.

https://www.lgmonitorpc.com/

Copyright © 2025 LG Electronics. All Rights Reserved.