

LG MAGNIT All-in-One LAAA Series

# All-in-One Micro LED Display



All-in-One LED Screen



Achieving Deep Black



Detailed Color



Intelligent Processor




Easy Installation



Life's Good.

# Clear Vision, Great Decision.

All-in-One Micro LED display for easy choice, easy installation

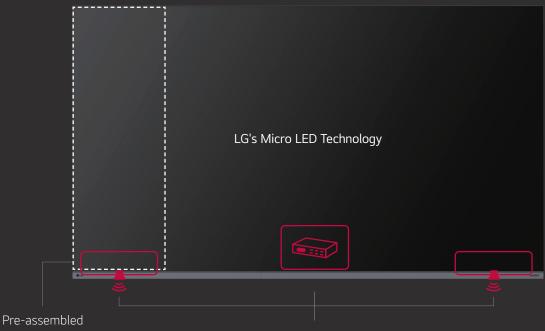

Pre-assembled LED Display Modules


Embedded Controller, Built-in Speaker



A sleek and slim design



Front-accessible design for easy interface connectivity

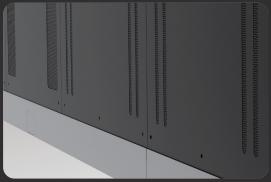

Neatly organized vent hole design on the back



Easy access to buttons



#### Improving Visual Precision with Micro Pixel Technology

LG MAGNIT's Micro Pixel Pitch Technology offers remarkable visual precision. Our advanced LED chips provide impressive detail accuracy and precise light control, delivering crystal-clear images on the display. With accurate color expression, every hue is rendered with stunning clarity and depth, providing a true-to-life visual experience. Enjoy the fineness of display technology with LG MAGNIT.







# Enhanced Uniformity with LST (LG Surface Treatment) Technology

LG MAGNIT's innovative Chip Transfer and Surface Treatment Technology enhances white uniformity and reduces color distortion across a wide viewing angle, delivering true and accurate viewing experiences. This technology ensures remarkable color uniformity, resulting in superb image quality.





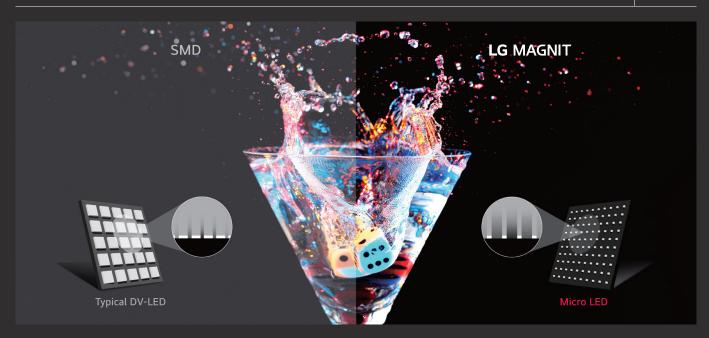

#### Achieving Deep Black with Black Coating Technology

LG MAGNIT's advanced and precise method for direct bonding micro-sized chips onto circuit boards, combined with the black coating technology and reduced spacing between the chips and the board, creates a stunning black expression that stands out compared to SMD-type LED displays. This makes it the ideal choice for displaying content that requires deep black color, ensuring that every image is rich, vibrant, and true to life.



#### Al-powered Viewing Experience with Alpha 7 Processor

LG MAGNIT features an advanced Al-powered Alpha 7 Intelligent Processor that provides clarity and sharpness to deliver an immersive viewing experience. Its advanced Al technology enables the processor to recognize and analyze content, tailoring the display settings for each individual scene to create a highly realistic and vivid image possible.



# All-in-One LED Screen with Built-in Speaker


The LAAA series is a 136 large screen which is offered as an all-in-one package including an embedded controller and built-in speaker. Eliminating the prejudice that LED displays are difficult and complex to install, it doesn't require controller connections or module configuration. After a simple installation process, all you need to do is to turn on the screen with a remote control like home TV.



# High Performance with webOS

Built-in Quad Core SoC (System on Chip) can execute several tasks at once for providing smooth content playback. Also, LG webOS Smart Platform enhances user convenience with intuitive GUI and provides to SI or/and developers simple app development tools\* such as SDK (Software Development Kit), SCAP, sample applications.

\* The webOS Signage Developer site (http://webossignage.developer.lge.com) provides SDK tools and documentation for creating apps on LG Digital Signage. This is only open to partners.

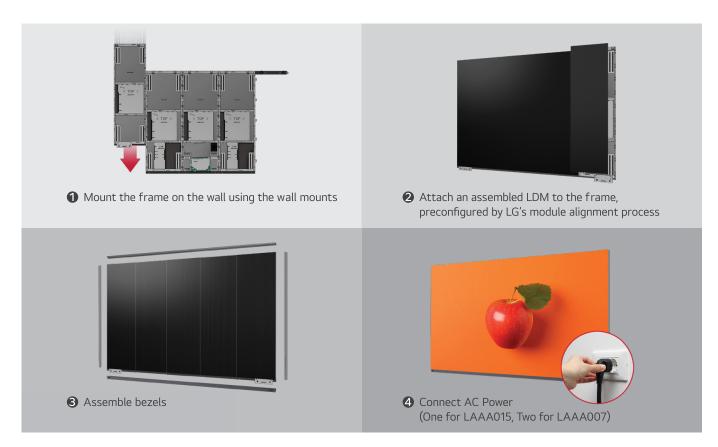

# Simple Installation Process

Create a full screen of LG MAGNIT AIO with 5 units of assembled LDM(LED Display Module)s. A unit consisting of 30 modules is preconfigured with reduced gaps thanks to LG MAGNIT's professional module alignment process. Tightly hold the screen with its refined bezels and back cover, and connect AC cables (One for LAAA015, Two for LAAA007). Then, it allows for neat installation without the complicated power connection.

<sup>\*</sup> Fixing screws or installing wall mount/accessories is need additionally.



# Office Meeting Mode

With Office Meeting Mode, easily configure meeting room details like the room number and current time. It also includes convenient features like automatic input switching, a presentation timer, and adjustable settings such as auto-brightness and picture mode.

\* Users can enable Office Meeting Mode at EZ Setting menu of the Signage.



# Compatible with AV Control Systems

The LAAA series supports Crestron Connected®\* for high compatibility with professional AV controls to achieve seamless integration and automated control\*\*, boosting business management efficiency.

- \* Initial setting from display is required for Crestron Connected® compatibility.
- \*\* Network based control
- \*\*\* Crestron Connected® needs to be purchased separately.



#### Magic Remote for Easy of Use

With the LG Magic Remote, you can select and run the menu of the signage just like using a mouse and its cursor can be used as a laser pointer. In addition, through the newly added 'FREEZE' button on the remote control, users can temporarily freeze the screen while switching contents on the PC, so that users are able to have uninterrupted meetings without exposing its switching process.

\* The FREEZE function is only available when the LAAA is connected to an external input signal.



# LG's Wireless Screen Sharing Solution, LG One:Quick | Share

LG One:Quick Share is a wireless screen sharing solution available through the LAAA series, USB transmission unit, and its app. You can simply share personal PC screen to the display with it's USB dongle button and embedded Wi-Fi\*, and can adjust the basic setting values (volume, picture mode, auto bright, etc.) of the connected display without a remote control. Also, the Office Meeting Mode\*\* helps you to display the agenda, note before the meeting starts.

- \* Users need to set up SoftAP enabled at Network Menu of the Signage.
- \*\* Users can enable Office Meeting Mode at EZ Setting Menu of the Signage.
- \*\*\* LG One:Quick Share needs to be purchased separately and is compatible with PC with the operating system of ~Windows10, ~MacOS 10.15.


#### PRODUCT INFORMATION




LAAA Series	LAAA015	LAAA007	LAAA009
Pixel Pitch	1.56 mm	0.78 mm	0.94 mm
Screen Size	136	136	163
Screen Resolution	1,920 × 1,080	3,840 × 2,160	3,840 × 2,160
Brightness (After Calibration)	500 nit / (Peak.) 1,500 nit	500 nit / (Peak.) 1,000 nit	500 nit / (Peak.) 1,500 nit
Service Access	Front	Front	Front

#### CONNECTIVITY






#### LAAA009



#### LAAA007



- 1 AC-IN
- **4** HDMI 3
- **7** RS-232C IN
- 10 OPTICAL DIGITAL AUDIO OUT

- 2 HDMI 1
- **5** DP
- 8 RS-232C OUT
- 1 LAN

- 3 HDMI 2
- **6** USB
- **9** IR
- 12 AC-IN

#### **SPECIFICATIONS**

		LAAA015	LAAA007	LAAA009	
Physical Parameters	Pixel Configuration	Micro	Micro	Micro	
	Pixel Pitch (mm)	1.56	0.78	0.94	
	Module Resolution	192 × 72	384 × 144	320 × 120	
	Module Dimensions (W × H, mm)	300 × 112.5	300 × 112.5	300 × 112.5	
	No. of Modules per Cabinet (W × H)	10 × 15 (Total 150)	10 × 15 (Total 150)	12 × 18 (Total 216)	
	Screen Resolution (W × H)	1,920 × 1,080	3,840 × 2,160	3,840 × 2,160	
	Screen Dimensions (W × H × D, mm, Including Bezel)	3,004 × 1,742 × 54.9 (Thickest 57.4)	3,004 × 1,742 × 54.9 (Thickest 57.4)	3,604 × 2,078.8 × 54.9 (Thickest 57.4)	
	Screen Surface Area (m²)	5.06	5.06	7.29	
	Weight per Screen (kg)	190	190	258.4	
	Physical Pixel Density (pixels/m²)	409,600	1,638,400	1,137,778	
	Flatness of Cabinet (mm)	±0.2	±0.2	±0.2	
	Cabinet Material	Steel	Steel	Steel	
	Service Access	Front	Front	Front	
	Max. Brightness (After Calibration, nit)	500 / (Peak.) 1,500	500 / (Peak.) 1,000	500 / (Peak.) 1,500	
	Color Temperature (K)	3,200-9,300	3,200-9,300	3,200-9,300	
	Visual Viewing Angle (Horizontal)	160	160	160	
Optical	Visual Viewing Angle (Vertical)	160	160	160	
Specifications	Brightness Uniformity	95%	95%	95%	
	Color Uniformity	±0.015 Cx, Cy	±0.015 Cx, Cy	±0.015 Cx, Cy	
	Contrast Ratio	55,000 : 1 @ 10lux	25,000 : 1 @ 10lux	40,000 : 1 @ 10lux	
	Processing Depth (bit)	20 (HDR10, HDR10 Pro)	20 (HDR10, HDR10 Pro)	20 (HDR10, HDR10 Pro)	
Electrical Specifications	Power Consumption (W/Screen, Max.)	1,050	1,450	1,925	
	Power Consumption (W/Screen, Avg.)	500	850	990	
	Power Consumption (W/m², Max.)	208	277	264	
	Heat Dissipation (BTU/h/Screen, Max.)	3,583	4,950	6,568	
	Heat Dissipation (BTU/h/Screen, Avg.)	1,706	2,900	3,378	
	Heat Dissipation (BTU/h/m², Max.)	710	950	901	
	Power Supply (V)	100 to 240	100 to 240	100 to 240	
	Frame Rate (Hz)	50 / 60	50 / 60	50 / 60	
	Refresh Rate (Hz)	3,840	3,840	3,840	
Operation Specifications	Lifetime (Half Brightness)	100,000	100,000	100,000	
	Operating Temperature (°C)	0 to +40	0 to +40	0 to +40	
	Operating Humidity	10-80% RH	10-80% RH	10-80% RH	
	IP Rating Front / Rear	IP50 / IP20	IP50 / IP20	IP50 / IP20	
Standard	Certification	S	afety 62368-1 / 60950-1, EMC Class	A	
Certification (Fire Protection)		BS476 Part 7 Class 1			
Speaker		Built-in (10 W + 10 W)			
	Environment	RoHS			
Controller		Embedded (webOS)			
I/O Port		HDMI (3), DP (1), USB, LAN, RS-232C In/Out, IR, Optical Digital Audio Out			
	Wi-Fi / Bluetooth	Yes / Yes			
	etc.	IR Remote (In-box), Magic Rem	ote (In-box), Side by Side : Yes (1 × N),	HDCP 2.2, Crestron Connected®	

As a continuing policy of product development at LG Electronics, the design and specifications are subject to change. They may vary from model to model. Color/shades may vary due to printing restrictions. E&OE.









To know more about LG, visit www.lg.com/in/business For B28 Solutions/Product enquiries, please write to **b2b.solutions/glg.com** For B2B Service, please write to **b2bsupport.india@lge.com**