## PRODUCT CATALOGUE | 2025 | LG | THERMA VIM



Q BROWSE NOW

For more LG THERMA V information, please visit our website through QR code.





www.lg.com | http://partner.lge.com | Copyright © 2025 LG Electronics. All rights reserved.

• The images in this catalogue are scenes created to help customers' understand and may differ from the actual product.

• The specifications or product appearance may be subject to change without prior notice to improve the appearance and product performance.





#### **INDEX**



#### INTRODUCTION

**004** LG Business Partnership & Infrastructure

006 The EU Building Sector

**010** Heat Pump Technology

012 Regulations & Certifications

016 THERMA V Introduction

020 What is LG THERMA V

022 THERMA V Solution Overview

026 THERMA V Line-up Overview

028 THERMA V Line-up Introduction

**034** Pre-Sales / Engineering Tools

036 ThinQ Seamless Connectivity

038 LG BECON cloud Service for THERMA V



#### SOLUTIONS

#### **INDIVIDUAL SOLUTIONS**

#### MONOBLOC

044 R290 Monobloc

**048** - Control Unit (7/9/12/14/16 kW)

**062** - Hydro Unit (7/9/12/14/16 kW)

**076** - Combi Unit (7/9/12/14/16 kW)

**094** R32 Monobloc S I (5/7/9/12/14/16 kW)

#### **HYDROSPLIT**

110 R32 Hydrosplit

**114** - Hydro Unit (12/14/16 kW)

**124** - Combi Unit (12/14/16 kW)

#### SPLIT

**134** R32 Split

**138** - Hydro Unit (4/6, 5/7/9 kW)

**152** - Combi Unit (4/6, 5/7/9 kW)

#### **HEAT PUMP WATER HEATER**

174 R290 Round Type (100/150/200l)

**182** R134a Square Type (200/270*l*)

#### **COLLECTIVE SOLUTIONS**

#### MONOBLOC

190 R32 Monobloc 51 kW

#### **CASCADE SOLUTION**

200 Cascade Control Unit

#### ACCESSORIES

208 Accessories Provided by LG

212 Electric Backup Heater

214 LG Wi-Fi Modem

215 Domestic Hot Water Tank





## LG BUSINESS PARTNERSHIP & INFRASTRUCTURE

#### Infrastructure in Europe

LG Electronics' European Air Solution department is committed to ensuring your business success.

With 16 pan-European sales offices and academies, we seek to deliver on our promise of support, efficiency and proactivity throughout each stage of our business partnership.

Our highly competitive products are delivered through our dedicated European distribution centre to ensure a steady and reliable supply of inventory.

At our European Energy Lab, LG Business Solutions is developing a heat pump technology that is optimized for the varied European climates and weather patterns along with continuous product performance verification.





#### LG Europe R&D Center

LG Europe R&D Center is located in Eschborn Germany. Purpose of this laboratory where to test and verity LG Air Solution product's liability in advance and also to verify with local HVAC components compatibility.



#### LG Europe B2B Regional Head Office

LG Business Solutions Europe is based in Eschborn, Germany, with regional offices located throughout Europe. LG Europe B2B Regional Head Office is a control tower for European B2B business dealing with a wide range of products, including heat pumps and air conditioners. LG Electronics has a strong global network.





#### LG Heat Pump and Air Conditioning Academy

LG has set up 20 official heat pump and air conditioning academies in Europe, teaching much needed skills to thousands of current industry professionals including installers, consultants, designers, sales staff and service technicians. The academy program is designed to share expertise and educate these HVAC experts by providing a cutting-edge technical experience with the newest and most advanced technologies and equipment. Moreover, as LG's entire product range is installed on site, professionals can be trained in a realistic way that offers them the chance to experience the latest products first-hand.



#### **European Distribution Center**

LG's European Distribution Center is located in Tilburg, the Netherlands. Supplying products all over Europe, this distribution hub has contributed to smooth and rapid delivery, direct shipping for smaller orders and delivery tailored to air conditioners. Inventory efficiency of the hub is secured by the LG EU's established inventory pool.

## THE EU BUILDING SECTOR

Buildings account for 40% of the total carbon emissions in Europe. The building stock that dates back to the 90s is three times less energy efficient than new construction built today.



OF EU ENERGY IS USED BY BUILDING SECTOR, MAKING IT THE SINGLE LARGEST ENERGY CONSUMER IN EUROPE



OF GREENHOUSE GAS EMISSIONS
COME FROM BUILDINGS

## **LG OUR MISSION**

- ① Create low-consuming or self-consuming innovations
- ② Build awareness and help people use energy more conservatively
- 3 Reimagine a building's usability, connectivity, convenience & health

<sup>\*</sup> Source: The European Commission website. https://commission.europa.eu/news/focus-energy-efficiency-buildings-2020-02-17\_en



#### Re-Design

#### Improve Circularity of Raw Materials


Minimize environmental impact with our eco-conscious air conditioning solutions. By reducing reliance on finite resources such as plastic, aluminum, and copper, LG's innovative approach embraces a circular economy supply chain. This not only lessens carbon emissions during pre-manufacturing but also ensures resource efficiency, particularly for energy-hungry materials. Discover the sustainability of LG air conditioners, where recycled materials play a pivotal role. We conduct thorough stability and quality tests to guarantee optimal performance, leading the way toward a more sustainable and efficient future.

About LG Business Solutions: http://www.lg.com/global/business/about-lg-business

# Amount of recycled plastic that LG used in previous years 27,000 Tons 2021 achievement 9,282 Tons 11,030 Tons 17,134 Tons 2030 target

#### **Recycling Old Appliances**

Many reusable resources are left in discarded products. Founded in 2001 through investment from LG, the Chilseo Recycling Center acts as a virtuous cycle of resources, from product design, use, and recovery, to disposal. Engineers collect old appliances from LG and other brands, then carefully take them apart. More than 40 kinds of renewable raw materials, including separated plastic, iron, and nonferrous metals, are reborn into new LG products.

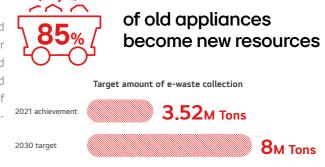



## THE EU BUILDING SECTOR

#### **Re-Program**

#### Achieve 95% in Waste Recycling at Production Sites by 2030

At LGE, we continuously invest in environmental facilities and improve our waste treatment processes with a view to being able to recycle 95% of waste generated at production sites around the world by 2030.





#### Innovate


#### Reduce Reliance Upon High GWP Refrigerant Gases

Refrigerant gases contribute to global warming even though their contribution is not the biggest. LG was the first manufacturer to launch an R32 monobloc air-to-water heat pump in 2018 and have also converted our full single split line up to R32 with 3 years lead time on the EU -driven planned ban in 2025. Also, LG is likely to put in place collection and recovery streams of refrigerant gases from end of life equipment at no extra cost for its customers.

#### **Constant Product Efficiency Improvements**

Electrically-driven heating and cooling equipment is LG's signature. What's more, we always aim at the highest energy ratings, generation after generation of product launching.

> Reduce carbon emissions during use of 7 major products (baseline year 2020)

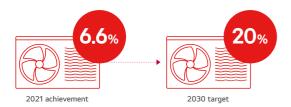

#### First Home Appliances Lighthouse Factory

In March 2022, Changwon LG Smart Park was named the first 'lighthouse factory' by the World Economic Forum (WEF). The WEF "Lighthouse" facilities implement Fourth Industrial Revolution technologies, such as the Internet of Things, big data, artificial intelligence and robots, into manufacturing and supply chain operations to deliver a wide range of benefits, from increased production efficiency to enhanced environmental sustainability. LG plans to apply the innovative, smart production technologies pioneered at LG Smart Park to a total of 26 LG production facilities in 13 countries, accelerating the digital transformation of its global manufacturing network by 2025.

#### **Educate**

#### Life Cycle Analysis

The Air Solution Division has assessed 4 product families, as regards their total life cycle impact, according to the French PEP certification scheme: it provides product greenhouse gas emissions from production, transport, use and end of life phases, over a period of 22 years.

Efficiency comparisons between THERMA V & differing technologies

improvement

Standard

improvement Standard

\* In Italy

Standard

\*\* In Poland

#### Certifications

#### LG Electronics is listed in the:

- DJSI World for 9 consecutive years
- 2020 Global Sustainability Leadership top 100, announced by Privileged United Nationals Sustainability Development Goals (UNSDGs)
- 6th place in the top 100 World Sustainable Management Companies by Wall Street Journal
- ECOVADIS Platinum certified in 2021 & 2023






#### What is an Air-to-Water Heat Pump System?


#### Modern Technology to Replace Conventional Boilers

Historically, conventional heating systems have used either oil or gas or have represented direct electric heaters. In such conventional heating systems, environmental aspects such as the pollution produced by fossil fuel use have been overlooked. Over the last years, the interest in these environmentally friendly devices has been increasing and in order to respond to the growing demand for eco-conscious devices, LG has further developed its heat pump technology to produce more efficient, environmentally friendly products.

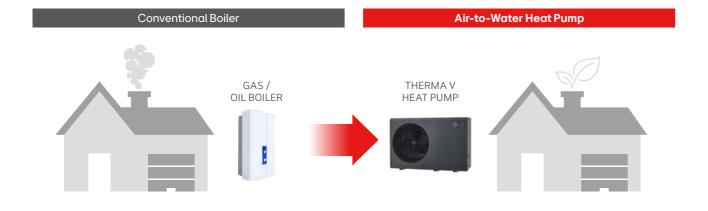

#### Modern Technology for Renewable Energy

The term "Heat Pump" refers to a technique that pumps heat from renewable energy sources, like the air, ground and water. A heat pump device transforms this energy into a usable heat source via the refrigerant cycle. With THERMA V heat pump technology about 75% of the energy needed to provide heating and hot water comes from a natural air source<sup>-1)</sup>

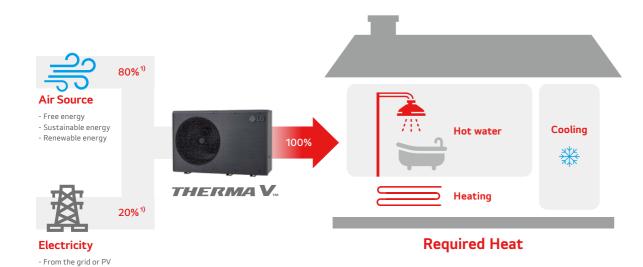


<sup>1)</sup> The efficiency ratio is to help general understanding and is based on the Seasonal Coefficient of Performance (SCOP) of THERMA V R290 Monobloc under Low Temperature & Average Climate conditions, which is higher than 5. The actual efficiency may vary with water and outside temperatures.

#### LG Electronics Leads the Way in Heat Pump Technology

As a leading HVAC supplier, LG's heating product portfolio comprises a wide range of highly energy efficient renewable energy systems, providing the right heating solution for any type of requirements and/or buildings.

#### How do Air-to-Water Heat Pumps work?

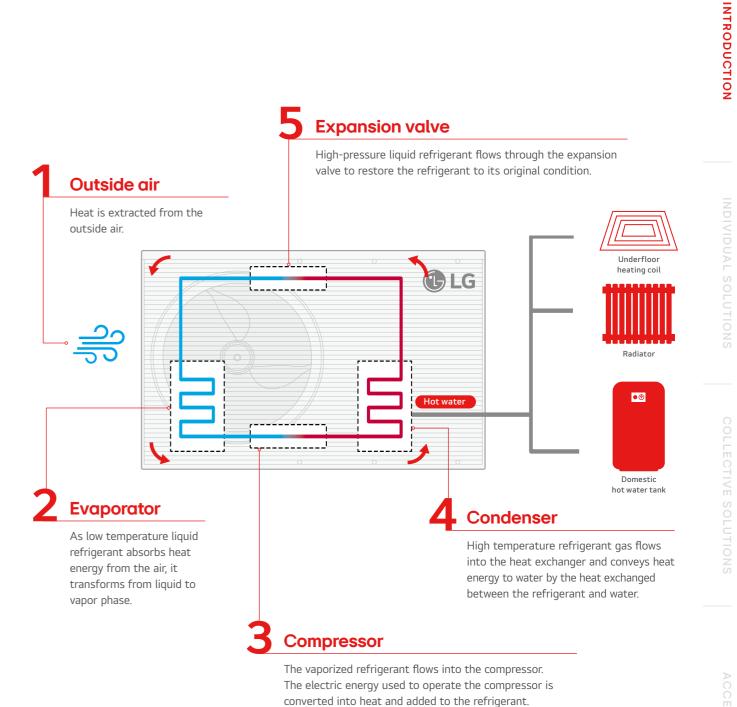

## **REGULATIONS & CERTIFICATIONS**


#### **Energy Label**

#### **Energy Labels**

The EU energy label has been a key driver for helping consumers choose products which are more energy efficient. At the same time, it also encourages manufacturers to drive innovation by using more energy efficient technologies. The energy label was recognized by 93% of consumers and 79% considered it when buying energy efficient products, according to the special eurobarometer 492 carried out in the 28 EU member states during 2019. Starting from 2013, the regulations apply to heat pumps, as well as to water heaters since 2015. As of September 26th, 2019, the energy efficiency scale for seasonal space heating ranges from A+++ to D, with A+++ being the most efficient. The water heating energy efficiency scale for the declared load profile for combination heat pumps ranges from to A+ to F, with A+ being the most efficient.

#### Information on the Energy Label

The energy labels provide minimum necessary information such as: manufacturer's name, manufacturer's model name, seasonal space heating energy efficiency class under average climate condition from A+++ to D in medium/low temperature applications (55°C/35°C), rated heat output under average, colder and warmer climate conditions in medium/ low temperature applications (55°C/35°C), European map displaying the three temperature zones, the sound power level indoors and/or outdoors. In addition, just for combination heat pumps, the energy label also includes Water heating energy efficiency class under average climate condition from A+ to F at declared load profile, while the seasonal space heating energy efficiency class and rated heat output are indicated only for the medium temperature application (55°C).

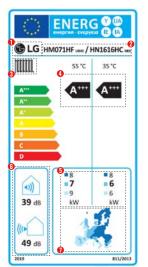

#### Heat pump space heaters

- Manufacturer's name or trade mark Manufacturer's model name
- 3 Space heating function
- Seasonal space heating energy efficiency class under average climate condition from A+++ to D in medium/low temperature applications (55°C/35°C)
- 6 Rated heat output (kW) under average colder and warmer climate conditions in medium/low temperature applications (55°C/35°C)
- Operating noise for indoor and outdoor European map displaying the three temperature zones
- \* This energy label may differ depending on local regulations (for example in the UK).

# A\*\* = 7 kW 49 dB

#### Heat pump combination heaters

- Manufacturer's name or trade mark
- Manufacturer's model name 3 Space heating function
- Seasonal space heating energy efficiency class under average climate conditions from A+++ to D in medium temperature applications (55°C)
- Water heating energy efficiency class under average climate conditions from
- 6 Rated heat output (kW) under average, colder and warmer climate conditions in medium temperature application (55°C)
- Operating noise for indoor and outdoor 1 European map displaying the three temperature zones
- \* This energy label may differ depending on local regulations (for example in the UK).


#### Nearly Zero Energy Building (nZEB)

#### **Nearly Zero Energy Building**

Nearly Zero-Energy Building (nZEB) means a building that has a very high energy performance, while the nearly zero or very low amount of energy required should be covered to a very significant extent by energy from renewable sources, including energy from renewable sources produced on-site or nearby. The Energy Performance of Buildings Directive (EPBD) requires that EU countries ensure that all new buildings are nearly zero-energy by the end of 2020, while all new public buildings had to be nearly zero-energy after 31 December 2018. As concrete numeric thresholds or ranges are not defined in the EPBD, each EU member state defines their Nearly Zero-Energy Buildings (nZEB) in a flexible way, taking into account their country-specific climate conditions, primary energy factors, calculation methodologies, building traditions and current ambitions.

#### How LG THERMA V Supports to Nearly Zero Energy Buildings (nZEB)

In general, consultants use software programs to evaluate nZEB satisfaction of a new building. LG has been registering THERMA V products in their database so that our THERMA V products can be used directly in these software programs such as BENG in Netherlands. SAP in UK and RE2020 in France.

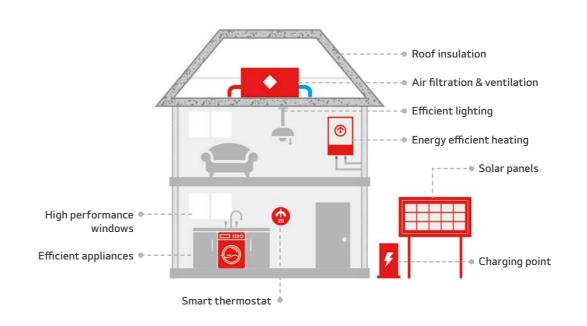

LG THERMA V energy labels | Energy labels for each LG THERMA V model can be found on the websites below.



LG.COM -Compliance Information

https://www.lg.com/global/ support/cedoc/cedoc

Browse now Q



European Product Registry for Energy Labelling

https://eprel.ec.europa.eu/screen/product/

Browse now Q



Netherland -**BFNG** 

https://bcrg.nl/nl/databanken/ energieprestaties/databank/



https://www.ncm-pcdb.org.uk/sap/ pcdbsearch.jsp?type=362&pid=31

Browse now Q



RF2020

https://www.edibatec.org/baseproduits/

Browse now Q

## **REGULATIONS & CERTIFICATIONS**

#### **Keymark**



The heat pump Keymark is a voluntary, independent European certification mark (ISO type 5 certification) for all heat pumps, combination heat pumps and hot water heaters (as covered by ecodesign, EU regulation 813/2013 and 814/2013). It is based on independent, third party testing and demonstrates compliance with product requirements as set in the heat pump Keymark scheme rules and with efficiency requirements as set by ecodesign lot 1 and lot 2. The heat pump Keymark scheme is owned by the European committee for standardization (CEN). The certificates are granted by independent certification bodies to products fulfilling all requirements of the scheme. LG THERMA V products are certified with the heat pump Keymark. Please, refer to the web page below for details.



https://keymark.eu/en/products/heatpumps/certified-products



#### Eurovent

014



Established in 1993, Eurovent certification is recognized as a world leader in third-party product performance certification in the heating, ventilation, air conditioning and refrigeration fields. Its major certification brand 'Eurovent Certified Performance' has become over the years a major European certification. Today over 67% of HVAC-R products sold in Europe hold this certification. LG THERMA V products are certified with Eurovent. Please, refer to the web page below for details.







#### Certifications

All heat pumps and water heaters in the European market are continuously tested by various certification schemes. These are usually the basis for qualifying for subsidy programs in each country.

#### **MCS**



MCS certification is a mark of quality and demonstrates compliance to industry standards. It is supported by the department for business, energy & industrial strategy of the UK. In particular, MCS certification demonstrates the quality and reliability of products in the renewable technology sector and it ensures that products are compliant with the UK regulations. LG THERMA V products are certified with MCS. Please, refer to the web page below for details.



https://mcscertified.com/product-directory/



#### **EHPA**



The EHPA quality label is a label that shows the end-consumer a quality heat pump unit or model range on the market. The heat pumps that receive the label need to undergo tests according to the international standard EN14511 and EN16147. These tests are executed by EN17025 accredited test centres. LG THERMA V products are certified with the EHPA quality label for Austria, Germany and Switzerland. Please, refer to the web page below for details.



## THERMA V<sub>TM</sub> INTRODUCTION



## THE SUSTAINABLE CHOICE

Today's informed consumer will consider multiple factors when choosing a heating solution, like an Air-to-Water Heat Pump (AWHP) to include user-friendliness, reliability and regulation-compliance. Shifting regulations year after year exceedingly impact the European customers' choice of heating products.

With refrigerant regulations changing around the world, it's time to move to a more eco-conscious solution. THERMA V R290 Monobloc uses natural R290 refrigerant which has a lower tonne of CO<sub>2</sub> equivalent index than other gases such as R32. Possible carbon emission from refrigerants is reduced by 99.7% compared to previous R32 Monobloc. The R290 can be vented directly into the atmosphere without any impact on the climate because it's ecoconscious refrigerant with nearly zero carbon emissions.

LG Electronics' THERMA V line-up fulfills both European regulations as well as customer needs.

THERMAV

# FORM MEETS FUNCTION: THERMA V IN DARK DAWN GRAY

Outdoor units are now transformed with an elegant monotone design, showcasing a distinctive style through their design alone while elevating the aesthetic appeal of home's exterior.

1 LG

Its refined new design ensures seamless integration with a wide variety of home and building exteriors.

Designed with European environmental considerations in mind, it not only offers aesthetic excellence but also ensures exceptional installation efficiency.

This design has been applied not only to the R290 model but also to the R32 Monobloc S II, achieving design unity and maximizing display value by featuring a wave-shaped grille that harmonizes simplicity and a unique pattern.

SIMPLER INSTALLATION

**BETTER DESIGN** 

()LG


MORE COMFORTABLE LIVING

## THERMAV...

## WHAT IS LG THERMA V?

#### LG's Advanced Heating Technology

The LG THERMA V Air-to-Water Heat Pump system boasts an advanced heating technology that can minimize energy consumption more than any other solution in the market. In addition, it has been specially designed to provide a valuable living space and domestic hot water supply to both new build and renovated homes.

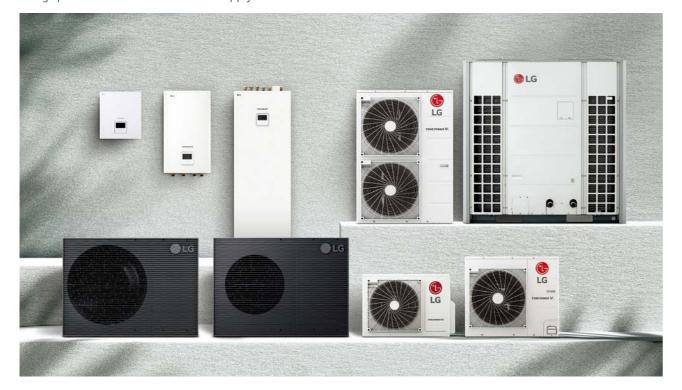

#### THERMA V.

#### Space heating

The wide span THERMA V systems with high efficiency can cover heating loads of various types of houses.


#### Domestic hot water

As the hot water efficiency becomes more and more important, THERMA V can provide an optimized solution for this.

#### Space cooling

THERMA V is a single device that can also provide a cooling solution besides the heating and hot water provided by boilers.

#### High Efficiency and Low CO<sub>2</sub> Emission

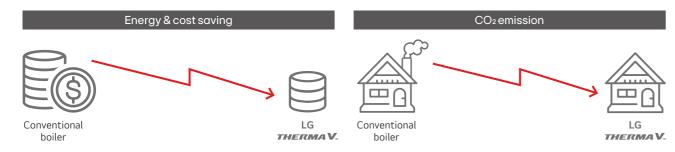



#### **Benefits of LG THERMA V**



#### For Installers and Service Providers

- Time savings with features for quicker installation and commissioning
- Less manpower for handling with the compact size and light weight
- Less service visit with high reliability and durable equipment
- Intuitive controller interface for all LG products, requiring less training
- Remote control, monitoring and diagnosis to avoid unnecessary site visits
- Clip connections for quick maintenance and no need for special tools



#### For Consultants and Designers

- Variety of software to support selection and designing THERMA  $\mbox{\sc V}$
- Multiple solutions with space heating, cooling and DHW supply
- Wide leaving water temperature compatible with various heat emitters
- Valuable space savings with the small footprint
- Excellent heating performance even at low ambient temperature
- Optimal system interoperability open modbus with 3<sup>rd</sup> party controller
- Adapts operation to ESS battery output, maximizing self-consumption of locally produced PV energy



#### For Homeowners

- Energy saving by utilizing renewable energy and high efficiency equipment
- Multiple solutions with space heating, cooling and DHW supply
- Economic support through domestic renewable heat incentive programs
- Investment cost savings thanks to the compatibility with existing heating system like radiator, boiler, etc.
- Valuable space savings with the small footprint
- No disturbing caused to neighbors with low noise
- Low repair cost and high reliability with durable equipment
- Convenient control by user-friendly remote controller
- Remote connectivity for control and monitoring via LG ThinQ

Split

023

## THERMAV **SOLUTION OVERVIEW**

#### **Individual Solutions**

|                    |                         |  | Monobloc  |  |   |
|--------------------|-------------------------|--|---|--|---|
| Line-up            |                         |  | <b>₽</b>  |  | <b>○</b>  |
|                    |                         | R290 Monobloc Control Unit   | R290 Monobloc Hydro Unit  | R290 Monobloc Combi Unit   | R32 Monobloc S II   |
|                    |                         | 1 Ø: 7/9/12/14/16 kW<br>3 Ø: 7/9/12/14/16 kW   | 1 Ø: 7/9/12/14/16 kW<br>3 Ø: 7/9/12/14/16 kW                                      | 1 Ø: 7/9/12/14/16 kW<br>3 Ø: 7/9/12/14/16 kW   | 1 Ø: 5/7/9/12/14/16 kW<br>3 Ø: 12/14/16 kW  |
| Capacity           |                         |  | -   |  |   |
| Application        |                         |  | ÷   | *  |   |
| Energy labe        | al                      | Space heating  A+++  35°C  A+++  55°C  A+++  DHW heating heating  Combination with OSHW-200F (Profile L) | Space heating  A+++  35°C  A+++  55°C  A+  Combination with OSHW-200F (Profile L) | Space heating  A+++  = 35°C  A+++  = 55°C  A+++  DHW heating   | Space heating  A+++  =35°C  A++  =55°C  A++  Combination with OSHW-200F (Profile L) |
| Certificatio       | ns                      | SG CHE MAN   | S S S S S S S S S S S S S S S S S S S   | AMERICAN DE LA COMPANIA DEL COMPANIA DEL COMPANIA DE LA COMPANIA D | SG SG   |
| Operation          | Outdoor air             | -28 ~ 35°C   | -28 ~ 35°C  | -28 ~ 35°C   | -25 ~ 35°C  |
| range<br>(heating) | Leaving water           | 15 ~ 75°C  | 15 ~ 75°C   | 15 ~ 75°C  | 15 ~ 65°C   |
| Operation          | Outdoor air             | 5 ~ 48°C   | 5 ~ 48°C  | 5~48°C   | 5~48°C  |
| range<br>(cooling) | Leaving water           | 5 ~ 27°C   | 5 ~ 27°C  | 5 ~ 27°C   | 5 ~ 27°C  |
| Operation r        | ange (hot water)        | 15 ~ 65°C 1)   | 15 ~ 65°C¹)   | 15 ~ 65°C <sup>1)</sup>  | 15 ~ 55°C¹)   |
| Domestic h         | ot water tank included  | х  | Х   | ○ (200 ℓ)  | Х   |
| Backup hea         | ter included            | х  | 0   | 0  | X (accessory)   |
| F-gas licens       | se needed               | Х  | Х   | Х  | х   |
| Wi-Fi remot        | te control via ThinQ 2) | 0  | 0   | 0  | 0   |
|                    |                         |  |   |  |   |

| R32 Hydrosplit Hydro Unit            | R32 Hydrosplit Combi Unit  | R32 Split Hydro Unit   | R32 Split Combi Unit   |
|--------------------------------------|--|--|--|
| 1 Ø: 12/14/16 kW<br>3 Ø: 12/14/16 kW | 1 Ø: 12/14/16 kW<br>3 Ø: 12/14/16 kW                                       | 1 Ø: 4/6 kW (U24A)<br>1 Ø: 5/7/9 kW (U36A)                           | 1 Ø: 4/6 kW (U24A)<br>1 Ø: 5/7/9 kW (U36A)   |
|                                      | 100  |  |  |
|                                      | <b>☆</b> ≦   |  |  |
| Space heating  A***  = 35°C  A**     | Space heating  A+++  = 35°C  A++                               DHW heating | Space heating  A+++  =35°C  A++  =55°C                               | Space heating  A++  = 35°C  A++  To be a sing and a sing a |
|                                      |  |  |  |
| SG<br>Reedy<br>activation            | SG<br>Redgi  | SG<br>Ready<br>Configs   | SG<br>Redy   |
| -25 ~ 35°C                           | -25 ~ 35°C   | 4/6 kW: -20 ~ 35°C<br>5/7/9 kW: -25 ~ 35°C                           | 4/6 kW: -20 ~ 35°C<br>5/7/9 kW: -25 ~ 35°C   |
| 15 ~ 65°C                            | 15 ~ 65°C  | 4/6 kW: 15 ~ 55°C<br>5/7/9 kW: 15 ~ 65°C                             | 4/6 kW: 15 ~ 55°C<br>5/7/9 kW: 15 ~ 65°C   |
| 5~48°C                               | 5 ~ 48°C   | 5~48°C   | 5~48°C   |
| 5 ~ 27°C                             | 5 ~ 27°C   | 5 ~ 27°C   | 5 ~ 27°C   |
| 15 ~ 55°C <sup>1)</sup>              | 15 ~ 55°C <sup>1)</sup>  | 4/6 kW: 15 ~ 50°C <sup>1)</sup><br>5/7/9 kW: 15 ~ 55°C <sup>1)</sup> | 4/6 kW: 15 ~ 50°C <sup>1)</sup><br>5/7/9 kW: 15 ~ 55°C <sup>1)</sup>   |
| X                                    | ○ (200 ℓ)  | X  | ○(200ℓ)  |
| X (accessory)                        | 0  | 0  | 0  |
| X                                    | X  | 0  | 0  |
| 0                                    | 0  | 0  | 0  |

Hydrosplit

<sup>1)</sup> With electric boost heater up to 80°C possible.

<sup>2)</sup> Wi-Fi modem (PWFMDD200) should be purchased and installed separately.

## THERMA V<sub>IM</sub> **SOLUTION OVERVIEW**

#### **Individual Solutions**

|              |                                | Heat Pump V                               | Vater Heater                     |
|--------------|--------------------------------|---|----------------------------------|
| Line-up      |                                | Thing                                     | Thing                            |
|              |                                | R290 Round Type                           | R134a Square Type                |
| Capacity     |                                | 1 Ø: 100/150/200 l                        | 1 Ø: 200/270 &                   |
| Application  |                                |   |                                  |
| Energy labe  | el                             | DHW 100¢ (profile M) 150/200¢ (profile L) | DHW heating 200/270ℓ (profile L) |
| Certificatio | ns                             | SG<br>Rest)                               | SG 2)                            |
| Operation    | Air temperature<br>(Heat pump) | -7 ~ 48°C                                 | -5 ~ 48°C                        |
| range        | Max. water<br>temperature      | up to 75°C                                | up to 60°C                       |
| Compresso    | r type                         | Constant speed rotary                     | Inverter twin rotary             |
| Heating ele  | ment included                  | 0   | 0                                |
| F-gas licens | se needed                      | x   | X                                |
| Wi-Fi remot  | te control via ThinQ           | 0   | 0                                |

#### 1) WH20S.F5 / WH27S.F5 2) WH20STR2.FA / WH27STR2.FA

#### **Collective Solutions**

|                                  |                           | Monobloc   |  |  |  |  |
|----------------------------------|---------------------------|--|--|--|--|--|
| Line-up                          |                           | R32 Monobloc 51 kW   |  |  |  |  |
| Capacity                         |                           | 3 Ø: 51 kW   |  |  |  |  |
| Application                      | ı                         | * **   |  |  |  |  |
| Energy labe                      | el                        | Space heating  A++  (A++  (A++ |  |  |  |  |
| Certificatio                     | ns <sup>1)</sup>          | AND SECOND SECOND  |  |  |  |  |
| Operation range                  | Outdoor<br>air            | -25 ~ 35°C   |  |  |  |  |
| (heating)                        | Leaving<br>water          | 25 ~ 60°C (65°C) <sup>2)</sup>   |  |  |  |  |
| Operation range                  | Outdoor<br>air            | 10 ~ 48°C  |  |  |  |  |
| (cooling) Leaving water          |                           | 5 ~ 27°C   |  |  |  |  |
| Operation range (hot water)      |                           | 25 ~ 55°C³)  |  |  |  |  |
| Domestic hot water tank included |                           | Х  |  |  |  |  |
| Backup heater included           |                           | Х  |  |  |  |  |
| F-gas licens                     | se needed                 | Х  |  |  |  |  |
| Wi-Fi remo                       | te<br>ThinQ <sup>4)</sup> | 0  |  |  |  |  |

| 1) | THE UTHER  | CELLITICA | LIUIIS IUI | NOZ IVIC  | JIIODIOC | . JIKVV  | are uniuer | progress.   |           |
|----|------------|-----------|------------|-----------|----------|----------|------------|-------------|-----------|
| 2) | The leavir | ng water  | temperat   | ture of 6 | 55°C is  | possible | only whe   | en a backur | heater is |

installed.

<sup>3)</sup> With electric boost heater up to 80°C possible
4) Wi-Fi modem (PWFMDD200) should be purchased and installed separately.

|  |                  | Cascade                                     |  |  |  |
|--|------------------|---|--|--|--|
| Line-up  |                  |   |  |  |  |
|  |                  | Cascade Control Unit  8 Units <sup>1)</sup> |  |  |  |
| Max. number of outdoor units that can be combined          |                  |   |  |  |  |
| Application  | ı                | *   |  |  |  |
| Compatible line-up   |                  | R290 Monobloc <sup>2)</sup>                 |  |  |  |
| Operation range 3)   | Outdoor          | -28 ~ 35°C                                  |  |  |  |
| (heating)  | Leaving<br>water | 15 ~ 70°C                                   |  |  |  |
| Operation  | Outdoor          | 5 ~ 48°C                                    |  |  |  |
| range <sup>3)</sup><br>(cooling)                           | Leaving<br>water | 5 ~ 27°C                                    |  |  |  |
| Operation range (hot water)                                |                  | 15 ~ 65°C ³ <sup>3,4)</sup>                 |  |  |  |
| Indoor unit is needed separately from Cascade control unit |                  | X   |  |  |  |
| Wi-Fi remo   |                  | 0   |  |  |  |

same capacity.

<sup>2)</sup> Only R290 Monobloc outdoor units manufactured after June of 2025 are compatible with cascade control unit,

<sup>3)</sup> When combined to R290 Monobloc

With electric boost heater up to 80°C possible
 Wi-Fi modem (PWFMDD200) should be purchased and installed separately.

## THERMA V<sub>IM</sub> **LINE-UP OVERVIEW**

| Line-up           | Unit            | Туре            | Power supply                     | Appearance     | 4 kW        | 6 kW           | Appearance | 5 kW          |  |  |  |
|-------------------|-----------------|-----------------|----------------------------------|----------------|-------------|----------------|------------|---------------|--|--|--|
|                   | Outdoor<br>Unit | -               | 1 Ø /<br>230 V<br>3 Ø /<br>400 V |                |             |                |            |               |  |  |  |
| R290              |                 | Control<br>Unit | Common                           |                |             |                | -          |               |  |  |  |
| Monobloc          | Indoor<br>Unit  | Hydro<br>Unit   | 1 Ø /<br>230 V<br>3 Ø /          |                |             |                | -          |               |  |  |  |
|                   |                 |                 | 400 V                            |                |             |                | -          |               |  |  |  |
|                   |                 | Combi<br>Unit   | 230 V<br>3 Ø /<br>400 V          |                |             |                | -          |               |  |  |  |
| R32               |                 |                 | 1 Ø /<br>230 V                   |                |             |                | 02         | HM051MRS UA40 |  |  |  |
| Monobloc S I      | Set             | -               | 3 Ø /<br>400 V                   |                |             |                |            |               |  |  |  |
|                   | Outdoor<br>Unit |                 | Outdoor                          | Outdoor        |             | 1 Ø /<br>230 V |            |               |  |  |  |
|                   |                 |                 | -                                | 3 Ø /<br>400 V |             |                |            |               |  |  |  |
| R32<br>Hydrosplit | Indoor<br>Unit  | Hydro<br>Unit   | Common                           |                |             |                |            |               |  |  |  |
|                   |                 | Combi<br>Unit   | Common                           |                |             |                |            |               |  |  |  |
|                   | Outdoor<br>Unit | -               | 1 Ø /<br>230 V                   |                | HU041MR U20 | HU061MR U20    | 2          | HU051MR U44   |  |  |  |
| R32<br>Split      | Indoor          | Hydro<br>Unit   | 1 Ø /<br>230 V                   | =              | HN061:      | 3M NK5         | -          | HN091MR NK5   |  |  |  |
|                   | Unit            | Combi<br>Unit   | 1 Ø /<br>230 V                   |                | HN061       | 3T NKO         |            | HN0913T NK0   |  |  |  |
| R32               | Outdoor<br>Unit | -               | 3 Ø /<br>400 V                   |                |             |                |            |               |  |  |  |
| Monobloc<br>51 kW | Indoor<br>Unit  | Control<br>Unit | 1 Ø /<br>230 V                   |                |             |                |            |               |  |  |  |

<sup>1)</sup> This is the power specifications of the backup heater inside indoor unit, and the main power supply of the indoor unit is single phase (10/230V).

| Line-up                   | Туре        | Power supply   | Appearance | 100 £                      | Appearance | 150 £                      | Appearance |
|---------------------------|-------------|----------------|------------|----------------------------|------------|----------------------------|------------|
| Heat Pump                 | Round Type  | 1 Ø /<br>230 V |            | WH10ESF0 HA <sup>-1)</sup> |            | WH15ESF0 HA <sup>-1)</sup> |            |
| Heat Pump<br>Water Heater | Square Type | 1 Ø /<br>230 V |            |                            |            |                            |            |

<sup>1)</sup> SG Ready certified

| 7 kW          | 9 kW                 | Appearance | 12 kW         | 14 kW                      | 16 kW         | Appearance | 51 kW          |
|---------------|----------------------|------------|---------------|----------------------------|---------------|------------|----------------|
| HM071HF UB40  | HM091HF UB40         |            | HM121HF UB60  | HM141HF UB60               | HM161HF UB60  |            |                |
| HM073HF UB40  | HM093HF UB40         |            | HM123HF UB60  | HM143HF UB60               | HM163HF UB60  |            |                |
| PHCS0 E       | ENCXLEU              | -          |               | PHCS0 ENCXLEU              |               |            |                |
| HN1616        | HC NK0 <sup>2)</sup> |            |               | HN1616HC NK0 <sup>2)</sup> |               |            |                |
| HN1639        | HC NK0 <sup>3)</sup> | =          |               | HN1639HC NK0 <sup>3)</sup> |               |            |                |
| HN1616        | HY NK0 <sup>2)</sup> | -          |               | HN1616HY NK0 <sup>2)</sup> |               |            |                |
| HN1639        | HY NKO <sup>3)</sup> |            |               | HN1639HY NK0 <sup>3)</sup> |               |            |                |
| HM071MRS UA40 | HM091MRS UA40        | A .        | HM121MRS UB40 | HM141MRS UB40              | HM161MRS UB40 |            |                |
|               |                      |            | HM123MRS UB40 | HM143MRS UB40              | HM163MRS UB40 |            |                |
|               |                      | 0          | HU121MRB U30  | HU141MRB U30               | HU161MRB U30  |            |                |
|               |                      | 0          | HU123MRB U30  | HU143MRB U30               | HU163MRB U30  |            |                |
|               |                      | ·<br>•     |               | HN1600MC NK1               |               |            |                |
|               |                      | *          |               | HN1616Y NB1                |               |            |                |
| HU071MR U44   | HU091MR U44          |            |               |                            |               |            |                |
| HN091         | MR NK5               |            |               |                            |               |            |                |
| HN0913T NK0   |                      |            |               |                            |               |            |                |
|               |                      |            |               |                            |               |            | HM513MR UXC0   |
|               |                      |            |               |                            |               | -          | PHCSL0 ENCXLEU |

| 200 l                                 | Appearance | 270 l                                 |
|---------------------------------------|------------|---------------------------------------|
| WH20ESF0 CA <sup>1)</sup>             |            |                                       |
| WH20STR2 FA <sup>1)</sup><br>WH20S F5 |            | WH27STR2 FA <sup>1)</sup><br>WH27S F5 |

| าา | 51- | Wheas | certified |  |
|----|-----|-------|-----------|--|
|    |     |       |           |  |

| Line-up                 | Power supply | Appearance | Model name    |
|-------------------------|--------------|------------|---------------|
| Cascade<br>Control Unit | 10/<br>230 V | -          | PHCM0 ENCXLEU |

<sup>2)</sup> Combinations for 1 Ø outdoor units
3) Combinations for 3 Ø outdoor units

## THERMA V.

## LINE-UP INTRODUCTION

#### **R290 Monobloc**




The new R290 Monobloc is a super-quiet, future-conscious heat pump that uses the R290 refrigerant which has lower GWP of only three. From an aesthetic standpoint, refined gray design allows it to seamlessly harmonize with a diverse range of home and building exteriors, and from a technical standpoint, it is designed to be low-noise, so you don't have to worry about causing noise pollution to neighbors. The LG THERMA V R290 Monobloc is available in three different combinations (Control Unit, Hydro Unit or Combi Unit) depending on the customers' needs. By adopting a highefficiency compressor leveraging injection technology, R290 Monobloc can deliver a leaving water temperature of up to 75°C all year round. Thus, this unit is suitable for home renovations due to high water temperature compatibility with existing radiators.

Due to LG's advanced compressor technology, the THERMA V R290 Monobloc keeps indoor spaces comfortably warm-even when outdoor temperatures drop as low as -28°C.







| <br>Wiring |
|------------|
| Water pipe |
| ombi Unit  |

 $\bar{\blacksquare}$ 

| Wiring only                            |  |
|--|--|
| ************************************** |  |

Cascade Control Unit

| Line-up  | Capacity (kW) | 4.0 | 5.5 | 6.0 | 7.0 | 9.0 | 12.0 | 14.0 | 16.0 |
|----------|---------------|-----|-----|-----|-----|-----|------|------|------|
| R290     | 1 Ø 230 V     |     |     |     | •   | •   | •    | •    | •    |
| Monobloc | 3 Ø 400 V     |     |     |     | •   | •   | •    | •    | •    |

<sup>\*</sup> The power supply is shown based on the outdoor unit.



#### R32 Monobloc SII



The THERMA V R32 Monobloc S II is the next generation model that continues the legacy of the LG THERMA V R32 Monobloc S. The new generation's sleek look matches that of the rest of the modernized lineup, while maintaining the excellent performance of the existing R32 Monobloc S, and that the single fan design has been applied to not only the 5, 7, and 9 kW but also the 12, 14, and 16 kW models. Along with these design changes, various features and installation conveniences that were developed from the R290 Monobloc have been reflected.






| Line-up      | Capacity (kW) | 4.0 | 5.5 | 6.0 | 7.0 | 9.0 | 12.0 | 14.0 | 16.0 |
|--------------|---------------|-----|-----|-----|-----|-----|------|------|------|
| R32          | 1 Ø 230 V     |     | •   |     | •   | •   | •    | •    | •    |
| Monobloc S I | 3 Ø 400 V     |     |     |     |     |     | •    | •    | •    |

#### R32 Hydrosplit Hydro Unit



The LG THERMA V Hydrosplit series separates the indoor unit (IDU) and outdoor unit (ODU), connecting them via water pipes. The unit's heat exchanger is located within the ODU, reducing the risk of indoor refrigerant leakage. THERMA V R32 Hydrosplit Hydro Unit is a solution providing space heating, cooling and DHW supply with high installation flexibility thanks to the characteristic of being a wall mounted type. Its wall-mounted design frees up floor space and speeds up installation due to its lightweight build. With the unit located indoors-often in a machine room-access for maintenance is quick and hassle-free.





| Line-up        | Capacity (kW) | 4.0 | 5.5 | 6.0 | 7.0 | 9.0 | 12.0 | 14.0 | 16.0 |
|----------------|---------------|-----|-----|-----|-----|-----|------|------|------|
| R32 Hydrosplit | 1 Ø 230 V     |     |     |     |     |     | •    | •    | •    |
| Hydro Unit     | 3 Ø 400 V     |     |     |     |     |     | •    | •    | •    |

<sup>\*</sup> The power supply is shown based on the outdoor unit


## THERMA V<sub>IM</sub>

## **LINE-UP INTRODUCTION**

#### R32 Hydrosplit Combi Unit



The LG THERMA V Hydrosplit series separates the indoor unit (IDU) and outdoor unit (ODU), connecting them via water pipes. The unit's heat exchanger is located within the ODU, reducing the risk of indoor refrigerant leakage. THERMA V R32 Hydrosplit Combi Unit combines an indoor unit, a water tank and complex piping into a single, space-saving solution that is able to provide space heating, cooling and DHW supply. Relatively compact and lightweight, the innovative all-in-one system is easy to install and operate, and boasts outstanding reliability and efficiency. Since there is no need to install a separate domestic hot water tank for hot water supply, space is not wasted, and the concept with all-in-one enables quick installation.






| Line-up        | Capacity (kW) | 4.0 | 5.5 | 6.0 | 7.0 | 9.0 | 12.0 | 14.0 | 16.0 |
|----------------|---------------|-----|-----|-----|-----|-----|------|------|------|
| R32 Hydrosplit | 1 Ø 230 V     |     |     |     |     |     | •    | •    | •    |
| Combi Unit     | 3 Ø 400 V     |     |     |     |     |     | •    | •    | •    |

<sup>\*</sup> The power supply is shown based on the outdoor unit.

#### R32 Split Hydro Unit



The LG THERMA V R32 Split Hydro Unit is a hydro type system consisting of an indoor unit and an outdoor unit. The two units are connected by refrigerant piping only, thus hydronic components such as plate heat exchanger, expansion tank and water pump are located within the indoor unit. Due to the split nature, freezing will not compromise this unit regardless of outdoor ambient temperatures. The outdoor unit is on offer in 4/6 kW and 5/7/9 kW capacity range. R32 Split 4/6 kW model is suitable for new build houses that are well insulated and require a small heating load, while R32 Split 5/7/9 kW model is adapted for both new build and renovation projects.





| Line-up    | Capacity (kW) | 4.0 | 5.5 | 6.0 | 7.0 | 9.0 | 12.0 | 14.0 | 16.0 |
|------------|---------------|-----|-----|-----|-----|-----|------|------|------|
| R32 Split  | 1 Ø 230 V     | •   | •   | •   | •   | •   |      |      |      |
| Hydro Unit | 3 Ø 400 V     |     |     |     |     |     |      |      |      |


<sup>\*</sup> The power supply is shown based on the outdoor unit.

030

#### R32 Split Combi Unit



The LG THERMA V R32 Split Combi Unit is a domestic hot water supply, space heating and cooling solution that conveniently combines an indoor hot water tank with a separate outdoor unit. THERMA V R32 Split Combi Unit is the perfect space-saving solution for residential applications because hydronic components like the Domestic Hot Water (DHW) and buffer tanks, which are typically installed separately, are fully integrated. Its split design eliminates the risk of freezing, delivering reliable operation against harsh outdoor ambient temperatures. The outdoor unit is on offer in 4/6 kW and 5/7/9 kW capacity range. R32 Split 4/6 kW model is suitable for new build houses that are well insulated and require a small heating load, while the R32 Split 5/7/9 kW model is adapted for both new build and renovation projects.





| Line-up    | Capacity (kW) | 4.0 | 5.5 | 6.0 | 7.0 | 9.0 | 12.0 | 14.0 | 16.0 |
|------------|---------------|-----|-----|-----|-----|-----|------|------|------|
| R32 Split  | 1 Ø 230 V     | •   | •   | •   | •   | •   |      |      |      |
| Combi Unit | 3 Ø 400 V     |     |     |     |     |     |      |      |      |

<sup>\*</sup> The power supply is shown based on the outdoor unit.

033

## THERMA V<sub>TM</sub>

## **LINE-UP INTRODUCTION**

#### **R290 Heat Pump Water Heater**



The new refrigerant technology allows the unit to efficiently reach outlet temperatures of up to 75°C. Available in sizes ranging from 100 to 200 liters, the unit is developed to meet the capacity needs of each household. Designed with modern living in mind, the R290 Heat Pump Water Heater blends seamlessly into any indoor space. Plus, its ultralow noise level-quieter than a typical office-ensures everyday comfort without disruption. The magnesium anode and ICCP (Impressed Current Cathodic Protection) help to always keep the tank clean by preventing interior corrosion.





| Line-up                           | Capacity (ℓ) | 80 £ | 100 l | 150 ℓ | 200 ℓ | 270 ℓ | 300 l |
|-----------------------------------|--------------|------|-------|-------|-------|-------|-------|
| R290<br>Heat Pump<br>Water Heater | 1 Ø 230 V    |      | •     | •     | •     |       |       |

#### R134a Heat Pump Water Heater



LG inverter compressor and two heater coils on the top and bottom provide hot water quickly. LG unit's exclusive square shape and luxury silver color make it an excellent fit for any interior design. With the LG ThinQ smartphone app, users can easily control and monitor the heat pump, check for current water temperatures, setting operating schedules and more. Four operating modes help the customer use the water heater more effectively.






| Line-up                            | Capacity (1) | 80 l | 100 l | 150 ℓ | 200 ℓ | 270 ℓ | 300 l |
|------------------------------------|--------------|------|-------|-------|-------|-------|-------|
| R134a<br>Heat Pump<br>Water Heater | 1 Ø 230 V    |      |       |       | •     | •     |       |

#### R32 Monobloc 51 kW



The LG R32 Monobloc 51 kW is a large capacity heat pump that provides a collective central heating solution for multi-family houses or light commercial buildings. Ideal for locations that require reliable heating and cooling year-round, this air to water heat pump offers a versatile solution.

Operating efficiently as a single system, it is well-suited for various commercial spaces including multi family house, office buildings, schools and universities.






| Line-up               | Capacity (kW) | 18.0 | 24.0      | 32.0        | 36.0        | 48.0 | 51.0 | 64.0 | 80.0      | 96.0          | 112.0        | 128.0 |
|-----------------------|---------------|------|-----------|-------------|-------------|------|------|------|-----------|---------------|--------------|-------|
| R32<br>Monobloc 51 kW | 3 Ø 400 V     | F    | Recommend | to use Caso | ade Solutio | n    | •    |      | Recommend | l to use Casc | ade Solution | n     |

#### **Cascade Control Unit**



The LG Cascade Control Unit is an advanced heating solution designed to manage up to 8 units of the THERMAV system with a single controller. This centralized control enhances system efficiency and simplifies operation, making it an ideal choice for optimizing heat pump performance in multiunit applications.

Cascade system offers efficient performance across all heating capacity ranges, adapting to fluctuating demand while maintaining reliability and reducing unnecessary energy consumption.





| Line-up                 | Capacity (kW) | 18.0              | 24.0               | 32.0               | 36.0               | 48.0               | 64.0               | 80.0               | 96.0               | 112.0              | 128.0              |
|-------------------------|---------------|-------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Cascade<br>Control Unit | Combination   | 9 kW x<br>2 Units | 12 kW x<br>2 Units | 16 kW x<br>2 Units | 12 kW x<br>3 Units | 16 kW x<br>3 Units | 16 kW x<br>4 Units | 16 kW x<br>5 Units | 16 kW x<br>6 Units | 16 kW x<br>7 Units | 16 kW x<br>8 Units |
|                         | No of Units   |                   | 2 Units            |                    | 3 U                | nits               | 4 Units            | 5 Units            | 6 Units            | 7 Units            | 8 Units            |

<sup>\*</sup> LG recommends above combinations as much as possible even though up to eight (8) R290 Monobloc outdoor units of the same capacity can be connected.

## PRE-SALES / **ENGINEERING TOOLS**

#### **Pre-sales / Engineering Tools**

LG provides a variety of software to support THERMA V for all customers including designers, installers, and end users.

#### 1, LATS THERMA V

LATS THERMA V is a web based simulation tool that enables to choose the optimal THERMA V model from various capacity range and simulates its energy cost comparing to other heating solutions. Furthermore, customer is easily able to simulate payback compared to a conventional system such as a gas boiler, electric boiler by using LATS THERMA V.





1. Model Selection: Select suitable model based on the design conditions you input.

There are 3 types project in LATS THERMA V WEB.



2. Diagram: Generate piping / wiring diagrams in DWG format based on the design conditions and other selected applications.




3. Sound Simulation: Provide noise simulation results according to distance from house.



#### 2. LG Energy Lab

LG Energy Lab online is a web version tool that can print energy labels. It is easy to use because it is composed of a user-friendly UI, and provides additional functions such as contact function and project management function.




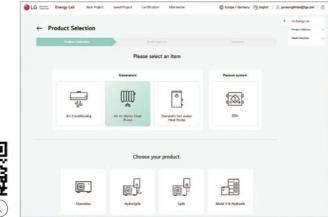

#### 3. LGMV

LGMV is a useful engineering tool that monitors THERMA V's real-time refrigerant and water cycle. It assists installers with effective and efficient start-up and commissioning after the THERMA V installation. LGMV enables service/field engineers to detect the errors and troubleshooting for fast and reliable problem solving.

\* LGMV is available on the LG partner portal.

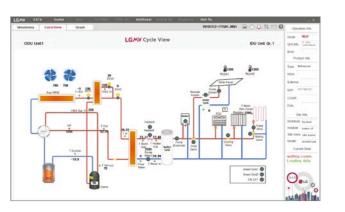

#### 4. LG THERMA V Selector

The LG THERMA V Selector is a mobile application for designers, installers and end users, which provides various real-life simulations. An energy simulation can quickly indicate energy consumption and cost as well as CO<sub>2</sub> emission values that can be vastly reduced from conventional heating systems using minimal input

With both model selection and energy simulation tools, quick and accurate selection is made possible with detailed input values such as desired system configuration, required heating and Domestic Hot Water (DHW) load, which will calculate payback, result in a faster energy simulation and generate cost comparisons. Sound level can also be calculated through simulations based on the installation environment.



## ThinQ SEAMLESS CONNECTIVITY

#### **Smart Control, Smarter Life**

LG ThinQ, a smart phone app, allows users to monitor and manage compatible LG products remotely, which means they can set the temperature and regulate the use of their THERMA V anytime and anywhere.

In most EU countries, LG ThinQ technology also works with Google Assistant, letting users control their THERMA V with voice commands.



PWFMDD200 (LG Wi-Fi Modem) / PWYREW000 (10 m extension connect cable in between THERMA V indoor and LG Wi-Fi Modem) could be required depending on

- \* Search "LG ThinQ" on Google market or App store, then download the app.
- \* Google assistant voice control may be restricted in use and language in some countries.
- \* Google and Google Home are trademarks of Google LLC.
- \* Voice-enabled smart speaker device is not included

#### How to install the LG ThinQ app

Search and install for the LG ThinQ application from the Google Play or Apple App Store on a smart phone.

For iOS users





036



Download now 🕹 )

How to connect THERMA V to the LG ThinQ app



A ThinQ guide for **LG THERMA V** 



In the video below, see how to install Wi-Fi modem and connect THERMA V and ThinQ.



In the video below, learn how to smartly monitor and control your THERMA V with ThinQ



#### **Connect and Control** from anywhere, anytime

LG ThinQ allows end users to easily control their heating system in away they have never done before. Let them experience smart control of THERMA V with just the tap of a button. Even when outside, they can operate the THERMA V remotely.



#### Simple control with voice assistant

Tell THERMA V exactly what is needed. Say, "Turn on/off the THERMA V" and the AI speaker will listen and turn on/off the THERMA V.



#### Efficient energy monitoring


The LG ThinQ app continuously monitors THERMA V. Whether it's everyday maintenance or something else, the app allows you to easily monitor energy usage.







#### ThinQ mobile app

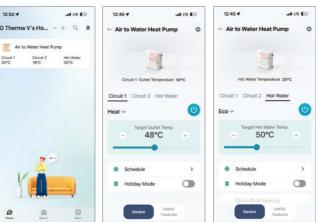

Space heating / Cooling control



Hot water control

Useful features



Energy monitoring



Widget on home screen

(Android)

This image is intended to help you understand, and there may be some differences in actual use.

\* Control via widgets is only possible with the Android app.


## LG BECON CLOUD SERVICE

#### for THERMA V




#### What is LG BECON cloud Service?

LG BECON cloud service is a cloud-based service that remotely monitors a customer's heating system via PC, tablet or mobile anytime, anywhere. The operation status of the heat pump can be monitored at a glance as well as the past operation history. In the event of an issue, the cause can be identified in advance and the repair can be completed during a one-time visit. For more details and service contract, please contact your LG regional service contact.

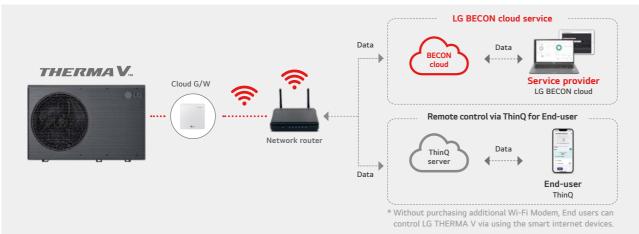

#### **Target Customer and Benefits**

#### Service partners / Installers

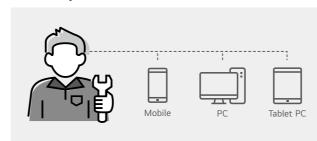

#### ✓ Save time and cost

- One time visit with right parts
- No need pre-visit for diagnosis

#### **☑** Quality of service

- Better service to end users with accurate diagnosis and fast repair

#### ✓ Increased business opportunity

- Combine product + service offer
- Make more installation / repairs

#### **End-users**



#### **☑** Enjoy peace of mind

- Be serviced at once or faster
- Be confident that immediate and quality of service will be provided in case of an error

#### **✓ Less constraints**

- No need to be at home for first diagnosis
- Monitor the operation status and control the system remotely

#### **Key Features**



#### Management at a glance

Monitoring status of customers

• Interactive map view or list view



#### **Energy monitoring**

Providing warning if energy usage is excessively

• Display estimated power consumption by selfcalculation



#### Operation and error history

Providing operation data and error history to quickly identify the issue

• Operation history, error history, setting history,



#### Error notification by e-mail

Providing an e-mail notification automatically when an error occurs

• Possible to identify immediately and take a fast



#### Remote control via cloud

• Schematic view or table view

• Current status and historical data

Preventing unnecessary site visit caused by simple operation mistake

• Operation mode (heating / cooling / DHW), target temperature

Monitoring with visualized schematic

• Cycle monitoring, sensor and actuator monitoring

• Emergency operation, low noise operation, quick

DHW operation


## LG BECON CLOUD SERVICE

#### for THERMA VI

#### Why LG BECON cloud Service?


#### Quick service response time

Saving time and cost thanks to remote diagnosis of operation cycle without access to product.

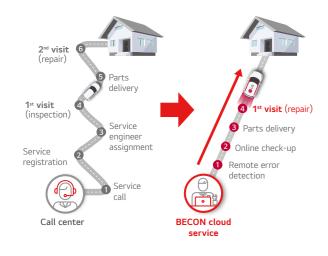


#### Accurate diagnosis

Accurate diagnosis for cause of failure can be done by utilizing the error code and cycle data when an actual failure occurs.

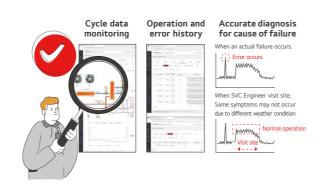


#### Remote device control

With single account, maintenance service provider (or installer) can control their customer's sites remotely. As a result, site visit is not needed for minor issues, such as adjusting temperature or mode.

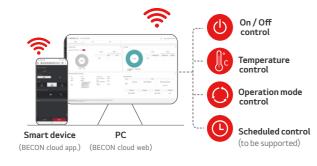

#### Error notification by e-mail

Providing an e-mail notification automatically when an error occurs, making it possible for maintenance service provider (or installer) to immediately identify and quickly react.

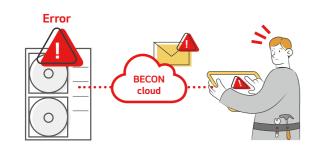

#### **Energy monitoring**

Power consumption based on self-calculation is recorded and displayed. Maintenance service provider (or installer) can provide warning if energy usage is excessively high.



#### ThinQ for end-users

Without purchasing additional Wi-Fi Modem, end-users can control LG THERMA V via using smart internet devices.



#### Requirements



#### Cloud gateway



PI485 gateway

- Compatible THERMA V 1) Required accessory Network router R290 Monobloc R32 Monobloc S I Cloud gateway (PWFMDB200) Wireless or wired LAN R32 Split Hydro Unit R32 Split Combi Unit R32 Hydrosplit Hydro Unit LG BECON cloud service contract Supported language Supported device / software Authority (ID and PW) PC, Tablet, Mobile PC or English, Spanish, Italian, to use LG platform Mobile web browser, German, Polish, Greek (LG BECON cloud service) Mobile app. (Android / iOS)
- 1) In the case of R290 Monobloc, PI485 G/W is built-in, so there is no need to purchase it separately.
- 2) More languages will be supported sequentially. The schedule for service availability may vary by country.

#### Interface Screen

#### Dashboard



[Operation status summary]

[Operation status]

#### Site




[Site overview]

#### Control



[Device control]



[Cycle monitoring – schematic view]



[Cycle monitoring – table view]

#### History



| ΓΩ |          | Linear and |
|----|----------|------------|
| 10 | peration | history    |



[Error history]



[Outdoor unit cycle history]

#### SOLUTIONS

#### INDIVIDUAL SOLUTIONS

#### MONOBLOC

044 R290 Monobloc

**048** - Control Unit (7/9/12/14/16 kW)

**062** - Hydro Unit (7/9/12/14/16 kW)

**076** - Combi Unit (7/9/12/14/16 kW)

**094** R32 Monobloc S I (5/7/9/12/14/16 kW)

#### HYDROSPLIT

110 R32 Hydrosplit

**114** - Hydro Unit (12/14/16 kW)

**124** - Combi Unit (12/14/16 kW)

#### SPLIT

134 R32 Split


**138** - Hydro Unit (4/6, 5/7/9 kW)

**152** - Combi Unit (4/6, 5/7/9 kW)

#### HEAT PUMP WATER HEATER

174 R290 Round Type (100/150/200l)

182 R134a Square Type (200/270l)

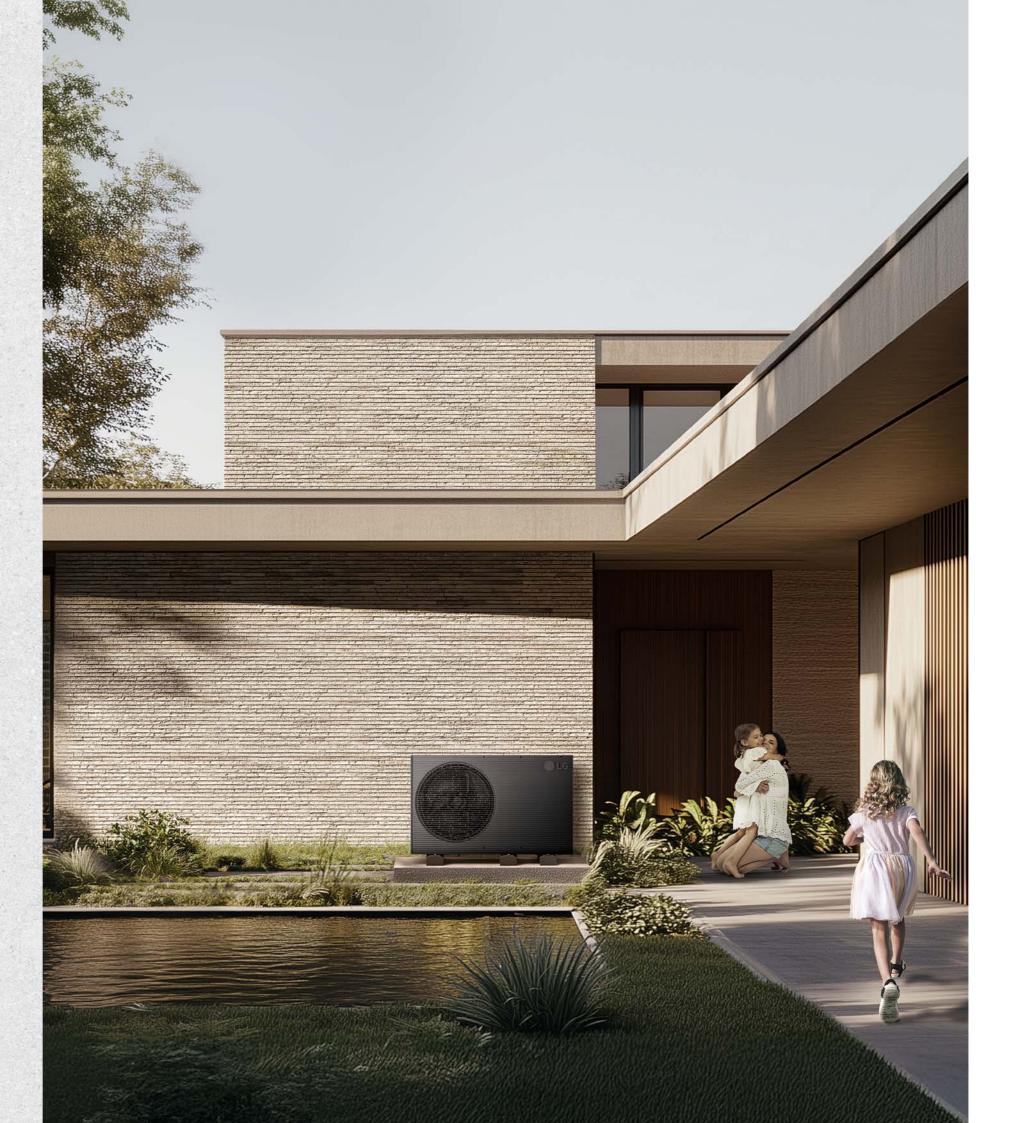



#### What is R290 Monobloc

The new R290 Monobloc is a super-quiet, future-conscious heat pump that uses the R290 refrigerant which has lower GWP of only three.

From an aesthetic standpoint, refined gray design allows it to seamlessly harmonize with a diverse range of home and building exteriors, and from a technical standpoint, it is designed to be lownoise, so you don't have to worry about causing noise pollution to neighbors.

The LG THERMA V R290 Monobloc is available in three different combinations (Control Unit, Hydro Unit or Combi Unit) depending on the customers' needs.

#### **Key Features**

- Capacity range from 7 to 16 kW for new build and renovation
- Natural refrigerant R290 with low GWP (3)
- Refined gray design that adapts to various surroundings
- ErP Energy Labeling A+++ / A+++ for space heating (Average Climate 35°C / 55°C LWT)
- One of the quietest models on the market (49 dB(A) for 7 kW, 12 kW models)
- Maximum flow temperature up to 75°C
- Operation range down to -28°C
- Customized options through different three indoor units combinations
- Provides 75°C leaving water even at -15°C outdoor temperatures (7/9 kW only)
- 2024 IDEA Design Awards Bronze Winner















#### **Product Range**

| Di    | Capacity |              | Indoor Unit  |              |              |  |  |  |
|-------|----------|--------------|--------------|--------------|--------------|--|--|--|
| Phase | (kW)     | Control Unit | Hydro Unit   | Combi Unit   | Outdoor Unit |  |  |  |
|       | 7        |              |              |              | HM071HF UB40 |  |  |  |
|       | 9        |              |              |              | HM091HF UB40 |  |  |  |
| 1Ø    | 12       |              | HN1616HC NK0 | HN1616HY NK0 | HM121HF UB60 |  |  |  |
|       | 14       | E Company    |              |              | HM141HF UB60 |  |  |  |
|       | 16       | PHCS0        |              |              | HM161HF UB60 |  |  |  |
|       | 7        | ENCXLEU      |              |              | HM073HF UB40 |  |  |  |
|       | 9        |              |              |              | HM093HF UB40 |  |  |  |
| 3Ø    | ð 12     | HN1639HC NK0 | HN1639HY NK0 | HM123HF UB60 |              |  |  |  |
|       | 14       |              |              |              | HM143HF UB60 |  |  |  |
|       | 16       |              |              |              | HM163HF UB60 |  |  |  |

## HIGHLIGHT OF **R290 MONOBLOC**

#### **New Design**

#### **European Design**



#### **High Reliability**







Anti-icing and Deicing technologies for R290 Monobloc.

- 1 Defrost operation by dual EEVs & Cycle
- 2 Corrugated fin
- 3 Base pan heating (heater)
- 4 Elimination of side panel and rear grille
- **6** Frost-free for bottom pass of heat exchanger
- **6** Increased quantity for drain hole

#### Improved Operational Stability

#### Freezing Outside, but Toasty Inside

The R290 Monobloc can function in external temperatures as low as -28°C. Plus, customers can retain their existing radiators as the system can generate an outlet water of up to 75°C, offering a cost-saving advantage. Even at -15°C, it is possible to provide an outlet water temperature of 75°C. (7 / 9 kW only)



#### **Extremely Quiet Operation**


#### **Heats Home in Hushed Tones**



| R290 Monobloc                                   | 7 kW | 9 kW | 12 kW | 14 kW | 16 kW |
|---|------|------|-------|-------|-------|
| Sound power level 1) (heating / rated)          | 49   | 50   | 49    | 51    | 52    |
| Sound power level 1) (heating / low noise mode) | 47   | 48   | 48    | 50    | 51    |

<sup>1)</sup> Sound power level is measured in accordance with EN 12102-1 and ISO 9614.


#### Ensuring regulatory compliance across all EU markets

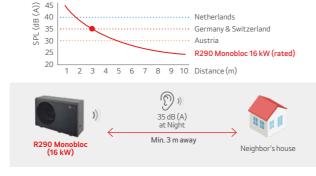

Customers can have peace of mind with no risk of complaints and no additional costs for acoustic enclosures.

#### **High Efficiency Operation**

#### **Exceptional Efficiency**

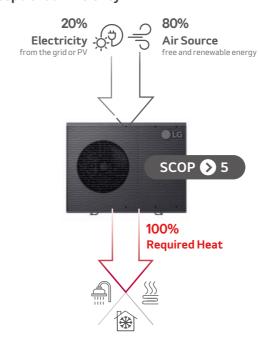


#### Achieving the highest ErP energy grade A+++ / A+++ for space heating

LG THERMA V R290 Monobloc (7/9/12/14/16kW)



#### Reduced annual energy costs

Estimated Average Annual Energy Costs\* in the EU (EU 27)

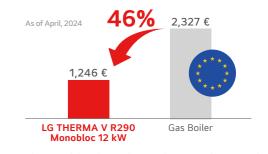


\* This is simulation result based on conditions under average climate & Medium temperature (55°C) and it may differ from actual value since there are many


#### Convenience

#### **Easy Installation**

The two-way piping connection method not only grants greater installation flexibility but also offers distinct advantages when it comes to concealing underground piping for both aesthetic and frost protection purposes.

- \* The downward piping kit should be purchased and installed separately.
- PHDW36B0 for 7. 9 kW models
- PHDW60B0 for 12, 14, 16 kW models





Backward Connection

**Downward Connection** 

#### **Freedom of Integration**

#### **Customized Combinations to Meet Diverse Needs**

Since THERMA V R290 Monobloc has hydro components integrated into the outdoor unit, it can be combined with various indoor units to implement applications tailored to customer needs.

| Outdoor Unit | Indoor Unit Type |  |  |  |  |  |
|--------------|------------------|--|--|--|--|--|
| 200          |                  | Control Unit  Stand-alone concept Easy integration with 3 <sup>rd</sup> party equipment            |  |  |  |  |
|              |                  | Hydro Unit  Back-up heater & expansion tank integrated inside                                      |  |  |  |  |
| 0 7          | 8                | Combi Unit  DHW tank, back-up heater, expansion tank integrated inside  200 l stainless steel tank |  |  |  |  |



## THERMA V. R290 Monobloc **CONTROL UNIT**




#### Easy to Install, **Minimal Space** Required

Since the water pipe is not connected to the indoor unit and requires less installation space, it offers an easy installation process similar to the full Monobloc concept.

This setup is especially recommended for cases where the customer does not wish to install a backup heater, prefers to add it as a third-party accessory, or opts to install a larger expansion tank.

#### **Key Features**

- Stand-alone concept
- Light weight and compact size fits in small spaces
- Simple installation by minimizing piping and wiring work
- Easy integration with 3<sup>rd</sup> party equipment because of less cabling
- No pipe connections for the indoor unit allow for a neat installation

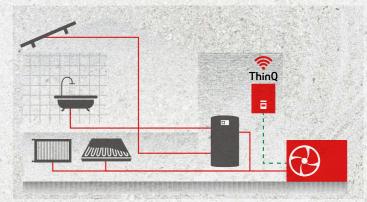

#### Application







#### Certifications









#### **Energy Label**








## THERMA V R290 MONOBLOC CONTROL UNIT (7/9 kW)

#### Outdoor unit

HM071HF UB40 / HM073HF UB40 HM091HF UB40 / HM093HF UB40

#### Indoor unit

PHCS0 ENCXLEU

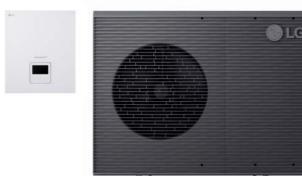





















#### **Key Components**

Outdoor Unit



#### Components

- 1 Black Fin heat exchanger (air / ref.)
- 2 Biomimetic fan
- 3 New R1 compressor
- 4 Hydronic components assembly
- Deaerator
- 6 Water pump
- 7 Flow sensor
- 8 Plate heat exchanger
- 9 Pressure sensor

#### Connections

- A Leaving water pipe (male PT 1")
- B Entering water pipe (male PT 1")

#### Indoor Unit (Control Unit)



#### Components

1 Standard III remote controller 1) (air temp. sensor integrated)

1) Temperature control class (ERP class): V

#### **Product Specification**

| Efficiency Data                                      |                                  |          | 7 kW (1 Ø)<br>7 kW (3 Ø)     | 9 kW (1 Ø)<br>9 kW (3 Ø)     |  |  |  |
|--|----------------------------------|----------|------------------------------|------------------------------|--|--|--|
| Seasonal space heating eff. class (35°C / 55         | °C)                              | -        | A+++ / A+++                  | A+++ / A+++                  |  |  |  |
| Seasonal space heating efficiency ( $\eta_s$ ) (35°C | / 55°C)                          | %        | 207 / 151                    | 205 / 151                    |  |  |  |
| SCOP (35°C / 55°C)                                   |                                  | -        | 5.24 / 3.86                  | 5.20 / 3.86                  |  |  |  |
| Sound power level (outdoor unit)                     | Rated / low noise mode           | dB(A)    | 49 / 48                      | 50 / 48                      |  |  |  |
| Sound pressure level at 5m (outdoor unit)            | Rated / low noise mode           | dB(A)    | 27 / 26                      | 28 / 26                      |  |  |  |
| Nominal Capacity and COP/EER                         |                                  |          |                              |                              |  |  |  |
| Air +7°C / water +35°C                               | Heating capacity / COP           | kW / -   | 7.00 / 5.00                  | 9.00 / 4.70                  |  |  |  |
| Air +2°C / water +35°C                               | Heating capacity / COP           | kW / -   | 7.00 / 3.80                  | 8.00 / 3.70                  |  |  |  |
| Air -7°C / water +35°C                               | Heating capacity / COP           | kW / -   | 7.00 / 2.80                  | 9.00 / 2.70                  |  |  |  |
| Air +7°C / water +55°C                               | Heating capacity / COP           | kW / -   | 4.50 / 3.35                  | 5.50 / 3.30                  |  |  |  |
| Air -7°C / water +55°C                               | Heating capacity / COP           | kW / -   | 7.00 / 2.40                  | 8.00 / 2.20                  |  |  |  |
| Air +35°C / water +18°C                              | Cooling capacity / EER           | kW / -   | 5.00 / 4.40                  | 5.50 / 4.20                  |  |  |  |
| Air +35°C / water +7°C                               | Cooling capacity / EER           | kW / -   | 5.00 / 2.80                  | 5.50 / 2.60                  |  |  |  |
| Outdoor Units  |                                  | Unit     | HM071HF UB40<br>HM073HF UB40 | HM091HF UB40<br>HM093HF UB40 |  |  |  |
| Operation range                                      | Heating & DHW (Min. ~ Max.)      | °C       | -28 ~ 35                     |                              |  |  |  |
| (outdoor air temperature)                            | Cooling (Min. ~ Max.)            | °C       | 5 ~ 48                       |                              |  |  |  |
|  | Туре                             | -        | R2                           | 90                           |  |  |  |
| Refrigerant  | GWP                              | -        | 3                            |                              |  |  |  |
|  | Precharged amount                | g        | 900                          |                              |  |  |  |
| Piping connections (water)                           | Inlet / outlet diameter          | inch     | Male PT 1" according to ISC  | 7-1 (tapered pipe threads)   |  |  |  |
| Dimension  | HxWxD                            | mm       | 1,019 x 1,                   | 320 x 520                    |  |  |  |
| Weight   | Net                              | kg       | 13                           | 0.0                          |  |  |  |
| Exterior   | Color of chassis / RAL code      | -        | Dawn gray                    | / RAL 7037                   |  |  |  |
| Exterior   | Color of front grille / RAL code | -        | Dark dawn gr                 | ay / RAL 7012                |  |  |  |
|  | Voltage, phase, frequency        | V, Ø, Hz | 220 ~ 240, 1, 50             | / 380 ~ 415, 3, 50           |  |  |  |
| Power supply   | Standby power consumption        | W        | 1                            | 0                            |  |  |  |
|  | Recommended circuit breaker      | А        | 1 Ø: 20                      | / 3 Ø: 16                    |  |  |  |
| Indoor Units   |                                  | Unit     | PHCS0 E                      | NCXLEU                       |  |  |  |
|  | Heating (Min. ~ Max.)            | °C       | 15                           | ~ 75                         |  |  |  |
| Operation range (leaving water temperature)          | Cooling (Min. ~ Max.)            | °C       | 5 ~                          | 27                           |  |  |  |
|  | DHW (Min. ~ Max.)                | °C       | 15                           | - 80                         |  |  |  |
| Dimension  | HxWxD                            | mm       | 490 x 4                      | 20 x 141                     |  |  |  |
| Weight   | Net                              | kg       | 6                            | .8                           |  |  |  |
| Exterior   | Color / RAL code                 | -        | Essence whit                 | e / RAL 9003                 |  |  |  |
| Power supply   | Voltage, phase, frequency        | V, Ø, Hz | 220 ~ 2                      | 40, 1, 50                    |  |  |  |
| Power supply   | Recommended circuit breaker      | А        | 1                            | 0                            |  |  |  |

- 1. Due to our policy of innovation, some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes. Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound power level is measured on the rated condition in accordance with ISO 9614 standard, Sound pressure level is not a value declared on Eurovent Program and is converted from sound power level based on a tonality penalty of 0 dB and installation in free-field. The directivity index (Q) is assumed as 2. Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is in accordance with EN12102-1 under condition of EN14825.
- 4. Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation.
- 5. This product contains fluorinated greenhouse gases.
- $6. \ All \ installation \ sites \ must \ be \ equipped \ with \ an \ earth \ leakage \ circuit \ breaker \ (ELCB).$
- 7. DHW 65 ~ 80  $^{\circ}\text{C}$  Operating is available only when the booster heater is operating.

## THERMA V R290 MONOBLOC CONTROL UNIT (7/9 kW)

#### **Performance Table for Heating Operation**

Maximum heating capacity (Include defrost effect)

#### HM071HF UB40 + PHCS0 ENCXLEU / HM073HF UB40 + PHCS0 ENCXLEU

| Outdoor Temp. | LWT 30 °C | LWT 35 °C | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C | LWT 70 °C | LWT 75 °C |
|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| [°C DB]       |           |           |           |           | Capaci    | ty (kW)   |           |           |           |           |
| -25           | 5.90      | 5.85      | 5.85      | 5.85      | 5.80      | 5.80      | 5.80      | -         | -         | -         |
| -20           | 6.50      | 6.50      | 6.50      | 6.50      | 6.20      | 6.10      | 6.10      | 6.00      | -         | -         |
| -15           | 7.00      | 7.00      | 7.00      | 7.00      | 6.80      | 6.70      | 6.30      | 6.30      | 6.20      | 6.20      |
| -7            | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 6.70      | 6.60      | 6.40      |
| -4            | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 6.70      | 6.50      |
| -2            | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 6.80      | 6.50      |
| 2             | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 6.70      |
| 7             | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 6.80      |
| 10            | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |
| 15            | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |
| 18            | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |
| 20            | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |
| 35            | -         | -         | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |

#### HM091HF UB40 + PHCS0 ENCXLEU

| Outdoor Temp. | LWT 30 °C | LWT 35 °C     | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C | LWT 70 °C | LWT 75 °C |
|---------------|-----------|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| [°C DB]       |           | Capacity (kW) |           |           |           |           |           |           |           |           |
| -25           | 7.40      | 7.20          | 7.10      | 6.90      | 6.80      | 6.70      | 6.60      | -         | -         | -         |
| -20           | 8.20      | 7.90          | 7.70      | 7.50      | 7.30      | 7.10      | 6.90      | 6.60      | -         | -         |
| -15           | 9.00      | 9.00          | 8.20      | 7.90      | 7.70      | 7.60      | 7.30      | 7.00      | 6.80      | 6.50      |
| -7            | 9.00      | 9.00          | 9.00      | 8.50      | 8.40      | 8.00      | 7.90      | 7.70      | 7.40      | 6.60      |
| -4            | 9.00      | 9.00          | 9.00      | 9.00      | 9.00      | 8.40      | 8.20      | 7.90      | 7.70      | 6.70      |
| -2            | 9.00      | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 8.40      | 8.10      | 7.60      | 6.80      |
| 2             | 8.00      | 8.00          | 8.10      | 8.20      | 8.30      | 8.40      | 8.20      | 8.10      | 7.80      | 6.90      |
| 7             | 9.00      | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 8.20      | 7.10      |
| 10            | 9.00      | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 8.20      | 7.20      |
| 15            | 9.00      | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 8.30      | 7.30      |
| 18            | 9.00      | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 8.40      | 7.40      |
| 20            | 9.00      | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 8.40      | 7.50      |
| 35            | -         | -             | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 8.00      |

#### HM093HF UB40 + PHCS0 ENCXLEU

| Outdoor Temp. | LWT 30 °C | LWT 35 °C | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C | LWT 70 °C | LWT 75 °C |
|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| [°C DB]       |           |           |           |           | Capaci    | ty (kW)   |           |           |           |           |
| -25           | 7.90      | 7.77      | 7.92      | 8.08      | 8.20      | 8.40      | 8.40      | -         | -         | -         |
| -20           | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | -         | -         |
| -15           | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |
| -7            | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |
| -4            | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |
| -2            | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |
| 2             | 8.00      | 8.00      | 8.10      | 8.20      | 8.30      | 8.40      | 8.20      | 8.10      | 8.00      | 7.00      |
| 7             | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |
| 10            | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |
| 15            | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |
| 18            | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |
| 20            | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |
| 35            | -         | -         | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 8.00      |

#### Note

- 1. DB : Dry Bulb Temperature (°C), LWT : Leaving Water Temperature (°C),
- LPM : Liters Per Minute ( $\ell/\min$ ), TC : Total Capacity (kW)
- Direct interpolation is permissible. Do not extrapolate.
- 3. Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- $\bullet \ \, \text{Above table values may not be matched according to installation condition.} \ \, \text{Except for rated value, the performance is not guaranteed.}$
- In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

#### **Performance Table for Cooling Operation**

Maximum cooling capacity

#### HM071HF UB40 + PHCS0 ENCXLEU / HM073HF UB40 + PHCS0 ENCXLEU

| Outdoor Temp. | LWT 7 °C | LWT 10 °C | LWT 13 °C | LWT 15 °C     | LWT 18 °C | LWT 20 °C | LWT 22 °C |
|---------------|----------|-----------|-----------|---------------|-----------|-----------|-----------|
| [°C DB]       |          |           |           | Capacity (kW) |           |           |           |
| 20            | 5.30     | 6.00      | 6.70      | 7.00          | 7.00      | 7.00      | 7.00      |
| 30            | 5.10     | 5.40      | 5.80      | 6.20          | 7.00      | 7.00      | 7.00      |
| 35            | 5.00     | 5.40      | 5.80      | 6.20          | 6.80      | 6.80      | 7.00      |
| 40            | 4.60     | 4.90      | 5.30      | 5.60          | 6.20      | 6.70      | 7.00      |
| 45            | 4.20     | 4.70      | 5.30      | 5.60          | 6.20      | 6.50      | 7.00      |

#### HM091HF UB40 + PHCS0 ENCXLEU / HM093HF UB40 + PHCS0 ENCXLEU

| LWT 7 °C | LWT 10 °C                    | LWT 13 °C   | LWT 15 °C   | LWT 18 °C   | LWT 20 °C   | LWT 22 °C   |
|----------|------------------------------|---|---|---|---|---|
|          |                              |   | Capacity (kW)   |   |   |   |
| 5.80     | 6.70                         | 7.50  | 9.00  | 9.00  | 9.00  | 9.00  |
| 5.60     | 6.40                         | 7.20  | 7.70  | 9.00  | 9.00  | 9.00  |
| 5.50     | 6.30                         | 7.20  | 7.80  | 9.00  | 9.00  | 9.00  |
| 5.00     | 5.70                         | 6.40  | 6.80  | 7.40  | 7.70  | 9.00  |
| 4.40     | 5.10                         | 5.70  | 6.10  | 6.80  | 7.20  | 7.60  |
|          | 5.80<br>5.60<br>5.50<br>5.00 | 5.80     6.70       5.60     6.40       5.50     6.30       5.00     5.70 | 5.80     6.70     7.50       5.60     6.40     7.20       5.50     6.30     7.20       5.00     5.70     6.40 | Capacity (kW)           5.80         6.70         7.50         9.00           5.60         6.40         7.20         7.70           5.50         6.30         7.20         7.80           5.00         5.70         6.40         6.80 | Capacity (kW)           5.80         6.70         7.50         9.00         9.00           5.60         6.40         7.20         7.70         9.00           5.50         6.30         7.20         7.80         9.00           5.00         5.70         6.40         6.80         7.40 | Capacity (kW)           5.80         6.70         7.50         9.00         9.00         9.00           5.60         6.40         7.20         7.70         9.00         9.00           5.50         6.30         7.20         7.80         9.00         9.00           5.00         5.70         6.40         6.80         7.40         7.70 |

#### Note

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),
- LPM: Liters Per Minute ( $\ell$ /min), TC: Total Capacity (kW)
- $2, {\hbox{\it Direct interpolation is permissible}}, {\hbox{\it Do not extrapolate}},$
- 3. Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
- In accordance with the test standard (or nations), the rating will vary slightly.

  4. The shaded areas are not guaranteed continuous operation.
- \_\_\_\_\_

#### **Supplied Parts**

#### Strainer



| Technical Specification |                    | Unit | Details                           |
|-------------------------|--------------------|------|-----------------------------------|
| Material                | Body               | -    | Brass                             |
|                         | Mesh               | -    | Stainless steel (STS304)          |
| Mesh                    | Mesh no.           | -    | 30                                |
| Mesn                    | Max. particle size | mm   | 0.6                               |
| Piping connection       |                    | -    | Female G1" according to ISO 228-1 |


- \* The strainer and valves are supplied with the product, but it need to be installed separately.
- \* This strainer should be installed at the inlet connection of the outdoor unit to protect the clogging of a plate heat exchanger.


052

## **THERMA V R290 MONOBLOC** CONTROL UNIT (7/9 kW)

**Drawings** [Unit: mm] [Unit: mm]


HM071HF UB40 / HM073HF UB40 HM091HF UB40 / HM093HF UB40










3D view











Before piping, remove the cover brackets.


Drain holes for drain cap (7EA)

If you need more drains, remove them.


#### **Bottom view**


| No. | Part Name                      | Description          |
|-----|--------------------------------|----------------------|
| 1   | Leaving Water Pipe             | Male PT 1 inch       |
| 2   | Entering Water Pipe            | Male PT 1 inch       |
| 3   | Air Discharge Grille           | -                    |
| 4   | Access to Electrical Terminals | Power, Communication |


#### PHCS0 ENCXLEU



3D view

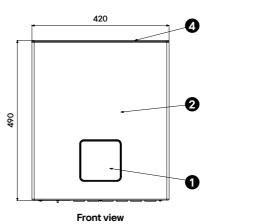





| No. | Part Name                  | Description                  |
|-----|----------------------------|------------------------------|
| 1   | Remote Controller Assembly | Built-in Remote Controller   |
| 2   | Panel Assembly.Front       | SGMCD1 M08 ESSENCE WHITE PCM |
| 3   | Panel Assembly.Indoor      | PCB and Terminal Blocks      |
| 4   | Cover                      | MOLD ABS                     |

## THERMA V R290 MONOBLOC **CONTROL UNIT (12/14/16 kW)**

#### Outdoor unit

HM121HF UB60 / HM123HF UB60 HM141HF UB60 / HM143HF UB60 HM161HF UB60 / HM163HF UB60

#### Indoor unit

PHCS0 ENCXLEU
























#### **Key Components**

Outdoor Unit

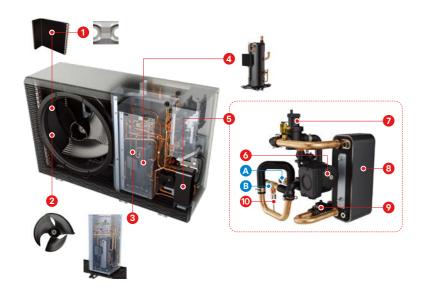

#### Components

- 1 Black Fin heat exchanger (air / ref.)
- 2 New biomimetic fan
- 3 Dual sound shield
- 4 R290 scroll compressor
- **5** Hydronic components assembly
- 6 Water pump
- Deaerator 8 Plate heat exchanger (ref / water)
- Flow sensor
- 10 Pressure sensor

#### Connections

- A Leaving water pipe (male PT 1")
- B Entering water pipe (male PT 1")

Indoor Unit (Control Unit)



#### Components

1 Standard III remote controller 1) (air temp. sensor integrated)

1) Temperature control class (ERP class): V

#### **Product Specification**

| Efficiency Data   |                                  | Unit     | 12 kW (1 Ø)<br>12 kW (3 Ø)   | 14 kW (1 Ø)<br>14 kW (3 Ø)   | 16 kW (1 Ø)<br>16 kW (3 Ø)   |  |  |
|---|----------------------------------|----------|------------------------------|------------------------------|------------------------------|--|--|
| Seasonal space heating eff. class (35°C / 55              | °C)                              | -        | A+++ / A+++                  | A+++ / A+++                  | A+++ / A+++                  |  |  |
| Seasonal space heating efficiency (η <sub>s</sub> ) (35°C | / 55°C)                          | %        | 215 / 156                    | 212 / 155                    | 201 / 154                    |  |  |
| SCOP (35°C / 55°C)  |                                  | -        | 5.45 / 3.97                  | 5.38 / 3.96                  | 5.11 / 3.92                  |  |  |
| Sound power level (outdoor unit)                          | Rated / low noise mode           | dB(A)    | 49 / 48                      | 51 / 50                      | 52 / 51                      |  |  |
| Sound pressure level at 5m (outdoor unit)                 | Rated / low noise mode           | dB(A)    | 27 / 26                      | 29 / 28                      | 30 / 29                      |  |  |
| Nominal Capacity and COP/EER                              |                                  |          |                              |                              |                              |  |  |
| Air +7°C / water +35°C                                    | Heating capacity / COP           | kW / -   | 12.00 / 4.70                 | 14.00 / 4.50                 | 16.00 / 4.30                 |  |  |
| Air +2°C / water +35°C                                    | Heating capacity / COP           | kW / -   | 12.00 / 3.72                 | 14.00 / 3.61                 | 14.50 / 3.49                 |  |  |
| Air -7°C / water +35°C                                    | Heating capacity / COP           | kW / -   | 11.80 / 3.27                 | 13.00 / 3.21                 | 13.80 / 3.17                 |  |  |
| Air +7°C / water +55°C                                    | Heating capacity / COP           | kW / -   | 10.00 / 3.10                 | 11.00 / 3.25                 | 12.00 / 3.30                 |  |  |
| Air -7°C / water +55°C                                    | Heating capacity / COP           | kW / -   | 9.30 / 2.32                  | 10.30 / 2.28                 | 10.90 / 2.26                 |  |  |
| Air +35°C / water +18°C                                   | Cooling capacity / EER           | kW / -   | 11.50 / 3.78                 | 12.00 / 3.70                 | 12.50 / 3.70                 |  |  |
| Air +35°C / water +7°C                                    | Cooling capacity / EER           | kW / -   | 10.50 / 3.12                 | 12.00 / 2.99                 | 12.50 / 2.95                 |  |  |
| Outdoor Units   |                                  | Unit     | HM121HF UB60<br>HM123HF UB60 | HM141HF UB60<br>HM143HF UB60 | HM161HF UB60<br>HM163HF UB60 |  |  |
| Operation range   | Heating & DHW (Min. ~ Max.)      | °C       |                              | -28 ~ 35                     |                              |  |  |
| (outdoor air temperature)                                 | Cooling (Min. ~ Max.)            | °C       | 5 ~ 48                       |                              |                              |  |  |
| Refrigerant   | Туре                             | -        |                              | R290                         |                              |  |  |
|   | GWP                              | -        | 3                            |                              |                              |  |  |
|   | Precharged amount                | g        | 1,200                        |                              |                              |  |  |
| Piping connections (water)                                | Inlet / outlet diameter          | inch     | Male PT 1" acc               | cording to ISO 7-1 (tapered  | f pipe threads)              |  |  |
| Dimension   | HxWxD                            | mm       |                              | 1,019 x 1,560 x 520          |                              |  |  |
| Weight  | Net                              | kg       |                              | 181.0                        |                              |  |  |
| Exterior  | Color of chassis / RAL code      | -        |                              | Dawn gray / RAL 7037         |                              |  |  |
| Exterior  | Color of front grille / RAL code | -        | I                            | Dark dawn gray / RAL 701     | 2                            |  |  |
|   | Voltage, phase, frequency        | V, Ø, Hz | 220                          | ~ 240, 1, 50 / 380 ~ 415, 3  | 3, 50                        |  |  |
| Power supply  | Standby power consumption        | W        |                              | 10                           |                              |  |  |
|   | Recommended circuit breaker      | А        |                              | 1 Ø: 25 / 3 Ø: 16            |                              |  |  |
| Indoor Units  |                                  | Unit     |                              | PHCS0 ENCXLEU                |                              |  |  |
|   | Heating (Min. ~ Max.)            | °C       |                              | 15 ~ 75                      |                              |  |  |
| Operation range<br>(leaving water temperature)            | Cooling (Min. ~ Max.)            | °C       |                              | 5 ~ 27                       |                              |  |  |
|   | DHW (Min. ~ Max.)                | °C       |                              | 15 ~ 80                      |                              |  |  |
| Dimension   | HxWxD                            | mm       | 490 x 420 x 141              |                              |                              |  |  |
| Weight  | Net                              | kg       |                              | 6.8                          |                              |  |  |
| Exterior  | Color / RAL code                 | -        |                              | Essence white / RAL 9003     | 1                            |  |  |
| Power supply  | Voltage, phase, frequency        | V, Ø, Hz |                              | 220 ~ 240, 1, 50             |                              |  |  |
| Power supply  | Recommended circuit breaker      | А        | 10                           |                              |                              |  |  |

- 1. Due to our policy of innovation, some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes. Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound power level is measured on the rated condition in accordance with ISO 9614 standard, Sound pressure level is not a value declared on Eurovent Program and is converted from sound power level based on a tonality penalty of 0 dB and installation in free-field. The directivity index (Q) is assumed as 2. Therefore, these values can be increased owing to ambient conditions during operation, Rated sound power level is in accordance with EN12102-1 under condition of EN14825
- 4. Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation.
- 5. This product contains fluorinated greenhouse gases.
- 6. All installation sites must be equipped with an earth leakage circuit breaker (ELCB).
- 7. DHW 65 ~ 80  $^{\circ}\text{C}$  Operating is available only when the booster heater is operating.

## THERMA V R290 MONOBLOC **CONTROL UNIT (12/14/16 kW)**

#### **Performance Table for Heating Operation**

Maximum heating capacity (Include defrost effect)

#### HM121HF UB60 + PHCS0 ENCXLEU / HM123HF UB60 + PHCS0 ENCXLEU

| Outdoor Temp. | LWT 30 °C | LWT 35 °C     | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C | LWT 70 °C | LWT 75 °C |  |  |  |
|---------------|-----------|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|--|--|--|
| [°C DB]       |           | Capacity (kW) |           |           |           |           |           |           |           |           |  |  |  |
| -25           | 8.36      | 8.07          | 7.79      | 7.54      | 7.32      | 6.37      | -         | -         | -         | -         |  |  |  |
| -20           | 9.60      | 9.39          | 9.20      | 9.09      | 9.08      | 8.27      | 6.77      | -         | -         | -         |  |  |  |
| -15           | 10.84     | 10.69         | 10.55     | 10.55     | 10.84     | 10.76     | 8.71      | 7.17      | -         | -         |  |  |  |
| -7            | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 11.27     | 10.00     | 8.99      | -         |  |  |  |
| -4            | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 10.88     | 9.65      | 8.91      |  |  |  |
| -2            | 12.00     | 12.00         | 12,00     | 12.00     | 12.00     | 12.00     | 12.00     | 11.45     | 10.29     | 9.32      |  |  |  |
| 2             | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 8.08      | 6.84      | 6.36      |  |  |  |
| 7             | 12.00     | 12.00         | 12,00     | 12.00     | 12.00     | 12.00     | 12.00     | 10.28     | 8.34      | 7.67      |  |  |  |
| 10            | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 11.20     | 9.90      | 8.95      |  |  |  |
| 15            | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 11.09     |  |  |  |
| 18            | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 11.69     |  |  |  |
| 20            | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     |  |  |  |
| 35            | -         | -             | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     |  |  |  |

#### HM141HF UB60 + PHCS0 ENCXLEU / HM143HF UB60 + PHCS0 ENCXLEU

| Outdoor Temp. | LWT 30 °C | LWT 35 °C | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C | LWT 70 °C | LWT 75 °C |
|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| [°C DB]       |           |           |           |           | Capaci    | ty (kW)   |           |           |           |           |
| -25           | 8.88      | 8.57      | 8.28      | 8.01      | 7.78      | 6.37      | -         | -         | -         | -         |
| -20           | 10.20     | 9.97      | 9.78      | 9.66      | 9.48      | 8.27      | 6.77      | -         | -         | -         |
| -15           | 12.06     | 11.99     | 11.79     | 11.59     | 11.29     | 10.76     | 8.71      | 7.17      | -         | -         |
| -7            | 14.00     | 14.00     | 13.82     | 13.63     | 13.45     | 12.58     | 11.27     | 10.00     | 8.99      | -         |
| -4            | 14.00     | 14.00     | 13.90     | 13.83     | 13.83     | 13.23     | 12.06     | 10.88     | 9.65      | 8.91      |
| -2            | 14.00     | 14.00     | 13.96     | 13.95     | 14.00     | 13.71     | 12,59     | 11.45     | 10.29     | 9.32      |
| 2             | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 13.16     | 8.08      | 6.84      | 6.36      |
| 7             | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 10.28     | 8.34      | 7.67      |
| 10            | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 11.20     | 9.90      | 8.95      |
| 15            | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 12.72     | 12.02     | 11.09     |
| 18            | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 13.82     | 12,89     | 11.69     |
| 20            | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 13.47     | 12.09     |
| 35            | -         | -         | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 12.80     |

#### HM161HF UB60 + PHCS0 ENCXLEU / HM163HF UB60 + PHCS0 ENCXLEU

| Outdoor Temp. | LWT 30 °C | LWT 35 °C     | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C | LWT 70 °C | LWT 75 °C |  |  |  |
|---------------|-----------|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|--|--|--|
| [°C DB]       |           | Capacity (kW) |           |           |           |           |           |           |           |           |  |  |  |
| -25           | 9.41      | 9.08          | 8.76      | 8.48      | 7.81      | 6.37      | -         | -         | -         | -         |  |  |  |
| -20           | 10.80     | 10.56         | 10.35     | 10.23     | 9.48      | 8.27      | 6.77      | -         | -         | -         |  |  |  |
| -15           | 13.36     | 13.28         | 12.74     | 12.15     | 11.29     | 10.76     | 8.71      | 7.17      | -         | -         |  |  |  |
| -7            | 16.00     | 16.00         | 15.17     | 14.35     | 13.52     | 12.58     | 11.27     | 10.00     | 8.99      | -         |  |  |  |
| -4            | 16.00     | 16.00         | 15.43     | 14.85     | 14.29     | 13.23     | 12.06     | 10.88     | 9.65      | 8.91      |  |  |  |
| -2            | 16.00     | 16.00         | 15.69     | 15.34     | 14.81     | 13.71     | 12.59     | 11.45     | 10.29     | 9.32      |  |  |  |
| 2             | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     | 14.84     | 13.16     | 8.08      | 6.84      | 6.36      |  |  |  |
| 7             | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 14.25     | 10.28     | 8.34      | 7.67      |  |  |  |
| 10            | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 14.92     | 11.20     | 9.90      | 8.95      |  |  |  |
| 15            | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 12.72     | 12.02     | 11.09     |  |  |  |
| 18            | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 13.82     | 12.89     | 11.69     |  |  |  |
| 20            | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 14.56     | 13.47     | 12.09     |  |  |  |
| 35            | -         | -             | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 14.40     | 12.80     |  |  |  |

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),
- LPM: Liters Per Minute ( $\ell$ /min), TC: Total Capacity (kW)
- 2. Direct interpolation is permissible. Do not extrapolate.
- 3. Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- $\bullet \ Above \ table \ values \ may \ not \ be \ matched \ according \ to \ installation \ condition. \ Except for \ rated \ value, \ the \ performance \ is \ not \ guaranteed.$
- In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

#### **Performance Table for Cooling Operation**

Maximum cooling capacity

#### HM121HF UB60 + PHCS0 ENCXLEU / HM123HF UB60 + PHCS0 ENCXLEU

| Outdoor Temp. | LWT 7 °C | LWT 10 °C | LWT 13 °C | LWT 15 °C     | LWT 18 °C | LWT 20 °C | LWT 22 °C |
|---------------|----------|-----------|-----------|---------------|-----------|-----------|-----------|
| [°C DB]       |          |           |           | Capacity (kW) |           |           |           |
| 20            | 11.50    | 11.50     | 11.50     | 11.50         | 11.50     | 11.50     | 11.50     |
| 30            | 10.97    | 11.50     | 11.50     | 11.50         | 11.50     | 11.50     | 11.50     |
| 35            | 10.50    | 11,28     | 11.50     | 11.50         | 11.50     | 11.50     | 11.50     |
| 40            | 9.35     | 10.08     | 10.80     | 11.27         | 11.50     | 11.50     | 11.50     |
| 45            | 8.19     | 8.90      | 9.61      | 10.07         | 10.77     | 11,23     | 11.50     |

#### HM141HF UB60 + PHCS0 ENCXLEU / HM143HF UB60 + PHCS0 ENCXLEU

| Outdoor Temp. | LWT 7 °C      | LWT 10 °C | LWT 13 °C | LWT 15 °C | LWT 18 °C | LWT 20 °C | LWT 22 °C |  |  |  |  |  |
|---------------|---------------|-----------|-----------|-----------|-----------|-----------|-----------|--|--|--|--|--|
| [°C DB]       | Capacity (kW) |           |           |           |           |           |           |  |  |  |  |  |
| 20            | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     |  |  |  |  |  |
| 30            | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     |  |  |  |  |  |
| 35            | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     |  |  |  |  |  |
| 40            | 10.68         | 11,52     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     |  |  |  |  |  |
| 45            | 9.36          | 10.17     | 10.98     | 11.51     | 12.00     | 12.00     | 12.00     |  |  |  |  |  |

#### HM161HF UB60 + PHCS0 ENCXLEU / HM163HF UB60 + PHCS0 ENCXLEU

| Outdoor Temp. | LWT 7 °C      | LWT 10 °C | LWT 13 °C | LWT 15 °C | LWT 18 °C | LWT 20 °C | LWT 22 °C |  |  |  |  |  |
|---------------|---------------|-----------|-----------|-----------|-----------|-----------|-----------|--|--|--|--|--|
| [°C DB]       | Capacity (kW) |           |           |           |           |           |           |  |  |  |  |  |
| 20            | 12.50         | 12.50     | 12,50     | 12.50     | 12,50     | 12.50     | 12,50     |  |  |  |  |  |
| 30            | 12.50         | 12.50     | 12,50     | 12.50     | 12.50     | 12.50     | 12,50     |  |  |  |  |  |
| 35            | 12.50         | 12.50     | 12,50     | 12.50     | 12,50     | 12.50     | 12.50     |  |  |  |  |  |
| 40            | 12.02         | 12.50     | 12.50     | 12.50     | 12.50     | 12,50     | 12.50     |  |  |  |  |  |
| 45            | 10.03         | 10.78     | 11.54     | 12.05     | 12.50     | 12.50     | 12.50     |  |  |  |  |  |

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),
- LPM: Liters Per Minute (\(\ell\)/min), TC: Total Capacity (kW)
- 2. Direct interpolation is permissible. Do not extrapolate.
- 3. Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- $\bullet \ Above \ table \ values \ may \ not \ be \ matched \ according \ to \ installation \ condition. \ Except \ for \ rated \ value, \ the \ performance \ is \ not \ guaranteed.$
- In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation

#### **Supplied Parts**

#### Strainer




| Technical Specification |                    | Unit | Details                           |  |  |
|-------------------------|--------------------|------|-----------------------------------|--|--|
| Material                | Body               | -    | Brass                             |  |  |
| Material                | Mesh               | -    | Stainless steel (STS304)          |  |  |
| Mesh                    | Mesh no.           | -    | 30                                |  |  |
| Mesn                    | Max. particle size | mm   | 0.6                               |  |  |
| Piping connection       |                    | -    | Female G1" according to ISO 228-1 |  |  |


- \* The strainer and valves are supplied with the product, but it need to be installed separately.
- \* This strainer should be installed at the inlet connection of the outdoor unit to protect the clogging of a plate heat exchanger.


## **THERMA V R290 MONOBLOC** CONTROL UNIT (12/14/16 kW)

**Drawings** [Unit: mm] [Unit: mm]

HM121HF UB60 / HM123HF UB60 HM141HF UB60 / HM143HF UB60 HM161HF UB60 / HM163HF UB60

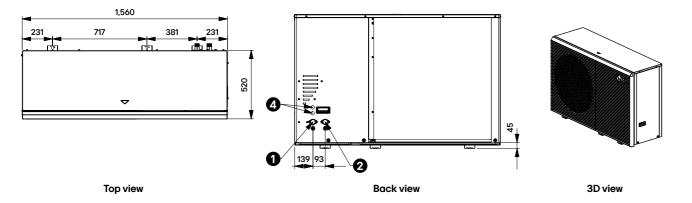

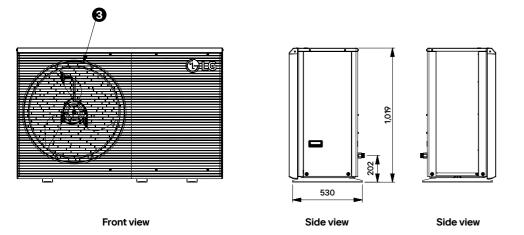


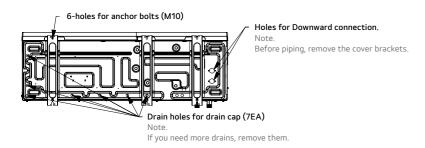



#### **Bottom view**


| No. | Part Name                      | Description          |
|-----|--------------------------------|----------------------|
| 1   | Leaving Water Pipe             | Male PT 1 inch       |
| 2   | Entering Water Pipe            | Male PT 1 inch       |
| 3   | Air Discharge Grille           | -                    |
| 4   | Access to Electrical Terminals | Power, Communication |

#### PHCS0 ENCXLEU









**Bottom view** 

| No. | Part Name                  | Description                  |
|-----|----------------------------|------------------------------|
| 1   | Remote Controller Assembly | Built-in Remote Controller   |
| 2   | Panel Assembly.Front       | SGMCD1 M08 ESSENCE WHITE PCM |
| 3   | Panel Assembly.Indoor      | PCB and Terminal Blocks      |
| 4   | Cover                      | MOLD ABS                     |



## THERMA V<sub>m</sub> R290% Monobloc **HYDRO UNIT**




#### **Optimized Solution, Time and Space** Saving Design

Hydronic components such as backup heater and expansion tank are included in the indoor unit, minimizing installation space and reducing installation time.

#### **Key Features**

- Integrated hydronic components Backup heater, Expansion tank
- Space-saving solution with compact and light indoor unit
- Simple installation due to no refrigerant piping work

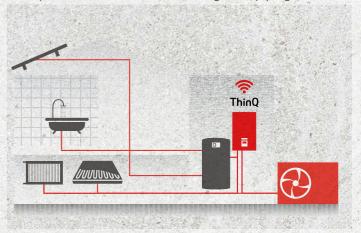

#### Application







#### Certifications









#### **Energy Label**







## THERMA V R290 MONOBLOC HYDRO UNIT (7/9kW)

#### Outdoor unit

HM071HF UB40 / HM073HF UB40 HM091HF UB40 / HM093HF UB40

#### Indoor unit

HN1616HC NK0 HN1639HC NK0

























#### **Key Components**

Outdoor Unit



#### Components

- 1 Black Fin heat exchanger (air / ref.)
- 2 Biomimetic fan
- 3 New R1 compressor
- 4 Hydronic components assembly
- Deaerator
- 6 Water pump
- 7 Flow sensor
- 8 Plate heat exchanger

#### 9 Pressure sensor

#### Connections

- A Leaving water pipe (male PT 1")
- B Entering water pipe (male PT 1")

#### Indoor Unit (Hydro Unit)



#### Components

- 1 Backup heater (1 Ø: 6 kW / 3 Ø: 9 kW)
- 2 Expansion tank (8 l)
- 3 Air vent valve
- 4 Standard III remote controller 1) (air temp. sensor integrated)

1) Temperature control class (ERP class): V

#### Connections

- A Heating circuit outlet pipe (male PT 1")
- B Heating circuit inlet pipe (male PT 1")
- Outlet pipe to outdoor unit (male PT 1")
- D Inlet pipe from outdoor unit (male PT 1")

#### **Product Specification**

| Efficiency Data                                      |  |          | 7 kW (1 Ø)<br>7 kW (3 Ø)    | 9 kW (1 Ø)<br>9 kW (3 Ø)    |  |  |
|--|--|----------|-----------------------------|-----------------------------|--|--|
| Seasonal space heating eff. class (35°C / 55         | °C)  | -        | A+++ / A+++                 | A+++ / A+++                 |  |  |
| Seasonal space heating efficiency ( $\eta_s$ ) (35°C | / 55°C)  | %        | 207 / 151                   | 205 / 151                   |  |  |
| SCOP (35°C / 55°C)                                   |  | -        | 5.24 / 3.86                 | 5.20 / 3.86                 |  |  |
| Sound power level (outdoor unit)                     | Rated / low noise mode                         | dB(A)    | 49 / 48                     | 50 / 48                     |  |  |
| Sound pressure level at 5m (outdoor unit)            | Rated / low noise mode                         | dB(A)    | 27 / 26                     | 28 / 26                     |  |  |
| Sound power level (indoor unit)                      | Rated  | dB(A)    | 39                          | 9                           |  |  |
| Sound pressure level at 1m (indoor unit)             | Rated  | dB(A)    | 3:                          | 1                           |  |  |
| Nominal Capacity and COP/EER                         |  |          |                             |                             |  |  |
| Air +7°C / water +35°C                               | Heating capacity / COP                         | kW / -   | 7.00 / 5.00                 | 9.00 / 4.70                 |  |  |
| Air +2°C / water +35°C                               | Heating capacity / COP                         | kW / -   | 7.00 / 3.80                 | 8.00 / 3.70                 |  |  |
| Air -7°C / water +35°C                               | Heating capacity / COP                         | kW / -   | 7.00 / 2.80                 | 9.00 / 2.70                 |  |  |
| Air +7°C / water +55°C                               | Heating capacity / COP                         | kW / -   | 4.50 / 3.35                 | 5.50 / 3.30                 |  |  |
| Air -7°C / water +55°C                               | Heating capacity / COP                         | kW / -   | 7.00 / 2.40                 | 8.00 / 2.20                 |  |  |
| Air +35°C / water +18°C                              | Cooling capacity / EER                         | kW / -   | 5.00 / 4.40                 | 5.50 / 4.20                 |  |  |
| Air +35°C / water +7°C                               | Cooling capacity / EER                         | kW / -   | 5.00 / 2.80                 | 5.50 / 2.60                 |  |  |
|  | Security supraises, 7 and                      | , ,      | HM071HF UB40                | HM091HF UB40                |  |  |
| Outdoor Units  |  | Unit     | HM073HF UB40                | HM093HF UB40                |  |  |
| Operation range                                      | Heating & DHW (Min. ~ Max.)                    | °C       | -28 ~ 35                    |                             |  |  |
| (outdoor air temperature)                            | Cooling (Min. ~ Max.)                          | °C       | 5 ~ 48                      |                             |  |  |
|  | Туре   | -        | R290                        |                             |  |  |
| Refrigerant  | GWP  | -        | 3                           |                             |  |  |
|  | Precharged amount                              | g        | 90                          | 00                          |  |  |
| Piping connections (water)                           | ng connections (water) Inlet / outlet diameter |          | Male PT 1" according to ISO | 7-1 (tapered pipe threads)  |  |  |
| Dimension  | HxWxD  | mm       | 1,019 x 1,320 x 520         |                             |  |  |
| Weight   | Net  | kg       | 130.0                       |                             |  |  |
| Exterior   | Color of chassis / RAL code                    | -        | Dawn gray / RAL 7037        |                             |  |  |
| Exterior   | Color of front grille / RAL code               | -        | Dark dawn gray / RAL 7012   |                             |  |  |
|  | Voltage, phase, frequency                      | V, Ø, Hz | 220 ~ 240, 1, 50 /          | 380 ~ 415, 3, 50            |  |  |
| Power supply   | Standby power consumption                      | W        | 10                          | )                           |  |  |
|  | Recommended circuit breaker                    | А        | 1 Ø: 20 /                   | 3 Ø: 16                     |  |  |
| Indoor Units   |  | Unit     | HN1616HC NK0 /              | HN1639HC NK0                |  |  |
|  | Heating (Min. ~ Max.)                          | °C       | 15 ~                        | 75                          |  |  |
| Operation range (leaving water temperature)          | Cooling (Min. ~ Max.)                          | °C       | 5 ~                         | 27                          |  |  |
| (leaving water temperature)                          | DHW (Min. ~ Max.)                              | °C       | 15 ~                        | 80                          |  |  |
| Expansion vessel (heating circuit)                   | Volume   | l        | 8                           | }                           |  |  |
|  | Capacity combination                           | kW       | 3.0 + 3.0 / 3.0             | 0 + 3.0 + 3.0               |  |  |
| Dealous heates                                       | Heating steps                                  | Steps    | 2                           | !                           |  |  |
| Backup heater  | Power supply                                   | V, Ø, Hz | 220 - 240, 1, 50 /          | 380 - 415, 3, 50            |  |  |
|  | Rated running current                          | А        | 26 /                        | 13                          |  |  |
|  | Heating circuit outlet pipe                    | inch     |                             |                             |  |  |
| Dining connections (water)                           | Heating circuit inlet pipe                     | inch     | Male PT 1" according to ISO | 7.1 (tapared pine threeds)  |  |  |
| Piping connections (water)                           | Outlet pipe to outdoor unit                    | inch     | Mate Fi T according to ISO  | 7-1 (tapered pipe tifreads) |  |  |
| Inlet pipe from outdoor unit                         |  | inch     |                             |                             |  |  |
| Dimension H x W x D                                  |  |          | 850 x 49                    | 90 x 315                    |  |  |
| Weight   | Net  | kg       | 1 Ø: 30.0 /                 | 3 Ø: 31.0                   |  |  |
| Exterior   | Color / RAL code                               | -        | Noble white                 | / RAL 9016                  |  |  |
| Davier august.                                       | Voltage, phase, frequency                      | V, Ø, Hz | 220 - 24                    | 0, 1, 50                    |  |  |
| Power supply   | Recommended circuit breaker                    | А        | 10                          | )                           |  |  |

- 1. Due to our policy of innovation, some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes, Especially the power cable and circuit breaker should be selected in accordance with that,
- 3. Sound power level is measured on the rated condition in accordance with ISO 9614 standard, Sound pressure level is not a value declared on Eurovent Program and is converted from sound power level based on a tonality penalty of 0 dB and installation in free-field. The directivity index (Q) is assumed as 2. Therefore, these values can be increased owing to ambient conditions during operation, Rated sound power level is in accordance with EN12102-1 under condition of EN14825
- 4. Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation.
- 5. This product contains fluorinated greenhouse gases.
- 6. All installation sites must be equipped with an earth leakage circuit breaker (ELCB).
- 7. DHW 65 ~ 80  $^{\circ}\text{C}$  Operating is available only when the booster heater is operating.

067

## THERMA V R290 MONOBLOC HYDRO UNIT (7/9kW)

#### **Performance Table for Heating Operation**

Maximum heating capacity (Include defrost effect)

#### HM071HF UB40 + HN1616HC NK0 / HM073HF UB40 + HN1639HC NK0

| Outdoor Temp. | LWT 30 °C     | LWT 35 °C | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C | LWT 70 °C | LWT 75 °C |  |
|---------------|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|--|
| [°C DB]       | Capacity (kW) |           |           |           |           |           |           |           |           |           |  |
| -25           | 5.90          | 5.85      | 5.85      | 5.85      | 5.80      | 5.80      | 5.80      | -         | -         | -         |  |
| -20           | 6.50          | 6.50      | 6.50      | 6.50      | 6.20      | 6.10      | 6.10      | 6.00      | -         | -         |  |
| -15           | 7.00          | 7.00      | 7.00      | 7.00      | 6.80      | 6.70      | 6.30      | 6.30      | 6.20      | 6.20      |  |
| -7            | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 6.70      | 6.60      | 6.40      |  |
| -4            | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 6.70      | 6.50      |  |
| -2            | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 6.80      | 6.50      |  |
| 2             | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 6.70      |  |
| 7             | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 6.80      |  |
| 10            | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |  |
| 15            | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |  |
| 18            | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |  |
| 20            | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |  |
| 35            | -             | -         | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |  |

#### HM091HF UB40 + HN1616HC NK0

| Outdoor Temp. | LWT 30 °C     | LWT 35 °C | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C | LWT 70 °C | LWT 75 °C |  |  |
|---------------|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|--|--|
| [°C DB]       | Capacity (kW) |           |           |           |           |           |           |           |           |           |  |  |
| -25           | 7.40          | 7.20      | 7.10      | 6.90      | 6.80      | 6.70      | 6.60      | -         | -         | -         |  |  |
| -20           | 8.20          | 7.90      | 7.70      | 7.50      | 7.30      | 7.10      | 6.90      | 6.60      | -         | -         |  |  |
| -15           | 9.00          | 9.00      | 8.20      | 7.90      | 7.70      | 7.60      | 7.30      | 7.00      | 6.80      | 6.50      |  |  |
| -7            | 9.00          | 9.00      | 9.00      | 8.50      | 8.40      | 8.00      | 7.90      | 7.70      | 7.40      | 6.60      |  |  |
| -4            | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 8.40      | 8.20      | 7.90      | 7.70      | 6.70      |  |  |
| -2            | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 8.40      | 8.10      | 7.60      | 6.80      |  |  |
| 2             | 8.00          | 8.00      | 8.10      | 8.20      | 8.30      | 8.40      | 8.20      | 8.10      | 7.80      | 6.90      |  |  |
| 7             | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 8.20      | 7.10      |  |  |
| 10            | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 8.20      | 7.20      |  |  |
| 15            | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 8.30      | 7.30      |  |  |
| 18            | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 8.40      | 7.40      |  |  |
| 20            | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 8.40      | 7.50      |  |  |
| 35            | -             | -         | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 8.00      |  |  |

#### HM093HF UB40 + HN1639HC NK0

| Outdoor Temp. | LWT 30 °C     | LWT 35 °C | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C | LWT 70 °C | LWT 75 °C |  |
|---------------|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|--|
| [°C DB]       | Capacity (kW) |           |           |           |           |           |           |           |           |           |  |
| -25           | 7.90          | 7.77      | 7.92      | 8.08      | 8.20      | 8.40      | 8.40      | -         | -         | -         |  |
| -20           | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | -         | -         |  |
| -15           | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |  |
| -7            | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |  |
| -4            | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |  |
| -2            | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |  |
| 2             | 8.00          | 8.00      | 8.10      | 8.20      | 8.30      | 8.40      | 8.20      | 8.10      | 8.00      | 7.00      |  |
| 7             | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |  |
| 10            | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |  |
| 15            | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |  |
| 18            | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |  |
| 20            | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |  |
| 35            | -             | -         | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 8.00      |  |

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),
- LPM : Liters Per Minute ( $\ell/\min$ ), TC : Total Capacity (kW)
- $2.\, {\sf Direct\ interpolation\ is\ permissible}.\, {\sf Do\ not\ extrapolate}.$
- 3. Measuring procedure follows EN-14511. • Rated values are based on standard conditions and it can be found on specifications.
- · Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
- In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

#### **Performance Table for Cooling Operation**

Maximum cooling capacity

#### HM071HF UB40 + HN1616HC NK0 / HM073HF UB40 + HN1639HC NK0

| Outdoor Temp. | LWT 7 °C | LWT 10 °C | LWT 13 °C | LWT 15 °C     | LWT 18 °C | LWT 20 °C | LWT 22 °C |
|---------------|----------|-----------|-----------|---------------|-----------|-----------|-----------|
| [°C DB]       |          |           |           | Capacity (kW) |           |           |           |
| 20            | 5.30     | 6.00      | 6.70      | 7.00          | 7.00      | 7.00      | 7.00      |
| 30            | 5.10     | 5.40      | 5.80      | 6.20          | 7.00      | 7.00      | 7.00      |
| 35            | 5.00     | 5.40      | 5.80      | 6.20          | 6.80      | 6.80      | 7.00      |
| 40            | 4.60     | 4.90      | 5.30      | 5.60          | 6.20      | 6.70      | 7.00      |
| 45            | 4.20     | 4.70      | 5.30      | 5.60          | 6.20      | 6.50      | 7.00      |

#### HM091HF UB40 + HN1616HC NK0 / HM093HF UB40 + HN1639HC NK0

| Outdoor Temp. | LWT 7 °C | LWT 10 °C | LWT 13 °C | LWT 15 °C | LWT 18 °C | LWT 20 °C | LWT 22 °C |
|---------------|----------|-----------|-----------|-----------|-----------|-----------|-----------|
| [°C DB]       |          |           |           |           |           |           |           |
| 20            | 5.80     | 6.70      | 7.50      | 9.00      | 9.00      | 9.00      | 9.00      |
| 30            | 5.60     | 6.40      | 7.20      | 7.70      | 9.00      | 9.00      | 9.00      |
| 35            | 5.50     | 6.30      | 7.20      | 7.80      | 9.00      | 9.00      | 9.00      |
| 40            | 5.00     | 5.70      | 6.40      | 6.80      | 7.40      | 7.70      | 9.00      |
| 45            | 4.40     | 5.10      | 5.70      | 6.10      | 6.80      | 7.20      | 7.60      |
|               |          | 1         |           | 1         | 1         | 1         |           |

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),
- LPM: Liters Per Minute ( $\ell$ /min), TC: Total Capacity (kW)
- 2. Direct interpolation is permissible. Do not extrapolate.
- 3. Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- $\bullet \ Above \ table \ values \ may \ not \ be \ matched \ according \ to \ installation \ condition. \ Except \ for \ rated \ value, \ the \ performance \ is \ not \ guaranteed.$
- In accordance with the test standard (or nations), the rating will vary slightly. 4. The shaded areas are not guaranteed continuous operation.

#### **Supplied Parts**

#### Strainer



| Technical Specification |                    | Unit | Details                           |  |  |
|-------------------------|--------------------|------|-----------------------------------|--|--|
| Material                | Body               | -    | Brass                             |  |  |
|                         | Mesh               | -    | Stainless steel (STS304)          |  |  |
| Mesh                    | Mesh no.           | -    | 30                                |  |  |
| Mesn                    | Max. particle size | mm   | 0.6                               |  |  |
| Piping connection       |                    | -    | Female G1" according to ISO 228-1 |  |  |

- \* The strainer and valves are supplied with the product, but it need to be installed separately.
- \* This strainer should be installed at the inlet connection of the outdoor unit to protect the clogging of a plate heat exchanger.


Built-in Remote Controller


[Unit: mm]

## **THERMA V R290 MONOBLOC** HYDRO UNIT (7/9kW)

**Drawings** [Unit: mm]

HM071HF UB40 / HM073HF UB40 HM091HF UB40 / HM093HF UB40









Top view

**Back view** 

3D view







Front view

Before piping, remove the cover brackets.

Drain holes for drain cap (7EA)

If you need more drains, remove them.

#### **Bottom view**


| No. | Part Name                      | Description          |
|-----|--------------------------------|----------------------|
| 1   | Leaving Water Pipe             | Male PT 1 inch       |
| 2   | Entering Water Pipe            | Male PT 1 inch       |
| 3   | Air Discharge Grille           | -                    |
| 4   | Access to Electrical Terminals | Power, Communication |

## External HN1616HC NK0 / HN1639HC NK0 Front view Side view **Bottom view**

#### Internal

HN1616HC NK0 / HN1639HC NK0

Control Panel

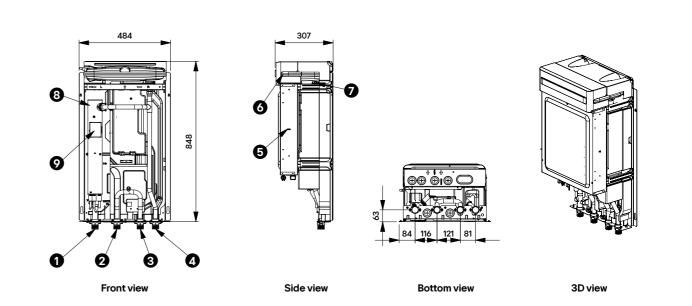

| No. | Part Name                       | Description  |
|-----|---------------------------------|--|
| 1   | Leaving Water Pipe (Heat load)  | Male PT 1 inch   |
| 2   | Entering Water Pipe (Heat load) | Male PT 1 inch   |
| 3   | Leaving Water Pipe (ODU)        | Male PT 1 inch   |
| 4   | Entering Water Pipe (ODU)       | Male PT 1 inch   |
| 5   | Control Box                     | PCB and Terminal Blocks  |
| 6   | Expansion Tank                  | Absorbing Volume Change of Heated Water                              |
| 7   | Air Vent                        | Air Purging when Charging Water                                      |
| 8   | Backup Heater                   | Capacity : 1 Ø 6 kW, 3 Ø 9 kW  |
| 9   | Thermal Switch                  | Cut-off Power Input to Backup Heater at 90°C (Manual return at 55°C) |

# THERMA V R290 MONOBLOC HYDRO UNIT (12/14/16 kW)

#### Outdoor unit

HM121HF UB60 / HM123HF UB60 HM141HF UB60 / HM143HF UB60 HM161HF UB60 / HM163HF UB60

#### Indoor unit

HN1616HC NK0 HN1639HC NK0























#### **Key Components**

**Outdoor Unit** 



#### Components

- 1 Black Fin heat exchanger (air / ref.)
- 2 New biomimetic fan
- 3 Dual sound shield
- 4 R290 scroll compressor5 Hydronic components assembly
- 6 Water pump
- 7 Deaerator
- 8 Plate heat exchanger (ref / water)
- 9 Flow sensor
- Pressure sensor

#### Connections

- A Leaving water pipe (male PT 1")
- B Entering water pipe (male PT 1")

#### Indoor Unit (Hydro Unit)



#### Components

- 1 Backup heater (1 Ø: 6 kW / 3 Ø: 9 kW)
- 2 Expansion tank (8 l)
- 3 Air vent valve
- 4 Standard III remote controller 1)
  (air temp. sensor integrated)

1) Temperature control class (ERP class) : V

#### Connections

- A Heating circuit outlet pipe (male PT 1")
- B Heating circuit inlet pipe (male PT 1")
- Outlet pipe to outdoor unit (male PT 1")
- Inlet pipe from outdoor unit (male PT 1")

#### **Product Specification**

| Efficiency Data                                      |                                  | Unit           | 12 kW (1 Ø)<br>12 kW (3 Ø)          | 14 kW (1 Ø)<br>14 kW (3 Ø)   | 16 kW (1 Ø)<br>16 kW (3 Ø)   |  |  |
|--|----------------------------------|----------------|-------------------------------------|------------------------------|------------------------------|--|--|
| Seasonal space heating eff. class (35°C / 55°        | °C)                              | -              | A+++ / A+++                         | A+++ / A+++                  | A+++ / A+++                  |  |  |
| Seasonal space heating efficiency ( $\eta_s$ ) (35°C | / 55°C)                          | %              | 215 / 156                           | 212 / 155                    | 201 / 154                    |  |  |
| SCOP (35°C / 55°C)                                   |                                  | -              | 5.45 / 3.97                         | 5.38 / 3.96                  | 5.11 / 3.92                  |  |  |
| Sound power level (outdoor unit)                     | Rated / low noise mode           | dB(A)          | 49 / 48                             | 51 / 50                      | 52 / 51                      |  |  |
| Sound pressure level at 5m (outdoor unit)            | Rated / low noise mode           | dB(A)          | 27 / 26                             | 29 / 28                      | 30 / 29                      |  |  |
| Sound power level (indoor unit)                      | Rated                            | dB(A)          |                                     | 39                           |                              |  |  |
| Sound pressure level at 1m (indoor unit)             | Rated                            | dB(A)          |                                     | 31                           |                              |  |  |
| Nominal Capacity and COP/EER                         |                                  |                |                                     |                              |                              |  |  |
| Air +7°C / water +35°C                               | Heating capacity / COP           | kW / -         | 12,00 / 4.70                        | 14.00 / 4.50                 | 16.00 / 4.30                 |  |  |
| Air +2°C / water +35°C                               | Heating capacity / COP           | kW / -         | 12.00 / 3.72                        | 14.00 / 3.61                 | 14.50 / 3.49                 |  |  |
| Air -7°C / water +35°C                               | Heating capacity / COP           | kW / -         | 11.80 / 3.27                        | 13.00 / 3.21                 | 13.80 / 3.17                 |  |  |
| Air +7°C / water +55°C                               | Heating capacity / COP           | kW / -         | 10.00 / 3.10                        | 11.00 / 3.25                 | 12.00 / 3.30                 |  |  |
| Air -7°C / water +55°C                               | Heating capacity / COP           | kW / -         | 9.30 / 2.32                         | 10.30 / 2.28                 | 10.90 / 2.26                 |  |  |
| Air +35°C / water +18°C                              | Cooling capacity / EER           | kW / -         | 11,50 / 3,78                        | 12.00 / 3.70                 | 12.50 / 3.70                 |  |  |
| Air +35°C / water +7°C                               | Cooling capacity / EER           | kW / -         | 10.50 / 3.12                        | 12.00 / 2.99                 | 12.50 / 2.95                 |  |  |
| Outdoor Units  |                                  | Unit           | HM121HF UB60<br>HM123HF UB60        | HM141HF UB60<br>HM143HF UB60 | HM161HF UB60<br>HM163HF UB60 |  |  |
| Operation range                                      | Heating & DHW (Min. ~ Max.)      | °C             |                                     | -28 ~ 35                     |                              |  |  |
| (outdoor air temperature)                            | Cooling (Min. ~ Max.)            | °C             | 5 ~ 48                              |                              |                              |  |  |
|  | Туре                             | -              | R290                                |                              |                              |  |  |
| Refrigerant  | GWP                              | -              | 3                                   |                              |                              |  |  |
|  | Precharged amount                | g              |                                     | 1,200                        |                              |  |  |
| Piping connections (water)                           | inch                             | Male PT 1" acc | cording to ISO 7-1 (tapered         | d pipe threads)              |                              |  |  |
| Dimension  | HxWxD                            | mm             | 1,019 x 1,560 x 520                 |                              |                              |  |  |
| Weight   | Net                              | kg             | 181.0                               |                              |                              |  |  |
|  | Color of chassis / RAL code      | -              | Dawn gray / RAL 7037                |                              |                              |  |  |
| Exterior   | Color of front grille / RAL code | -              | Dark dawn gray / RAL 7012           |                              |                              |  |  |
|  | Voltage, phase, frequency        | V, Ø, Hz       | 220 ~ 240, 1, 50 / 380 ~ 415, 3, 50 |                              |                              |  |  |
| Power supply   | Standby power consumption        | W              |                                     | 10                           |                              |  |  |
|  | Recommended circuit breaker      | А              | 1 Ø: 25 / 3 Ø: 16                   |                              |                              |  |  |
| Indoor Units   |                                  | Unit           | HN1616HC NK0 / HN1639HC NK0         |                              |                              |  |  |
|  | Heating (Min. ~ Max.)            | °C             |                                     | 15 ~ 75                      |                              |  |  |
| Operation range                                      | Cooling (Min. ~ Max.)            | °C             |                                     | 5 ~ 27                       |                              |  |  |
| (leaving water temperature)                          | DHW (Min. ~ Max.)                | °C             |                                     | 15 ~ 80                      |                              |  |  |
| Expansion vessel (heating circuit)                   | Volume                           | l              |                                     | 8                            |                              |  |  |
| ,              | Capacity combination             | kW             |                                     | 3.0 + 3.0 / 3.0 + 3.0 + 3.0  |                              |  |  |
|  | Heating steps                    | Steps          |                                     | 2                            |                              |  |  |
| Backup heater  | Power supply                     | V, Ø, Hz       | 220                                 | - 240, 1, 50 / 380 - 415, 3  | 3. 50                        |  |  |
|  | Rated running current            | A              |                                     | 26 / 13                      |                              |  |  |
|  | Heating circuit outlet pipe      | inch           |                                     |                              |                              |  |  |
|  | Heating circuit inlet pipe       | inch           |                                     |                              |                              |  |  |
| Piping connections (water)                           | Outlet pipe to outdoor unit      | inch           | Male PT 1" acc                      | cording to ISO 7-1 (tapered  | d pipe threads)              |  |  |
|  | Inlet pipe from outdoor unit     | inch           |                                     |                              |                              |  |  |
| Dimension  | H x W x D                        | mm             |                                     | 850 x 490 x 315              |                              |  |  |
| Weight   | Net                              | kg             |                                     | 1 Ø: 30.0 / 3 Ø: 31.0        |                              |  |  |
| Exterior   | Color / RAL code                 | -              |                                     | Noble white / RAL 9016       |                              |  |  |
|  | Voltage, phase, frequency        | V, Ø, Hz       |                                     | 220 - 240, 1, 50             |                              |  |  |
| Power supply   | Recommended circuit breaker      | Α              |                                     | 10                           |                              |  |  |

#### Note

- 1. Due to our policy of innovation, some specifications may be changed without notification.
- $2. \ Wiring \ cable \ size \ must \ comply \ with \ the \ applicable \ local \ and \ national \ codes. \ Especially \ the \ power \ cable \ and \ circuit \ breaker \ should \ be \ selected \ in \ accordance \ with \ that.$
- 3. Sound power level is measured on the rated condition in accordance with ISO 9614 standard. Sound pressure level is not a value declared on Eurovent Program and is converted from sound power level based on a tonality penalty of 0 dB and installation in free-field. The directivity index (Q) is assumed as 2. Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is in accordance with EN12102-1 under condition of EN14825.
- 4. Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation.
- 5. This product contains fluorinated greenhouse gases.
- 6. All installation sites must be equipped with an earth leakage circuit breaker (ELCB).
- 7, DHW 65 ~  $80^{\circ}$ C Operating is available only when the booster heater is operating.

073

# THERMA V R290 MONOBLOC HYDRO UNIT (12/14/16 kW)

## **Performance Table for Heating Operation**

Maximum heating capacity (Include defrost effect)

#### HM121HF UB60 + HN1616HC NK0 / HM123HF UB60 + HN1639HC NK0

| Outdoor Temp. | LWT 30 °C | LWT 35 °C     | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C | LWT 70 °C | LWT 75 °C |  |
|---------------|-----------|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|--|
| [°C DB]       |           | Capacity (kW) |           |           |           |           |           |           |           |           |  |
| -25           | 8.36      | 8.07          | 7.79      | 7.54      | 7.32      | 6.37      | -         | -         | -         | -         |  |
| -20           | 9.60      | 9.39          | 9.20      | 9.09      | 9.08      | 8.27      | 6.77      | -         | -         | -         |  |
| -15           | 10.84     | 10.69         | 10.55     | 10.55     | 10.84     | 10.76     | 8.71      | 7.17      | -         | -         |  |
| -7            | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 11.27     | 10.00     | 8.99      | -         |  |
| -4            | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 10.88     | 9.65      | 8.91      |  |
| -2            | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 11.45     | 10.29     | 9.32      |  |
| 2             | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 8.08      | 6.84      | 6.36      |  |
| 7             | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 10.28     | 8.34      | 7.67      |  |
| 10            | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 11.20     | 9.90      | 8.95      |  |
| 15            | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12,00     | 12.00     | 12.00     | 11.09     |  |
| 18            | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 11.69     |  |
| 20            | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     |  |
| 35            | -         | -             | 12,00     | 12,00     | 12,00     | 12.00     | 12,00     | 12,00     | 12,00     | 12.00     |  |

#### HM141HF UB60 + HN1616HC NK0 / HM143HF UB60 + HN1639HC NK0

| Outdoor Temp. | LWT 30 °C | LWT 35 °C | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C | LWT 70 °C | LWT 75 °C |
|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| [°C DB]       |           |           |           |           | Capaci    | ty (kW)   |           |           |           |           |
| -25           | 8.88      | 8.57      | 8.28      | 8.01      | 7.78      | 6.37      | -         | -         | -         | -         |
| -20           | 10.20     | 9.97      | 9.78      | 9.66      | 9.48      | 8.27      | 6.77      | -         | -         | -         |
| -15           | 12.06     | 11.99     | 11.79     | 11.59     | 11.29     | 10.76     | 8.71      | 7.17      | -         | -         |
| -7            | 14.00     | 14.00     | 13.82     | 13.63     | 13.45     | 12.58     | 11.27     | 10.00     | 8.99      | -         |
| -4            | 14.00     | 14.00     | 13.90     | 13.83     | 13.83     | 13.23     | 12.06     | 10.88     | 9.65      | 8.91      |
| -2            | 14.00     | 14.00     | 13.96     | 13.95     | 14.00     | 13.71     | 12.59     | 11.45     | 10.29     | 9.32      |
| 2             | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 13.16     | 8.08      | 6.84      | 6.36      |
| 7             | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 10.28     | 8.34      | 7.67      |
| 10            | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 11.20     | 9.90      | 8.95      |
| 15            | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 12.72     | 12.02     | 11.09     |
| 18            | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 13.82     | 12.89     | 11.69     |
| 20            | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 13.47     | 12.09     |
| 35            | -         | -         | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 12.80     |

#### HM161HF UB60 + HN1616HC NK0 / HM163HF UB60 + HN1639HC NK0

| Outdoor Temp. | LWT 30 °C | LWT 35 °C     | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C | LWT 70 °C | LWT 75 °C |  |
|---------------|-----------|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|--|
| [°C DB]       |           | Capacity (kW) |           |           |           |           |           |           |           |           |  |
| -25           | 9.41      | 9.08          | 8.76      | 8.48      | 7.81      | 6.37      | -         | -         | -         | -         |  |
| -20           | 10.80     | 10.56         | 10.35     | 10.23     | 9.48      | 8.27      | 6.77      | -         | -         | -         |  |
| -15           | 13.36     | 13.28         | 12.74     | 12.15     | 11.29     | 10.76     | 8.71      | 7.17      | -         | -         |  |
| -7            | 16.00     | 16.00         | 15.17     | 14.35     | 13.52     | 12.58     | 11.27     | 10.00     | 8.99      | -         |  |
| -4            | 16.00     | 16.00         | 15.43     | 14.85     | 14.29     | 13.23     | 12.06     | 10.88     | 9.65      | 8.91      |  |
| -2            | 16.00     | 16.00         | 15.69     | 15.34     | 14.81     | 13.71     | 12.59     | 11.45     | 10.29     | 9.32      |  |
| 2             | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     | 14.84     | 13.16     | 8.08      | 6.84      | 6.36      |  |
| 7             | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 14.25     | 10.28     | 8.34      | 7.67      |  |
| 10            | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 14.92     | 11.20     | 9.90      | 8.95      |  |
| 15            | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 12.72     | 12.02     | 11.09     |  |
| 18            | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 13.82     | 12.89     | 11.69     |  |
| 20            | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 14.56     | 13.47     | 12.09     |  |
| 35            | -         | -             | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 14.40     | 12.80     |  |

#### Note

- 1. DB : Dry Bulb Temperature (°C), LWT : Leaving Water Temperature (°C),
- LPM : Liters Per Minute ( $\ell$ /min), TC : Total Capacity (kW)
- $2.\, {\hbox{Direct interpolation is permissible.}}\, \hbox{Do not extrapolate}.$
- 3. Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- $\bullet \ \, \text{Above table values may not be matched according to installation condition.} \, \text{Except for rated value, the performance is not guaranteed}.$
- In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

# **Performance Table for Cooling Operation**

Maximum cooling capacity

#### HM121HF UB60 + HN1616HC NK0 / HM123HF UB60 + HN1639HC NK0

| Outdoor Temp. | LWT 7 °C | LWT 10 °C | LWT 13 °C | LWT 15 °C     | LWT 18 °C | LWT 20 °C | LWT 22 °C |
|---------------|----------|-----------|-----------|---------------|-----------|-----------|-----------|
| [°C DB]       |          |           |           | Capacity (kW) |           |           |           |
| 20            | 11.50    | 11.50     | 11.50     | 11.50         | 11.50     | 11.50     | 11.50     |
| 30            | 10.97    | 11.50     | 11.50     | 11.50         | 11.50     | 11.50     | 11.50     |
| 35            | 10.50    | 11,28     | 11.50     | 11.50         | 11.50     | 11.50     | 11.50     |
| 40            | 9.35     | 10.08     | 10.80     | 11.27         | 11.50     | 11.50     | 11.50     |
| 45            | 8.19     | 8.90      | 9.61      | 10.07         | 10.77     | 11.23     | 11.50     |

#### HM141HF UB60 + HN1616HC NK0 / HM143HF UB60 + HN1639HC NK0

| Outdoor Temp. | LWT 7 °C | LWT 10 °C | LWT 13 °C | LWT 15 °C     | LWT 18 °C | LWT 20 °C | LWT 22 °C |
|---------------|----------|-----------|-----------|---------------|-----------|-----------|-----------|
| [°C DB]       |          |           |           | Capacity (kW) |           |           |           |
| 20            | 12.00    | 12.00     | 12.00     | 12.00         | 12.00     | 12.00     | 12,00     |
| 30            | 12.00    | 12.00     | 12.00     | 12.00         | 12.00     | 12.00     | 12,00     |
| 35            | 12.00    | 12.00     | 12.00     | 12.00         | 12.00     | 12.00     | 12,00     |
| 40            | 10.68    | 11,52     | 12.00     | 12.00         | 12.00     | 12.00     | 12,00     |
| 45            | 9.36     | 10.17     | 10.98     | 11,51         | 12,00     | 12,00     | 12.00     |

#### HM161HF UB60 + HN1616HC NK0 / HM163HF UB60 + HN1639HC NK0

| Outdoor Temp. | LWT 7 °C | LWT 10 °C | LWT 13 °C | LWT 15 °C     | LWT 18 °C | LWT 20 °C | LWT 22 °C |
|---------------|----------|-----------|-----------|---------------|-----------|-----------|-----------|
| [°C DB]       |          |           |           | Capacity (kW) |           |           |           |
| 20            | 12.50    | 12,50     | 12.50     | 12.50         | 12.50     | 12.50     | 12,50     |
| 30            | 12.50    | 12,50     | 12,50     | 12,50         | 12,50     | 12.50     | 12.50     |
| 35            | 12.50    | 12,50     | 12.50     | 12,50         | 12.50     | 12.50     | 12.50     |
| 40            | 12.02    | 12.50     | 12.50     | 12,50         | 12.50     | 12.50     | 12.50     |
| 45            | 10.03    | 10.78     | 11.54     | 12,05         | 12,50     | 12,50     | 12.50     |

#### Note

- 1. DB : Dry Bulb Temperature (°C), LWT : Leaving Water Temperature (°C),
- LPM: Liters Per Minute ( $\ell$ /min), TC: Total Capacity (kW)
- $2.\, {\hbox{Direct interpolation is permissible.}}\, \hbox{Do not extrapolate},$
- 3. Measuring procedure follows EN-14511.
- $\bullet$  Rated values are based on standard conditions and it can be found on specifications.
- Above table values may not be matched according to installation condition, Except for rated value, the performance is not guaranteed.
- In accordance with the test standard (or nations), the rating will vary slightly.

  4. The shaded areas are not guaranteed continuous operation.

# **Supplied Parts**

#### Strainer



| Technical Specification | Fechnical Specification |    | Details                           |  |  |
|-------------------------|-------------------------|----|-----------------------------------|--|--|
| Material                | Body                    | -  | Brass                             |  |  |
| Material                | Mesh                    | -  | Stainless steel (STS304)          |  |  |
| Mesh                    | Mesh no.                | -  | 30                                |  |  |
| Mesn                    | Max. particle size      | mm | 0.6                               |  |  |
| Piping connection       |                         | -  | Female G1" according to ISO 228-1 |  |  |


- \* The strainer and valves are supplied with the product, but it need to be installed separately.
- \* This strainer should be installed at the inlet connection of the outdoor unit to protect the clogging of a plate heat exchanger.


[Unit: mm]


# **THERMA V R290 MONOBLOC HYDRO UNIT (12/14/16 kW)**

**Drawings** [Unit: mm]

HM121HF UB60 / HM123HF UB60 HM141HF UB60 / HM143HF UB60 HM161HF UB60 / HM163HF UB60

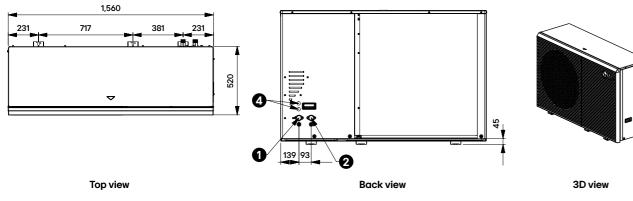


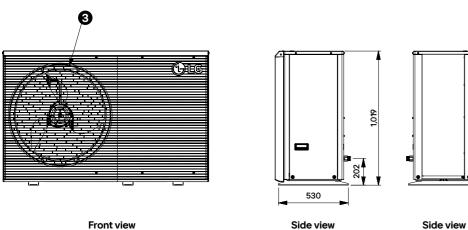

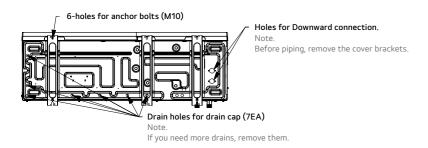

#### **Bottom view**


| No. | Part Name                      | Description          |
|-----|--------------------------------|----------------------|
| 1   | Leaving Water Pipe             | Male PT 1 inch       |
| 2   | Entering Water Pipe            | Male PT 1 inch       |
| 3   | Air Discharge Grille           | -                    |
| 4   | Access to Electrical Terminals | Power, Communication |

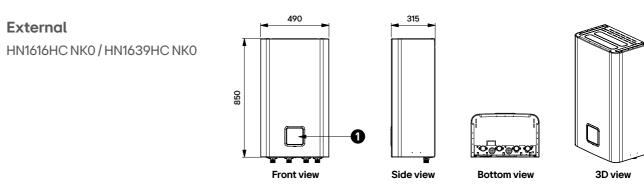

| No. | Part Name     | Description                |
|-----|---------------|----------------------------|
| 1   | Control Panel | Built-in Remote Controller |

#### Internal

HN1616HC NK0 / HN1639HC NK0

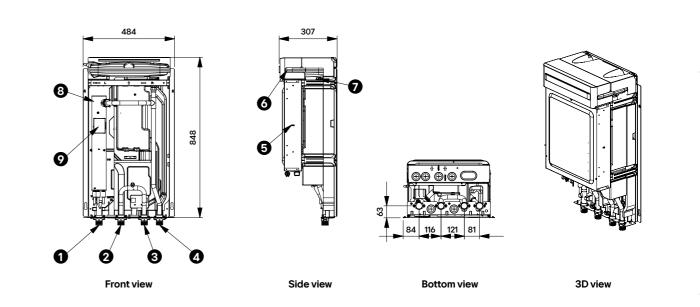

| No. | Part Name                       | Description  |
|-----|---------------------------------|--|
| 1   | Leaving Water Pipe (Heat load)  | Male PT 1 inch   |
| 2   | Entering Water Pipe (Heat load) | Male PT 1 inch   |
| 3   | Leaving Water Pipe (ODU)        | Male PT 1 inch   |
| 4   | Entering Water Pipe (ODU)       | Male PT 1 inch   |
| 5   | Control Box                     | PCB and Terminal Blocks  |
| 6   | Expansion Tank                  | Absorbing Volume Change of Heated Water                              |
| 7   | Air Vent                        | Air Purging when Charging Water                                      |
| 8   | Backup Heater                   | Capacity : 1 Ø 6 kW, 3 Ø 9 kW  |
| 9   | Thermal Switch                  | Cut-off Power Input to Backup Heater at 90°C (Manual return at 55°C) |
|     |                                 |  |



# THERMA V<sub>m</sub> R290% Monobloc **COMBIUNIT**



## All-in-One

Designed to streamline your home's heating, cooling, and hot water systems, this all-inone solution provides seamless integration.

It efficiently saves space in your

#### **Key Features**

- All-in-one Combi Unit with integrated hot water cylinder
- Saves space in the technical room with a small footprint
- Reduced installation time with pre-installed components
- Harmonized with other household appliances for a cohesive exterior









#### Certifications











### **Energy Label**











# THERMA V R290 MONOBLOC COMBI UNIT (7/9kW)

#### Outdoor unit

HM071HF UB40 / HM073HF UB40 HM091HF UB40 / HM093HF UB40

#### Indoor unit

HN1616HY NKO HN1639HY NKO


























### **Key Components**

Outdoor Unit



#### Indoor Unit (Combi Unit)

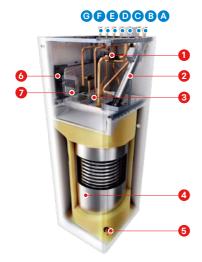

#### Components

- 1 Black Fin heat exchanger (air / ref.)
- 2 Biomimetic fan
- 3 New R1 compressor
- 4 Hydronic components assembly
- 6 Deaerator
- 6 Water pump
- 7 Flow sensor
- 8 Plate heat exchanger
- 9 Pressure sensor

### **Connections**

- A Leaving water pipe (male PT 1")
- B Entering water pipe (male PT 1")

#### Components

- 1 3 Way diverting valve (DC)
- 2 Electric heater (1 ph: 6 kW / 3 ph: 9 kW)
- 3 Drain pan
- 4 DHW storage tank (200 L / Duplex stainless Steel)
- 6 Drain valve
- 6 Expansion tank (81)
- 7 Standard III remote controller 1) (air temp. sensor integrated)
- 1) Temperature control class (ERP class) : V

#### **Connections**

- A Inlet pipe from outdoor unit (female G1")
- B Outlet pipe to outdoor unit (female G1")
- Heating circuit outlet pipe (female G1")
- D Heating circuit inlet pipe (female G1")
- **(E)** Domestic hot water inlet pipe (female G1") Domestic hot water outlet pipe (female G1")
- © Domestic hot water re-circulation pipe (female G1")

## THERMA V<sub>III</sub> R290% Monobloc

## **Product Specification**

| Efficiency Data   |  | Unit   | 7 kW (1 Ø)<br>7 kW (3 Ø) | 9 kW (1 Ø)<br>9 kW (3 Ø) |
|---|--|--------|--------------------------|--------------------------|
| Seasonal space heating eff. class (35°C / 55°               | C)                                       | -      | A+++ / A+++              | A+++ / A+++              |
| Seasonal space heating efficiency ( $\eta_s$ ) (35°C        | / 55°C)                                  | %      | 207 / 151                | 205 / 151                |
| SCOP (35°C / 55°C)  |  | -      | 5.24 / 3.86              | 5.20 / 3.86              |
| Declared load profile, average climate                      |  | -      | L                        | L                        |
| Water heating efficiency ( $\eta_{WH}$ ), average clima     | te                                       | %      | 130                      | 130                      |
| COP <sub>DHW</sub> , average climate                        |  | -      | 3.10                     | 3.10                     |
| Water heating eff. class, average climate                   |  | -      | A+                       | A+                       |
| Annual energy consumption, DHW (average of                  | climate)                                 | kWh    | 780                      | 780                      |
| Heating up time acc. to EN 16147 (average c                 | limate)                                  | h/mm   | 1h 25                    | 1h 25                    |
| Max. usable water volume acc. to EN 16147 (                 | average climate)                         | l      | 240                      | 240                      |
| Declared load profile, warmer climate                       |  | -      | L                        | L                        |
| Water heating efficiency (η <sub>WH</sub> ), warmer climate |  |        | 160                      | 160                      |
| COP <sub>DHW</sub> , warmer climate                         |  |        | 3.78                     | 3.78                     |
| Water heating eff. class, warmer climate                    | Water heating eff. class, warmer climate |        |                          | A++                      |
| Declared load profile, colder climate                       |  |        | L                        | L                        |
| Water heating efficiency ( $\eta_{WH}$ ), colder climate    | 2  | %      | 110                      | 110                      |
| COP <sub>DHW</sub> , colder climate                         |  | -      | 2.64                     | 2.64                     |
| Water heating eff. class, colder climate                    |  | -      | A                        | A                        |
| Sound power level (outdoor unit)                            | Rated / low noise mode                   | dB(A)  | 49 / 48                  | 50 / 48                  |
| Sound pressure level at 5m (outdoor unit)                   | Rated / low noise mode                   | dB(A)  | 27 / 26                  | 28 / 26                  |
| Sound power level (indoor unit)                             | Rated                                    | dB(A)  | 3                        | 9                        |
| Sound pressure level at 1m (indoor unit)                    | Rated                                    | dB(A)  | 3                        | 1                        |
| Nominal Capacity and COP/EER                                |  |        |                          |                          |
| Air +7°C / water +35°C                                      | Heating capacity / COP                   | kW / - | 7.00 / 5.00              | 9.00 / 4.70              |
| Air +2°C / water +35°C                                      | Heating capacity / COP                   | kW / - | 7.00 / 3.80              | 8.00 / 3.70              |
| Air -7°C / water +35°C                                      | Heating capacity / COP                   | kW / - | 7.00 / 2.80              | 9.00 / 2.70              |
| Air +7°C / water +55°C                                      | Heating capacity / COP                   | kW / - | 4.50 / 3.35              | 5.50 / 3.30              |
| Air -7°C / water +55°C                                      | Heating capacity / COP                   | kW / - | 7.00 / 2.40              | 8.00 / 2.20              |
| Air +35°C / water +18°C                                     | Cooling capacity / EER                   | kW / - | 5.00 / 4.40              | 5.50 / 4.20              |
| Air +35°C / water +7°C                                      | Cooling capacity / EER                   | kW / - | 5.00 / 2.80              | 5.50 / 2.60              |

- 1. Due to our policy of innovation, some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes. Especially the power cable and circuit breaker should be selected in accordance with that,
- 3. Sound power level is measured on the rated condition in accordance with ISO 9614 standard. Sound pressure level is not a value declared on Eurovent Program and is increased owing to ambient conditions during operation. Rated sound power level is in accordance with EN12102-1 under condition of EN14825.
- 4. Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation.
- 5. This product contains fluorinated greenhouse gases.
- 6. All installation sites must be equipped with an earth leakage circuit breaker (ELCB).
- 7. DHW 65 ~ 80  $^{\circ}\text{C}$  Operating is available only when the booster heater is operating.

# **Product Specification**

COMBI UNIT (7/9kW)

| Outdoor Units                               |  | Unit     | HM071HF UB40<br>HM073HF UB40 | HM091HF UB40<br>HM093HF UB40   |  |
|---|--|----------|------------------------------|--------------------------------|--|
| Operation range                             | Heating & DHW (Min. ~ Max.)                            | °C       | -28                          | ~ 35                           |  |
| (outdoor air temperature)                   | Cooling (Min. ~ Max.)                                  | °C       | 5 -                          | - 48                           |  |
|   | Туре   | -        | R2                           | 290                            |  |
| Refrigerant                                 | GWP  | -        |                              | 3                              |  |
|   | Precharged amount                                      | g        | 9                            | 00                             |  |
| Piping connections (water)                  | Inlet / outlet diameter                                | inch     | Male PT 1" according to IS0  | O 7-1 (tapered pipe threads)   |  |
| Dimension                                   | HxWxD  | mm       | 1,019 x 1,                   | 320 x 520                      |  |
| Weight                                      | Net  | kg       | 13                           | 0.0                            |  |
| Exterior                                    | Color of chassis / RAL code                            | -        | Dawn gray                    | / RAL 7037                     |  |
| Exterior                                    | Color of front grille / RAL code                       | -        | Dark dawn gr                 | ay / RAL 7012                  |  |
|   | Voltage, phase, frequency                              | V, Ø, Hz | 220 ~ 240, 1, 50             | / 380 ~ 415, 3, 50             |  |
| Power supply                                | Standby power consumption                              | W        | 1                            | 10                             |  |
|   | Recommended circuit breaker                            | А        | 1 Ø: 20                      | / 3 Ø: 16                      |  |
| Indoor Units                                |  | Unit     | HN1616HY NKO                 | / HN1639HY NK0                 |  |
|   | Heating (Min. ~ Max.)                                  | °C       | 15                           | ~ 75                           |  |
| Operation range (leaving water temperature) | Cooling (Min. ~ Max.)                                  | °C       | 5 ~ 27                       |                                |  |
|   | DHW (Min. ~ Max.)                                      | °C       | 15                           | ~ 80                           |  |
|   | Volume   | l        | 2                            | 00                             |  |
| Domestic hot water tank                     | Tank material  | -        | Duplex sta                   | inless steel                   |  |
|   | Standby losses   | W        | 6                            | 60                             |  |
| Expansion vessel (heating circuit)          | Volume   | l        |                              | 8                              |  |
| Electric heater                             | Capacity combination                                   | kW       | 1 Ø: 6.0                     | / 3 Ø: 9.0                     |  |
| Electric fleater                            | Power supply   | V, Ø, Hz | 220 ~ 2                      | 40, 1, 50                      |  |
|   | Inlet / outlet diameter for connection to outdoor unit | inch     |                              |                                |  |
| Piping connections (water)                  | Inlet / outlet diameter for space heating              | inch     | Female G1" according to ISC  | 2228-1 (parallel pipe threads) |  |
|   | Inlet / outlet diameter for DHW                        | inch     |                              |                                |  |
|   | Recirculation  | inch     |                              |                                |  |
| Dimension                                   | HxWxD  | mm       | 1,750 x 6                    | 600 × 660                      |  |
| Weight                                      | Net  | kg       | 1 Ø: 106.5                   | / 3 Ø: 107.0                   |  |
| Exterior                                    | Color / RAL code                                       | -        | Noble white                  | e / RAL 9016                   |  |

**THERMA V R290 MONOBLOC** 

#### Note

- 1. Due to our policy of innovation, some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes. Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound power level is measured on the rated condition in accordance with ISO 9614 standard. Sound pressure level is not a value declared on Eurovent Program and is converted from sound power level based on a tonality penalty of 0 dB and installation in free-field. The directivity index (Q) is assumed as 2. Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is in accordance with EN12102-1 under condition of EN14825.
- $4. \ Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation.\\$
- 5. This product contains fluorinated greenhouse gases.
- 6. All installation sites must be equipped with an earth leakage circuit breaker (ELCB).
- 7. DHW 65 ~ 80°C Operating is available only when the booster heater is operating.



# THERMA V R290 MONOBLOC COMBI UNIT (7/9 kW)

## **Performance Table for Heating Operation**

Maximum heating capacity (Include defrost effect)

#### HM071HF UB40 + HN1616HY NK0 / HM073HF UB40 + HN1639HY NK0

| Outdoor Temp. | LWT 30 °C | LWT 35 °C | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C | LWT 70 °C | LWT 75 °C |
|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| [°C DB]       |           |           |           |           | Capaci    | ty (kW)   |           |           |           |           |
| -25           | 5.90      | 5.85      | 5.85      | 5.85      | 5.80      | 5.80      | 5.80      | -         | -         | -         |
| -20           | 6.50      | 6.50      | 6.50      | 6.50      | 6.20      | 6.10      | 6.10      | 6.00      | -         | -         |
| -15           | 7.00      | 7.00      | 7.00      | 7.00      | 6.80      | 6.70      | 6.30      | 6.30      | 6.20      | 6.20      |
| -7            | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 6.70      | 6.60      | 6.40      |
| -4            | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 6.70      | 6.50      |
| -2            | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 6.80      | 6.50      |
| 2             | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 6.70      |
| 7             | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 6.80      |
| 10            | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |
| 15            | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |
| 18            | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |
| 20            | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |
| 35            | -         | -         | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |

#### HM091HF UB40 + HN1616HY NK0

| Outdoor Temp. | LWT 30 °C | LWT 35 °C | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C | LWT 70 °C | LWT 75 °C |
|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| [°C DB]       |           |           |           |           | Capaci    | ty (kW)   |           |           |           |           |
| -25           | 7.40      | 7.20      | 7.10      | 6.90      | 6.80      | 6.70      | 6.60      | -         | -         | -         |
| -20           | 8.20      | 7.90      | 7.70      | 7.50      | 7.30      | 7.10      | 6.90      | 6.60      | -         | -         |
| -15           | 9.00      | 9.00      | 8.20      | 7.90      | 7.70      | 7.60      | 7.30      | 7.00      | 6.80      | 6.50      |
| -7            | 9.00      | 9.00      | 9.00      | 8.50      | 8.40      | 8.00      | 7.90      | 7.70      | 7.40      | 6.60      |
| -4            | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 8.40      | 8.20      | 7.90      | 7.70      | 6.70      |
| -2            | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 8.40      | 8.10      | 7.60      | 6.80      |
| 2             | 8.00      | 8.00      | 8.10      | 8.20      | 8.30      | 8.40      | 8.20      | 8.10      | 7.80      | 6.90      |
| 7             | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 8.20      | 7.10      |
| 10            | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 8.20      | 7.20      |
| 15            | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 8.30      | 7.30      |
| 18            | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 8.40      | 7.40      |
| 20            | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 8.40      | 7.50      |
| 35            | -         | -         | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 8.00      |

#### HM093HF UB40 + HN1639HY NK0

| Outdoor Temp. | LWT 30 °C | LWT 35 °C | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C | LWT 70 °C | LWT 75 °C |
|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| [°C DB]       |           |           |           |           | Capacit   | ty (kW)   |           |           |           |           |
| -25           | 7.90      | 7.77      | 7.92      | 8.08      | 8.20      | 8.40      | 8.40      | -         | -         | -         |
| -20           | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | -         | -         |
| -15           | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |
| -7            | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |
| -4            | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |
| -2            | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |
| 2             | 8.00      | 8.00      | 8.10      | 8.20      | 8.30      | 8.40      | 8.20      | 8.10      | 8.00      | 7.00      |
| 7             | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |
| 10            | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |
| 15            | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |
| 18            | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |
| 20            | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |
| 35            | -         | -         | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 8.00      |

#### Note

- 1. DB : Dry Bulb Temperature (°C), LWT : Leaving Water Temperature (°C),
- LPM: Liters Per Minute ( $\ell/\min$ ), TC: Total Capacity (kW)
- $2.\, {\sf Direct\ interpolation\ is\ permissible}.\, {\sf Do\ not\ extrapolate}.$
- 3. Measuring procedure follows EN-14511.

   Rated values are based on standard conditions and it can be found on specifications.
- Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
- In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

# **Performance Table for Cooling Operation**

Maximum cooling capacity

#### HM071HF UB40 + HN1616HY NK0 / HM073HF UB40 + HN1639HY NK0

| Outdoor Temp. | LWT 7 °C      | LWT 10 °C | LWT 13 °C | LWT 15 °C | LWT 18 °C | LWT 20 °C | LWT 22 °C |  |  |  |
|---------------|---------------|-----------|-----------|-----------|-----------|-----------|-----------|--|--|--|
| [°C DB]       | Capacity (kW) |           |           |           |           |           |           |  |  |  |
| 20            | 5.30          | 6.00      | 6.70      | 7.00      | 7.00      | 7.00      | 7.00      |  |  |  |
| 30            | 5.10          | 5.40      | 5.80      | 6.20      | 7.00      | 7.00      | 7.00      |  |  |  |
| 35            | 5.00          | 5.40      | 5.80      | 6.20      | 6.80      | 6.80      | 7.00      |  |  |  |
| 40            | 4.60          | 4.90      | 5.30      | 5.60      | 6.20      | 6.70      | 7.00      |  |  |  |
| 45            | 4.20          | 4.70      | 5.30      | 5.60      | 6.20      | 6.50      | 7.00      |  |  |  |

#### HM091HF UB40 + HN1616HY NK0 / HM093HF UB40 + HN1639HY NK0

| Outdoor Temp. | LWT 7 °C | LWT 10 °C     | LWT 13 °C | LWT 15 °C | LWT 18 °C | LWT 20 °C | LWT 22 °C |  |  |  |  |  |
|---------------|----------|---------------|-----------|-----------|-----------|-----------|-----------|--|--|--|--|--|
| [°C DB]       |          | Capacity (kW) |           |           |           |           |           |  |  |  |  |  |
| 20            | 5.80     | 6.70          | 7.50      | 9.00      | 9.00      | 9.00      | 9.00      |  |  |  |  |  |
| 30            | 5.60     | 6.40          | 7.20      | 7.70      | 9.00      | 9.00      | 9.00      |  |  |  |  |  |
| 35            | 5.50     | 6.30          | 7.20      | 7.80      | 9.00      | 9.00      | 9.00      |  |  |  |  |  |
| 40            | 5.00     | 5.70          | 6.40      | 6.80      | 7.40      | 7.70      | 9.00      |  |  |  |  |  |
| 45            | 4.40     | 5.10          | 5.70      | 6.10      | 6.80      | 7.20      | 7.60      |  |  |  |  |  |
| 40            | 5.00     | 5.70          | 6.40      | 6.80      | 7.40      | 7.70      | 9         |  |  |  |  |  |

#### Note

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),
- LPM: Liters Per Minute ( $\ell$ /min), TC: Total Capacity (kW)
- $2.\, {\hbox{Direct interpolation is permissible.}}\, \hbox{Do not extrapolate},$
- 3. Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
- In accordance with the test standard (or nations), the rating will vary slightly.

  4. The shaded areas are not guaranteed continuous operation.

# **Supplied Parts**

#### Strainer



| Technical Specification |                    | Unit | Details                           |
|-------------------------|--------------------|------|-----------------------------------|
| Material                | Body               | -    | Brass                             |
| Material                | Mesh               | -    | Stainless steel (STS304)          |
| Mesh                    | Mesh no.           | -    | 30                                |
| Mesn                    | Max. particle size | mm   | 0.6                               |
| Piping connection       |                    | -    | Female G1" according to ISO 228-1 |


- \* The strainer and valves are supplied with the product, but it need to be installed separately.
- \*This strainer should be installed at the inlet connection of the outdoor unit to protect the clogging of a plate heat exchanger.


082

# **THERMA V R290 MONOBLOC** COMBI UNIT (7/9kW)

**Drawings** [Unit: mm] [Unit: mm]

HM071HF UB40 / HM073HF UB40 HM091HF UB40 / HM093HF UB40



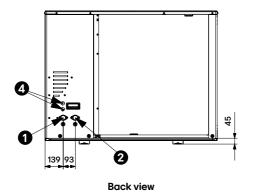




3D view

Top view

3





Side view

Front view



Side view

Before piping, remove the cover brackets.

Drain holes for drain cap (7EA)


If you need more drains, remove them.

#### **Bottom view**

| No. | Part Name                      | Description          |
|-----|--------------------------------|----------------------|
| 1   | Leaving Water Pipe             | Male PT 1 inch       |
| 2   | Entering Water Pipe            | Male PT 1 inch       |
| 3   | Air Discharge Grille           | -                    |
| 4   | Access to Electrical Terminals | Power, Communication |

### External

HN1616HY NK0 / HN1639HY NK0

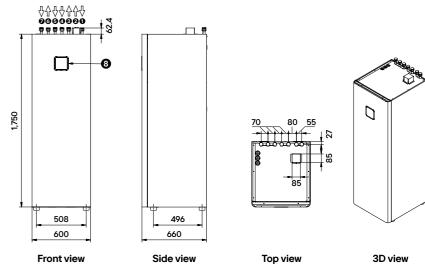


| No. | Part Name                     | Description                      | No. | Part Name                      |  |
|-----|-------------------------------|----------------------------------|-----|--------------------------------|--|
| 1   | Inlet Pipe from Outdoor Unit  |                                  | 5   | Domestic Hot Water Inlet Pipe  |  |
| 2   | Outlet Pipe from Outdoor Unit | Female G1" According to ISO228-1 | 6   | Domestic Hot Water Outlet Pipe | Female G1" According to ISO228-<br>(Parallel pipe threads) |
| 3   | Heating Circuit Outlet Pipe   | (Parallel pipe threads)          | 7   | DHW Re-circulation Pipe        | (, =,=,=, =, =, =, =, =, =, =, =, =, =, =                  |
| 4   | Heating Circuit Inlet Pipe    |                                  | 8   | Control Panel                  | Built-in Remote Controller                                 |

#### Internal

HN1616HY NK0 / HN1639HY NK0

Top view

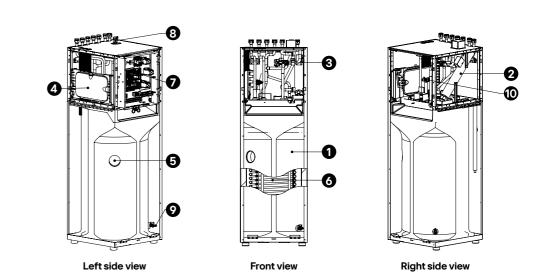

| No. | Part Name        | Description                        | No. | Part Name      |                                   |
|-----|------------------|------------------------------------|-----|----------------|-----------------------------------|
| 1   | DHW Tank         | Domestic Hot Water Tank (200 L)    | 6   | Heat Exchanger | Coil Heat Exchanger (Water / DHW) |
| 2   | Heater           | Electric Heater (1Ø 6 kW, 3Ø 9 kW) | 7   | Control Box    | PCB'A and Terminal Blocks         |
| 3   | 3 Way Valve      | For DHW / Heating                  | 8   | Air Vent       | For Air Purging                   |
| 4   | Expansion Vessel | 8L for Heating Circuit             | 9   | Drain Cock 1   | Valve for DHW Tank Drain          |
| 5   | DHW Tank Sensor  | Temperature Sensor                 | 10  | Safety Valve   | For DHW (10 bar)                  |

# THERMA V R290 MONOBLOC **COMBI UNIT (12/14/16 kW)**

#### **Outdoor unit**

HM121HF UB60 / HM123HF UB60 HM141HF UB60 / HM143HF UB60 HM161HF UB60 / HM163HF UB60

#### Indoor unit

HN1616HY NKO HN1639HY NKO


























### **Key Components**

Outdoor Unit



#### Indoor Unit (Combi Unit)

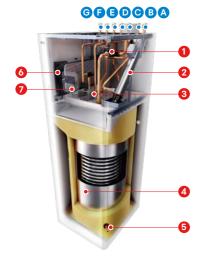

#### Components

- 1 Black Fin heat exchanger (air / ref.)
- 2 New biomimetic fan
- 3 Dual sound shield
- 4 R290 scroll compressor
- **5** Hydronic components assembly
- 6 Water pump
- Deaerator
- 8 Plate heat exchanger (ref / water)
- 9 Flow sensor
- Pressure sensor

#### **Connections**

- A Leaving water pipe (male PT 1")
- B Entering water pipe (male PT 1")

#### Components

- 1 3 Way diverting valve (DC)
- 2 Electric heater (1 ph: 6 kW / 3 ph: 9 kW)
- 3 Drain pan
- 4 DHW storage tank (200 L / Duplex stainless Steel)
- 6 Drain valve
- 6 Expansion tank (81)
- 7 Standard III remote controller 1) (air temp. sensor integrated)
- 1) Temperature control class (ERP class) : V

#### **Connections**

- A Inlet pipe from outdoor unit (female G1")
- B Outlet pipe to outdoor unit (female G1")
- Heating circuit outlet pipe (female G1")
- D Heating circuit inlet pipe (female G1")
- **(E)** Domestic hot water inlet pipe (female G1") Domestic hot water outlet pipe (female G1")
- © Domestic hot water re-circulation pipe (female G1")

## THERMA V<sub>III</sub> R290% Monobloc

## **Product Specification**

| Efficiency Data  |                        | Unit   | 12 kW (1 Ø)<br>12 kW (3 Ø) | 14 kW (1 Ø)<br>14 kW (3 Ø) | 16 kW (1 Ø)<br>16 kW (3 Ø) |
|--|------------------------|--------|----------------------------|----------------------------|----------------------------|
| Seasonal space heating eff. class (35°C / 55               | °C)                    | -      | A+++ / A+++                | A+++ / A+++                | A+++ / A+++                |
| Seasonal space heating efficiency ( $\eta_s$ ) (35°C       | / 55°C)                | %      | 215 / 156                  | 212 / 155                  | 201 / 154                  |
| SCOP (35°C / 55°C)   |                        | -      | 5.45 / 3.97                | 5.38 / 3.96                | 5.11 / 3.92                |
| Declared load profile, average climate                     |                        | -      | L                          | L                          | L                          |
| Water heating efficiency (η <sub>WH</sub> ), average clima | %                      | 130    | 130                        | 130                        |                            |
| COP <sub>DHW</sub> , average climate                       | -                      | 3.00   | 3.00                       | 3.00                       |                            |
| Water heating eff. class, average climate                  |                        | -      | A+                         | A+                         | A+                         |
| Annual energy consumption, DHW (average                    | climate)               | kWh    | 771                        | 771                        | 771                        |
| Heating up time acc. to EN 16147 (average of               | limate)                | h/mm   | 1h 25                      | 1h 25                      | 1h 25                      |
| Max. usable water volume acc. to EN 16147                  | (average climate)      | l      | 240                        | 240                        | 240                        |
| Declared load profile, warmer climate                      |                        |        | L                          | L                          | L                          |
| Water heating efficiency (η <sub>WH</sub> ), warmer clima  | %                      | 151    | 151                        | 151                        |                            |
| COP <sub>DHW</sub> , warmer climate                        | -                      | 3.43   | 3.43                       | 3.43                       |                            |
| Water heating eff. class, warmer climate                   |                        | -      | A++                        | A++                        | A++                        |
| Declared load profile, colder climate                      |                        | -      | L                          | L                          | L                          |
| Water heating efficiency (η <sub>WH</sub> ), colder climat | е                      | %      | 101                        | 101                        | 101                        |
| COP <sub>DHW</sub> , colder climate                        |                        | -      | 2.34                       | 2.34                       | 2.34                       |
| Water heating eff. class, colder climate                   |                        | -      | А                          | A                          | А                          |
| Sound power level (outdoor unit)                           | Rated / low noise mode | dB(A)  | 49 / 48                    | 51 / 50                    | 52 / 51                    |
| Sound pressure level at 5m (outdoor unit)                  | Rated / low noise mode | dB(A)  | 27 / 26                    | 29 / 28                    | 30 / 29                    |
| Sound power level (indoor unit)                            | Rated                  | dB(A)  |                            | 39                         |                            |
| Sound pressure level at 1m (indoor unit)                   | Rated                  | dB(A)  |                            | 31                         |                            |
| Nominal Capacity and COP/EER                               |                        |        |                            |                            |                            |
| Air +7°C / water +35°C                                     | Heating capacity / COP | kW / - | 12.00 / 4.70               | 14.00 / 4.50               | 16.00 / 4.30               |
| Air +2°C / water +35°C                                     | Heating capacity / COP | kW / - | 12.00 / 3.72               | 14.00 / 3.61               | 14.50 / 3.49               |
| Air -7°C / water +35°C                                     | Heating capacity / COP | kW / - | 11.80 / 3.27               | 13.00 / 3.21               | 13.80 / 3.17               |
| Air +7°C / water +55°C                                     | Heating capacity / COP | kW / - | 10.00 / 3.10               | 11.00 / 3.25               | 12.00 / 3.30               |
| Air -7°C / water +55°C                                     | Heating capacity / COP | kW / - | 9.30 / 2.32                | 10.30 / 2.28               | 10.90 / 2.26               |
| Air +35°C / water +18°C                                    | Cooling capacity / EER | kW / - | 11.50 / 3.78               | 12.00 / 3.70               | 12.50 / 3.70               |

Air +35°C / water +7°C

1. Due to our policy of innovation, some specifications may be changed without notification.

Cooling capacity / EER

- 2. Wiring cable size must comply with the applicable local and national codes. Especially the power cable and circuit breaker should be selected in accordance with that,
- 3. Sound power level is measured on the rated condition in accordance with ISO 9614 standard. Sound pressure level is not a value declared on Eurovent Program and is increased owing to ambient conditions during operation. Rated sound power level is in accordance with EN12102-1 under condition of EN14825.

kW / -

10.50 / 3.12

12.00 / 2.99

12.50 / 2.95

- 4. Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation
- 5. This product contains fluorinated greenhouse gases.
- 6. All installation sites must be equipped with an earth leakage circuit breaker (ELCB).
- 7. DHW 65 ~  $80^{\circ}\text{C}$  Operating is available only when the booster heater is operating.


# THERMA V R290 MONOBLOC COMBI UNIT (12/14/16 kW)

# **Product Specification**

| Outdoor Units  |  | Unit     |                                     | 1HF UB60<br>3HF UB60  | HM161HF UB60<br>HM163HF UB60 |  |  |  |
|--|--|----------|-------------------------------------|---|------------------------------|--|--|--|
| Operation range  | Heating & DHW (Min. ~ Max.)                            | °C       | -2                                  | 8 ~ 35  |                              |  |  |  |
| (outdoor air temperature)  | Cooling (Min. ~ Max.)                                  | °C       | 5                                   | i ~ 48  |                              |  |  |  |
|  | Туре   | -        | F                                   | R290  |                              |  |  |  |
| efrigerant  ping connections (water)  imension  feight  cterior  door Units  peration range eaving water temperature)  pomestic hot water tank | GWP  | -        |                                     | 3   |                              |  |  |  |
|  | Precharged amount                                      | g        | 1                                   | 1,200   |                              |  |  |  |
| Piping connections (water)   | Inlet / outlet diameter                                | inch     | Male PT 1" according to Is          | 50 7-1 (tapered p   | ipe threads)                 |  |  |  |
| Dimension  | HxWxD  | mm       | 1,019 x                             | 1,560 x 520   |                              |  |  |  |
| Weight   | Net  | kg       | 1                                   | 181.0   |                              |  |  |  |
| Francisco  | Color of chassis / RAL code                            | -        | Dawn gra                            | y / RAL 7037  |                              |  |  |  |
| Exterior   | Color of front grille / RAL code                       | -        | Dark dawn g                         | Dawn gray / RAL 7037  Dark dawn gray / RAL 7012  220 ~ 240, 1, 50 / 380 ~ 415, 3, 50  10  1 Ø: 25 / 3 Ø: 16  HN1616HY NKO / HN1639HY NKO  15 ~ 75  5 ~ 27 |                              |  |  |  |
|  | Voltage, phase, frequency                              | V, Ø, Hz | 220 ~ 240, 1, 50 / 380 ~ 415, 3, 50 |   |                              |  |  |  |
| Power supply   | Standby power consumption                              |          |                                     |   |                              |  |  |  |
|  | Recommended circuit breaker                            | А        | 1 Ø: 25                             | 1 Ø: 25 / 3 Ø: 16   |                              |  |  |  |
| Indoor Units   |  | Unit     | HN1616HY NKO                        | ) / HN1639HY NI   | ко                           |  |  |  |
| Operation range<br>leaving water temperature)  | Heating (Min. ~ Max.)                                  | °C       | 15                                  | 5 ~ 75  |                              |  |  |  |
|  | Cooling (Min. ~ Max.)                                  | °C       | 5                                   | ~ 27  |                              |  |  |  |
| (,   | DHW (Min. ~ Max.)                                      | °C       | 15 ~ 80                             |   |                              |  |  |  |
|  | Volume   | l        |                                     | 200   |                              |  |  |  |
| Domestic hot water tank  | Tank material  | -        | Duplex st                           | tainless steel  |                              |  |  |  |
|  | Standby losses   | W        |                                     | 60  |                              |  |  |  |
| Expansion vessel (heating circuit)   | Volume   | l        |                                     | Duplex stainless steel  |                              |  |  |  |
| EL   | Capacity combination                                   | kW       | 1 Ø: 6.0                            | 0 / 3 Ø: 9.0  |                              |  |  |  |
| Electric heater  | Power supply   | V, Ø, Hz | 220 ~                               | 240, 1, 50  |                              |  |  |  |
|  | Inlet / outlet diameter for connection to outdoor unit | inch     |                                     |   |                              |  |  |  |
| Piping connections (water)   | Inlet / outlet diameter for space heating              | inch     | Female G1" according to IS          | 60228-1 (parallel   | pipe threads)                |  |  |  |
| Piping connections (water)   | Inlet / outlet diameter for DHW                        | inch     |                                     |   |                              |  |  |  |
|  | Recirculation  | inch     |                                     |   |                              |  |  |  |
| Dimension  | HxWxD  | mm       | 1,750 x                             | 600 × 660   |                              |  |  |  |
| Weight   | Net  | kg       | 1 Ø: 106.                           | 5 / 3 Ø: 107.0  |                              |  |  |  |
| Exterior   | Color / RAL code                                       | -        | Noble whi                           | te / RAL 9016   |                              |  |  |  |

#### Note

- 1. Due to our policy of innovation, some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes. Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound power level is measured on the rated condition in accordance with ISO 9614 standard. Sound pressure level is not a value declared on Eurovent Program and is converted from sound power level based on a tonality penalty of 0 dB and installation in free-field. The directivity index (Q) is assumed as 2. Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is in accordance with EN12102-1 under condition of EN14825.
- 4. Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation.
- 5. This product contains fluorinated greenhouse gases.
- 6. All installation sites must be equipped with an earth leakage circuit breaker (ELCB).
- 7, DHW 65 ~ 80°C Operating is available only when the booster heater is operating

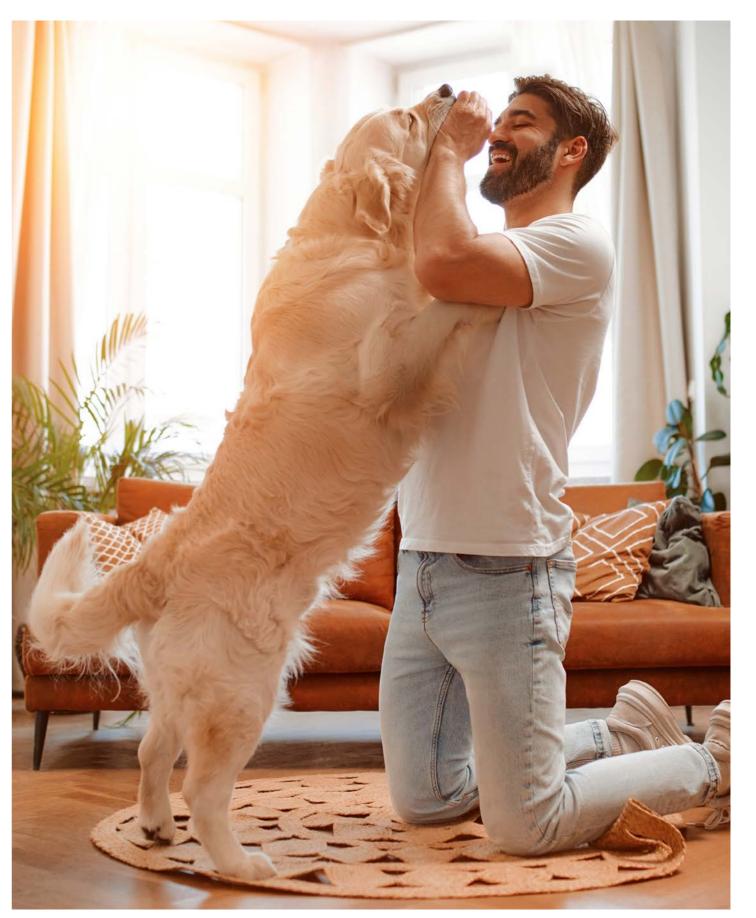

# THERMA V R290 MONOBLOC COMBI UNIT (12/14/16 kW)

## **Performance Table for Heating Operation**

Maximum heating capacity (Include defrost effect)

#### HM121HF UB60 + HN1616HY NK0 / HM123HF UB60 + HN1639HY NK0

| Outdoor Temp. | LWT 30 °C | LWT 35 °C     | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C | LWT 70 °C | LWT 75 °C |  |  |
|---------------|-----------|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|--|--|
| [°C DB]       |           | Capacity (kW) |           |           |           |           |           |           |           |           |  |  |
| -25           | 8.36      | 8.07          | 7.79      | 7.54      | 7.32      | 6.37      | -         | -         | -         | -         |  |  |
| -20           | 9.60      | 9.39          | 9.20      | 9.09      | 9.08      | 8.27      | 6.77      | -         | -         | -         |  |  |
| -15           | 10.84     | 10.69         | 10.55     | 10.55     | 10.84     | 10.76     | 8.71      | 7.17      | -         | -         |  |  |
| -7            | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 11.27     | 10.00     | 8.99      | -         |  |  |
| -4            | 12.00     | 12.00         | 12,00     | 12.00     | 12.00     | 12.00     | 12.00     | 10.88     | 9.65      | 8.91      |  |  |
| -2            | 12.00     | 12.00         | 12,00     | 12.00     | 12.00     | 12.00     | 12.00     | 11.45     | 10.29     | 9.32      |  |  |
| 2             | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 8.08      | 6.84      | 6.36      |  |  |
| 7             | 12.00     | 12.00         | 12,00     | 12.00     | 12.00     | 12.00     | 12.00     | 10.28     | 8.34      | 7.67      |  |  |
| 10            | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 11.20     | 9.90      | 8.95      |  |  |
| 15            | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 11.09     |  |  |
| 18            | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 11.69     |  |  |
| 20            | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     |  |  |
| 35            | -         | -             | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     |  |  |

#### HM141HF UB60 + HN1616HY NK0 / HM143HF UB60 + HN1639HY NK0

| Outdoor Temp. | LWT 30 °C | LWT 35 °C     | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C | LWT 70 °C | LWT 75 °C |
|---------------|-----------|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| [°C DB]       |           | Capacity (kW) |           |           |           |           |           |           |           |           |
| -25           | 8.88      | 8.57          | 8.28      | 8.01      | 7.78      | 6.37      | -         | -         | -         | -         |
| -20           | 10.20     | 9.97          | 9.78      | 9.66      | 9.48      | 8.27      | 6.77      | -         | -         | -         |
| -15           | 12.06     | 11.99         | 11.79     | 11.59     | 11.29     | 10.76     | 8.71      | 7.17      | -         | -         |
| -7            | 14.00     | 14.00         | 13.82     | 13.63     | 13.45     | 12,58     | 11.27     | 10.00     | 8.99      | -         |
| -4            | 14.00     | 14.00         | 13.90     | 13.83     | 13.83     | 13.23     | 12.06     | 10.88     | 9.65      | 8.91      |
| -2            | 14.00     | 14.00         | 13.96     | 13.95     | 14.00     | 13.71     | 12.59     | 11.45     | 10.29     | 9.32      |
| 2             | 14.00     | 14.00         | 14.00     | 14.00     | 14.00     | 14.00     | 13.16     | 8.08      | 6.84      | 6.36      |
| 7             | 14.00     | 14.00         | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 10.28     | 8.34      | 7.67      |
| 10            | 14.00     | 14.00         | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 11,20     | 9.90      | 8.95      |
| 15            | 14.00     | 14.00         | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 12.72     | 12.02     | 11.09     |
| 18            | 14.00     | 14.00         | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 13.82     | 12.89     | 11.69     |
| 20            | 14.00     | 14.00         | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 13.47     | 12.09     |
| 35            | -         | -             | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 12.80     |

#### HM161HF UB60 + HN1616HY NK0 / HM163HF UB60 + HN1639HY NK0

| Outdoor Temp. | LWT 30 °C | LWT 35 °C     | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C | LWT 70 °C | LWT 75 °C |  |  |
|---------------|-----------|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|--|--|
| [°C DB]       |           | Capacity (kW) |           |           |           |           |           |           |           |           |  |  |
| -25           | 9.41      | 9.08          | 8.76      | 8.48      | 7.81      | 6.37      | -         | -         | -         | -         |  |  |
| -20           | 10.80     | 10.56         | 10.35     | 10.23     | 9.48      | 8.27      | 6.77      | -         | -         | -         |  |  |
| -15           | 13.36     | 13.28         | 12.74     | 12.15     | 11.29     | 10.76     | 8.71      | 7.17      | -         | -         |  |  |
| -7            | 16.00     | 16.00         | 15.17     | 14.35     | 13.52     | 12.58     | 11.27     | 10.00     | 8.99      | -         |  |  |
| -4            | 16.00     | 16.00         | 15.43     | 14.85     | 14.29     | 13.23     | 12.06     | 10.88     | 9.65      | 8.91      |  |  |
| -2            | 16.00     | 16.00         | 15.69     | 15.34     | 14.81     | 13.71     | 12.59     | 11.45     | 10.29     | 9.32      |  |  |
| 2             | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     | 14.84     | 13.16     | 8.08      | 6.84      | 6.36      |  |  |
| 7             | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 14.25     | 10.28     | 8.34      | 7.67      |  |  |
| 10            | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 14.92     | 11.20     | 9.90      | 8.95      |  |  |
| 15            | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 12.72     | 12.02     | 11.09     |  |  |
| 18            | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 13.82     | 12.89     | 11.69     |  |  |
| 20            | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 14.56     | 13.47     | 12.09     |  |  |
| 35            | -         | -             | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 14.40     | 12.80     |  |  |

#### Note

- 1. DB : Dry Bulb Temperature (°C), LWT : Leaving Water Temperature (°C),
- LPM : Liters Per Minute ( \( \ell / \text{min} \), TC : Total Capacity (kW)
- $2.\, {\hbox{Direct interpolation is permissible.}}\, \hbox{Do not extrapolate}.$
- Measuring procedure follows EN-14511.
   Rated values are based on standard conditions and it can be found on specifications.
- Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
- In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

# **Performance Table for Cooling Operation**

Maximum cooling capacity

#### HM121HF UB60 + HN1616HY NK0 / HM123HF UB60 + HN1639HY NK0

| Outdoor Temp. | LWT 7 °C | LWT 10 °C | LWT 13 °C     | LWT 15 °C | LWT 18 °C | LWT 20 °C | LWT 22 °C |
|---------------|----------|-----------|---------------|-----------|-----------|-----------|-----------|
| [°C DB]       |          |           | Capacity (kW) |           |           |           |           |
| 20            | 11.50    | 11.50     | 11.50         | 11.50     | 11.50     | 11.50     | 11.50     |
| 30            | 10.97    | 11.50     | 11.50         | 11.50     | 11.50     | 11.50     | 11.50     |
| 35            | 10.50    | 11,28     | 11.50         | 11.50     | 11.50     | 11.50     | 11.50     |
| 40            | 9.35     | 10.08     | 10.80         | 11.27     | 11.50     | 11.50     | 11.50     |
| 45            | 8.19     | 8.90      | 9.61          | 10.07     | 10.77     | 11.23     | 11.50     |

#### HM141HF UB60 + HN1616HY NK0 / HM143HF UB60 + HN1639HY NK0

| Outdoor Temp. | LWT 7 °C | LWT 10 °C | LWT 13 °C | LWT 15 °C     | LWT 18 °C | LWT 20 °C | LWT 22 °C |
|---------------|----------|-----------|-----------|---------------|-----------|-----------|-----------|
| [°C DB]       |          |           |           | Capacity (kW) |           |           |           |
| 20            | 12.00    | 12.00     | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     |
| 30            | 12.00    | 12.00     | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     |
| 35            | 12.00    | 12.00     | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     |
| 40            | 10.68    | 11,52     | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     |
| 45            | 9.36     | 10.17     | 10.98     | 11,51         | 12.00     | 12.00     | 12.00     |

#### HM161HF UB60 + HN1616HY NK0 / HM163HF UB60 + HN1639HY NK0

| Outdoor Temp. | LWT 7 °C | LWT 10 °C | LWT 13 °C | LWT 15 °C | LWT 18 °C | LWT 20 °C | LWT 22 °C |
|---------------|----------|-----------|-----------|-----------|-----------|-----------|-----------|
| [°C DB]       |          |           |           |           |           |           |           |
| 20            | 12.50    | 12.50     | 12.50     | 12.50     | 12,50     | 12.50     | 12.50     |
| 30            | 12.50    | 12.50     | 12,50     | 12.50     | 12,50     | 12.50     | 12.50     |
| 35            | 12.50    | 12.50     | 12.50     | 12.50     | 12,50     | 12.50     | 12.50     |
| 40            | 12.02    | 12.50     | 12.50     | 12.50     | 12.50     | 12,50     | 12,50     |
| 45            | 10.03    | 10.78     | 11.54     | 12.05     | 12,50     | 12,50     | 12.50     |

#### Note

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),
- LPM: Liters Per Minute ( $\ell$ /min), TC: Total Capacity (kW)
- $2.\, {\hbox{Direct interpolation is permissible.}}\, \hbox{Do not extrapolate},$
- 3. Measuring procedure follows EN-14511.
- $\bullet$  Rated values are based on standard conditions and it can be found on specifications.
- Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
- In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

## **Supplied Parts**

#### Strainer



| Technical Specification |                    | Unit | Details                           |
|-------------------------|--------------------|------|-----------------------------------|
| Material                | Body -             |      | Brass                             |
| Material                | Mesh               | -    | Stainless steel (STS304)          |
| Mesh                    | Mesh no.           | -    | 30                                |
| Mesn                    | Max. particle size | mm   | 0.6                               |
| Piping connection       |                    | -    | Female G1" according to ISO 228-1 |


- \* The strainer and valves are supplied with the product, but it need to be installed separately.
- \* This strainer should be installed at the inlet connection of the outdoor unit to protect the clogging of a plate heat exchanger.


090

# **THERMA V R290 MONOBLOC COMBI UNIT** (12/14/16 kW)


**Drawings** [Unit: mm] [Unit: mm]


HM121HF UB60 / HM123HF UB60 HM141HF UB60 / HM143HF UB60 HM161HF UB60 / HM163HF UB60

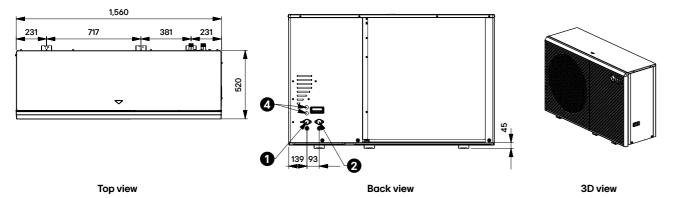

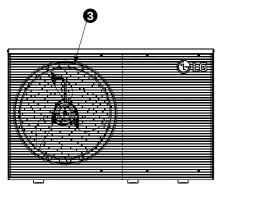


Front view




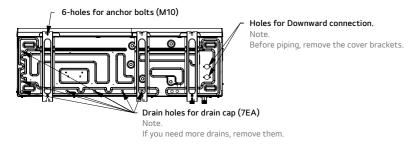

#### **Bottom view**

| No. | Part Name                      | Description          |
|-----|--------------------------------|----------------------|
| 1   | Leaving Water Pipe             | Male PT 1 inch       |
| 2   | Entering Water Pipe            | Male PT 1 inch       |
| 3   | Air Discharge Grille           | -                    |
| 4   | Access to Electrical Terminals | Power, Communication |

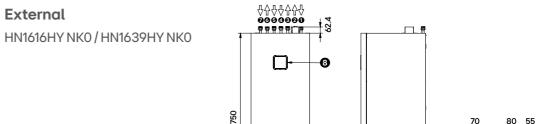


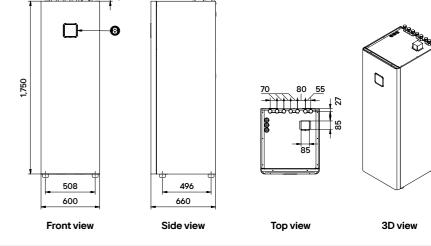

| No. | Part Name                     | Description                      | No. | Part Name                      |  |
|-----|-------------------------------|----------------------------------|-----|--------------------------------|--|
| 1   | Inlet Pipe from Outdoor Unit  |                                  | 5   | Domestic Hot Water Inlet Pipe  |  |
| 2   | Outlet Pipe from Outdoor Unit | Female G1" According to ISO228-1 | 6   | Domestic Hot Water Outlet Pipe | Female G1" According to ISO228-1 (Parallel pipe threads) |
| 3   | Heating Circuit Outlet Pipe   | (Parallel pipe threads)          | 7   | DHW Re-circulation Pipe        | ,                  |
| 4   | Heating Circuit Inlet Pipe    |                                  | 8   | Control Panel                  | Built-in Remote Controller                               |

#### Internal

HN1616HY NK0 / HN1639HY NK0

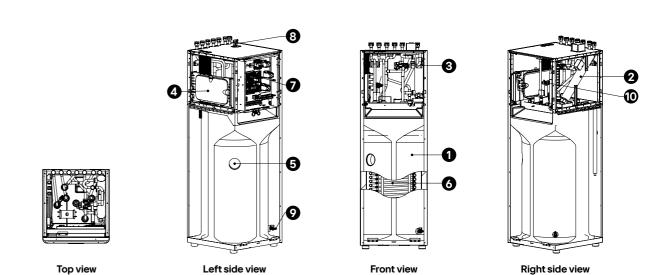

| No. | Part Name Description |                                    | No. | Part Name      | Description                       |
|-----|-----------------------|------------------------------------|-----|----------------|-----------------------------------|
| 1   | DHW Tank              | Domestic Hot Water Tank (200 L)    | 6   | Heat Exchanger | Coil Heat Exchanger (Water / DHW) |
| 2   | Heater                | Electric Heater (1Ø 6 kW, 3Ø 9 kW) | 7   | Control Box    | PCB'A and Terminal Blocks         |
| 3   | 3 Way Valve           | For DHW / Heating                  | 8   | Air Vent       | For Air Purging                   |
| 4   | Expansion Vessel      | 8L for Heating Circuit             | 9   | Drain Cock 1   | Valve for DHW Tank Drain          |
| 5   | DHW Tank Sensor       | Temperature Sensor                 | 10  | Safety Valve   | For DHW (10 bar)                  |






### The Final Evolution of the R32 Monobloc

The R32 Monobloc S I is the ultimate evolution of the R32 Monobloc series, with all the benefits of the R32 Monobloc S in a sleek gray European design.

#### What is R32 Monobloc SII

The THERMA V R32 Monobloc S I is the next generation model that continues the legacy of the LG THERMA V R32 Monobloc S. The new generation's sleek look matches that of the rest of the modernized line-up, while maintaining the excellent performance of the existing R32 Monobloc S, and that the single fan design has been applied to not only the 5, 7, and 9 kW but also the 12, 14, and 16 kW models. Along with these design changes, various features and installation conveniences that were developed from the R290 Monobloc have been reflected.

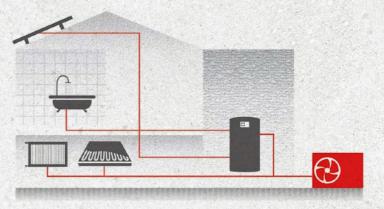

#### **Key Features**

- Capacity range from 5 to 16 kW for new build and renovation
- Refined gray design that adapt to various surroundings
- Standalone heat pump allowing easy installation (Plug and play solution)
- ErP Energy Labeling A+++ / A++ for space heating (Average Climate 35°C / 55°C LWT)
- Low noise level for high installation flexibility
- 100% Heating capacity at -15°C outdoor temperature (16 kW 90%)
- Maximum flow temperature up to 65°C
- Operation range down to -25°C











#### **Product Range**

| Phase | Capacity (kW) | Outdoor Unit  |
|-------|---------------|---------------|
| FX    | 5             | HM051MRS UA40 |
|       | 7             | HM071MRS UA40 |
| 10    | 9             | HM091MRS UA40 |
| 10    | 12            | HM121MRS UB40 |
|       | 14            | HM141MRS UB40 |
|       | 16            | HM161MRS UB40 |
|       | 12            | HM123MRS UB40 |
| 3Ø    | 14            | HM143MRS UB40 |
|       | 16            | HM163MRS UB40 |

# **HIGHLIGHT OF** R32 MONOBLOC S II



Browse now Q

### **New Design**

#### European-style Gray



#### **Enhanced Convenience**



- Outdoor units design meets European standards
- Refined gray design that will look great anywhere
- 2 feet instead of 3 feet which was uncomfortable


### **Improved Structure**

#### **Prevent Cumulative Icing**

Elimination of side panel and rear grille to prevent ice build-up

Monobloc S











Free from ice build up

Monobloc S I

# **Space Efficiency**

#### Simpler Exterior

- Integrated hydronic components in the package
- Easier and quicker installation without refrigerant piping work
- The best solution, when interior space is limited



### **Comfortable Ease**

#### Low Noise Level Allowing Installation Flexibility

- Designed to reach lower noise levels in order to meet homeowner expectations in urban areas
- Noise reduction technology such as encapsulated compressor and vibration-decoupling to ensure a quieter and more comfortable experience



#### **Reliable Performance**

#### Remarkable Heating Performance even in Cold Weather

- 100 % heating capacity at -15 °C ambient temp. (@LWT 35 °C, except for 16 kW model)
- Longer continuous heating periods with reduced defrost operation time and extended intervals



### Convenience

#### **Easy Maintenance**

Easy access to PCB for installing and maintenance







### Separate Supply of Strainer

Easy strainer cleaning by not opening the panel







Integrated strainer

Loose supplied item (Supplied with outdoor unit)

# THERMA V R32 MONOBLOC S II (5/7/9kW)

#### Outdoor unit

HM051MRS UA40 HM071MRS UA40 HM091MRS UA40






















### **Key Components**

Outdoor Unit

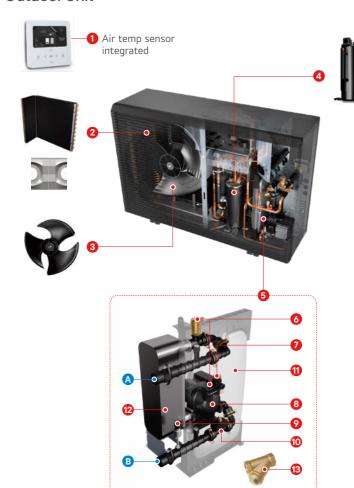

#### Components

- 1 Standard III remote controller 1) 2)
- 2 Black Fin heat exchanger (air / ref.)
- 3 Biomimetic fan
- 4 R1 compressor
- 5 Hydronic components assembly
- 6 Air vent valve
- Safety valve
- 8 Water pump
- Pressure sensor
- Tlow sensor
- ① Expansion tank (81)
- Plate heat exchanger Strainer (loose supplied)
- 1) The remote controller is supplied with the product,
- but it needs to be installed separately.
- 2) Temperature control class (ERP class): V

#### Connections

- A Leaving water pipe (male PT 1")
- B Entering water pipe (male PT 1")

# THERMA V... (B) Monobloc S I

# **Product Specification**

| Efficiency Data                                   |                                  | Unit     | 5 kW (1 Ø)    | 7 kW (1 Ø)                  | 9 kW (1 Ø)      |  |
|---|----------------------------------|----------|---------------|-----------------------------|-----------------|--|
| Seasonal space heating eff. class (35°C           | / 55°C)                          | -        | A+++ / A++    | A+++ / A++                  | A+++ / A++      |  |
| Seasonal space heating efficiency ( $\eta_s$ ) (3 | B5°C / 55°C)                     | %        | 175 / 125     | 176 / 125                   | 179 / 125       |  |
| SCOP (35°C / 55°C)                                |                                  | -        | 4.46 / 3.20   | 4.48 / 3.20                 | 4.55 / 3.20     |  |
| Sound power level                                 | Rated / low noise mode           | dB(A)    | 57 / 54       | 57 / 55                     | 57 / 55         |  |
| Sound pressure level at 5m                        | Rated / low noise mode           | dB(A)    | 35 /32        | 35 / 33                     | 35 / 33         |  |
| Nominal Capacity and COP/EER                      |                                  |          |               |                             |                 |  |
| Air +7°C / water +35°C                            | Heating capacity / COP           | kW/-     | 5.50 / 4.70   | 7.00 / 4.70                 | 9.00 / 4.60     |  |
| Air +2°C / water +35°C                            | Heating capacity / COP           | kW / -   | 5.50 / 3.60   | 6.00 / 3.55                 | 7.00 / 3.50     |  |
| Air +7°C / water +55°C                            | Heating capacity / COP           | kW / -   | 5.50 / 2.70   | 5.75 / 2.70                 | 6.00 / 2.70     |  |
| Air +35°C / water +18°C                           | Cooling capacity / EER           | kW / -   | 5.50 / 4.70   | 7.00 / 4.65                 | 9.00 / 4.60     |  |
| Air +35°C / water +7°C                            | Cooling capacity / EER           | kW / -   | 5.50 / 3.30   | 7.00 / 3.20                 | 9.00 / 3.00     |  |
| Outdoor Units                                     |                                  | Unit     | HM051MRS UA40 | HM071MRS UA40               | HM091MRS UA40   |  |
| Operation range                                   | Heating & DHW (Min. ~ Max.)      | °C       |               | -25 ~ 35                    |                 |  |
| (outdoor air temperature)                         | Cooling (Min. ~ Max.)            | °C       | 5 ~ 48        |                             |                 |  |
|   | Heating (Min. ~ Max.)            | °C       | 15 ~ 65       |                             |                 |  |
| Operation range (leaving water temperature)       | Cooling (Min. ~ Max.)            | °C       | 5 ~ 27        |                             |                 |  |
|   | DHW (Min. ~ Max.)                | °C       |               | 15 ~ 80                     |                 |  |
|   | Туре                             | -        |               | R32                         |                 |  |
| Refrigerant                                       | GWP                              | -        |               | 675                         |                 |  |
|   | Precharged amount                | g        |               | 1,400                       |                 |  |
| Piping connections (water)                        | Inlet / outlet diameter          | inch     | Male PT 1" ac | cording to ISO 7-1 (tapered | l pipe threads) |  |
| Expansion vessel (heating circuit)                | Volume                           | l        |               | 8                           |                 |  |
| Dimension   | H x W x D                        | mm       |               | 853 x 1,242 x 391           |                 |  |
| Weight  | Net                              | kg       |               | 94                          |                 |  |
| Exterior  | Color of chassis / RAL code      | -        |               | Dawn gray / RAL 7037        |                 |  |
| Exterior  | Color of front grille / RAL code | -        |               | Dark dawn gray / RAL 7012   | 2               |  |
|   | Voltage, phase, frequency        | V, Ø, Hz |               | 220 ~ 240, 1, 50            |                 |  |
| Power supply                                      | Standby power consumption        | W        |               | 10                          |                 |  |
|   | Recommended circuit breaker      | А        | 16 20         |                             | 25              |  |

- 1. Due to our policy of innovation, some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes. Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound power level is measured on the rated condition in accordance with ISO 9614 standard, Sound pressure level is not a value declared on Eurovent Program and is converted from sound power level based on a tonality penalty of 0 dB and installation in free-field. The directivity index (Q) is assumed as 2. Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is in accordance with EN12102-1 under condition of EN14825.
- 4. Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation.
- 5. This product contains fluorinated greenhouse gases.
- 6. All installation sites must be equipped with an earth leakage circuit breaker (ELCB).
- 7. DHW 55 ~ 80  $^{\circ}\text{C}$  Operating is available only when the booster heater is operating.

# THERMA V R32 MONOBLOC S II (5/7/9kW)

## **Performance Table for Heating Operation**

Maximum heating capacity (Include defrost effect)

#### HM051MRS UA40

| Outdoor Temp. | LWT 30 °C | LWT 35 °C | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C |
|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| [°C DB]       |           |           |           | Capaci    | ty (kW)   |           |           |           |
| -25           | 5.50      | 5.50      | 5.50      | 5.50      | -         | -         | -         | -         |
| -20           | 5.50      | 5.50      | 5.50      | 5.50      | 5.23      | -         | -         | -         |
| -15           | 5.50      | 5.50      | 5.50      | 5.50      | 5.23      | 5.23      | -         | -         |
| -7            | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | -         |
| -4            | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      |
| -2            | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      |
| 2             | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      |
| 7             | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      |
| 10            | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      |
| 15            | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      |
| 18            | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      |
| 20            | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      |
| 35            | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      |

#### HM071MRS UA40

| Outdoor Temp. | LWT 30 °C | LWT 35 °C | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C |
|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| [°C DB]       |           |           |           |           |           |           |           |           |
| -25           | 5.85      | 5.85      | 5.85      | 5.85      | -         | -         | -         | -         |
| -20           | 6.43      | 6.43      | 6.43      | 6.43      | 6.10      | -         | -         | -         |
| -15           | 7.00      | 7.00      | 7.00      | 7.00      | 6.65      | 6.65      | -         | -         |
| -7            | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | -         |
| -4            | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |
| -2            | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |
| 2             | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |
| 7             | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |
| 10            | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |
| 15            | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |
| 18            | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |
| 20            | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |
| 35            | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |

#### HM091MRS UA40

| Outdoor Temp. | LWT 30 °C | LWT 35 °C     | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C |
|---------------|-----------|---------------|-----------|-----------|-----------|-----------|-----------|-----------|
| [°C DB]       |           | Capacity (kW) |           |           |           |           |           |           |
| -25           | 6.20      | 6.20          | 6.20      | 6.20      | -         | -         | -         | -         |
| -20           | 7.60      | 7.60          | 7.60      | 7.60      | 7.22      | -         | -         | -         |
| -15           | 9.00      | 9.00          | 9.00      | 9.00      | 8.55      | 8.55      | -         | -         |
| -7            | 9.00      | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | -         |
| -4            | 9.00      | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |
| -2            | 9.00      | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |
| 2             | 9.00      | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |
| 7             | 9.00      | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |
| 10            | 9.00      | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |
| 15            | 9.00      | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |
| 18            | 9.00      | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |
| 20            | 9.00      | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |
| 35            | 9.00      | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),
- LPM: Liters Per Minute (2/min), TC: Total Capacity (kW)
- 2. Direct interpolation is permissible. Do not extrapolate.
- 3. Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- · Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
- In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

# **Performance Table for Cooling Operation**

Maximum cooling capacity

#### HM051MRS UA40

| Outdoor Temp. | LWT 7 °C | LWT 10 °C | LWT 13 °C | LWT 15 °C     | LWT 18 °C | LWT 20 °C | LWT 22 °C |
|---------------|----------|-----------|-----------|---------------|-----------|-----------|-----------|
| [°C DB]       |          |           |           | Capacity (kW) |           |           |           |
| 10            | 5.50     | 5.50      | 5.50      | 5.50          | 5.50      | 5.50      | 5.50      |
| 20            | 5.50     | 5.50      | 5.50      | 5.50          | 5.50      | 5.50      | 5.50      |
| 30            | 5.50     | 5.50      | 5.50      | 5.50          | 5.50      | 5.50      | 5.50      |
| 35            | 5.50     | 5.50      | 5.50      | 5.50          | 5.50      | 5.50      | 5.50      |
| 40            | 5.29     | 5.32      | 5.36      | 5.38          | 5.41      | 5.43      | 5,45      |
| 45            | 5.09     | 5.15      | 5.21      | 5.25          | 5.31      | 5.36      | 5.40      |

THERMA V. (B32) Monobloc S I

#### HM071MRS UA40

| Outdoor Temp. | LWT 7 °C | LWT 10 °C | LWT 13 °C | LWT 15 °C     | LWT 18 °C | LWT 20 °C | LWT 22 °C |
|---------------|----------|-----------|-----------|---------------|-----------|-----------|-----------|
| [°C DB]       |          |           |           | Capacity (kW) |           |           |           |
| 10            | 7.00     | 7.00      | 7.00      | 7.00          | 7.00      | 7.00      | 7.00      |
| 20            | 7.00     | 7.00      | 7.00      | 7.00          | 7.00      | 7.00      | 7.00      |
| 30            | 7.00     | 7.00      | 7.00      | 7.00          | 7.00      | 7.00      | 7.00      |
| 35            | 7.00     | 7.00      | 7.00      | 7.00          | 7.00      | 7.00      | 7.00      |
| 40            | 6.36     | 6.45      | 6.55      | 6.61          | 6.71      | 6.77      | 6.84      |
| 45            | 5.71     | 5.82      | 5.92      | 5.99          | 6.10      | 6.17      | 6.24      |

#### HM091MRS UA40

| Outdoor Temp. | LWT 7 °C | LWT 10 °C | LWT 13 °C | LWT 15 °C     | LWT 18 °C | LWT 20 °C | LWT 22 °C |
|---------------|----------|-----------|-----------|---------------|-----------|-----------|-----------|
| [°C DB]       |          |           |           | Capacity (kW) |           |           |           |
| 10            | 9.00     | 9.00      | 9.00      | 9.00          | 9.00      | 9.00      | 9.00      |
| 20            | 9.00     | 9.00      | 9.00      | 9.00          | 9.00      | 9.00      | 9.00      |
| 30            | 9.00     | 9.00      | 9.00      | 9.00          | 9.00      | 9.00      | 9.00      |
| 35            | 9.00     | 9.00      | 9.00      | 9.00          | 9.00      | 9.00      | 9.00      |
| 40            | 7.66     | 7.66      | 7.65      | 7.65          | 7.65      | 7.65      | 7.65      |
| 45            | 6.31     | 6.35      | 6.39      | 6.42          | 6.45      | 6.48      | 6.51      |

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),
- LPM: Liters Per Minute ( $\ell$ /min), TC: Total Capacity (kW)
- 2. Direct interpolation is permissible. Do not extrapolate.
- 3. Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- $\bullet \ Above \ table \ values \ may \ not \ be \ matched \ according \ to \ installation \ condition. \ Except for \ rated \ value, \ the \ performance \ is \ not \ guaranteed.$
- In accordance with the test standard (or nations), the rating will vary slightly. 4. The shaded areas are not guaranteed continuous operation.

# **Supplied Parts**

#### Strainer




| Technical Specification | Technical Specification |    | Details                           |
|-------------------------|-------------------------|----|-----------------------------------|
| Material                | Body                    | -  | Brass                             |
| Material                | Mesh                    | -  | Stainless steel (STS304)          |
| Mach                    | Mesh no.                | -  | 30                                |
| Mesh                    | Max. particle size      | mm | 0.6                               |
| Piping connection       |                         | -  | Female G1" according to ISO 228-1 |


- \* The strainer and valves are supplied with the product, but it need to be installed separately.
- \* This strainer should be installed at the inlet connection of the outdoor unit to protect the clogging of a plate heat exchanger.


# **THERMA V R32** MONOBLOC S II (5/7/9kW)


**Drawings** [Unit: mm] [Unit: mm]

HM051MRS UA40 HM071MRS UA40 HM091MRS UA40

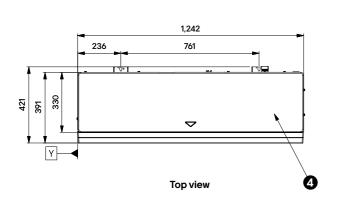




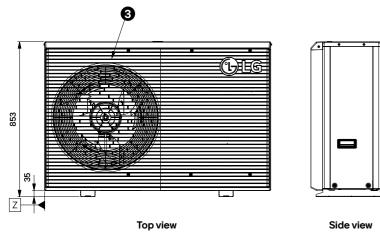



# Drain holes for drain cap (7EA) If you need more drains, remove them 4-holes for anchor bolts (M10) Drain hole for drain nipple (1EA) **Bottom view**

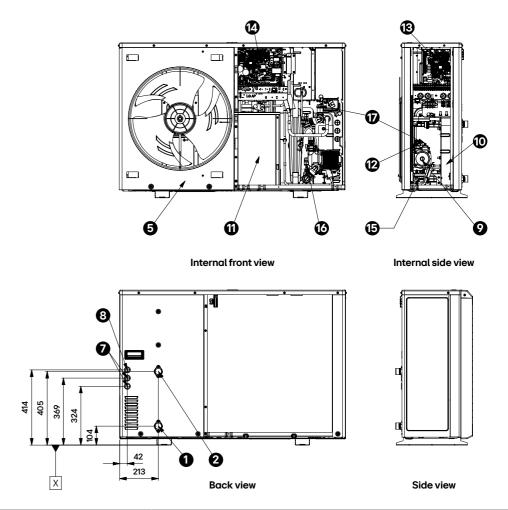

THERMA V<sub>m</sub> (R32) Monobloc S I

| No. | Part Name               | Description  |
|-----|-------------------------|--|
| 1   | Entering Water Pipe     | Male PT 1" according to ISO 7-1 (Tapered pipe threads) |
| 2   | Leaving Water Pipe      | Male PT 1" according to ISO 7-1 (Tapered pipe threads) |
| 3   | Air Discharge Grille    | -  |
| 4   | Top Cover               | -  |
| 5   | Front Panel             | -  |
| 6   | Side Panel              | -  |
| 7   | Low Voltage             | Communication Cable Hole                               |
| 8   | UNIT Power              | Power Cable Hole                                       |
| 9   | Water Pump              | OH SUNG, ODM-061P / GRUNDFOS, UPM3K 20-75 CHBL         |
| 10  | Plate Heat Exchanger    | Heat Exchanger Between Refrigerant and Water           |
| 11  | Compressor Shield Panel | -  |
| 12  | Safety Relief Valve     | Open at Water Pressure 3 Bar                           |
| 13  | Indoor Control Box      | Hydro, Cycle PCB and Terminal Blocks                   |
| 14  | Outdoor Control Box     | Inverter PCB and Terminal Blocks                       |
| 15  | Flow Sensor             | SIKA VVX20 / SEBA LGF-080-C20-E-0.5V, 5-80 LPM         |
| 16  | Water Pressure Sensor   | SENSATA 2HMP3-05W 02-MPa                               |
| 17  | Automatic Air Vents     | -  |

# THERMA V R32 MONOBLOC S II (12/14/16 kW)

#### Outdoor unit

HM121MRS UB40 / HM123MRS UB40 HM141MRS UB40 / HM143MRS UB40 HM161MRS UB40 / HM163MRS UB40
























### **Key Components**

Outdoor Unit

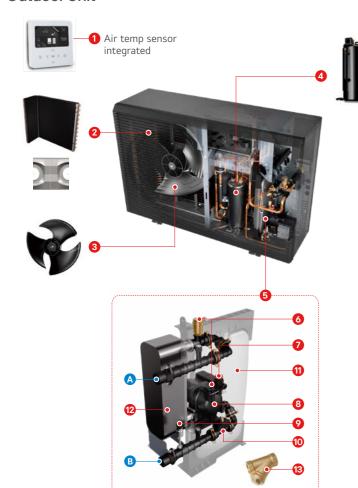

#### Components

- 1 Standard III remote controller 1) 2)
- 2 Black Fin heat exchanger (air / ref.)
- 3 Biomimetic fan
- 4 R1 compressor
- 5 Hydronic components assembly
- 6 Air vent valve
- Safety valve
- 8 Water pump
- Pressure sensor
- Tlow sensor
- ① Expansion tank (81)
- Plate heat exchanger Strainer (loose supplied)
- 1) The remote controller is supplied with the product,
- but it needs to be installed separately.
- 2) Temperature control class (ERP class): V

#### Connections

- A Leaving water pipe (male PT 1")
- B Entering water pipe (male PT 1")

# THERMA V... (B) Monobloc S I

# **Product Specification**

| Efficiency Data                                   |  | Unit     | 12 kW (1 Ø)<br>12 kW (3 Ø)     | 14 kW (1 Ø)<br>14 kW (3 Ø)     | 16 kW (1 Ø)<br>16 kW (3 Ø)     |  |
|---|--|----------|--------------------------------|--------------------------------|--------------------------------|--|
| Seasonal space heating eff. class (35°C           | / 55°C)                                      | -        | A+++ / A++                     | A+++ / A++                     | A+++ / A++                     |  |
| Seasonal space heating efficiency ( $\eta_s$ ) (3 | 85°C / 55°C)                                 | %        | 184 / 136                      | 182 / 135                      | 178 / 135                      |  |
| SCOP (35°C / 55°C)                                |  | -        | 4.67 / 3.47                    | 4.62 / 3.46                    | 4.53 / 3.45                    |  |
| Sound power level                                 | Rated / low noise mode                       | dB(A)    | 60 / 56 61 / 57                |                                | 61 / 57                        |  |
| Sound pressure level at 5m                        | Rated / low noise mode                       | dB(A)    | 38 / 34                        | 39 / 35                        | 39 / 35                        |  |
| Nominal Capacity and COP/EER                      |  |          |                                |                                |                                |  |
| Air +7°C / water +35°C                            | Heating capacity / COP                       | kW / -   | 12.00 / 4.90                   | 14.00 / 4.80                   | 16.00 / 4.70                   |  |
| Air +2°C / water +35°C                            | ir +2°C / water +35°C Heating capacity / COP |          | 11.00 / 3.60                   | 12.00 / 3.55                   | 13.80 / 3.50                   |  |
| Air +7°C / water +55°C                            | Heating capacity / COP                       | kW / -   | 11.00 / 2.90                   | 11.50 / 2.85                   | 12.00 / 2.80                   |  |
| Air +35°C / water +18°C                           | Cooling capacity / EER                       | kW / -   | 12.00 / 4.80                   | 14.00 / 4.70                   | 16.00 / 4.60                   |  |
| Air +35°C / water +7°C                            | Cooling capacity / EER                       | kW / -   | 12.00 / 3.20                   | 14.00 / 3.10                   | 15.00 / 3.00                   |  |
| Outdoor Units                                     |  | Unit     | HM121MRS UB40<br>HM123MRS UB40 | HM141MRS UB40<br>HM143MRS UB40 | HM161MRS UB40<br>HM163MRS UB40 |  |
| Operation range                                   | Heating & DHW (Min. ~ Max.)                  | °C       |                                | '                              |                                |  |
| (outdoor air temperature)                         | Cooling (Min. ~ Max.)                        | °C       | 5 ~ 48                         |                                |                                |  |
|   | Heating (Min. ~ Max.)                        | °C       | 15 ~ 65                        |                                |                                |  |
| Operation range (leaving water temperature)       | Cooling (Min. ~ Max.)                        | °C       | 5 ~ 27                         |                                |                                |  |
|   | DHW (Min. ~ Max.)                            | °C       |                                | 15 ~ 80                        |                                |  |
|   | Туре   | -        |                                | R32                            |                                |  |
| Refrigerant                                       | GWP  | -        |                                | 675                            |                                |  |
|   | Precharged amount                            | g        |                                | 1,600                          |                                |  |
| Piping connections (water)                        | Inlet / outlet diameter                      | inch     | Male PT 1" ac                  | cording to ISO 7-1 (tapered    | l pipe threads)                |  |
| Expansion vessel (heating circuit)                | Volume                                       | l        |                                | 8                              |                                |  |
| Dimension   | HxWxD  | mm       |                                | 1,019 x 1,320 x 520            |                                |  |
| Weight  | Net  | kg       |                                | 117                            |                                |  |
| Frebusian   | Color of chassis / RAL code                  | -        |                                | Dawn gray / RAL 7037           |                                |  |
| Exterior  | Color of front grille / RAL code             | -        |                                | Dark dawn gray / RAL 701:      | 2                              |  |
|   | Voltage, phase, frequency                    | V, Ø, Hz | 220                            | ~ 240, 1, 50 / 380 ~ 415, 3    | 3, 50                          |  |
| Power supply                                      | Standby power consumption                    | W        |                                | 10                             |                                |  |
|   | Recommended circuit breaker                  | А        |                                |                                |                                |  |

- 1. Due to our policy of innovation, some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes. Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound power level is measured on the rated condition in accordance with ISO 9614 standard, Sound pressure level is not a value declared on Eurovent Program and is converted from sound power level based on a tonality penalty of 0 dB and installation in free-field. The directivity index (Q) is assumed as 2. Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is in accordance with EN12102-1 under condition of EN14825.
- 4. Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation.
- 5. This product contains fluorinated greenhouse gases.
- 6. All installation sites must be equipped with an earth leakage circuit breaker (ELCB).
- 7. DHW 55 ~ 80  $^{\circ}\text{C}$  Operating is available only when the booster heater is operating.

107

# THERMA V R32 MONOBLOC S II (12/14/16 kW)

## **Performance Table for Heating Operation**

Maximum heating capacity (Include defrost effect)

#### HM121MRS UB40 / HM123MRS UB40

| Outdoor Temp. | LWT 30 °C | LWT 35 °C | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C |
|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| [°C DB]       |           |           |           | Capaci    | ty (kW)   |           |           |           |
| -25           | 9.50      | 9.50      | 9.50      | 9.50      | -         | -         | -         | -         |
| -20           | 10.75     | 10.75     | 10.75     | 10.75     | 10.21     | -         | -         | -         |
| -15           | 12.00     | 12.00     | 12.00     | 12,00     | 11.50     | 11.50     | -         | -         |
| -7            | 12,00     | 12.00     | 12.00     | 12,00     | 12,00     | 12,00     | 12.00     | -         |
| -4            | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     |
| -2            | 12,00     | 12.00     | 12.00     | 12,00     | 12,00     | 12,00     | 12.00     | 12.00     |
| 2             | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     |
| 7             | 12,00     | 12.00     | 12.00     | 12,00     | 12,00     | 12,00     | 12.00     | 12.00     |
| 10            | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     |
| 15            | 12,00     | 12.00     | 12.00     | 12,00     | 12,00     | 12,00     | 12.00     | 12.00     |
| 18            | 12,00     | 12.00     | 12.00     | 12,00     | 12,00     | 12,00     | 12.00     | 12.00     |
| 20            | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     |
| 35            | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     |

#### HM141MRS UB40 / HM143MRS UB40

| Outdoor Temp. | LWT 30 °C | LWT 35 °C | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C |
|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| [°C DB]       |           |           |           |           |           |           |           |           |
| -25           | 10.00     | 10.00     | 10.00     | 10.00     | -         | -         | -         | -         |
| -20           | 12,00     | 12.00     | 12.00     | 12,00     | 11.40     | -         | -         | -         |
| -15           | 14.00     | 14.00     | 14.00     | 14.00     | 13.30     | 13.30     | -         | -         |
| -7            | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | -         |
| -4            | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     |
| -2            | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     |
| 2             | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     |
| 7             | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     |
| 10            | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     |
| 15            | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     |
| 18            | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     |
| 20            | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     |
| 35            | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 12.50     |

#### HM161MRS UB40 / HM163MRS UB40

| Outdoor Temp. | LWT 30 °C | LWT 35 °C | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C |
|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| [°C DB]       |           |           |           | Capaci    | ty (kW)   |           |           |           |
| -25           | 10.50     | 10.50     | 10.50     | 10.50     | -         | -         | -         | -         |
| -20           | 13.25     | 13.25     | 13.25     | 13.25     | 12,59     | -         | -         | -         |
| -15           | 16.00     | 14.40     | 14.40     | 14.40     | 13.68     | 13.68     | -         | -         |
| -7            | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | -         |
| -4            | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     |
| -2            | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     |
| 2             | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     |
| 7             | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     |
| 10            | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     |
| 15            | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     |
| 18            | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     |
| 20            | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     |
| 35            | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 13.00     |

#### Note

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),
- LPM: Liters Per Minute ( $\ell$ /min), TC: Total Capacity (kW)
- $2.\, {\hbox{Direct interpolation is permissible.}}\, \hbox{Do not extrapolate}.$
- Measuring procedure follows EN-14511.
   Rated values are based on standard conditions and it can be found on specifications.
- $\bullet \, \text{Above table values may not be matched according to installation condition.} \, \text{Except for rated value, the performance is not guaranteed.} \,$
- In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

# THERMA V... (RED) Monobloc S I

# **Performance Table for Cooling Operation**

Maximum cooling capacity

#### HM121MRS UB40 / HM123MRS UB40

| Outdoor Temp. | LWT 7 °C | LWT 10 °C | LWT 13 °C | LWT 15 °C     | LWT 18 °C | LWT 20 °C | LWT 22 °C |
|---------------|----------|-----------|-----------|---------------|-----------|-----------|-----------|
| [°C DB]       |          |           |           | Capacity (kW) |           |           |           |
| 10            | 12.00    | 12,00     | 12,00     | 12.00         | 12.00     | 12,00     | 12.00     |
| 20            | 12.00    | 12.00     | 12,00     | 12.00         | 12.00     | 12,00     | 12.00     |
| 30            | 12.00    | 12.00     | 12.00     | 12.00         | 12.00     | 12,00     | 12.00     |
| 35            | 12.00    | 12.00     | 12.00     | 12.00         | 12,00     | 12,00     | 12.00     |
| 40            | 11.05    | 11.19     | 11,33     | 11.43         | 11.57     | 11.67     | 11.76     |
| 45            | 10.10    | 10.37     | 10.64     | 10.83         | 11.10     | 11.28     | 11.46     |

#### HM141MRS UB40 / HM143MRS UB40

| Outdoor Temp. | LWT 7 °C | LWT 10 °C | LWT 13 °C | LWT 15 °C     | LWT 18 °C     | LWT 20 °C | LWT 22 °C |  |  |  |
|---------------|----------|-----------|-----------|---------------|---------------|-----------|-----------|--|--|--|
| [°C DB]       |          |           |           | Capacity (kW) | Capacity (kW) |           |           |  |  |  |
| 10            | 12.50    | 12,80     | 13.10     | 13.30         | 13.60         | 13.80     | 14.00     |  |  |  |
| 20            | 14.00    | 14.00     | 14.00     | 14.00         | 14.00         | 14.00     | 14.00     |  |  |  |
| 30            | 14.00    | 14.00     | 14.00     | 14.00         | 14.00         | 14.00     | 14.00     |  |  |  |
| 35            | 14.00    | 14.00     | 14.00     | 14.00         | 14.00         | 14.00     | 14.00     |  |  |  |
| 40            | 12,35    | 12.60     | 12,84     | 13.01         | 13.26         | 13.42     | 13.59     |  |  |  |
| 45            | 10.69    | 11.19     | 11.69     | 12,02         | 12,51         | 12,84     | 13.17     |  |  |  |

#### HM161MRS UB40 / HM163MRS UB40

| Outdoor Temp. | LWT 7 °C | LWT 10 °C | LWT 13 °C | LWT 15 °C | LWT 18 °C | LWT 20 °C | LWT 22 °C |
|---------------|----------|-----------|-----------|-----------|-----------|-----------|-----------|
| [°C DB]       |          |           |           |           |           |           |           |
| 10            | 13.00    | 13.60     | 14.20     | 14.60     | 15,20     | 15.60     | 16.00     |
| 20            | 16.00    | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     |
| 30            | 16.00    | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     |
| 35            | 16.00    | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     |
| 40            | 13.60    | 13.96     | 14.32     | 14.56     | 14.92     | 15.16     | 15.40     |
| 45            | 11.20    | 11.76     | 12.32     | 12.69     | 13,25     | 13.62     | 14.00     |

#### Note

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),
- LPM: Liters Per Minute ( $\ell$ /min), TC: Total Capacity (kW)
- $2.\, {\hbox{Direct interpolation is permissible.}}\, \hbox{Do not extrapolate},$
- 3. Measuring procedure follows EN-14511.
- $\bullet$  Rated values are based on standard conditions and it can be found on specifications.
- Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
- In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

## **Supplied Parts**

#### Strainer



| Technical Specification |                         | Unit | Details                           |
|-------------------------|-------------------------|------|-----------------------------------|
| Material                | Body                    | -    | Brass                             |
| Material                | Mesh                    | -    | Stainless steel (STS304)          |
| Mach                    | Mesh no.                | -    | 30                                |
| Mesn                    | Mesh Max. particle size |      | 0.6                               |
| Piping connection       |                         | -    | Female G1" according to ISO 228-1 |


- \* The strainer and valves are supplied with the product, but it need to be installed separately.
- \* This strainer should be installed at the inlet connection of the outdoor unit to protect the clogging of a plate heat exchanger.


# THERMA V R32 MONOBLOC S II (12/14/16 kW)

THERMA V. (R32) Monobloc S I


Drawings [Unit: mm]


HM121MRS UB40 / HM123MRS UB40 HM141MRS UB40 / HM143MRS UB40 HM161MRS UB40 / HM163MRS UB40

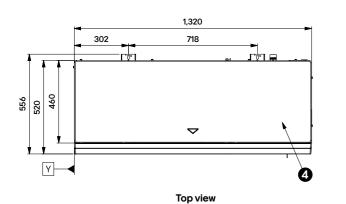





3D view

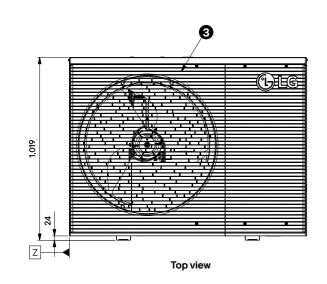



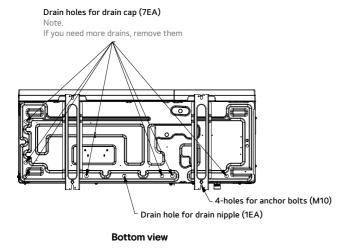

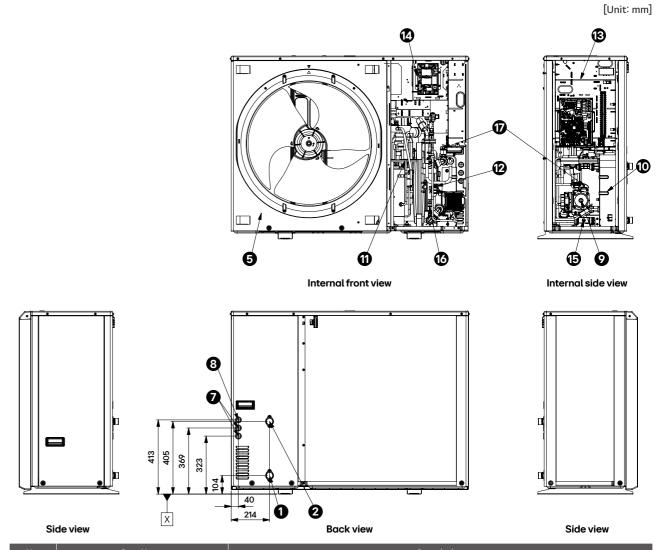

| No. | Part Name               | Description  |
|-----|-------------------------|--|
| 1   | Entering Water Pipe     | Male PT 1" according to ISO 7-1 (Tapered pipe threads) |
| 2   | Leaving Water Pipe      | Male PT 1" according to ISO 7-1 (Tapered pipe threads) |
| 3   | Air Discharge Grille    | -  |
| 4   | Top Cover               | -  |
| 5   | Front Panel             | -  |
| 6   | Side Panel              |  |
| 7   | Low Voltage             | Communication Cable Hole                               |
| 8   | UNIT Power              | Power Cable Hole                                       |
| 9   | Water Pump              | OH SUNG, ODM-061P / GRUNDFOS, UPM3K 20-75 CHBL         |
| 10  | Plate Heat Exchanger    | Heat Exchanger Between Refrigerant and Water           |
| 11  | Compressor Shield Panel | -  |
| 12  | Safety Relief Valve     | Open at Water Pressure 3 Bar                           |
| 13  | Indoor Control Box      | Hydro, Cycle PCB and Terminal Blocks                   |
| 14  | Outdoor Control Box     | Inverter PCB and Terminal Blocks                       |
| 15  | Flow Sensor             | SIKA VVX20 / SEBA LGF-080-C20-E-0.5V, 5-80 LPM         |
| 16  | Water Pressure Sensor   | SENSATA 2HMP3-05W 02-MPa                               |
| 17  | Automatic Air Vents     | -  |





### What is R32 Hydrosplit

The LG THERMA V Hydrosplit series is a simple, safe heat pump that eliminating the risk of indoor refrigerant leakage by connecting outdoor unit and indoor unit using water piping. It separates the indoor unit and outdoor unit, connecting them just via water pipes instead of refrigerant pipe.

### **Key Features**

- Capacity range from 12 to 16 kW for renovation and large new build
- ErP Energy Labeling A+++ / A++ for space heating (Average Climate 35°C / 55°C LWT)
- ErP Energy Labeling A+ for hot water heating (L profile)
- No need for F-gas license and simple installation due to no refrigerant piping work
- Operation range down to -25°C
- Maximum flow temperature up to 65°C














#### **Product Range**

| Phase | Capacity | Indoor                                  | Outdoor Unit |              |  |
|-------|----------|---|--------------|--------------|--|
| Pnase | (kW)     | Hydro Unit                              | Combi Unit   | Outdoor Unit |  |
|       | 12       |   |              | HU121MRB U30 |  |
| 1Ø    | 14       |   |              | HU141MRB U30 |  |
|       | 16       | 111111111111111111111111111111111111111 | LINESSCANIDA | HU161MRB U30 |  |
|       | 12       | HN1600MC NK1                            | HN1616Y NB1  | HU123MRB U30 |  |
| 3Ø    | 3Ø 14    |   |              | HU143MRB U30 |  |
| 16    |          |   |              | HU163MRB U30 |  |

# HIGHLIGHT OF R32 HYDROSPLIT

# THERMAV... (R32) Hydrosplit



#### Browse now

# Simple Installation without Refrigerant Piping

- No need for F-gas license, because outdoor and indoor unit are connected by water pipes
- As hydronic parts are packaged inside indoor units, the installation can be realized with minimum usage of space
- Refrigerant is hermetically sealed inside outdoor unit




# Remarkable Heating Performance even in Cold Weather

- Wide operation range down to -25℃
- 100 % heating capacity at -7℃ ambient temp. (@ LWT 35℃)
- Reduces energy bills with the highest energy efficiency of A+++ (a 35°C)



## No Risk of Indoor Refrigerant Leakage

The Hydrosplit architecture, with no refrigerant circulating indoors, makes it possible to expand the living space, as the minimum floor area requirements do not apply.

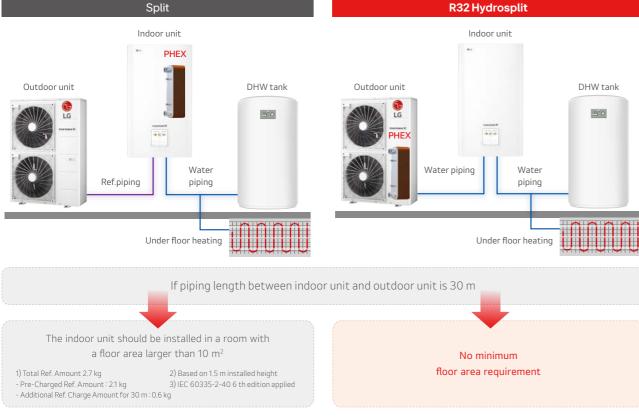

# All-in-one Integration (Combi Unit)

- Integrated indoor unit with a hot water storage tank
- Saves space in the technical room with a small footprint
- Installation time reduced with pre-installed components
- Harmonized with other household appliances for a cohesive exterior



## Sophisticated and Harmonious Exterior

The indoor unit's sleek design fits into diverse indoor spaces, such as a utility or laundry room, a garage or a kitchen.



# Save Space and Time $\,$

Unlike in the case of a conventional system, this all-in-one solution requires reduced installation time and saves valuable living space.



# THERMA V<sub>TM</sub> (R32) Hydrosplit **HYDRO UNIT**




# **Only Water Enters Home**

The LG THERMA V Hydrosplit series is a simple, safe heat pump that eliminating the risk of indoor refrigerant leakage by connecting outdoor unit and indoor unit using water piping. Since the indoor unit of R32 Hydrosplit Hydro Unit is installed on the wall rather than on the floor, space is not wasted, and the light weight enables quick installation. This makes it perfect for renovation projects. Also, it has good maintainability because the indoor unit is located indoors, for example in a machine room.

#### **Key Features**

- Capacity range from 12 to 16 kW for renovation and large new build
- No need for F-gas license and simple installation due to no refrigerant piping work
- Operation range down to -25°C
- Maximum flow temperature up to 65°C
- High level hydronic components integration for fast and clean

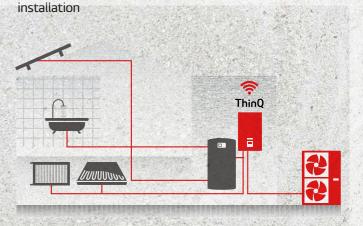

### Application







#### Certifications







### **Energy Label**







THERMA V<sub>m</sub> (R22) Hydrosplit

# THERMA V R32 HYDROSPLIT **HYDRO UNIT**


#### Outdoor unit

HU121MRB U30 / HU123MRB U30 HU141MRB U30 / HU143MRB U30 HU161MRB U30 / HU163MRB U30

#### Indoor unit

HN1600MC NK1



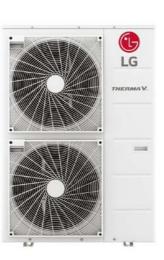


















## **Key Components**

Hydro Unit

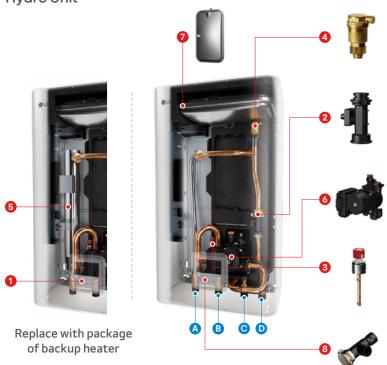

#### Components

- 1 Standard III remote controller 1) (air temp. sensor integrated)
- 2 Flow sensor
- Water pressure sensor
- 4 Air vent valve
- 6 Backup electric heater (6 kW, accessory)
- 6 Water pump
- 7 Expansion vessel (8 l)
- 8 Strainer

1) Temperature control class (ERP class) : V

#### Connections

- A Heating circuit outlet pipe (male PT 1")
- B Heating circuit inlet pipe (male PT 1")
- Outlet pipe to outdoor unit (male PT 1")
- D Inlet pipe from outdoor unit (male PT 1")

# **Product Specification**

| Efficiency Data                                      |                                      | Unit     | 12 kW (1 Ø)<br>12 kW (3 Ø)                             | 14 kW (1 Ø)<br>14 kW (3 Ø)   | 16 kW (1 Ø)<br>16 kW (3 Ø)   |  |  |  |
|--|--------------------------------------|----------|--|------------------------------|------------------------------|--|--|--|
| Seasonal space heating eff. class (35°C / 55         | 5°C)                                 | -        | A+++ / A++   | A+++ / A++                   | A+++ / A++                   |  |  |  |
| Seasonal space heating efficiency ( $\eta_s$ ) (35°C | C / 55°C)                            | %        | 181 / 137  | 180 / 136                    | 179 / 135                    |  |  |  |
| SCOP (35°C / 55°C)                                   |                                      | -        | 4.60 / 3.50  | 4.57 / 3.47                  | 4.55 / 3.45                  |  |  |  |
| Sound power level (outdoor unit)                     | Rated / low noise mode               | dB(A)    | 61 / 60  | 62 / 60                      | 63 / 60                      |  |  |  |
| Sound pressure level at 5m (outdoor unit)            | Rated / low noise mode               | dB(A)    | 39 / 38  | 40 / 38                      | 41 / 38                      |  |  |  |
| Sound power level (indoor unit)                      | Rated                                | dB(A)    |  | 44                           |                              |  |  |  |
| Sound pressure level at 1m (indoor unit)             | Rated                                | dB(A)    |  | 36                           |                              |  |  |  |
| Nominal Capacity and COP/EER                         |                                      |          |  |                              |                              |  |  |  |
| Air +7°C / water +35°C                               | Heating capacity / COP               | kW / -   | 12.00 / 5.04   | 14.00 / 4.89                 | 16.00 / 4.80                 |  |  |  |
| Air +2°C / water +35°C                               | Heating capacity / COP               | kW / -   | 11.00 / 3.65   | 12.00 / 3.63                 | 13.80 / 3.60                 |  |  |  |
| Air +7°C / water +55°C                               | Heating capacity / COP               | kW / -   | 11.00 / 2.90   | 11.50 / 2.85                 | 12.00 / 2.80                 |  |  |  |
| Air +35°C / water +18°C                              | Cooling capacity / EER               | kW / -   | 12.00 / 4.75   | 14.00 / 4.30                 | 16.00 / 4.00                 |  |  |  |
| Air +35°C / water +7°C                               | Cooling capacity / EER               | kW / -   | 12.00 / 2.70   | 14.00 / 2.60                 | 16.00 / 2.50                 |  |  |  |
| utdoor Units   |                                      | Unit     | HU121MRB U30<br>HU123MRB U30                           | HU141MRB U30<br>HU143MRB U30 | HU161MRB U30<br>HU163MRB U30 |  |  |  |
| Operation range                                      | Heating & DHW (Min. ~ Max.)          | °C       |  | -25 ~ 35                     |                              |  |  |  |
| (outdoor air temperature)                            | Cooling (Min. ~ Max.)                | °C       | 5 ~ 48   |                              |                              |  |  |  |
|  | Туре                                 | -        | R32  |                              |                              |  |  |  |
| Refrigerant  | GWP                                  | -        | 675  |                              |                              |  |  |  |
|  | Precharged amount                    | g        | 2,100  |                              |                              |  |  |  |
| Piping connections (water)                           | Inlet / outlet diameter              | inch     | Male PT 1" according to ISO 7-1 (tapered pipe threads) |                              |                              |  |  |  |
| Dimension  | HxWxD                                | mm       | 1,380 x 950 x 330                                      |                              |                              |  |  |  |
| Weight   | Net                                  | kg       |  | 91.7                         |                              |  |  |  |
| Exterior   | Color of chassis / RAL code          | -        |  | Warm gray / RAL 7044         |                              |  |  |  |
|  | Voltage, phase, frequency (10, 30)   | V, Ø, Hz | 220  | - 240, 1, 50 / 380 - 415, 3  | 3, 50                        |  |  |  |
| Power supply   | Standby power consumption            | W        |  | 60                           |                              |  |  |  |
|  | Recommended circuit breaker (10, 30) | А        |  | 40 / 16                      |                              |  |  |  |
| Indoor Units   |                                      | Unit     |  | HN1600MC NK1                 |                              |  |  |  |
|  | Heating (Min. ~ Max.)                | °C       |  | 15 ~ 65                      |                              |  |  |  |
| Operation range<br>(leaving water temperature)       | Cooling (Min. ~ Max.)                | °C       |  | 5 ~ 27                       |                              |  |  |  |
|  | DHW (Min. ~ Max.)                    | °C       |  | 15 ~ 80                      |                              |  |  |  |
| Expansion vessel (heating circuit)                   | Volume                               | l        |  | 8                            |                              |  |  |  |
|  | Outlet to outdoor unit               | inch     |  |                              |                              |  |  |  |
| Piping connections (water)                           | Inlet from outdoor unit              | inch     | Mala DT 1" acc   | cording to ISO 7-1 (tanaras  | I nine threads)              |  |  |  |
| riping connections (water)                           | Outlet to heat load                  | inch     | Male PT 1" according to ISO 7-1 (tapered pipe threads) |                              |                              |  |  |  |
|  | Inlet from heat load                 | inch     |  |                              |                              |  |  |  |
| Dimension  | HxWxD                                | mm       |  | 850 x 490 x 315              |                              |  |  |  |
| Weight   | Net                                  | kg       |  | 30.5                         |                              |  |  |  |
| Exterior   | Color / RAL code                     | -        |  | Noble white / RAL 9016       |                              |  |  |  |

- 1. Due to our policy of innovation, some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes. Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound power level is measured on the rated condition in accordance with ISO 9614 standard, Sound pressure level is not a value declared on Eurovent Program and is converted from sound power level based on a tonality penalty of 0 dB and installation in free-field. The directivity index (Q) is assumed as 2. Therefore, these values can be increased owing to ambient conditions during operation, Rated sound power level is in accordance with EN12102-1 under condition of EN14825,
- 4. Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation.
- 5. This product contains fluorinated greenhouse gases.
- 6. All installation sites must be equipped with an earth leakage circuit breaker (ELCB).
- 7. DHW 55 ~ 80  $^{\circ}\text{C}$  Operating is available only when the booster heater is operating.

# THERMA V R32 HYDROSPLIT HYDRO UNIT

# **Accessory Parts (Optional Accessory)**

Accessory Backup Heater for Hydrosplit Hydro Unit



| Electrical Specification |                       |          | HA061C E1        | HA063C E1         |
|--------------------------|-----------------------|----------|------------------|-------------------|
|                          | Capacity combination  | kW       | 3.0 + 3.0        | 2,0 +2,0 + 2,0    |
| Backup heater            | Heating steps         | Steps    | 1                | 1                 |
| васкир пеасег            | Power supply          | V, Ø, Hz | 220 ~ 240, 1, 50 | 380 ~ 415, 30, 50 |
|                          | Rated running current | А        | 24.0             | 8.7               |

<sup>\*</sup> The backup heater should be purchased and installed separately.

# **Supplied Parts**


#### **Strainer**



| Technical Specificati | on                 | Details                            |
|-----------------------|--------------------|------------------------------------|
| Material Body         |                    | Brass                              |
| Material              | Mesh               | Stainless steel (ST304)            |
| Mesh                  | Mesh no.           | 30                                 |
| Mesn                  | Max. particle size | 0.6 mm                             |
| Piping connection     |                    | Female G 1" according to ISO 228-1 |

 $<sup>\</sup>ensuremath{^{\star}}$  The strainer is supplied with the product, but it needs to be installed separately.



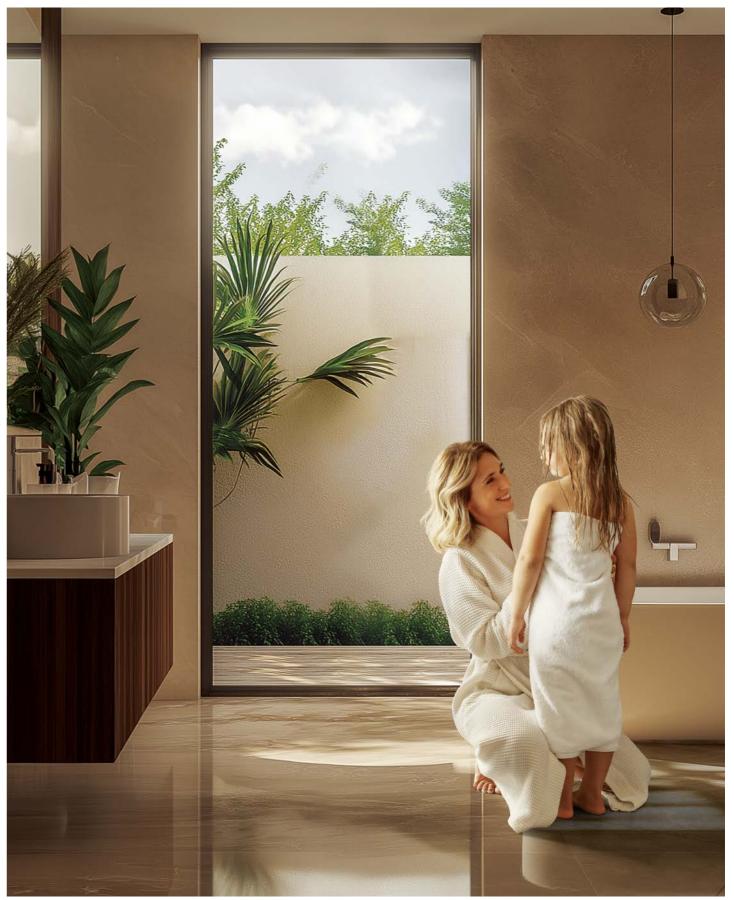

<sup>\*</sup> This strainer should be installed at the inlet connection of the outdoor unit to protect the clogging of a plate heat exchanger.

121

# **THERMA V R32 HYDROSPLIT HYDRO UNIT**

# **Performance Table for Heating Operation**

Maximum heating capacity (including defrost effect)

#### HU121MRB U30 / HU123MRB U30 + HN1600MC NK1

| Outdoor Temp. | LWT 30 °C | LWT 35 °C     | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C |  |  |  |
|---------------|-----------|---------------|-----------|-----------|-----------|-----------|-----------|-----------|--|--|--|
| [°C DB]       |           | Capacity (kW) |           |           |           |           |           |           |  |  |  |
| -25           | 9.66      | 8.85          | 8.42      | 8.29      | -         | -         | -         | -         |  |  |  |
| -20           | 10.13     | 10.00         | 9.88      | 9.75      | 9.63      | -         | -         | -         |  |  |  |
| -15           | 11.50     | 11.50         | 11.50     | 11.50     | 11.50     | 11.50     | -         | -         |  |  |  |
| -7            | 12,00     | 12.00         | 12.00     | 12,00     | 12,00     | 12.00     | 12.00     | -         |  |  |  |
| -4            | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     |  |  |  |
| -2            | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     |  |  |  |
| 2             | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     |  |  |  |
| 7             | 12,00     | 12.00         | 12.00     | 12,00     | 12,00     | 12.00     | 12.00     | 12.00     |  |  |  |
| 10            | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     |  |  |  |
| 15            | 12.00     | 12.00         | 12.00     | 12,00     | 12,00     | 12.00     | 12.00     | 12.00     |  |  |  |
| 18            | 12.00     | 12.00         | 12,00     | 12,00     | 12,00     | 12.00     | 12.00     | 12.00     |  |  |  |
| 20            | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     |  |  |  |
| 35            | 12,00     | 12,00         | 12,00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     |  |  |  |

#### HU141MRB U30 / HU143MRB U30 + HN1600MC NK1

| Outdoor Temp. | LWT 30 °C | LWT 35 °C     | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C |  |  |  |
|---------------|-----------|---------------|-----------|-----------|-----------|-----------|-----------|-----------|--|--|--|
| [°C DB]       |           | Capacity (kW) |           |           |           |           |           |           |  |  |  |
| -25           | 10.04     | 9.21          | 8.76      | 8.62      | -         | -         | -         | -         |  |  |  |
| -20           | 11.82     | 11,25         | 10.95     | 10.67     | 10.59     | -         | -         | -         |  |  |  |
| -15           | 12.52     | 12.90         | 13.26     | 12,88     | 12.81     | 12.63     | -         | -         |  |  |  |
| -7            | 14.00     | 14.00         | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | -         |  |  |  |
| -4            | 14.00     | 14.00         | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     |  |  |  |
| -2            | 14.00     | 14.00         | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     |  |  |  |
| 2             | 14.00     | 14.00         | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     |  |  |  |
| 7             | 14.00     | 14.00         | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     |  |  |  |
| 10            | 14.00     | 14.00         | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     |  |  |  |
| 15            | 14.00     | 14.00         | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     |  |  |  |
| 18            | 14.00     | 14.00         | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     |  |  |  |
| 20            | 14.00     | 14.00         | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     |  |  |  |
| 35            | 14.00     | 14.00         | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     |  |  |  |

#### HU161MRB U30 / HU163MRB U30 + HN1600MC NK1

| Outdoor Temp. | LWT 30 °C | LWT 35 °C     | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C |  |  |  |
|---------------|-----------|---------------|-----------|-----------|-----------|-----------|-----------|-----------|--|--|--|
| [°C DB]       |           | Capacity (kW) |           |           |           |           |           |           |  |  |  |
| -25           | 10.98     | 10.00         | 9.50      | 9.33      | -         | -         | -         | -         |  |  |  |
| -20           | 13.43     | 12,54         | 12.03     | 11.78     | 11.47     | -         | -         | -         |  |  |  |
| -15           | 14.23     | 14.39         | 14.50     | 13.95     | 13.86     | 13.12     | -         | -         |  |  |  |
| -7            | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | -         |  |  |  |
| -4            | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     |  |  |  |
| -2            | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     |  |  |  |
| 2             | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     |  |  |  |
| 7             | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     |  |  |  |
| 10            | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     |  |  |  |
| 15            | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     |  |  |  |
| 18            | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     |  |  |  |
| 20            | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     |  |  |  |
| 35            | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     |  |  |  |

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),
- LPM : Liters Per Minute ( $\ell/\min$ ), TC : Total Capacity (kW)
- 2. Direct interpolation is permissible. Do not extrapolate.
- 3. Measuring procedure follows EN-14511. • Rated values are based on standard conditions and it can be found on specifications.
- · Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
- In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

# THERMA V<sub>m</sub> (R22) Hydrosplit

# **Performance Table for Cooling Operation**

Maximum cooling capacity

#### HU121MRB U30 / HU123MRB U30 + HN1600MC NK1

| Outdoor Temp. | LWT 7 °C | LWT 10 °C | LWT 13 °C | LWT 15 °C     | LWT 18 °C | LWT 20 °C | LWT 22 °C |
|---------------|----------|-----------|-----------|---------------|-----------|-----------|-----------|
| [°C DB]       |          |           |           | Capacity (kW) |           |           |           |
| 10            | 12.00    | 12.00     | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     |
| 20            | 12.00    | 12.00     | 12.00     | 12.00         | 12,00     | 12.00     | 12.00     |
| 30            | 12.00    | 12.00     | 12.00     | 12.00         | 12,00     | 12.00     | 12.00     |
| 35            | 12.00    | 12.00     | 12.00     | 12.00         | 12,00     | 12.00     | 12.00     |
| 40            | 11.75    | 12,00     | 12.00     | 12,00         | 12,00     | 12.00     | 12.00     |
| 45            | 11.50    | 12.00     | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     |

#### HU141MRB U30 / HU143MRB U30 + HN1600MC NK1

| Outdoor Temp. | LWT 7 °C | LWT 10 °C | LWT 13 °C | LWT 15 °C | LWT 18 °C | LWT 20 °C | LWT 22 °C |
|---------------|----------|-----------|-----------|-----------|-----------|-----------|-----------|
| [°C DB]       |          |           |           |           |           |           |           |
| 10            | 14.00    | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     |
| 20            | 14.00    | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     |
| 30            | 14.00    | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     |
| 35            | 14.00    | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     |
| 40            | 13.75    | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     |
| 45            | 13.50    | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     |

#### HU161MRB U30 / HU163MRB U30 + HN1600MC NK1

| Outdoor Temp. | LWT 7 °C | LWT 10 °C | LWT 13 °C | LWT 15 °C     | LWT 18 °C     | LWT 20 °C | LWT 22 °C |  |  |  |
|---------------|----------|-----------|-----------|---------------|---------------|-----------|-----------|--|--|--|
| [°C DB]       |          |           |           | Capacity (kW) | Capacity (kW) |           |           |  |  |  |
| 10            | 16.00    | 16.00     | 16.00     | 16.00         | 16.00         | 16.00     | 16.00     |  |  |  |
| 20            | 16.00    | 16.00     | 16.00     | 16.00         | 16.00         | 16.00     | 16.00     |  |  |  |
| 30            | 16.00    | 16.00     | 16.00     | 16.00         | 16.00         | 16.00     | 16.00     |  |  |  |
| 35            | 16.00    | 16.00     | 16.00     | 16.00         | 16.00         | 16.00     | 16.00     |  |  |  |
| 40            | 15.75    | 16.00     | 16.00     | 16.00         | 16.00         | 16.00     | 16.00     |  |  |  |
| 45            | 15.50    | 16.00     | 16.00     | 16.00         | 16.00         | 16.00     | 16.00     |  |  |  |


- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),
- LPM: Liters Per Minute (2/min), TC: Total Capacity (kW)
- 2. Direct interpolation is permissible. Do not extrapolate.
- 3. Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- $\bullet \ Above \ table \ values \ may \ not \ be \ matched \ according \ to \ installation \ condition. \ Except for \ rated \ value, the \ performance \ is \ not \ guaranteed.$
- In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

[Unit: mm]

# **THERMA V R32 HYDROSPLIT HYDRO UNIT**

**Drawings** [Unit: mm]


HU121MRB U30 / HU123MRB U30 HU141MRB U30 / HU143MRB U30 HU161MRB U30 / HU163MRB U30




Top view



3D view

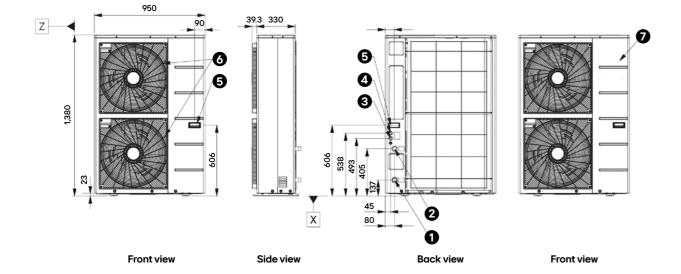




**Bottom view** 

| No. | Part Name Description |  |  |  |  |
|-----|-----------------------|--|--|--|--|
| 1   | Entering Water Pipe   | Male PT 1" according to ISO 7-1 (Tapered pipe threads) |  |  |  |
| 2   | Leaving Water Pipe    | Male PT 1" according to ISO 7-1 (Tapered pipe threads) |  |  |  |
| 3   | Unit Power            | Power Cable Hole                                       |  |  |  |
| 4   | Low Voltage           | Communication Cable Hole                               |  |  |  |
| 5   | Handle                | -  |  |  |  |
| 6   | Air Outlet            | -  |  |  |  |
| 7   | Side Panel            | -  |  |  |  |

# External

HN1600MC NK1

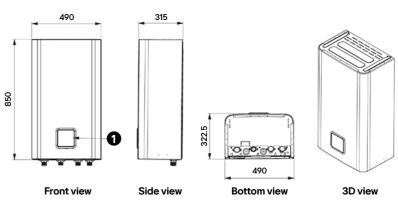


THERMA V<sub>m</sub> (RE2) Hydrosplit

| No. | Part Name     | Description                |
|-----|---------------|----------------------------|
| 1   | Control Panel | Built-in Remote Controller |

#### Internal

HN1600MC NK1

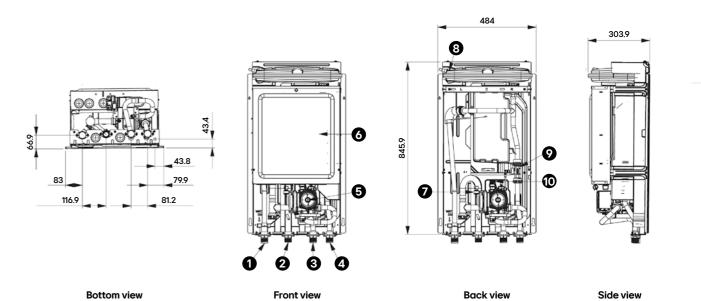

| No. | Part Name                                 | Description  |  |  |
|-----|---|--|--|--|
| 1   | Heating Circuit Outlet Pipe               | Male PT 1" according to ISO 7-1 (Tapered pipe threads) |  |  |
| 2   | Heating Circuit Inlet Pipe                | Male PT 1" according to ISO 7-1 (Tapered pipe threads) |  |  |
| 3   | Outlet Pipe to Outdoor Unit               | Male PT 1" according to ISO 7-1 (Tapered pipe threads) |  |  |
| 4   | Inlet Pipe to Outdoor Unit                | Male PT 1" according to ISO 7-1 (Tapered pipe threads) |  |  |
| 5   | Water Pump                                | To Circulate Water Inside the System                   |  |  |
| 6   | Control Box                               | PCB and Terminal Blocks                                |  |  |
| 7   | Pressure Sensor                           | To Measure the Water Pressure (0-2MPa)                 |  |  |
| 8   | Expansion Tank                            | 8 Liter, 3/4" Connection                               |  |  |
| 9   | Flow Sensor                               | To Measure the Water Flow Rate (5-80 LPM)              |  |  |
| 10  | Safety Valve Open at Water Pressure 3 Bar |  |  |  |




# THERMA V<sub>TM</sub> (R32) Hydrosplit **COMBIUNIT**



#### **Key Features**

- Capacity range from 12 to 16 kW for renovation and large
- No need for F-gas license and simple installation due to no refrigerant piping work
- Operation range down to -25°C
- Maximum flow temperature up to 65°C
- All-in-one Combi Unit with integrated hot water cylinder

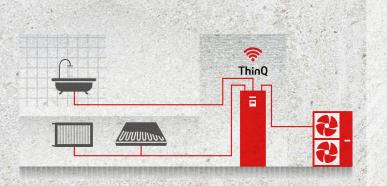

# **Perfect Space-Saving** Solution

THERMA V R32 Hydrosplit Combi Unit combines an indoor unit, a water tank and complex piping into a single, space-saving solution that is able to provide space heating, cooling and DHW supply.

Since there is no need to install a separate domestic hot water tank for hot water supply, space is not wasted, and the concept with all-in-one enables quick installation.

Also, it has good installability and maintainability because the indoor unit is located indoors, for example in a machine room.

### Application







#### Certifications









### **Energy Label**











# THERMA V R32 HYDROSPLIT **COMBIUNIT**

#### Outdoor unit

HU121MRB U30 / HU123MRB U30 HU141MRB U30 / HU143MRB U30 HU161MRB U30 / HU163MRB U30

#### Indoor unit

HN1616Y NB1

















## **Key Components**

Combi Unit



#### Components

- 1 DHW storage tank (200 l)
- 2 Main water pump
- 3 Water pump for DHW charging
- 4 Plate heat exchanger for DHW (water / DHW)
- 5 Electric heater (max. 6 kW)
- **6** 3-way diverting valve
- Texpansion vessel for heating (12 l)
- 8 Flow sensor
- Water pressure sensor
- (D) Expansion vessel for DHW (8 l, option)
- 11 Buffer tank (40 l, option)
- 2 Standard III remote controller 1) (attached on the front panel)

1) Temperature control class (ERP class): V

#### Connections

- A Inlet pipe from outdoor unit (female G1")
- B Outlet pipe to outdoor unit (female G1")
- O Domestic hot water outlet pipe (female G3/4")
- Domestic cold water outlet pipe (female G3/4")
- **■** DHW recirculation pipe (female G3/4")
- (Female G1")
- G Heating circuit outlet pipe (female G1")



# **Product Specification**

| Efficiency Data   |                        | Unit   | 12 kW (1 Ø)<br>12 kW (3 Ø) | 14 kW (1 Ø)<br>14 kW (3 Ø) | 16 kW (1 Ø)<br>16 kW (3 Ø) |
|---|------------------------|--------|----------------------------|----------------------------|----------------------------|
| Seasonal space heating eff. class (35°C / 55                | 5°C)                   | -      | A+++ / A++                 | A+++ / A++                 | A+++ / A++                 |
| Seasonal space heating efficiency ( $\eta_s$ ) (35°C        | : / 55°C)              | %      | 181 / 137                  | 180 / 136                  | 179 / 135                  |
| SCOP (35°C / 55°C)  |                        | -      | 4.60 / 3.50                | 4.57 / 3.47                | 4.55 / 3.45                |
| Declared load profile, average climate                      |                        | -      | L                          | L                          | L                          |
| Water heating efficiency (η <sub>WH</sub> ), average clim   | ate                    | %      | 120                        | 120                        | 120                        |
| COP <sub>DHW</sub> , average climate                        |                        | -      | 2.74                       | 2.74                       | 2.74                       |
| Water heating eff. class, average climate                   |                        | -      | A+                         | A+                         | A+                         |
| Annual energy consumption, DHW (average                     | climate)               | kWh    | 850                        | 850                        | 850                        |
| Heating up time acc. to EN 16147 (average of                | climate)               | h/mm   | 1h 25                      | 1h 25                      | 1h 25                      |
| Max. usable water volume acc. to EN 16147                   | (average climate)      | l      | 222                        | 222                        | 222                        |
| Declared load profile, warmer climate                       |                        | -      | L                          | L                          | L                          |
| Water heating efficiency (η <sub>WH</sub> ), warmer climate |                        |        | 151                        | 151                        | 151                        |
| COP <sub>DHW</sub> , warmer climate                         |                        | -      | 3.43                       | 3.43                       | 3,43                       |
| Water heating eff. class, warmer climate                    |                        |        | A++                        | A++                        | A++                        |
| Declared load profile, colder climate                       |                        | -      | L                          | L                          | L                          |
| Water heating efficiency (η <sub>WH</sub> ), colder climat  | e                      | %      | 101                        | 101                        | 101                        |
| COP <sub>DHW</sub> , colder climate                         |                        | -      | 2.34                       | 2.34                       | 2.34                       |
| Water heating eff. class, colder climate                    |                        | -      | А                          | A                          | A                          |
| Sound power level (outdoor unit)                            | Rated / low noise mode | dB(A)  | 61 / 60                    | 62 / 60                    | 63 / 60                    |
| Sound pressure level at 5m (outdoor unit)                   | Rated / low noise mode | dB(A)  | 39 / 38                    | 40 / 38                    | 41 / 38                    |
| Sound power level (indoor unit)                             | Rated                  | dB(A)  |                            | 43                         |                            |
| Sound pressure level at 1m (indoor unit)                    | Rated                  | dB(A)  |                            | 35                         |                            |
| Nominal Capacity and COP/EER                                |                        |        |                            |                            |                            |
| Air +7°C / water +35°C                                      | Heating capacity / COP | kW / - | 12.00 / 5.04               | 14.00 / 4.89               | 16.00 / 4.80               |
| Air +2°C / water +35°C                                      | Heating capacity / COP | kW / - | 11.00 / 3.65               | 12.00 / 3.63               | 13.80 / 3.60               |
| Air +7°C / water +55°C                                      | Heating capacity / COP | kW / - | 11.00 / 2.90               | 11.50 / 2.85               | 12.00 / 2.80               |
| Air +35°C / water +18°C                                     | Cooling capacity / EER | kW / - | 12.00 / 4.75               | 14.00 / 4.30               | 16.00 / 4.00               |
| Air +35°C / water +7°C                                      | Cooling capacity / EER | kW / - | 12.00 / 2.70               | 14.00 / 2.60               | 16.00 / 2.50               |

- 1. Due to our policy of innovation, some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes, Especially the power cable and circuit breaker should be selected in accordance with that,
- 3. Sound power level is measured on the rated condition in accordance with ISO 9614 standard. Sound pressure level is not a value declared on Eurovent Program and is converted from sound power level based on a tonality penalty of 0 dB and installation in free-field. The directivity index (Q) is assumed as 2. Therefore, these values can be increased owing to ambient conditions during operation, Rated sound power level is in accordance with EN12102-1 under condition of EN14825
- 4. Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation.
- 5. This product contains fluorinated greenhouse gases.
- 6. All installation sites must be equipped with an earth leakage circuit breaker (ELCB).
- 7. DHW 55 ~ 80  $^{\circ}\text{C}$  Operating is available only when the booster heater is operating.

# THERMA V R32 HYDROSPLIT COMBI UNIT

## **Product Specification**

| Outdoor Units                                  |                                 | Unit     | HU121MRB U30<br>HU123MRB U30                            | HU141MRB U30<br>HU143MRB U30 | HU161MRB U30<br>HU163MRB U30 |  |  |
|--|---------------------------------|----------|---|------------------------------|------------------------------|--|--|
| Operation range                                | Heating & DHW (Min. ~ Max.)     | °C       |   | -25 ~ 35                     |                              |  |  |
| (outdoor air temperature)                      | Cooling (Min. ~ Max.)           | °C       |   |                              |                              |  |  |
|  | Туре                            | -        |   | R32                          |                              |  |  |
| Refrigerant                                    | GWP                             | -        |   | 675                          |                              |  |  |
|  | Precharged amount               | g        |   | 2,100                        |                              |  |  |
| Piping connections (water)                     | Inlet / outlet diameter         | inch     | Male PT 1" acc  | cording to ISO 7-1 (tapered  | d pipe threads)              |  |  |
| Dimension                                      | HxWxD                           | mm       |   | 1,380 x 950 x 330            |                              |  |  |
| Weight   | Net                             | kg       |   | 91.7                         |                              |  |  |
| Exterior                                       | Color of chassis / RAL code     | -        |   | Warm gray / RAL 7044         |                              |  |  |
|  | Voltage, phase, frequency       | V, Ø, Hz | 220   | - 240, 1, 50 / 380 - 415, 3  | 3, 50                        |  |  |
| Power supply                                   | Standby power consumption       | W        |   | 60                           |                              |  |  |
|  | Recommended circuit breaker     | А        | 40 / 16   |                              |                              |  |  |
| Indoor Units                                   |                                 | Unit     |   | HN1616Y NB1                  |                              |  |  |
|  | Heating (Min. ~ Max.)           | °C       | 15 ~ 65   |                              |                              |  |  |
| Operation range<br>(leaving water temperature) | Cooling (Min. ~ Max.)           | °C       | 5 ~ 27  |                              |                              |  |  |
|  | DHW (Min. ~ Max.)               | °C       | 15 ~ 80   |                              |                              |  |  |
|  | Volume                          | Q.       | 200   |                              |                              |  |  |
| Domestic hot water tank                        | Tank material                   | -        | Enameled steel  |                              |                              |  |  |
|  | Standby losses                  | -        | 61  |                              |                              |  |  |
| Expansion vessel (heating circuit)             | Volume                          | l        | 12  |                              |                              |  |  |
|  | Capacity combination            | kW       | 2.0 / 2.0 + 2.0 / 2.0 + 2.0 + 2.0                       |                              |                              |  |  |
| Electric heater                                | Heating steps                   | Steps    |   | 1                            |                              |  |  |
| (Case 1 / Case 2 / Case 3)                     | Power supply                    | V, Ø, Hz | 220 - 240, 1,   | 50 / 220 - 240, 1, 50 / 38   | 0 - 415, 3, 50               |  |  |
|  | Rated running current           | А        |   | 8.7 / 17.4 / 8.7             |                              |  |  |
|  | Outlet to outdoor unit          | inch     |   |                              |                              |  |  |
|  | Inlet from outdoor unit         | inch     | Female G1" acc  | ording to ISO228-1 (parall   | el nine threads)             |  |  |
| Piping connections (water)                     | Outlet to heat load             | inch     | . Smale of acc  | g to 100220 1 (parati        | F-lbo cudd3)                 |  |  |
|  | Inlet from heat load            | inch     |   |                              |                              |  |  |
|  | Inlet / outlet diameter for DHW | inch     | Female G3/4" according to ISO228-1 (parallel pipe threa |                              | llel pipe threads)           |  |  |
| Recirculation                                  |                                 | inch     |   |                              |                              |  |  |
| Dimension                                      | HxWxD                           | mm       | 1,812 x 601 x 685                                       |                              |                              |  |  |
| Weight   | Net                             | kg       |   | 130.0                        |                              |  |  |
| Exterior Color / RAL code                      |                                 |          |   | White / RAL 9002             |                              |  |  |

#### lote

- 1. Due to our policy of innovation, some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes, Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound power level is measured on the rated condition in accordance with ISO 9614 standard. Sound pressure level is converted from sound power level based on a tonality penalty of 0 dB and installation in free-field. The directivity index (Q) is assumed as 2. Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is in accordance with EN12102-1 under condition of EN14825.
- $4. \ Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation.\\$
- 5. This product contains fluorinated greenhouse gases.
- 6. All installation sites must be equipped with an earth leakage circuit breaker (ELCB).
- 7. DHW 55 ~ 80°C Operating is available only when the booster heater is operating.

# **Accessory Parts (Optional Accessory)**

#### **Buffer Tank for Space Heating**



A standard 40  $\ell$  buffer tank for can be installed as an optional accessory for space heating. Fitting seamlessly into the main casing, it can be attached to the backside of the indoor unit.

THERMA V<sub>m</sub> (R22) Hydrosplit

| Electrical Specification   |  | Unit | OSHB-40KT AEU   |
|----------------------------|--|------|-----------------|
| Water volume               |  | l    | 40              |
| Dimensions (H x W x D)     |  | mm   | 518 x 560 x 175 |
| Weight (w/o water) Product |  | kg   | 24              |

<sup>\*</sup> The buffer tank for space heating should be purchased and installed separately.

#### **Expansion Vessel for DHW**



A standard 8  $\ell$  DHW expansion vessel, that conveniently fits inside the indoor unit, can be installed as an optional accessory. It is provided with an accessory kit that includes a flexible connection tube.

| Electrical Specification   |               | Unit | OSHE-12KT AEU   |  |  |
|----------------------------|---------------|------|-----------------|--|--|
| Water volume               |               | l    | 8               |  |  |
| Connection                 |               | inch | 3/4             |  |  |
| Max. pressure              | Max. pressure |      | 10              |  |  |
| Pre-charge                 | Pre-charge    |      | 3               |  |  |
| Dimensions (H x W x D)     |               | mm   | 416 x 238 x 502 |  |  |
| Weight (w/o water) Product |               | kg   | 2.5             |  |  |

 $<sup>\</sup>ensuremath{^{\star}}$  The expansion vessel for DHW should be purchased and installed separately.

# **Supplied Parts**

#### Shut-off Valve



#### Shut-off Valve with Strainer



#### Strainer



| Technical Specification |                    | Unit | Details                           |  |  |
|-------------------------|--------------------|------|-----------------------------------|--|--|
| Material                | Body               | -    | Brass                             |  |  |
| Material                | Mesh               | -    | Stainless steel (STS304)          |  |  |
| Mesh                    | Mesh no.           | -    | 30                                |  |  |
| Mesn                    | Max. particle size | mm   | 0.6                               |  |  |
| Piping connection       |                    | -    | Female G1" according to ISO 228-1 |  |  |

<sup>\*</sup> The strainer and valves are supplied with the product, but it need to be installed separately.

<sup>\*</sup> This strainer should be installed at the inlet connection of the outdoor unit to protect the clogging of a plate heat exchanger.

# THERMA V<sub>m</sub> (R22) Hydrosplit

# THERMA V R32 HYDROSPLIT **COMBIUNIT**

## **Performance Table for Heating Operation**

Maximum heating capacity (including defrost effect)

#### HU121MRB U30 / HU123MRB U30 + HN1616Y NB1

| Outdoor Temp. | LWT 30 °C | LWT 35 °C     | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C |  |  |
|---------------|-----------|---------------|-----------|-----------|-----------|-----------|-----------|-----------|--|--|
| [°C DB]       |           | Capacity (kW) |           |           |           |           |           |           |  |  |
| -25           | 9.66      | 8.85          | 8.42      | 8.29      | -         | -         | -         | -         |  |  |
| -20           | 10.13     | 10.00         | 9.88      | 9.75      | 9.63      | -         | -         | -         |  |  |
| -15           | 11.50     | 11.50         | 11.50     | 11.50     | 11.50     | 11.50     | -         | -         |  |  |
| -7            | 12,00     | 12.00         | 12.00     | 12,00     | 12,00     | 12.00     | 12.00     | -         |  |  |
| -4            | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     |  |  |
| -2            | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     |  |  |
| 2             | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     |  |  |
| 7             | 12,00     | 12.00         | 12.00     | 12,00     | 12,00     | 12.00     | 12.00     | 12.00     |  |  |
| 10            | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     |  |  |
| 15            | 12.00     | 12.00         | 12.00     | 12,00     | 12,00     | 12.00     | 12.00     | 12.00     |  |  |
| 18            | 12.00     | 12.00         | 12,00     | 12,00     | 12,00     | 12.00     | 12.00     | 12.00     |  |  |
| 20            | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     |  |  |
| 35            | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     | 12.00     |  |  |

#### HU141MRB U30 / HU143MRB U30 + HN1616Y NB1

| Outdoor Temp. | LWT 30 °C     | LWT 35 °C | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C |
|---------------|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| [°C DB]       | Capacity (kW) |           |           |           |           |           |           |           |
| -25           | 10.04         | 9.21      | 8.76      | 8.62      | -         | -         | -         | -         |
| -20           | 11.82         | 11,25     | 10.95     | 10.67     | 10.59     | -         | -         | -         |
| -15           | 12.52         | 12.90     | 13.26     | 12,88     | 12.81     | 12.63     | -         | -         |
| -7            | 14.00         | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | -         |
| -4            | 14.00         | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     |
| -2            | 14.00         | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     |
| 2             | 14.00         | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     |
| 7             | 14.00         | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     |
| 10            | 14.00         | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     |
| 15            | 14.00         | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     |
| 18            | 14.00         | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     |
| 20            | 14.00         | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     |
| 35            | 14.00         | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     | 14.00     |

#### HU161MRB U30 / HU163MRB U30 + HN1616Y NB1

| Outdoor Temp. | LWT 30 °C     | LWT 35 °C | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C |
|---------------|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| [°C DB]       | Capacity (kW) |           |           |           |           |           |           |           |
| -25           | 10.98         | 10.00     | 9.50      | 9.33      | -         | -         | -         | -         |
| -20           | 13.43         | 12.54     | 12.03     | 11.78     | 11.47     | -         | -         | -         |
| -15           | 14.23         | 14.39     | 14.50     | 13.95     | 13.86     | 13.12     | -         | -         |
| -7            | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | -         |
| -4            | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     |
| -2            | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     |
| 2             | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     |
| 7             | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     |
| 10            | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     |
| 15            | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     |
| 18            | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     |
| 20            | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     |
| 35            | 16.00         | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     | 16.00     |

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),
- LPM : Liters Per Minute ( $\ell/\min$ ), TC : Total Capacity (kW)
- 2. Direct interpolation is permissible. Do not extrapolate.
- 3. Measuring procedure follows EN-14511. • Rated values are based on standard conditions and it can be found on specifications.
- · Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
- In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

# **Performance Table for Cooling Operation**

Maximum cooling capacity

#### HU121MRB U30 / HU123MRB U30 + HN1616Y NB1

| Outdoor Temp. | LWT 7 °C | LWT 10 °C | LWT 13 °C | LWT 15 °C     | LWT 18 °C | LWT 20 °C | LWT 22 °C |
|---------------|----------|-----------|-----------|---------------|-----------|-----------|-----------|
| [°C DB]       |          |           |           | Capacity (kW) |           |           |           |
| 10            | 12.00    | 12.00     | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     |
| 20            | 12.00    | 12.00     | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     |
| 30            | 12.00    | 12.00     | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     |
| 35            | 12.00    | 12.00     | 12.00     | 12,00         | 12,00     | 12.00     | 12.00     |
| 40            | 11.75    | 12.00     | 12.00     | 12,00         | 12,00     | 12.00     | 12.00     |
| 45            | 11.50    | 12.00     | 12.00     | 12.00         | 12.00     | 12.00     | 12.00     |

#### HU141MRB U30 / HU143MRB U30 + HN1616Y NB1

| Outdoor Temp. | LWT 7 °C | LWT 10 °C | LWT 13 °C | LWT 15 °C     | LWT 18 °C | LWT 20 °C | LWT 22 °C |
|---------------|----------|-----------|-----------|---------------|-----------|-----------|-----------|
| [°C DB]       |          |           |           | Capacity (kW) |           |           |           |
| 10            | 14.00    | 14.00     | 14.00     | 14.00         | 14.00     | 14.00     | 14.00     |
| 20            | 14.00    | 14.00     | 14.00     | 14.00         | 14.00     | 14.00     | 14.00     |
| 30            | 14.00    | 14.00     | 14.00     | 14.00         | 14.00     | 14.00     | 14.00     |
| 35            | 14.00    | 14.00     | 14.00     | 14.00         | 14.00     | 14.00     | 14.00     |
| 40            | 13.75    | 14.00     | 14.00     | 14.00         | 14.00     | 14.00     | 14.00     |
| 45            | 13.50    | 14.00     | 14.00     | 14.00         | 14.00     | 14.00     | 14.00     |

#### HU161MRB U30 / HU163MRB U30 + HN1616Y NB1

| Outdoor Temp. | LWT 7 °C | LWT 10 °C | LWT 13 °C | LWT 15 °C     | LWT 18 °C | LWT 20 °C | LWT 22 °C |
|---------------|----------|-----------|-----------|---------------|-----------|-----------|-----------|
| [°C DB]       |          |           |           | Capacity (kW) |           |           |           |
| 10            | 16.00    | 16.00     | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     |
| 20            | 16.00    | 16.00     | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     |
| 30            | 16.00    | 16.00     | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     |
| 35            | 16.00    | 16.00     | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     |
| 40            | 15.75    | 16.00     | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     |
| 45            | 15.50    | 16.00     | 16.00     | 16.00         | 16.00     | 16.00     | 16.00     |

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),
- LPM: Liters Per Minute (2/min), TC: Total Capacity (kW)
- 2. Direct interpolation is permissible. Do not extrapolate.
- 3. Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- $\bullet \ \, \text{Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed. } \\$
- In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

[Unit: mm]


133


# THERMA V R32 HYDROSPLIT COMBI UNIT

THERMA V<sub>m</sub> (R32) Hydrosplit

**Drawings** 

HU121MRB U30 / HU123MRB U30 HU141MRB U30 / HU143MRB U30 HU161MRB U30 / HU163MRB U30



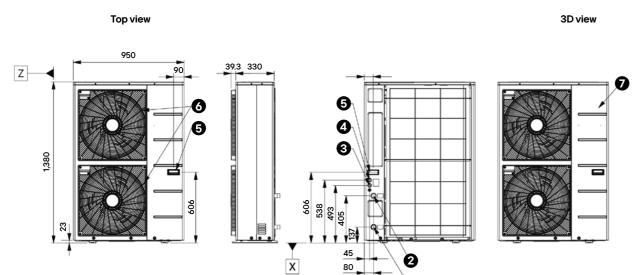


Side view

O

**Back view** 


Front view




Bottom view


Front view


| No. | Part Name   | Description  |  |  |  |
|-----|---|--|--|--|--|
| 1   | Entering Water Pipe   | Male PT 1" according to ISO 7-1 (Tapered pipe threads) |  |  |  |
| 2   | Leaving Water Pipe Male PT 1" according to ISO 7-1 (Tapered pipe threads) |  |  |  |  |
| 3   | Unit Power  | Power Cable Hole                                       |  |  |  |
| 4   | Low Voltage   | Communication Cable Hole                               |  |  |  |
| 5   | Handle  | -  |  |  |  |
| 6   | Air Outlet  | -  |  |  |  |
| 7   | Side Panel  | -  |  |  |  |




[Unit: mm]



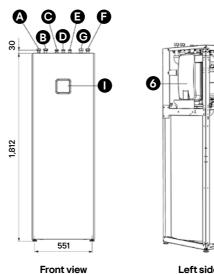

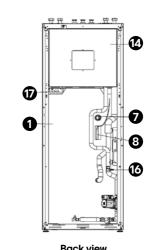



3D view

| Left side view | Back view | Right side vi |
|----------------|-----------|---------------|
|                |           |               |

| NO. | Fai L Naille            | Description                               | NO. | Fai L INdille                  | Description                |
|-----|-------------------------|---|-----|--------------------------------|----------------------------|
| 1   | Domestic Hot Water Tank | Domestic Hot Water Tank (200L)            | А   | Inlet Pipe from Outdoor Unit   | Female G1"                 |
| 2   | Electric Heater         | 200 ℓ                                     | В   | Outlet Pipe to Outdoor Unit    | Female G1"                 |
| 3   | Flow Sensor             | Max. 6 kW                                 | С   | Domestic Hot Water Outlet Pipe | Female G3/4"               |
| 4   | 3 Way Valve             | To Measure the Water Flow Rate (5-80 LPM) | D   | Domestic Cold Water Inlet Pipe | Female G3/4"               |
| 5   | Water Pressure Sensor   | Heating / DHW Circuit                     | E   | Domestic Re-circulation Pipe   | Female G3/4"               |
| 6   | Expansion Vessel        | To Measure the Water Pressure (0-2 MPa)   | F   | Heating Circuit Outlet Pipe    | Female G1"                 |
| 7   | Magnesium Anode         | 12 ℓ for Heating Circuit                  | G   | Heating Circuit Inlet Pipe     | Female G1"                 |
| 8   | DHW Tank Sensor         | To Prevent Corrosion                      | Н   | Electrical Conduits            | For electric wiring        |
| 9   | Plate Heat Exchanger    | Temperature Sensor                        | I   | Control Panel                  | Built-in remote controller |
| 10  | DHW Charging Pump       | Heat Exchange (Water / DHW tank)          |     |                                |                            |
| 11  | Strainer for DHW Tank   | To Circulate Water for DHW Heating        |     |                                |                            |
| 12  | Main Water Pump         | Filtering and Stacking Particles          |     |                                |                            |
| 13  | Expansion Vessel        | To Circulate Water Inside the System      |     |                                |                            |
| 14  | Control Box             | 8 l For DHW Circuit (Accessory)           |     |                                |                            |
| 15  | Air Vent                | Air Purging when Charging Water           |     |                                |                            |
| 16  | Drain Cock              | Valve for Water Draining                  |     |                                |                            |
| 17  | Electrical Conduits     | For Electric Wiring                       |     |                                |                            |

**OUTDOOR UNIT** 



#### What is R32 Split

The LG THERMA V Split series is a heat pump that is easy, flexible to install. As the expression "split" suggests, the outdoor and indoor units are connected by refrigerant piping, thus freezing will not compromise this unit regardless of outdoor ambient temperatures.

### **Key Features**

- Capacity range from 4 and 6 kW for new build and 5 to 9 kW for new build or small renovation
- ErP Energy Labeling A+++ / A++ for space heating (Average Climate 35°C / 55°C LWT)
- Maximum flow temperature up to 55°C (4/6 kW) and 65°C (5/7/9 kW)
- Operation range down to -20°C (4/6 kW) and -25°C (5/7/9 kW)

#### 4/6 kW













#### 5/7/9 kW











**Product Range** 

| Phase | Capacity | Indoo                 | Outdoor Unit |              |
|-------|----------|-----------------------|--------------|--------------|
|       | (kW)     | Hydro Unit Combi Unit |              | Outdoor Unit |
| 6     | 4        | LINIO CAONA NUCE      | LINIOSACTANA | HU041MR U20  |
|       | 6        | HN0613M NK5           | HN0613T NK0  | HU061MR U20  |
| 1Ø    | 5        |                       |              | HU051MR U44  |
|       | 7        | HN091MR NK5           | HN0913T NK0  | HU071MR U44  |
|       | 9        |                       |              | HU091MR U44  |

# HIGHLIGHT OF R32 SPLIT

# THERMAV. (32) Split

#### — Browse now ℚ

# No Potential Risk of Piping Freezing

- Robust to cold ambient thanks to refrigerant piping
- No exposed piping freezing even during prolonged blackouts



# High Installation Flexibility Not Restricted by the Site Condition

- Light weight and compact size
- Allows a maximum refrigerant pipe length of 50 m and offers 3-way piping connection availability (R32 Split 5/7/9 kW Split)
- Eliminates minimum floor area requirements due to R32 refrigerant (R32 Split 4/6 kW)



# **Small Refrigerant Amount**


ONLY 4 / 6 kW

#### Free from Minimum Floor Area Requirements Due to R32 Refrigerant

Minimum floor space requirements do not apply to R32 Split 4/6 kW, as the maximum refrigerant amount (including 30 m pipes) used in the product is smaller than the minimum set by regulation. As a result, there are more opportunities for flexible design and installation.






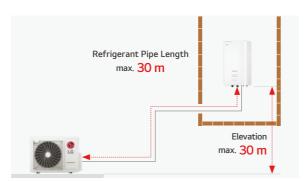

# All-in-one Integration (Combi Unit)

THERMA V R32 Split Combi Unit is the perfect space-saving solution for residential application thanks to its fully integrated hot water tank. Unlike in the case of typical separate installation, in this all-in-one solution hydronic components and Domestic Hot Water (DHW) are pre-wired, which requires reduced installation time and saves valuable living space. THERMA V R32 Split Combi Unit is easy to set up and operate while it demonstrates outstanding reliability and efficiency.

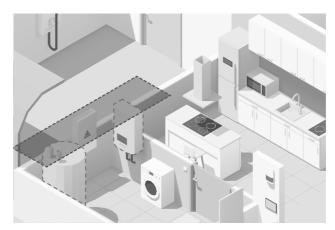

Conventional

LG THERMA V R32 Split Combi Unit (less installation space required)

# **Easy Draining System**

It is convenient for maintenance or moving as the water inside can be easily drained through the built-in drain valve.







# **DHW Recirculation Pump Control**

THERMA V can be connected to the DHW recirculation pump, which can then be managed via the scheduling function. When a user opens the faucet, hot water is immediately accessible thanks to the DHW recirculating function. This feature also has the added advantage of preventing Legionella growth in the hot water pipe.





# THERMA V<sub>TM</sub> (R32) Split **HYDRO UNIT**




# **Effortless** Installation, **Cold-Weather** Resistance

THERMA V Split Hydro Unit is a combination of an outdoor unit and an indoor Hydro Unit with built-in hydronic components such as a plate heat exchanger, backup heater, expansion tank and water pump.

### **Key Features**

- Capacity range from 4 and 6 kW for new build and 5 to 9 kW for new build or small renovation
- Maximum flow temperature up to 55°C (4/6 kW) and 65°C (5/7/9 kW)
- Operation range down to -20°C (4/6 kW) and -25°C (5/7/9 kW)
- High level hydronic components integration for fast and clean installation

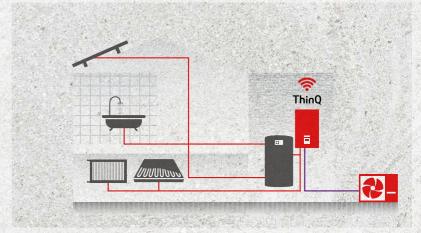

### Application







#### Certifications







## **Energy Label**







THERMA V<sub>TM</sub> (R32) Split

# **THERMA V R32 SPLIT** HYDRO UNIT (4/6 kW)

#### Outdoor unit

HU041MR U20 HU061MR U20

Indoor unit

HN0613M NK5




















## **Key Components**

Hydro Unit

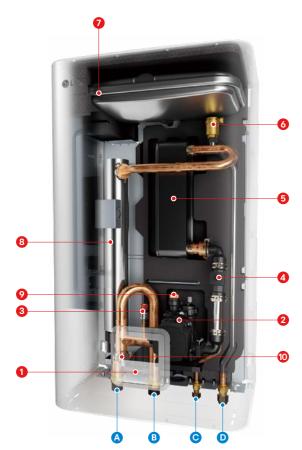

#### Components

- 1 Standard III remote controller 1) (air temp. sensor integrated)
- Water pump
- 3 Water pressure sensor
- 4 Flow sensor
- **6** Plate type heat exchanger (ref/water)
- 6 Air vent valve
- 7 Expansion vessel (8 l)
- 8 Back up electric heater (3 kW)
- Safety valve
- Strainer

1) Temperature control class (ERP class): V

#### **Connections**

- A Heating circuit outlet pipe (male PT 1" \*)
- B Heating circuit inlet pipe (male PT 1" \*)
- © Refrigerant liquid pipe (SAE 1/4" with connector \*\*)
- Refrigerant gas pipe (SAE 1/2" with connector \*\*)
- \* According to ISO 7-1 (tapered pipe threads)
- \*\* In case of Split 4/6 kW model, the adaptors provided with the outdoor unit must be separately installed on the gas/liquid connection of the indoor unit when connecting the refrigerant pipe. After installing the adaptors, the liquid and gas connection size becomes Ø 6.35 (1/4 inch) and Ø 12.7 (1/2 inch) respectively.

## **Product Specification**

| Efficiency Data                                      |                                | Unit     | 4 kW (1 Ø)                  | 6 kW (1 Ø)                 |  |
|--|--------------------------------|----------|-----------------------------|----------------------------|--|
| Seasonal space heating eff. class (35°C / 55         | 5°C)                           | -        | A+++ / A++                  | A+++ / A++                 |  |
| Seasonal space heating efficiency ( $\eta_s$ ) (35°C | C / 55°C)                      | %        | 183 / 126                   | 183 / 126                  |  |
| SCOP (35°C / 55°C)                                   |                                | -        | 4.65 / 3.23                 | 4.65 / 3.23                |  |
| Sound power level (outdoor unit)                     | Rated / low noise mode         | dB(A)    | 57 / 56                     | 58 / 57                    |  |
| Sound pressure level at 5m (outdoor unit)            | Rated / low noise mode         | dB(A)    | 35 / 34                     | 36 / 35                    |  |
| Sound power level (indoor unit)                      | Rated                          | dB(A)    | 4-                          | 4                          |  |
| Sound pressure level at 1m (indoor unit)             | Rated                          | dB(A)    | 31                          | 6                          |  |
| Nominal Capacity and COP/EER                         |                                |          |                             |                            |  |
| Air +7°C / water +35°C                               | Heating capacity / COP         | kW / -   | 4.00 / 5.10                 | 6.00 / 4.95                |  |
| Air +2°C / water +35°C                               | Heating capacity / COP         | kW / -   | 3.60 / 3.75                 | 4.80 / 3.65                |  |
| Air -7°C / water +35°C                               | Heating capacity / COP         | kW / -   | 4.00 / 3.08                 | 6.00 / 2.98                |  |
| Air +7°C / water +55°C                               | Heating capacity / COP         | kW / -   | 3.70 / 2.85                 | 4.60 / 2.90                |  |
| Air -7°C / water +55°C                               | Heating capacity / COP         | kW / -   | 3.70 / 1.80                 | 4.60 / 1.80                |  |
| Air +35°C / water +18°C                              | Cooling capacity / EER         | kW / -   | 4.00 / 4.80                 | 6.00 / 4.80                |  |
| Air +35°C / water +7°C                               | Cooling capacity / EER         | kW / -   | 4.00 / 3.40                 | 6.00 / 3.20                |  |
| Outdoor Units  |                                | Unit     | HU041MR U20                 | HU061MR U20                |  |
| Operation range                                      | Heating & DHW (Min. ~ Max.)    | °C       | -20 <i>-</i>                | - 35                       |  |
| (outdoor air temperature)                            | Cooling (Min. ~ Max.)          | °C       | 5~                          | 48                         |  |
|  | Туре                           | -        | R3                          |                            |  |
| Refrigerant  | GWP                            | -        | 675                         |                            |  |
|  | Precharged amount              | g        | 1,10                        | 00                         |  |
|  | Gas / Liquid                   | mm(inch) | Ø 12.7 (1/2) /              | Ø 6.35 (1/4)               |  |
| Nining annuations (water)                            | Length standard / Max.         | m        | 5 / 30                      |                            |  |
|  | Level difference Max.          | m        | 30                          |                            |  |
| Piping connections (water)                           | Max. length                    |          | 10                          |                            |  |
|  | without additional charge      | m        |                             | ,                          |  |
|  | Mass of additional ref. charge | g/m      | 21                          |                            |  |
| Dimension  | HxWxD                          | mm       | 650 x 87                    |                            |  |
| Weight   | Net                            | kg       | 44                          |                            |  |
| Exterior   | Color of chassis / RAL code    | -        | Warm gray /                 | / RAL 7044                 |  |
|  | Voltage, phase, frequency      | V, Ø, Hz | 220 - 24                    | 10, 1, 50                  |  |
| Power supply   | Standby power consumption      | W        | 20                          |                            |  |
|  | Recommended circuit breaker    | A        | 16                          | 20                         |  |
| Indoor Units   |                                | Unit     | HN0613                      | M NK5                      |  |
|  | Heating (Min. ~ Max.)          | °C       | 15 ~                        | 55                         |  |
| Operation range<br>(leaving water temperature)       | Cooling (Min. ~ Max.)          | °C       | 5 ~                         | 27                         |  |
|  | DHW (Min. ~ Max.)              | °C       | 15 ~                        | 80                         |  |
| Expansion vessel (heating circuit)                   | Volume                         | l        | 8                           | 3                          |  |
|  | Capacity combination           | kW       | 1.5 +                       | 1.5                        |  |
| Backup heater  | Heating steps                  | Steps    | 2                           | !                          |  |
| action fielder                                       | Power supply                   | V, Ø, Hz | 220 - 24                    | 0, 1, 50                   |  |
|  | Rated running current          | А        | 13                          | .0                         |  |
| Piping connections (water)                           | Inlet / outlet diameter        | inch     | Male PT 1" according to ISO | 7-1 (tapered pipe threads) |  |
| Piping connections (ref.)                            | Gas / Liquid                   | mm(inch) | Ø 12.7 (1/2) /              | Ø 6.35 (1/4)               |  |
| Dimension  | H x W x D                      | mm       | 850 x 49                    | 90 x 315                   |  |
| Weight   | Net                            | kg       | 37                          | .8                         |  |
| Exterior   | Color / RAL code               | -        | Noble white                 | / RAL 9016                 |  |

- 1. Due to our policy of innovation, some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes. Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound power level is measured on the rated condition in accordance with ISO 9614 standard, Sound pressure level is not a value declared on Eurovent Program and is converted from sound power level based on a tonality penalty of 0 dB and installation in free-field. The directivity index (Q) is assumed as 2. Therefore, these values can be increased owing to ambient conditions during operation, Rated sound power level is in accordance with EN12102-1 under condition of EN14825,
- 4. Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation.
- 5. This product contains fluorinated greenhouse gases.
- $6. \ All \ installation \ sites \ must \ be \ equipped \ with \ an \ earth \ leakage \ circuit \ breaker \ (ELCB).$
- 7. DHW 50 ~ 80  $^{\circ}\text{C}$  Operating is available only when the booster heater is operating.

# THERMA V... (Split

# **THERMA V R32 SPLIT** HYDRO UNIT (4/6kW)

# **Performance Table for Heating Operation**

Maximum heating capacity (including defrost effect)

#### HU041MR U20 + HN0613M NK5

| Outdoor Temp. | LWT 30 °C | LWT 35 °C | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C |
|---------------|-----------|-----------|-----------|-----------|-----------|-----------|
| [°C DB]       |           |           | Capaci    | ty (kW)   |           |           |
| -20           | 4.00      | 4.00      | 4.00      | 4.00      | -         | -         |
| -15           | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      | -         |
| -7            | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      |
| -4            | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      |
| -2            | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      |
| 2             | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      |
| 7             | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      |
| 10            | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      |
| 15            | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      |
| 18            | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      |
| 20            | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      |
| 35            | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      |

#### HU061MR U20 + HN0613M NK5

| Outdoor Temp. | LWT 30 °C | LWT 35 °C | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C |
|---------------|-----------|-----------|-----------|-----------|-----------|-----------|
| [°C DB]       |           |           | Capaci    | ty (kW)   |           |           |
| -20           | 4.92      | 4.78      | 4.64      | 4.50      | -         | -         |
| -15           | 5.56      | 5.52      | 5.48      | 5.44      | 5.40      | -         |
| -7            | 6.00      | 6.00      | 6.00      | 6.00      | 6.00      | 6.00      |
| -4            | 6.00      | 6.00      | 6.00      | 6.00      | 6.00      | 6.00      |
| -2            | 6.00      | 6.00      | 6.00      | 6.00      | 6.00      | 6.00      |
| 2             | 6.00      | 6.00      | 6.00      | 6.00      | 6.00      | 6.00      |
| 7             | 6.00      | 6.00      | 6.00      | 6.00      | 6.00      | 6.00      |
| 10            | 6.00      | 6.00      | 6.00      | 6.00      | 6.00      | 6.00      |
| 15            | 6.00      | 6.00      | 6.00      | 6.00      | 6.00      | 6.00      |
| 18            | 6.00      | 6.00      | 6.00      | 6.00      | 6.00      | 6.00      |
| 20            | 6.00      | 6.00      | 6.00      | 6.00      | 6.00      | 6.00      |
| 35            | 6.00      | 6.00      | 6.00      | 6.00      | 6.00      | 6.00      |

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),
- LPM: Liters Per Minute (2/min), TC: Total Capacity (kW)
- 2. Direct interpolation is permissible. Do not extrapolate. 3. Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- · Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
- In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

# **Performance Table for Cooling Operation**

Maximum cooling capacity

#### HU041MR U20 + HN0613M NK5

| Outdoor Temp. | LWT 7 °C | LWT 10 °C | LWT 13 °C | LWT 15 °C     | LWT 18 °C | LWT 20 °C | LWT 22 °C |
|---------------|----------|-----------|-----------|---------------|-----------|-----------|-----------|
| [°C DB]       |          |           |           | Capacity (kW) |           |           |           |
| 10            | 4.00     | 4.00      | 4.00      | 4.00          | 4.00      | 4.00      | 4.00      |
| 20            | 4.00     | 4.00      | 4.00      | 4.00          | 4.00      | 4.00      | 4.00      |
| 30            | 4.00     | 4.00      | 4.00      | 4.00          | 4.00      | 4.00      | 4.00      |
| 35            | 4.00     | 4.00      | 4.00      | 4.00          | 4.00      | 4.00      | 4.00      |
| 40            | 4.00     | 4.00      | 4.00      | 4.00          | 4.00      | 4.00      | 4.00      |
| 45            | 4.00     | 4.00      | 4.00      | 4.00          | 4.00      | 4.00      | 4.00      |

#### HU061MR U20 + HN0613M NK5


| LWT 7 °C      | LWT 10 °C                            | LWT 13 °C   | LWT 15 °C  | LWT 18 °C  | LWT 20 °C  | LWT 22 °C   |
|---------------|--------------------------------------|---|--|--|--|---|
| Capacity (kW) |                                      |   |  |  |  |   |
| 6.00          | 6.00                                 | 6.00  | 6.00   | 6.00   | 6.00   | 6.00  |
| 6.00          | 6.00                                 | 6.00  | 6.00   | 6.00   | 6.00   | 6.00  |
| 6.00          | 6.00                                 | 6.00  | 6.00   | 6.00   | 6.00   | 6.00  |
| 6.00          | 6.00                                 | 6.00  | 6.00   | 6.00   | 6.00   | 6.00  |
| 5.74          | 5.81                                 | 5.87  | 5.91   | 6.00   | 6.00   | 6.00  |
| 5.48          | 5.61                                 | 5.73  | 5.81   | 5.94   | 6.00   | 6.00  |
|               | 6.00<br>6.00<br>6.00<br>6.00<br>5.74 | 6.00 6.00<br>6.00 6.00<br>6.00 6.00<br>6.00 6.00<br>5.74 5.81 | 6.00     6.00       6.00     6.00       6.00     6.00       6.00     6.00       6.00     6.00       6.00     6.00       5.74     5.81       5.87 | Capacity (kW)           6.00         6.00         6.00           6.00         6.00         6.00           6.00         6.00         6.00           6.00         6.00         6.00           6.00         6.00         6.00           5.74         5.81         5.87         5.91 | Capacity (kW)           6.00         6.00         6.00         6.00         6.00           6.00         6.00         6.00         6.00         6.00           6.00         6.00         6.00         6.00         6.00           6.00         6.00         6.00         6.00         6.00           5.74         5.81         5.87         5.91         6.00 | Capacity (kW)           6.00         6.00         6.00         6.00         6.00           6.00         6.00         6.00         6.00         6.00           6.00         6.00         6.00         6.00         6.00           6.00         6.00         6.00         6.00         6.00           5.74         5.81         5.87         5.91         6.00         6.00 |


- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),
- LPM: Liters Per Minute (2/min), TC: Total Capacity (kW)
- 2. Direct interpolation is permissible. Do not extrapolate.
- 3. Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
- In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.


# THERMA V R32 SPLIT HYDRO UNIT (4/6 kW)

Drawings [Unit: mm]

HU041MR U20 / HU061MR U20

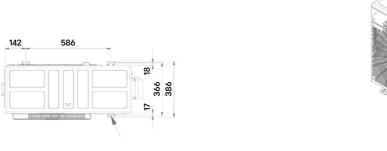

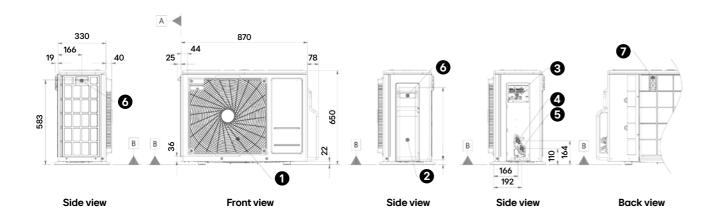




Bottom view

Top view

| No. | Part Name                                | Description |
|-----|--|-------------|
| 1   | Air Outlet                               | -           |
| 2   | Control Cover & SVC Valve Cover          | -           |
| 3   | Power and Communication Cable Connection | -           |
| 4   | Gas Pipe Connection                      | Flare Joint |
| 5   | Liquid Pipe Connection                   | Flare Joint |
| 6   | Handle                                   | -           |
| 7   | Intake Air Temperature Sensor Cover      | -           |

External
HN0613M NK5

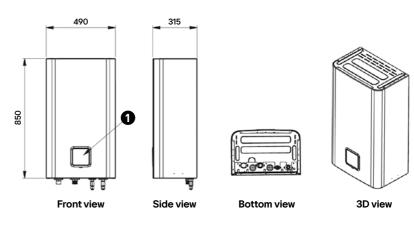


THERMA V... (Split

| No. | Part Name     | Description                |
|-----|---------------|----------------------------|
| 1   | Control Panel | Built-in Remote Controller |

#### Internal

HN0613M NK5

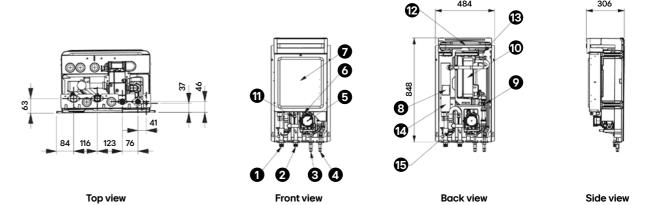

| No. | Part Name  | Description   |  |
|-----|--|---|--|
| 1   | Leaving Water Pipe   | Male PT 1" according to ISO 7-1 (Tapered pipe threads)    |  |
| 2   | Entering Water Pipe Male PT 1" according to ISO 7-1 (Tapered pipe threads) |   |  |
| 3   | Refrigerant Piping Connection  | Ø 6.35 <sup>1)</sup> (mm)                                 |  |
| 4   | Refrigerant Piping Connection  | Ø 12.7 <sup>1)</sup> (mm)                                 |  |
| 5   | Water Pump   | To Circulate Water Inside the System                      |  |
| 6   | Safety Valve   | Open at Water Pressure 3 Bar                              |  |
| 7   | Control Box  | PCB and Terminal Blocks                                   |  |
| 8   | Thermostat   | Cut-off Power Input to Electric Heater at 90°C            |  |
| 9   | Flow Sensor  | To Measure the Water Flow Rate (5-80 LPM)                 |  |
| 10  | Plate Heat Exchanger   | Heat Exchange between Refrigerant and Water               |  |
| 11  | Pressure Sensor  | To Measure the Water Pressure (0-2 MPa)                   |  |
| 12  | Expansion Tank   | Absorbing Volume Change of Heated Water                   |  |
| 13  | Air Vent   | Air Purging when Charging Water                           |  |
| 14  | Backup Heater  | 3 kW  |  |
| 15  | Strainer   | Filtering and Stacking Particles Inside Circulating Water |  |

1) When connecting the refrigerant pipe, the adaptors provided with the outdoor unit must be installed on the connection of the indoor unit.

THERMA V<sub>m</sub> Split

## **THERMA V R32 SPLIT** HYDRO UNIT (5/7/9kW)

#### **Outdoor unit**

HU051MR U44 HU071MR U44

HU091MR U44

#### Indoor unit

HN091MR NK5






















#### **Key Components**

Hydro Unit

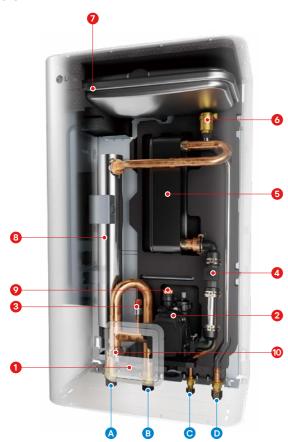

#### Components

- 1 Standard III remote controller 1) (air temp. sensor integrated)
- Water pump
- 3 Water pressure sensor
- 4 Flow sensor
- 5 Plate type heat exchanger (ref/water)
- 6 Air vent valve
- 7 Expansion vessel (8 l)
- 8 Back up electric heater (3 kW)
- Safety valve
- Strainer

1) Temperature control class (ERP class): V

#### Connections

- A Heating circuit outlet pipe (male PT 1" \*)
- B Heating circuit inlet pipe (male PT 1" \*)
- © Refrigerant liquid pipe (SAE 3/8")
- Refrigerant gas pipe (SAE 5/8")

#### **Product Specification**

| Efficiency Data   |                                       | Unit     | 5 kW (1 Ø)                  | 7 kW (1 Ø)                  | 9 kW (1 Ø)      |  |  |
|---|---------------------------------------|----------|-----------------------------|-----------------------------|-----------------|--|--|
| Seasonal space heating eff. class (35°C / 55°C)                   |                                       |          | A+++ / A++                  | A+++ / A++                  | A+++ / A++      |  |  |
| Seasonal space heating efficiency (η <sub>s</sub> ) (35°C / 55°C) |                                       |          | 183 / 126                   | 183 / 126                   | 183 / 126       |  |  |
| SCOP (35°C / 55°C)  |                                       | -        | 4.65 / 3.23                 | 4.65 / 3.23                 | 4.65 / 3.23     |  |  |
| Sound power level (outdoor unit)                                  | Rated / low noise mode                | dB(A)    |                             | 60 / 58                     |                 |  |  |
| Sound pressure level at 5m (outdoor unit)                         | Rated / low noise mode                | dB(A)    |                             | 38 / 36                     |                 |  |  |
| Sound power level (indoor unit)                                   | Rated                                 | dB(A)    |                             | 44                          |                 |  |  |
| Sound pressure level at 1m (indoor unit)                          | Rated                                 | dB(A)    |                             | 36                          |                 |  |  |
| Nominal Capacity and COP/EER                                      |                                       |          |                             |                             |                 |  |  |
| Air +7°C / water +35°C  | Heating capacity / COP                | kW / -   | 5.50 / 4.90                 | 7.00 / 4.90                 | 9.00 / 4.65     |  |  |
| Air +2°C / water +35°C  | Heating capacity / COP                | kW / -   | 3.30 / 3.52                 | 4.20 / 3.51                 | 5.40 / 3.50     |  |  |
| Air +7°C / water +55°C  | Heating capacity / COP                | kW / -   | 5.50 / 2.70                 | 5.50 / 2.70                 | 5.50 / 2.70     |  |  |
| Air +35°C / water +18°C   | Cooling capacity / EER                | kW / -   | 5.50 / 4.60                 | 7.00 / 4.50                 | 9.00 / 4.20     |  |  |
| Air +35°C / water +7°C  | Cooling capacity / EER                | kW / -   | 5.50 / 2.80                 | 7.00 / 2.70                 | 9.00 / 2.60     |  |  |
| Outdoor Units   |                                       | Unit     | HU051MR U44                 | HU071MR U44                 | HU091MR U44     |  |  |
| Operation range   | Heating & DHW (Min. ~ Max.)           | °C       |                             | -25 ~ 35                    |                 |  |  |
| (outdoor air temperature)   | Cooling (Min. ~ Max.)                 | °C       |                             | 5 ~ 48                      |                 |  |  |
|   | Туре                                  | -        |                             | R32                         |                 |  |  |
| Refrigerant   | GWP                                   | -        | 675                         |                             |                 |  |  |
|   | Precharged amount                     | g        | 1,500                       |                             |                 |  |  |
|   | Gas / Liquid                          | mm(inch) | Ø 12.7 (5/8) / Ø 9.52 (3/8) |                             |                 |  |  |
|   | Length standard / Max.                | m        | 5 / 50                      |                             |                 |  |  |
| Piping connections (water)  | Level difference Max.                 | m        | 30                          |                             |                 |  |  |
|   | Max. length without additional charge | m        | 10                          |                             |                 |  |  |
|   | Mass of additional ref. charge        | g/m      | 40                          |                             |                 |  |  |
| Dimension   | HxWxD                                 | mm       |                             | 834 x 950 x 330             |                 |  |  |
| Weight  | Net                                   | kg       |                             | 60.0                        |                 |  |  |
| Exterior  | Color of chassis / RAL code           | -        |                             | Warm gray / RAL 7044        |                 |  |  |
|   | Voltage, phase, frequency             | V, Ø, Hz |                             | 220 - 240, 1, 50            |                 |  |  |
| Power supply  | Standby power consumption             | W        |                             | 20                          |                 |  |  |
|   | Recommended circuit breaker           | А        | 20                          | 25                          | 30              |  |  |
| Indoor Units  |                                       | Unit     |                             | HN091MR NK5                 |                 |  |  |
|   | Heating (Min. ~ Max.)                 | °C       |                             | 15 ~ 65                     |                 |  |  |
| Operation range (leaving water temperature)                       | Cooling (Min. ~ Max.)                 | °C       |                             | 5 ~ 27                      |                 |  |  |
| , ,   | DHW (Min. ~ Max.)                     | °C       |                             | 15 ~ 80                     |                 |  |  |
| Expansion vessel (heating circuit)                                | Volume                                | l        |                             | 8                           |                 |  |  |
|   | Capacity combination                  | kW       |                             | 3.0 + 3.0                   |                 |  |  |
| Rackup heater   | Heating steps                         | Steps    |                             | 2                           |                 |  |  |
| Backup heater   | Power supply                          | V, Ø, Hz |                             | 220 - 240, 1, 50            |                 |  |  |
| Rated running current   |                                       | А        |                             | 25.0                        |                 |  |  |
| Piping connections (water)  | Inlet / outlet diameter               | inch     | Male PT 1" acc              | cording to ISO 7-1 (tapered | l pipe threads) |  |  |
| Piping connections (ref.)   | Gas / Liquid                          | mm(inch) | Ø                           | 15.88 (5/8) / Ø 9.52 (3/8   | 3)              |  |  |
| Dimension   | HxWxD                                 | mm       |                             | 850 x 490 x 315             |                 |  |  |
| Weight  | Net                                   | kg       |                             | 38.1                        |                 |  |  |
| Exterior  | Color / RAL code                      | -        |                             | Noble white / RAL 9016      |                 |  |  |

- 1. Due to our policy of innovation, some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes, Especially the power cable and circuit breaker should be selected in accordance with that,
- 3. Sound power level is measured on the rated condition in accordance with ISO 9614 standard, Sound pressure level is not a value declared on Eurovent Program and is converted from sound power level based on a tonality penalty of 0 dB and installation in free-field. The directivity index (Q) is assumed as 2. Therefore, these values can be increased owing to ambient conditions during operation, Rated sound power level is in accordance with EN12102-1 under condition of EN14825,
- 4. Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation.
- 5. This product contains fluorinated greenhouse gases.
- $6. \ All \ installation \ sites \ must be \ equipped \ with \ an \ earth \ leakage \ circuit \ breaker \ (ELCB).$
- 7. DHW 55 ~ 80  $^{\circ}\text{C}$  Operating is available only when the booster heater is operating.

<sup>\*</sup> According to ISO 7-1 (tapered pipe threads)

# THERMA V<sub>m</sub> (R22) Split

# **THERMA V R32 SPLIT** HYDRO UNIT (5/7/9kW)

#### **Performance Table for Heating Operation**

Maximum heating capacity (including defrost effect)

#### HU051MR U44 + HN091MR NK5

| Outdoor Temp. | LWT 30 °C     | LWT 35 °C | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C |  |  |
|---------------|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|--|--|
| [°C DB]       | Capacity (kW) |           |           |           |           |           |           |           |  |  |
| -25           | 4.02          | 3.90      | 3.78      | 3.66      | -         | -         | -         | -         |  |  |
| -20           | 4.64          | 4.51      | 4.38      | 4.26      | 4.13      | -         | -         | -         |  |  |
| -15           | 5.26          | 5.12      | 4.99      | 4.85      | 4.72      | 4.58      | -         | -         |  |  |
| -7            | 5.50          | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | -         |  |  |
| -4            | 5.50          | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | -         |  |  |
| -2            | 5.50          | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | -         |  |  |
| 2             | 5.50          | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      |  |  |
| 7             | 5.50          | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      |  |  |
| 10            | 5.50          | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      |  |  |
| 15            | 5.50          | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      |  |  |
| 18            | 5.50          | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      |  |  |
| 20            | 5.50          | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      |  |  |
| 35            | 5.50          | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      |  |  |

#### HU071MR U44 + HN091MR NK5

| Outdoor Temp. | LWT 30 °C     | LWT 35 °C | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C |
|---------------|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| [°C DB]       | Capacity (kW) |           |           |           |           |           |           |           |
| -25           | 5.00          | 4.85      | 4.71      | 4.56      | -         | -         | -         | -         |
| -20           | 5.58          | 5.43      | 5.27      | 5.11      | 4.95      | -         | -         | -         |
| -15           | 6.17          | 6.00      | 5.83      | 5.66      | 5.49      | 5.32      | -         | -         |
| -7            | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | -         |
| -4            | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | -         |
| -2            | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | -         |
| 2             | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |
| 7             | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |
| 10            | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |
| 15            | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |
| 18            | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |
| 20            | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |
| 35            | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |

#### HU091MR U44 + HN091MR NK5

| Outdoor Temp. | LWT 30 °C     | LWT 35 °C | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C |  |  |
|---------------|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|--|--|
| [°C DB]       | Capacity (kW) |           |           |           |           |           |           |           |  |  |
| -25           | 6.40          | 6.20      | 6.00      | 5.80      | -         | -         | -         | -         |  |  |
| -20           | 7.23          | 7.00      | 6.77      | 6.54      | 6.31      | -         | -         | -         |  |  |
| -15           | 8.06          | 7.80      | 7.54      | 7.28      | 7.02      | 6.76      | -         | -         |  |  |
| -7            | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | -         |  |  |
| -4            | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | -         |  |  |
| -2            | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | -         |  |  |
| 2             | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |  |  |
| 7             | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |  |  |
| 10            | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |  |  |
| 15            | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |  |  |
| 18            | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |  |  |
| 20            | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |  |  |
| 35            | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |  |  |

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),
- LPM : Liters Per Minute ( $\ell/\min$ ), TC : Total Capacity (kW)
- 2. Direct interpolation is permissible. Do not extrapolate. 3. Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- · Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
- In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

#### **Performance Table for Cooling Operation**

Maximum cooling capacity

#### HU051MR U44 + HN091MR NK5

| Outdoor Temp.         | LWT 7 °C | LWT 10 °C | LWT 13 °C | LWT 15 °C | LWT 18 °C | LWT 20 °C | LWT 22 °C |
|-----------------------|----------|-----------|-----------|-----------|-----------|-----------|-----------|
| [°C DB] Capacity (kW) |          |           |           |           |           |           |           |
| 10                    | 6.42     | 6.95      | 7.49      | 7.85      | 8.39      | 8.75      | 9.11      |
| 20                    | 6.05     | 6.37      | 6.70      | 6.91      | 7.23      | 7.45      | 7.66      |
| 30                    | 5.68     | 5.79      | 5.90      | 5.97      | 6.08      | 6.15      | 6.22      |
| 35                    | 5.50     | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      |
| 40                    | 5.32     | 5.34      | 5.35      | 5.37      | 5.38      | 5.40      | 5.41      |
| 45                    | 5.13     | 5.17      | 5.21      | 5.23      | 5.27      | 5.29      | 5.32      |

#### HU071MR U44 + HN091MR NK5

| Outdoor Temp. | LWT 7 °C         | LWT 10 °C | LWT 13 °C | LWT 15 °C | LWT 18 °C | LWT 20 °C | LWT 22 °C |  |
|---------------|------------------|-----------|-----------|-----------|-----------|-----------|-----------|--|
| [°C DB]       | B] Capacity (kW) |           |           |           |           |           |           |  |
| 10            | 8.17             | 8.85      | 9.54      | 9.99      | 10.68     | 11.13     | 11.59     |  |
| 20            | 7.70             | 8.11      | 8.52      | 8.80      | 9.21      | 9.48      | 9.75      |  |
| 30            | 7.23             | 7.37      | 7.51      | 7.60      | 7.74      | 7.83      | 7.92      |  |
| 35            | 7.00             | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |  |
| 40            | 6.77             | 6.79      | 6.81      | 6.83      | 6.85      | 6.87      | 6.88      |  |
| 45            | 6.53             | 6.58      | 6.63      | 6.66      | 6.70      | 6.74      | 6.77      |  |

#### HU091MR U44 + HN091MR NK5

| Outdoor Temp. | LWT 7 °C | LWT 10 °C     | LWT 13 °C | LWT 15 °C | LWT 18 °C | LWT 20 °C | LWT 22 °C |  |  |
|---------------|----------|---------------|-----------|-----------|-----------|-----------|-----------|--|--|
| [°C DB]       |          | Capacity (kW) |           |           |           |           |           |  |  |
| 10            | 10.50    | 11.38         | 12.26     | 12.85     | 13.73     | 14.31     | 14.90     |  |  |
| 20            | 9.90     | 10.43         | 10.96     | 11,31     | 11.84     | 12.19     | 12.54     |  |  |
| 30            | 9.30     | 9.48          | 9.65      | 9.77      | 9.95      | 10.06     | 10.18     |  |  |
| 35            | 9.00     | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |  |  |
| 40            | 8.70     | 8.73          | 8.76      | 8.78      | 8.81      | 8.83      | 8.85      |  |  |
| 45            | 8.40     | 8.46          | 8.52      | 8.56      | 8.62      | 8.66      | 8.70      |  |  |

- 1. DB: Dry Bulb Temperature (°C), LWT: Leaving Water Temperature (°C),
- LPM: Liters Per Minute (2/min), TC: Total Capacity (kW) 2. Direct interpolation is permissible. Do not extrapolate.
- 3. Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- \* Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
- In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

[Unit: mm]

3D view

# THERMA V R32 SPLIT HYDRO UNIT (5/7/9kW)

THERMA V... (RE) Split


**Bottom view** 

Drawings


HU051MR U44 / HU071MR U44 / HU091MR U44

Side view


Top view




[Unit: mm]

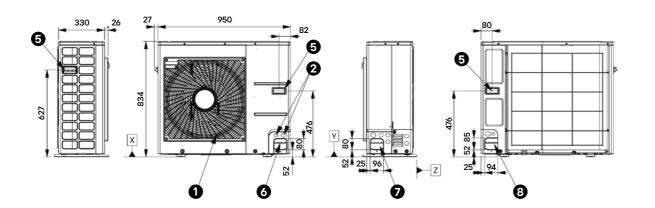

Side view

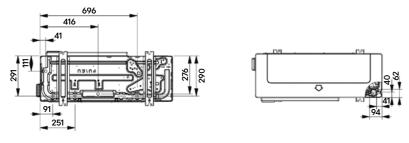


Front view



**Back view** 


| Bottom view | Internal top view | Internal front view |
|-------------|-------------------|---------------------|
|-------------|-------------------|---------------------|

| No. | Part Name                          | Description |
|-----|------------------------------------|-------------|
| 1   | Air Outlet                         | -           |
| 2   | Power and Communication Cable Hole | -           |
| 3   | Gas Pipe Connection                | Flare Joint |
| 4   | Liquid Pipe Connection             | Flare Joint |
| 5   | Handle                             | -           |
| 6   | Pipe Routing Hole (Front)          | -           |
| 7   | Pipe Routing Hole (Side)           | -           |
| 8   | Pipe Routing Hole (Back)           | -           |

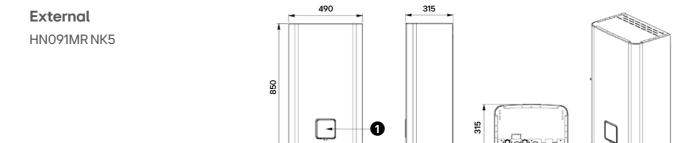

| No. | Part Name     | Description                |
|-----|---------------|----------------------------|
| 1   | Control Panel | Built-in Remote Controller |

Front view

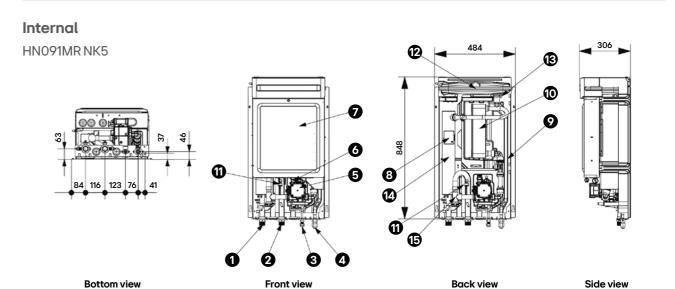

| No. | Part Name                 | Description   |
|-----|---------------------------|---|
| 1   | Leaving Water Pipe        | Male PT 1" according to ISO 7-1 (Tapered pipe threads)    |
| 2   | Entering Water Pipe       | Male PT 1" according to ISO 7-1 (Tapered pipe threads)    |
| 3   | Refrigerant Pipe (Liquid) | Ø 9.52 (mm)   |
| 4   | Refrigerant Pipe (Gas)    | Ø 15.88 (mm)  |
| 5   | Water Pump                | To Circulate Water Inside the System                      |
| 6   | Safety Valve              | Open at Water Pressure 3 Bar                              |
| 7   | Control Box               | PCB and Terminal Blocks                                   |
| 8   | Thermal Switch            | Cut-off Power Input to Electric Heater at 90°C            |
| 9   | Flow Sensor               | To Measure the Water Flow Rate (5-80 LPM)                 |
| 10  | Plate Heat Exchanger      | Heat Exchange between Refrigerant and Water               |
| 11  | Pressure Sensor           | To Measure the Water Pressure (0-2 MPa)                   |
| 12  | Expansion Tank            | Absorbing Volume Change of Heated Water                   |
| 13  | Air Vent                  | Air Purging when Charging Water                           |
| 14  | Backup Heater             | 6 kW  |
| 15  | Strainer                  | Filtering and Stacking Particles Inside Circulating Water |



# THERMA V<sub>TM</sub> (R32) Split **COMBIUNIT**



#### All-in-one Integration

The LG THERMA V R32 Split Combi Unit is a domestic hot water supply, space heating and cooling solution that conveniently combines an indoor hot water tank with a separate outdoor unit.

Since there is no need to install a separate domestic hot water tank for hot water supply, space is not wasted, and the concept with all-in-one enables quick installation.

#### **Key Features**

- Capacity range from 4 and 6 kW for new build and 5 to 9 kW for new build or small renovation
- Maximum flow temperature up to 55°C (4/6 kW) and 65°C (5/7/9 kW)
- Operation range down to -20°C (4/6 kW) and -25°C (5/7/9 kW)
- All-in-one Combi Unit with integrated hot water cylinder



## Application







#### Certifications









#### **Energy Label**











# THERMA V R32 SPLIT COMBI UNIT (4/6 kW)

#### Outdoor unit

HU041MR U20 HU061MR U20

#### Indoor unit

HN0613T NK0
























#### **Key Components**

Combi Unit

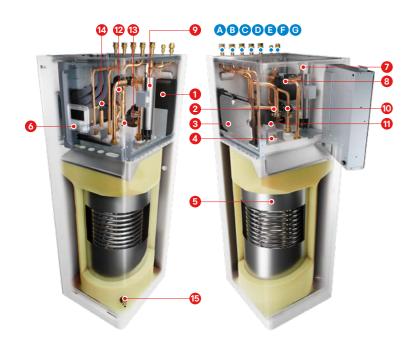

#### Components

- 1 Plate heat exchanger (ref. / water)
- 3 Expansion tank for heating (8 l)
- 4 Reserved space for DHW expansion tank
- 5 DHW storage tank (stainless steel, 200 l) with internal coil type heat exchanger
- 6 Standard III remote controller 1) (air temp. sensor integrated)
- 7 Air vent valve
- 8 3 Way diverting valve (DC)
- Electric back-up heater (3 kW)
- Water flow sensor
- 1 Main water pump with air vent and safety valve (water circuit, 3 bar)
- Water pressure sensor
- 13 Drain valve for water circuit
- 14 Safety valve (DHW tank, 10 bar)
- 15 Drain valve for DHW tank

1) Temperature control class (ERP class): V

#### Connections

- A DHW recirculation pipe (female G1" \*)
- B Domestic hot water outlet pipe (female G1" \*)
- O Domestic cold water inlet pipe (female G1" \*)
- D Heating circuit inlet pipe (female G1" \*)
- Heating circuit outlet pipe (female G1" \*)
- Refrigerant liquid pipe (SAE 1/4" with connector \*\*)
- © Refrigerant gas pipe (SAE 1/2" with connector \*\*)
- \* According to ISO 228-1 (parallel pipe threads)
- \*\* In case of Split 4/6 kW model, the adaptors provided with the outdoor unit must be separately installed on the gas/liquid connection of the indoor unit when connecting the refrigerant pipe. After installing the adaptors, the liquid and gas connection size becomes Ø 6.35 (1/4 inch) and Ø 12.7 (1/2 inch) respectively.



#### **Product Specification**

| Efficiency Data  |                        | Unit   | 4 kW (1 Ø)  | 6 kW (1 Ø)  |
|--|------------------------|--------|-------------|-------------|
| Seasonal space heating eff. class (35°C / 55               | °C)                    | -      | A+++ / A++  | A+++ / A++  |
| Seasonal space heating efficiency ( $\eta_s$ ) (35°C       | : / 55°C)              | %      | 183 / 126   | 183 / 126   |
| SCOP (35°C / 55°C)   |                        | -      | 4.65 / 3.23 | 4.65 / 3.23 |
| Declared load profile, average climate                     |                        | -      | L           | L           |
| Water heating efficiency (η <sub>WH</sub> ), average clim  | ate                    | %      | 133         | 133         |
| COP <sub>DHW</sub> , average climate                       |                        | -      | 3.15        | 3.15        |
| Water heating eff. class, average climate                  |                        | -      | A+          | A+          |
| Annual energy consumption, DHW (average                    | climate)               | kWh    | 770         | 770         |
| Heating up time acc. to EN 16147 (average                  | climate)               | h/mm   | 1h 45       | 1h 45       |
| Max. usable water volume acc. to EN 16147                  | (average climate)      | L      | 220         | 220         |
| Declared load profile, warmer climate                      |                        | -      | L           | L           |
| Water heating efficiency (ηwн), warmer clima               | ate                    | %      | 160         | 160         |
| COP <sub>DHW</sub> , warmer climate                        |                        | -      | 3.69        | 3.69        |
| Water heating eff. class, warmer climate                   |                        | -      | A++         | A++         |
| Declared load profile, colder climate                      |                        | -      | L           | L           |
| Water heating efficiency (η <sub>WH</sub> ), colder climat | ce                     | %      | 110         | 110         |
| COP <sub>DHW</sub> , colder climate                        |                        | -      | 2.54        | 2.54        |
| Water heating eff. class, colder climate                   |                        | -      | А           | А           |
| Sound power level (outdoor unit)                           | Rated / low noise mode | dB(A)  | 57 / 56     | 58 / 57     |
| Sound pressure level at 5m (outdoor unit)                  | Rated / low noise mode | dB(A)  | 35 / 34     | 36 / 35     |
| Sound power level (indoor unit)                            | Rated                  | dB(A)  | 42          |             |
| Sound pressure level at 1m (indoor unit)                   | Rated                  | dB(A)  | 34          | ļ           |
| Nominal Capacity and COP/EER                               |                        |        |             |             |
| Air +7°C / water +35°C                                     | Heating capacity / COP | kW / - | 4.00 / 5.10 | 6.00 / 4.95 |
| Air +2°C / water +35°C                                     | Heating capacity / COP | kW / - | 3.60 / 3.75 | 4.80 / 3.65 |
| Air -7°C / water +35°C                                     | Heating capacity / COP | kW / - | 4.00 / 3.08 | 6.00 / 2.98 |
| Air +7°C / water +55°C                                     | Heating capacity / COP | kW / - | 3.70 / 2.85 | 4.60 / 2.90 |
| Air -7°C / water +55°C                                     | Heating capacity / COP | kW / - | 3.70 / 1.80 | 4.60 / 1.80 |
| Air +35°C / water +18°C                                    | Cooling capacity / EER | kW / - | 4.00 / 4.80 | 6.00 / 4.80 |
| Air +35°C / water +7°C                                     | Cooling capacity / EER | kW / - | 4.00 / 3.40 | 6.00 / 3.20 |

- 1. Due to our policy of innovation, some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes, Especially the power cable and circuit breaker should be selected in accordance with that,
- 3. Sound power level is measured on the rated condition in accordance with ISO 9614 standard. Sound pressure level is not a value declared on Eurovent Program and is converted from sound power level based on a tonality penalty of 0 dB and installation in free-field. The directivity index (Q) is assumed as 2. Therefore, these values can be increased owing to ambient conditions during operation, Rated sound power level is in accordance with EN12102-1 under condition of EN14825
- 4. Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation.
- 5. This product contains fluorinated greenhouse gases.
- $6. \ All \ installation \ sites \ must \ be \ equipped \ with \ an \ earth \ leakage \ circuit \ breaker \ (ELCB).$
- 7. DHW 50 ~ 80°C Operating is available only when the booster heater is operating.

THERMA V<sub>m</sub> Split

# **THERMA V R32 SPLIT** COMBI UNIT (4/6 kW)

#### **Product Specification**

| Outdoor Units                               |   | Unit     | HU041MR U20 HU061MR U20                                  |  |  |
|---|---|----------|--|--|--|
| Operation range                             | Heating & DHW (Min. ~ Max.)               | °C       | -20 ~ 35   |  |  |
| (outdoor air temperature)                   | Cooling (Min. ~ Max.)                     | °C       | 5 ~ 48   |  |  |
|   | Туре                                      | -        | R32  |  |  |
| Refrigerant                                 | GWP                                       | -        | 675  |  |  |
|   | Precharged amount                         | g        | 1,100  |  |  |
|   | Gas / Liquid                              | mm(inch) | Ø 12.7 (1/2) / Ø 6.35 (1/4)                              |  |  |
|   | Length standard / Max.                    |          | 5 / 30   |  |  |
| Piping connections (water)                  | Level difference Max.                     |          | 30   |  |  |
|   | Max. length without additional charge     |          | 10   |  |  |
|   | Mass of additional ref. charge            |          | 20   |  |  |
| Dimension                                   | HxWxD                                     | mm       | 650 x 870 x 330  |  |  |
| Weight                                      | Net                                       | kg       | 44.7   |  |  |
| Exterior                                    | Color of chassis / RAL code               | -        | Warm gray / RAL 7044                                     |  |  |
|   | Voltage, phase, frequency                 | V, Ø, Hz | 220 - 240, 1, 50   |  |  |
| Power supply                                | Standby power consumption                 | W        | 20   |  |  |
|   | Recommended circuit breaker               | А        | 16 20  |  |  |
| Indoor Units                                |   | Unit     | HN0613T NK0  |  |  |
|   | Heating (Min. ~ Max.)                     | °C       | 15 ~ 55  |  |  |
| Operation range (leaving water temperature) | Cooling (Min. ~ Max.)                     | °C       | 5 ~ 27   |  |  |
|   | DHW (Min. ~ Max.)                         | °C       | 15 ~ 80  |  |  |
|   | Volume                                    | l        | 200  |  |  |
| Domestic hot water tank                     | Tank material                             | -        | Duplex stainless steel                                   |  |  |
|   | Standby losses                            | -        | 60   |  |  |
| Expansion vessel (heating circuit)          | Volume                                    | l        | 8  |  |  |
|   | Capacity combination                      | kW       | 3.0  |  |  |
| Electric heater                             | Heating steps                             | Steps    | 1  |  |  |
| Liectife fieater                            | Power supply                              | V, Ø, Hz | 220 - 240, 1, 50   |  |  |
|   | Rated running current                     | А        | 13.0   |  |  |
|   | Inlet / outlet diameter for space heating | inch     |  |  |  |
| Piping connections (water)                  | Inlet / outlet diameter for DHW           | inch     | Female G1" according to ISO228-1 (parallel pipe threads) |  |  |
|   | Recirculation                             | inch     |  |  |  |
| Piping connections (ref.)                   | Gas / Liquid                              | mm(inch) | Ø 12.7 (1/2) / Ø 6.35 (1/4)                              |  |  |
|   |   |          | 1,750 x 600 x 660  |  |  |
| Dimension                                   | HxWxD                                     | mm       | 1,750 x 600 x 660  |  |  |
| · -   | H x W x D  Net                            | mm<br>kg | 1,750 x 600 x 660<br>118.0                               |  |  |

- 1. Due to our policy of innovation, some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes. Especially the power cable and circuit breaker should be selected in accordance with that.

  3. Sound power level is measured on the rated condition in accordance with ISO 9614 standard. Sound pressure level is converted from sound power level based on a tonality
- penalty of 0 dB and installation in free-field. The directivity index (Q) is assumed as 2. Therefore, these values can be increased owing to ambient conditions during operation.

  Rated sound power level is in accordance with EN12102-1 under condition of EN14825.
- 4. Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation.
- 5. This product contains fluorinated greenhouse gases,
  6. All installation sites must be equipped with an earth leakage circuit breaker (ELCB).
  7. DHW 50 ~ 80°C Operating is available only when the booster heater is operating.



# THERMA V R32 SPLIT COMBI UNIT (4/6 kW)

#### **Performance Table for Heating Operation**

Maximum heating capacity (including defrost effect)

#### HU041MR U20 + HN0613T NK0

| Outdoor Temp. | LWT 30 °C | LWT 35 °C | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C |
|---------------|-----------|-----------|-----------|-----------|-----------|-----------|
| [°C DB]       |           |           | Capacit   | ty (kW)   |           |           |
| -20           | 4.00      | 4.00      | 4.00      | 4.00      | -         | -         |
| -15           | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      | -         |
| -7            | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      |
| -4            | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      |
| -2            | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      |
| 2             | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      |
| 7             | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      |
| 10            | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      |
| 15            | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      |
| 18            | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      |
| 20            | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      |
| 35            | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      | 4.00      |

#### HU061MR U20 + HN0613T NK0

| Outdoor Temp. | LWT 30 °C     | LWT 35 °C | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C |  |  |  |
|---------------|---------------|-----------|-----------|-----------|-----------|-----------|--|--|--|
| [°C DB]       | Capacity (kW) |           |           |           |           |           |  |  |  |
| -20           | 4.92          | 4.78      | 4.64      | 4.50      | -         | -         |  |  |  |
| -15           | 5.56          | 5.52      | 5.48      | 5.44      | 5.40      | -         |  |  |  |
| -7            | 6.00          | 6.00      | 6.00      | 6.00      | 6.00      | 6.00      |  |  |  |
| -4            | 6.00          | 6.00      | 6.00      | 6.00      | 6.00      | 6.00      |  |  |  |
| -2            | 6.00          | 6.00      | 6.00      | 6.00      | 6.00      | 6.00      |  |  |  |
| 2             | 6.00          | 6.00      | 6.00      | 6.00      | 6.00      | 6.00      |  |  |  |
| 7             | 6.00          | 6.00      | 6.00      | 6.00      | 6.00      | 6.00      |  |  |  |
| 10            | 6.00          | 6.00      | 6.00      | 6.00      | 6.00      | 6.00      |  |  |  |
| 15            | 6.00          | 6.00      | 6.00      | 6.00      | 6.00      | 6.00      |  |  |  |
| 18            | 6.00          | 6.00      | 6.00      | 6.00      | 6.00      | 6.00      |  |  |  |
| 20            | 6.00          | 6.00      | 6.00      | 6.00      | 6.00      | 6.00      |  |  |  |
| 35            | 6.00          | 6.00      | 6.00      | 6.00      | 6.00      | 6.00      |  |  |  |

#### Not

- 1. DB : Dry Bulb Temperature (°C), LWT : Leaving Water Temperature (°C),
- LPM: Liters Per Minute (l/min), TC: Total Capacity (kW)
- Direct interpolation is permissible. Do not extrapolate.
   Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
- In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

### THERMA V... (32) Split

#### **Performance Table for Cooling Operation**

Maximum cooling capacity

#### HU041MR U20 + HN0613T NK0

| LWT 7 °C | LWT 10 °C                            | LWT 13 °C   | LWT 15 °C   | LWT 18 °C   | LWT 20 °C   | LWT 22 °C   |
|----------|--------------------------------------|---|---|---|---|---|
|          |                                      |   | Capacity (kW)   |   |   |   |
| 4.00     | 4.00                                 | 4.00  | 4.00  | 4.00  | 4.00  | 4.00  |
| 4.00     | 4.00                                 | 4.00  | 4.00  | 4.00  | 4.00  | 4.00  |
| 4.00     | 4.00                                 | 4.00  | 4.00  | 4.00  | 4.00  | 4.00  |
| 4.00     | 4.00                                 | 4.00  | 4.00  | 4.00  | 4.00  | 4.00  |
| 4.00     | 4.00                                 | 4.00  | 4.00  | 4.00  | 4.00  | 4.00  |
| 4.00     | 4.00                                 | 4.00  | 4.00  | 4.00  | 4.00  | 4.00  |
|          | 4.00<br>4.00<br>4.00<br>4.00<br>4.00 | 4.00 4.00<br>4.00 4.00<br>4.00 4.00<br>4.00 4.00<br>4.00 4.00 | 4.00     4.00       4.00     4.00       4.00     4.00       4.00     4.00       4.00     4.00       4.00     4.00       4.00     4.00 | Capacity (kW)           4.00         4.00         4.00         4.00           4.00         4.00         4.00         4.00           4.00         4.00         4.00         4.00           4.00         4.00         4.00         4.00           4.00         4.00         4.00         4.00 | Capacity (kW)           4.00         4.00         4.00         4.00           4.00         4.00         4.00         4.00           4.00         4.00         4.00         4.00           4.00         4.00         4.00         4.00           4.00         4.00         4.00         4.00           4.00         4.00         4.00         4.00 | Capacity (kW)           4.00         4.00         4.00         4.00         4.00           4.00         4.00         4.00         4.00         4.00           4.00         4.00         4.00         4.00         4.00           4.00         4.00         4.00         4.00         4.00           4.00         4.00         4.00         4.00         4.00           4.00         4.00         4.00         4.00         4.00 |

#### HU061MR U20 + HN0613T NK0

| Outdoor Temp. | LWT 7 °C | LWT 10 °C | LWT 13 °C | LWT 15 °C     | LWT 18 °C | LWT 20 °C | LWT 22 °C |
|---------------|----------|-----------|-----------|---------------|-----------|-----------|-----------|
| [°C DB]       |          |           |           | Capacity (kW) |           |           |           |
| 10            | 6.00     | 6.00      | 6.00      | 6.00          | 6.00      | 6.00      | 6.00      |
| 20            | 6.00     | 6.00      | 6.00      | 6.00          | 6.00      | 6.00      | 6.00      |
| 30            | 6.00     | 6.00      | 6.00      | 6.00          | 6.00      | 6.00      | 6.00      |
| 35            | 6.00     | 6.00      | 6.00      | 6.00          | 6.00      | 6.00      | 6.00      |
| 40            | 5.74     | 5.81      | 5.87      | 5.91          | 6.00      | 6.00      | 6.00      |
| 45            | 5.48     | 5.61      | 5.73      | 5.81          | 5.94      | 6.00      | 6.00      |
|               |          |           |           |               |           |           |           |


#### Not

- 1. DB : Dry Bulb Temperature (°C), LWT : Leaving Water Temperature (°C),
- LPM: Liters Per Minute (l/min), TC: Total Capacity (kW)
- Direct interpolation is permissible. Do not extrapolate.
- 3. Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
- In accordance with the test standard (or nations), the rating will vary slightly.
- $\label{eq:continuous} \textbf{4.} \, \textbf{The shaded areas are not guaranteed continuous operation}.$


# THERMA V R32 SPLIT COMBI UNIT (4/6 kW)

Drawings [Unit: mm]


HU041MR U20 / HU061MR U20




Top view



3D view

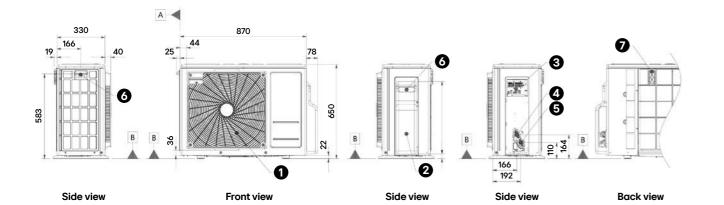


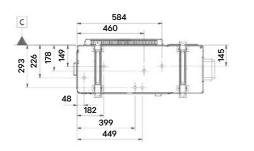

Bottom view


| No. | Part Name                                | Description |
|-----|--|-------------|
| 1   | Air Outlet                               | -           |
| 2   | Control Cover & SVC Valve Cover          | -           |
| 3   | Power and Communication Cable Connection | -           |
| 4   | Gas Pipe Connection                      | Flare Joint |
| 5   | Liquid Pipe Connection                   | Flare Joint |
| 6   | Handle                                   | -           |
| 7   | Intake Air Temperature Sensor Cover      | -           |

THERMA V<sub>TM</sub> (R32) Split

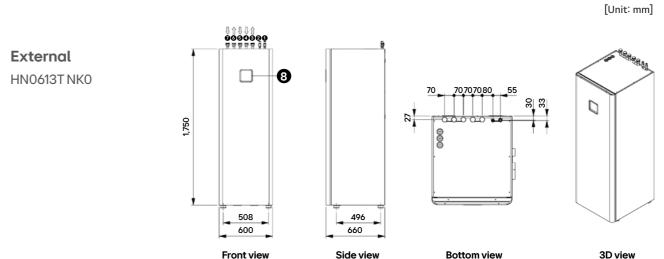

| No. | Part Name                       | Description  |  |  |  |  |
|-----|---------------------------------|--|--|--|--|--|
| 1   | Refrigerant Gas Pipe            | SAE 1/2" <sup>1)</sup>                                   |  |  |  |  |
| 2   | Refrigerant Liquid Pipe         | SAE 1/4" <sup>1)</sup>                                   |  |  |  |  |
| 3   | Heating Circuit Outlet Pipe     |  |  |  |  |  |
| 4   | Heating Circuit Inlet Pipe      |  |  |  |  |  |
| 5   | Domestic Cold Water Inlet Pipe  | Female G1" according to ISO228-1 (Parallel pipe threads) |  |  |  |  |
| 6   | Domestic Cold Water Outlet Pipe |  |  |  |  |  |
| 7   | DHW Re-circulation Pipe         |  |  |  |  |  |
| 8   | Control Panel                   | Built-in Remote Controller                               |  |  |  |  |

1) When connecting the refrigerant pipe, the adaptors provided with the outdoor unit must be installed on the connection of the indoor units.

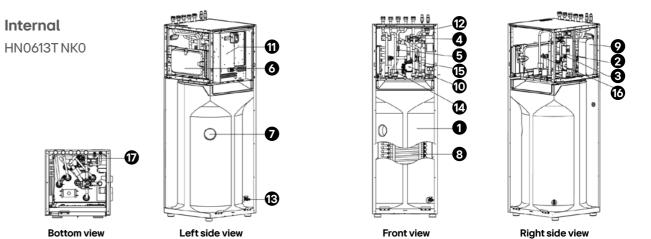

| No. | Part Name        | Description                        | No. | Part Name    | Description                   |
|-----|------------------|------------------------------------|-----|--------------|-------------------------------|
| 1   | DHW tank         | Domestic Hot Water Tank (200L)     | 10  | Water Pump   | Main Circulation Pump         |
| 2   | Heater           | Electric Heater (3 kW)             | 11  | Control Box  | PCB'A and Terminal Blocks     |
| 3   | Flow sensor      | Flow Metering Sensor               | 12  | Air Vent     | For Air Purging               |
| 4   | 3 Way Valve      | For DHW / Heating                  | 13  | Drain Cock 1 | Valve for DHW Tank Drain      |
| 5   | Pressure Sensor  | Pressure Sensor                    | 14  | Drain Cock 2 | Valve for Water Circuit Drain |
| 6   | Expansion Vessel | 8 $\ell$ for Heating Circuit       | 15  | Strainer     | For Water Circuit             |
| 7   | DHW Tank Sensor  | Temperature Sensor                 | 16  | Safety Valve | For DHW (10 Bar)              |
| 8   | Heat Exchanger 1 | Coil Heat Exchange (Water / DHW)   | 17  | Safety Valve | For Water Circuit (3 Bar)     |
| 9   | Heat Exchanger 2 | Plate Heat Exchange (Ref. / Water) |     |              |                               |

# THERMA V R32 SPLIT COMBI UNIT (5/7/9kW)

#### Outdoor unit

HU051MR U44

HU071MR U44

HU091MR U44

#### Indoor unit

HN0913T NK0






















#### **Key Components**

Combi Unit

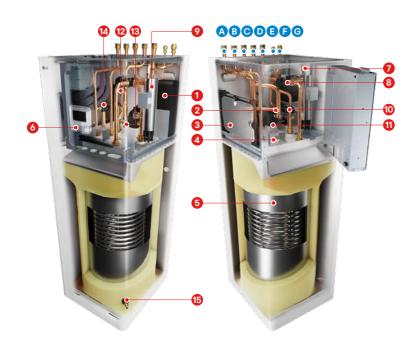

#### Components

- 1 Plate heat exchanger (ref. / water)
- 2 Strainer
- 3 Expansion tank for heating (8 l)
- 4 Reserved space for DHW expansion tank
- **5** DHW storage tank (stainless steel, 200  $\ell$ ) with internal coil type heat exchanger
- 6 Standard III remote controller 1) (air temp. sensor integrated)
- 7 Air vent valve
- 8 3 Way diverting valve (DC)
- Electric back-up heater (3 kW)
- Water flow sensor
- 1 Main water pump with air vent and safety valve (water circuit, 3 bar)
- 12 Water pressure sensor
- 13 Drain valve for water circuit
- 14 Safety valve (DHW tank, 10 bar)
- 15 Drain valve for DHW tank

1) Temperature control class (ERP class): V

#### Connections

- A DHW recirculation pipe (female G1" \*)
- B Domestic hot water outlet pipe (female G1" \*)
- O Domestic cold water inlet pipe (female G1" \*)
- D Heating circuit inlet pipe (female G1" \*)
- Heating circuit outlet pipe (female G1" \*)
- F Refrigerant liquid pipe (SAE 3/8") **G** Refrigerant gas pipe (SAE 5/8")
- \* According to ISO 228-1 (parallel pipe threads)



#### **Product Specification**

| Efficiency Data  | Unit                   | 5 kW (1 Ø) | 7 kW (1 Ø)  | 9 kW (1 Ø)  |             |
|--|------------------------|------------|-------------|-------------|-------------|
| Seasonal space heating eff. class (35°C / 55               | °C)                    | -          | A+++ / A++  | A+++ / A++  | A+++ / A++  |
| Seasonal space heating efficiency ( $\eta_s$ ) (35°C       | / 55°C)                | %          | 183 / 126   | 183 / 126   | 183 / 126   |
| SCOP (35°C / 55°C)   |                        | -          | 4.65 / 3.23 | 4.65 / 3.23 | 4.65 / 3.23 |
| Declared load profile, average climate                     |                        | -          | L           | L           | XL          |
| Water heating efficiency (η <sub>WH</sub> ), average clim  | ate                    | %          | 133         | 133         | 140         |
| COP <sub>DHW</sub> , average climate                       |                        | -          | 3.15        | 3.15        | 3.40        |
| Water heating eff. class, average climate                  |                        | -          | A+          | A+          | A÷          |
| Annual energy consumption, DHW (average                    | climate)               | kWh        | 770         | 770         | 1,196       |
| Heating up time acc. to EN 16147 (average                  | climate)               | h/mm       | 1h 44       | 1h 44       | 1h 44       |
| Max. usable water volume acc. to EN 16147                  | (average climate)      | l          | 250         | 250         | 250         |
| Declared load profile, warmer climate                      |                        | -          | L           | L           | XL          |
| Water heating efficiency (η <sub>WH</sub> ), warmer clima  | ate                    | %          | 160         | 160         | 170         |
| COP <sub>DHW</sub> , warmer climate                        |                        | -          | 3.69        | 3.69        | 4.10        |
| Water heating eff. class, warmer climate                   |                        |            | A++         | A++         | A++         |
| Declared load profile, colder climate                      |                        | -          | L           | L           | XL          |
| Water heating efficiency (η <sub>WH</sub> ), colder climat | e                      | %          | 110         | 110         | 115         |
| COP <sub>DHW</sub> , colder climate                        |                        | -          | 2.54        | 2.54        | 2.65        |
| Water heating eff. class, colder climate                   |                        | -          | А           | A           | А           |
| Sound power level (outdoor unit)                           | Rated / low noise mode | dB(A)      | 60 / 58     |             |             |
| Sound pressure level at 5m (outdoor unit)                  | Rated / low noise mode | dB(A)      | 38 / 36     |             |             |
| Sound power level (indoor unit)                            | Rated                  | dB(A)      | 42          |             |             |
| Sound pressure level at 1m (indoor unit)                   | Rated                  | dB(A)      |             | 34          |             |
| Nominal Capacity and COP/EER                               |                        |            |             |             |             |
| Air +7°C / water +35°C                                     | Heating capacity / COP | kW / -     | 5.50 / 4.90 | 7.00 / 4.90 | 9.00 / 4.65 |
| Air +2°C / water +35°C                                     | Heating capacity / COP | kW / -     | 3.30 / 3.52 | 4.20 / 3.51 | 5.40 / 3.50 |
| Air +7°C / water +55°C                                     | Heating capacity / COP | kW / -     | 5.50 / 2.70 | 5.50 / 2.70 | 5.50 / 2.70 |
| Air +35°C / water +18°C                                    | Cooling capacity / EER | kW / -     | 5.50 / 4.60 | 7.00 / 4.50 | 9.00 / 4.20 |
| Air +35°C / water +7°C                                     | Cooling capacity / EER | kW / -     | 5.50 / 2.80 | 7.00 / 2.70 | 9.00 / 2.60 |

- 1. Due to our policy of innovation, some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes. Especially the power cable and circuit breaker should be selected in accordance with that,
- 3. Sound power level is measured on the rated condition in accordance with ISO 9614 standard. Sound pressure level is converted from sound power level based on a tonality penalty of 0 dB and installation in free-field. The directivity index (Q) is assumed as 2. Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is in accordance with EN12102-1 under condition of EN14825.
- 4. Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation.
- 5. This product contains fluorinated greenhouse gases.
- $6. \ All \ installation \ sites \ must \ be \ equipped \ with \ an \ earth \ leakage \ circuit \ breaker \ (ELCB).$
- 7. DHW 55 ~ 80  $^{\circ}\text{C}$  Operating is available only when the booster heater is operating.

THERMA V<sub>m</sub> Split

# **THERMA V R32 SPLIT** COMBI UNIT (5/7/9kW)

#### **Product Specification**

| Outdoor Units                                  |   | Unit     | HU051MR U44 HU071MR U44 HU091MR U                        |  |  |  |
|--|---|----------|--|--|--|--|
| Operation range                                | Heating & DHW (Min. ~ Max.)               | °C       | -25 ~ 35   |  |  |  |
| (outdoor air temperature)                      | Cooling (Min. ~ Max.)                     | °C       | 5 ~ 48   |  |  |  |
|  | Туре                                      | -        | R32  |  |  |  |
| Refrigerant                                    | GWP                                       | -        | 675  |  |  |  |
|  | Precharged amount                         | g        | 1,500  |  |  |  |
|  | Gas / Liquid                              | mm(inch) | Ø 15.88 (5/8) / Ø 9.52 (3/8)                             |  |  |  |
|  | Length standard / Max.                    |          | 5 / 50   |  |  |  |
| Piping connections (water)                     | Level difference Max.                     |          | 30   |  |  |  |
|  | Max. length without additional charge     |          | 10   |  |  |  |
|  | Mass of additional ref. charge            |          | 40   |  |  |  |
| Dimension                                      | HxWxD                                     | mm       | 834 x 950 x 330  |  |  |  |
| Weight   | Net                                       | kg       | 60.0   |  |  |  |
| Exterior                                       | Color of chassis / RAL code               | -        | Warm gray / RAL 7044                                     |  |  |  |
|  | Voltage, phase, frequency                 | V, Ø, Hz | 220 - 240, 1, 50   |  |  |  |
| Power supply                                   | Standby power consumption                 | W        | 20   |  |  |  |
|  | Recommended circuit breaker               | А        | 20 25 30   |  |  |  |
| Indoor Units                                   |   | Unit     | HN0913T NK0  |  |  |  |
|  | Heating (Min. ~ Max.)                     | °C       | 15 ~ 65  |  |  |  |
| Operation range<br>(leaving water temperature) | Cooling (Min. ~ Max.)                     | °C       | 5 ~ 27   |  |  |  |
|  | DHW (Min. ~ Max.)                         | °C       | 15 ~ 80  |  |  |  |
|  | Volume                                    | l        | 200  |  |  |  |
| Domestic hot water tank                        | Tank material                             | -        | Duplex stainless steel                                   |  |  |  |
|  | Standby losses                            | -        | 60   |  |  |  |
| Expansion vessel (heating circuit)             | Volume                                    | l        | 8  |  |  |  |
|  | Capacity combination                      | kW       | 3.0  |  |  |  |
| Electric because                               | Heating steps                             | Steps    | 1  |  |  |  |
| Electric heater                                | Power supply                              | V, Ø, Hz | 220 - 240, 1, 50   |  |  |  |
|  | Rated running current                     | А        | 13.0   |  |  |  |
|  | Inlet / outlet diameter for space heating | inch     |  |  |  |  |
| Piping connections (water)                     | Inlet / outlet diameter for DHW           | inch     | Female G1" according to ISO228-1 (parallel pipe threads) |  |  |  |
|  | Recirculation                             | inch     |  |  |  |  |
| Piping connections (ref.)                      | Gas / Liquid                              | mm(inch) | Ø 15.88 (5/8) / Ø 9.52 (3/8)                             |  |  |  |
| Dimension                                      | H x W x D                                 | mm       | 1,750 x 600 x 660  |  |  |  |
| Weight   | Net                                       | kg       | 118.0  |  |  |  |
| Exterior                                       | Color / RAL code                          | -        | White / RAL 9016   |  |  |  |

- ${\it 1.}\ {\it Due\ to\ our\ policy\ of\ innovation}, some\ specifications\ may\ be\ changed\ without\ notification.$
- 2. Wiring cable size must comply with the applicable local and national codes. Especially the power cable and circuit breaker should be selected in accordance with that.

  3. Sound power level is measured on the rated condition in accordance with ISO 9614 standard. Sound pressure level is converted from sound power level based on a tonality
- penalty of 0 dB and installation in free-field. The directivity index (Q) is assumed as 2. Therefore, these values can be increased owing to ambient conditions during operation.

  Rated sound power level is in accordance with EN12102-1 under condition of EN14825.
- 4. Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation.
- 5. This product contains fluorinated greenhouse gases.
- 6. All installation sites must be equipped with an earth leakage circuit breaker (ELCB).
  7. DHW 55 ~ 80°C Operating is available only when the booster heater is operating.



THERMA V<sub>m</sub> (R22) Split

# THERMA V R32 SPLIT COMBI UNIT (5/7/9kW)

#### **Performance Table for Heating Operation**

Maximum heating capacity (including defrost effect)

#### HU051MR U44 + HN0913T NK0

| Outdoor Temp. | LWT 30 °C     | LWT 35 °C | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C |
|---------------|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| [°C DB]       | Capacity (kW) |           |           |           |           |           |           |           |
| -25           | 4.02          | 3.90      | 3.78      | 3.66      | -         | -         | -         | -         |
| -20           | 4.64          | 4.51      | 4.38      | 4.26      | 4.13      | -         | -         | -         |
| -15           | 5.26          | 5.12      | 4.99      | 4.85      | 4.72      | 4.58      | -         | -         |
| -7            | 5.50          | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | -         |
| -4            | 5.50          | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | -         |
| -2            | 5.50          | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | -         |
| 2             | 5.50          | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      |
| 7             | 5.50          | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      |
| 10            | 5.50          | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      |
| 15            | 5.50          | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      |
| 18            | 5.50          | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      |
| 20            | 5.50          | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      |
| 35            | 5.50          | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      | 5.50      |

#### HU071MR U44 + HN0913T NK0

| Outdoor Temp. | LWT 30 °C     | LWT 35 °C | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C |
|---------------|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| [°C DB]       | Capacity (kW) |           |           |           |           |           |           |           |
| -25           | 5.00          | 4.85      | 4.71      | 4.56      | -         | -         | -         | -         |
| -20           | 5.58          | 5.43      | 5.27      | 5.11      | 4.95      | -         | -         | -         |
| -15           | 6.17          | 6.00      | 5.83      | 5.66      | 5.49      | 5.32      | -         | -         |
| -7            | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 6.49      | -         |
| -4            | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | -         |
| -2            | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | -         |
| 2             | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |
| 7             | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |
| 10            | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |
| 15            | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |
| 18            | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |
| 20            | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |
| 35            | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |

#### HU091MR U44 + HN0913T NK0

| Outdoor Temp. | LWT 30 °C | LWT 35 °C     | LWT 40 °C | LWT 45 °C | LWT 50 °C | LWT 55 °C | LWT 60 °C | LWT 65 °C |  |
|---------------|-----------|---------------|-----------|-----------|-----------|-----------|-----------|-----------|--|
| [°C DB]       |           | Capacity (kW) |           |           |           |           |           |           |  |
| -25           | 6.40      | 6.20          | 6.00      | 5.80      | -         | -         | -         | -         |  |
| -20           | 7.23      | 7.00          | 6.77      | 6.54      | 6.31      | -         | -         | -         |  |
| -15           | 8.06      | 7.80          | 7.54      | 7.28      | 7.02      | 7.10      | -         | -         |  |
| -7            | 9.00      | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 8.60      | -         |  |
| -4            | 9.00      | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | -         |  |
| -2            | 9.00      | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | -         |  |
| 2             | 9.00      | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |  |
| 7             | 9.00      | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |  |
| 10            | 9.00      | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |  |
| 15            | 9.00      | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |  |
| 18            | 9.00      | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |  |
| 20            | 9.00      | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |  |
| 35            | 9.00      | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      | 7.95      |  |

#### Note

- 1. DB : Dry Bulb Temperature (°C), LWT : Leaving Water Temperature (°C),
- LPM: Liters Per Minute (2/min), TC: Total Capacity (kW)
- 2. Direct interpolation is permissible. Do not extrapolate.
- 3. Measuring procedure follows EN-14511.

   Rated values are based on standard conditions and it can be found on specifications.
- Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
- In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

# Performance Table for Cooling Operation

Maximum cooling capacity

#### HU051MR U44 + HN0913T NK0

| LWT 7 °C | LWT 10 °C                            | LWT 13 °C   | LWT 15 °C   | LWT 18 °C   | LWT 20 °C  | LWT 22 °C  |
|----------|--------------------------------------|---|---|---|--|--|
|          |                                      |   | Capacity (kW)   |   |  |  |
| 5.50     | 5.50                                 | 5.50  | 5.50  | 5.50  | 5.50   | 5.50   |
| 5.50     | 5.50                                 | 5.50  | 5.50  | 5.50  | 5.50   | 5.50   |
| 5.50     | 5.50                                 | 5.50  | 5.50  | 5.50  | 5.50   | 5.50   |
| 5.50     | 5.50                                 | 5.50  | 5.50  | 5.50  | 5.50   | 5.50   |
| 5.32     | 5.34                                 | 5.35  | 5.37  | 5.38  | 5.40   | 5.41   |
| 5.13     | 5.17                                 | 5.21  | 5.23  | 5.27  | 5.29   | 5.32   |
|          | 5.50<br>5.50<br>5.50<br>5.50<br>5.32 | 5.50     5.50       5.50     5.50       5.50     5.50       5.50     5.50       5.32     5.34 | 5.50     5.50       5.50     5.50       5.50     5.50       5.50     5.50       5.50     5.50       5.50     5.50       5.32     5.34       5.35     5.35 | Capacity (kW)           5.50         5.50         5.50         5.50           5.50         5.50         5.50         5.50           5.50         5.50         5.50         5.50           5.50         5.50         5.50         5.50           5.32         5.34         5.35         5.37 | Capacity (kW)           5.50         5.50         5.50         5.50           5.50         5.50         5.50         5.50           5.50         5.50         5.50         5.50           5.50         5.50         5.50         5.50           5.50         5.50         5.50         5.50           5.32         5.34         5.35         5.37         5.38 | Capacity (kW)           5.50         5.50         5.50         5.50         5.50           5.50         5.50         5.50         5.50         5.50           5.50         5.50         5.50         5.50         5.50           5.50         5.50         5.50         5.50         5.50           5.50         5.50         5.50         5.50         5.50           5.32         5.34         5.35         5.37         5.38         5.40 |

#### HU071MR U44 + HN0913T NK0

| Outdoor Temp. | LWT 7 °C | LWT 10 °C     | LWT 13 °C | LWT 15 °C | LWT 18 °C | LWT 20 °C | LWT 22 °C |  |  |  |
|---------------|----------|---------------|-----------|-----------|-----------|-----------|-----------|--|--|--|
| [°C DB]       |          | Capacity (kW) |           |           |           |           |           |  |  |  |
| 10            | 7.00     | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |  |  |  |
| 20            | 7.00     | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |  |  |  |
| 30            | 7.00     | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |  |  |  |
| 35            | 7.00     | 7.00          | 7.00      | 7.00      | 7.00      | 7.00      | 7.00      |  |  |  |
| 40            | 6.50     | 6.63          | 6.81      | 7.00      | 7.00      | 7.00      | 7.00      |  |  |  |
| 45            | 6.43     | 6.48          | 6.63      | 6.66      | 6.70      | 6.74      | 6.77      |  |  |  |

#### HU091MR U44 + HN0913T NK0

| Outdoor Temp. | LWT 7 °C | LWT 10 °C     | LWT 13 °C | LWT 15 °C | LWT 18 °C | LWT 20 °C | LWT 22 °C |  |  |  |
|---------------|----------|---------------|-----------|-----------|-----------|-----------|-----------|--|--|--|
| [°C DB]       |          | Capacity (kW) |           |           |           |           |           |  |  |  |
| 10            | 9.00     | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |  |  |  |
| 20            | 9.00     | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |  |  |  |
| 30            | 9.00     | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |  |  |  |
| 35            | 9.00     | 9.00          | 9.00      | 9.00      | 9.00      | 9.00      | 9.00      |  |  |  |
| 40            | 8.10     | 8.10          | 8.70      | 9.00      | 9.00      | 9.00      | 9.00      |  |  |  |
| 45            | 7.50     | 7.70          | 7.80      | 7.90      | 8.00      | 8.10      | 8.20      |  |  |  |

#### Not


- 1. DB : Dry Bulb Temperature (°C), LWT : Leaving Water Temperature (°C),
- LPM: Liters Per Minute (\$\ell/\text{min}), TC: Total Capacity (kW)
- Direct interpolation is permissible. Do not extrapolate.
   Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
- In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.


# THERMA V R32 SPLIT COMBI UNIT (5/7/9 kW)


THERMA V... (Split


Drawings [Unit: mm]


HU051MR U44 / HU071MR U44 / HU091MR U44





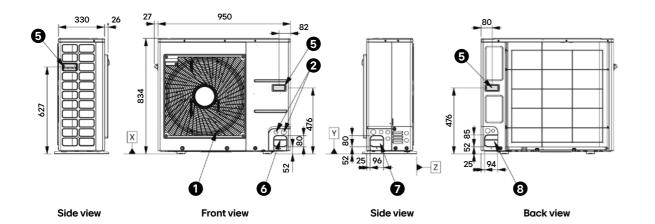

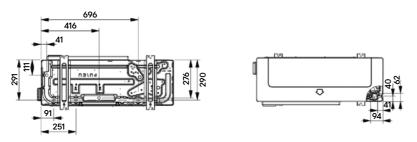





Internal front view

| Bottom view | Internal top view |
|-------------|-------------------|
|-------------|-------------------|

| No. | Part Name                          | Description |
|-----|------------------------------------|-------------|
| 1   | Air Outlet                         | -           |
| 2   | Power and Communication Cable Hole | -           |
| 3   | Gas Pipe Connection                | Flare Joint |
| 4   | Liquid Pipe Connection             | Flare Joint |
| 5   | Handle                             | -           |
| 6   | Pipe Routing Hole (Front)          | -           |
| 7   | Pipe Routing Hole (Side)           | -           |
| 8   | Pipe Routing Hole (Back)           | -           |

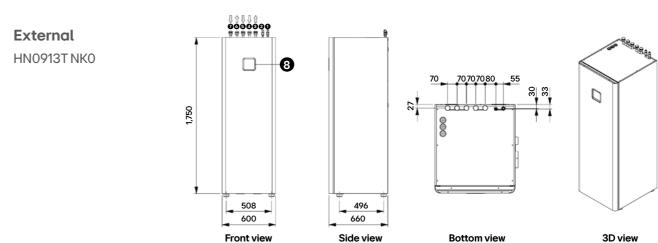

| No. | Part Name                       | Description  |
|-----|---------------------------------|--|
| 1   | Refrigerant Gas Pipe            | SAE 5/8"   |
| 2   | Refrigerant Liquid Pipe         | SAE 5/8"   |
| 3   | Heating Circuit Outlet Pipe     |  |
| 4   | Heating Circuit Inlet Pipe      |  |
| 5   | Domestic Cold Water Inlet Pipe  | Female G1" according to ISO228-1 (Parallel pipe threads) |
| 6   | Domestic Cold Water Outlet Pipe |  |
| 7   | DHW Re-circulation Pipe         |  |
| 8   | Control Panel                   | Built-in Remote Controller                               |

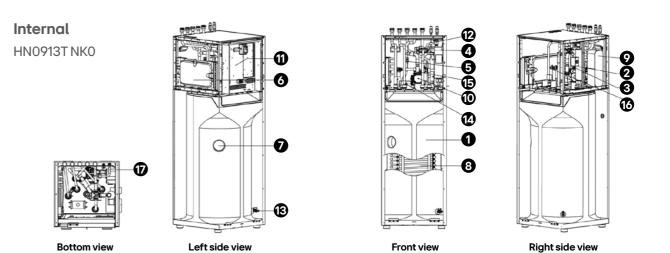

| No. | Part Name        | Description                        | No. | Part Name    | Description                   |
|-----|------------------|------------------------------------|-----|--------------|-------------------------------|
| 1   | DHW tank         | Domestic Hot Water Tank (200L)     | 10  | Water Pump   | Main Circulation Pump         |
| 2   | Heater           | Electric Heater (3 kW)             | 11  | Control Box  | PCB'A and Terminal Blocks     |
| 3   | Flow sensor      | Flow Metering Sensor               | 12  | Air Vent     | For Air Purging               |
| 4   | 3 Way Valve      | For DHW / Heating                  | 13  | Drain Cock 1 | Valve for DHW Tank Drain      |
| 5   | Pressure Sensor  | Pressure Sensor                    | 14  | Drain Cock 2 | Valve for Water Circuit Drain |
| 6   | Expansion Vessel | 8 $\ell$ for Heating Circuit       | 15  | Strainer     | For Water Circuit             |
| 7   | DHW Tank Sensor  | Temperature Sensor                 | 16  | Safety Valve | For DHW (10 Bar)              |
| 8   | Heat Exchanger 1 | Coil Heat Exchange (Water / DHW)   | 17  | Safety Valve | For Water Circuit (3 Bar)     |
| 9   | Heat Exchanger 2 | Plate Heat Exchange (Ref. / Water) |     |              |                               |



#### **What is Heat Pump Water Heater**

A Heat Pump Water Heater (HPWH) is an advanced, energyefficient water heating solution that utilizes heat pump technology to heat water more sustainably than traditional water heaters. A heat pump water heater extracts ambient heat from the air and transfers it to the water, significantly reducing energy consumption and lower utility bills while providing reliable hot water for home.

Ideal for residential applications, these systems offer an ecoconscious alternative to traditional water heating methods, making them a smart choice for sustainable living.

#### **Key Features**

- Wide capacity range from 100 to 270  $\ell$  to suit various household members
- LG's unique design provides harmony in various installation places
- Energy class A+ applies to all models
- Simple installation due to no refrigerant piping work
- · Connect and control anytime, anywhere with LG ThinQ
- Max. water temperature up to 75°C (R290 models only, with heating element)
- Includes SG Ready function (SG Ready models only)







ThinQ

**Product Range** 

|                      | Description   | Model Name | Damani      |                  |  |
|----------------------|---------------|------------|-------------|------------------|--|
| Power                | Туре          | Volume     | Model Name  | Remark           |  |
|                      |               | 100 l      | WH10ESF0 HA |                  |  |
|                      | Round<br>Type | 150 l      | WH15ESF0 HA | 1                |  |
|                      |               | 200 l      | WH20ESF0 CA | SG Read<br>model |  |
| 1 Ø, 230 V,<br>50 Hz |               | 200 l      | WH20STR2 FA |                  |  |
|                      |               | 270 l      | WH27STR2 FA |                  |  |
|                      | Туре          | 200 l      | WH20S F5    | 1                |  |
|                      |               | 270 l      | WH27S F5    |                  |  |

### HIGHLIGHT OF HEAT PUMP WATER HEATER

Browse now Q

#### Stylish Design

#### **New White Essence Design**



#### **Differentiated Design**



#### **High Efficiency Operation**



- 1) COP test conditions are base on EN16147 and EN 12102
- 2) 100 / 150 $\ell$  models COP at air temperature 7°C and water temperature 10°C to 54°C with duct. 3) 200 / 270 $\ell$  models COP at air temperature 15°C and water temperature 10°C to 54°C with duct.
- 4) Profile M: WH10ESF0.HA
- 5) Profile L: WH15ESF0.HA / WH20ESF0.CA / WH20S.F5 / WH27S.F5 / WH20STR2.FA / WH27STR2.FA

#### **Comfortable Environment**


#### Experience Warmth in Perfect Silence



Since the noise level is below  $45 \, \mathrm{dB(A)}^{1)}$ , it provides a comfortable environment even in indoor installation scenes.

| Sound levels                            | F     | ound typ | Square type |       |       |
|---|-------|----------|-------------|-------|-------|
| Souria levels                           | 100 l | 150 l    | 200 l       | 200 l | 270 l |
| Sound power level [dB(A)] <sup>2)</sup> | 45    | 45       | 53          | 55    | 55    |
| Sound pressure level [dB(A)] 2) 3)      | 38    | 38       | 38          | 38    | 38    |

Users will hardly recognize the water heater operating, as it runs quietly and creates a calm, peaceful environment.

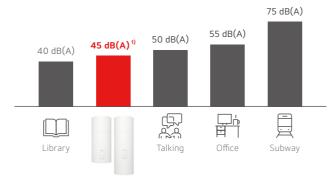

LG Heat Pump

1) Based on 100 / 150 l model (WH\*\*ESF0.HA)

172

- 2) Rated sound power / pressure level was measured on the rated condition in accordance with EN 12102-02 and ISO 3741
- 3) Sound pressure level measured at 2 m away from the unit

#### Convenience

#### Smart Control by LG ThinQ

Users can control their THERMA V via smart internet devices such as Android or iOS smartphones. With the LG ThinQ app, users can easily control and monitor the heat pump water heater, checking for current water temperatures, setting operating schedules and more.






#### **Intelligent Energy Management**

#### Smart Living Starts with SG Ready

The Heat Pump Water Heater is operated automatically according to the power supply status signals received from power supplying companies. It is minimizing energy costs and taking a step closer to achieving the ultimate smart home.

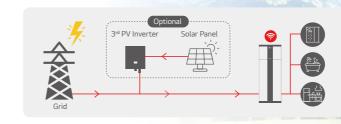

\* The SG Ready function is only available for models that support SG Ready. (Except the WH\*\*S,F5)

#### Easy to Use

#### **Choose Simple and Quick Comfort Mode**

Users can select from four operating modes, allowing for easy customization of the product to effectively meet their individual needs.





Auto mode

Heat pump mode



Turbo mode

Vacation mode





### THERMA V<sub>IM</sub> R290%

# HEAT PUMP WATER HEATER (100 / 150 / 200 l)




# Fits Perfectly with All Your Needs

The new refrigerant technology allows the unit to efficiently reach outlet temperatures of up to 75°C. Available in sizes ranging from 100 to 200 liters, the unit is developed to meet the capacity needs of each household. Designed with modern living in mind, the R290 Heat Pump Water Heater blends seamlessly into any indoor space.

#### **Key Features**

- Capacity range from 100, 150 and 200 &
- New round type design with essence white color
- Natural refrigerant R290 with low GWP (3)
- Connect and control anytime, anywhere with LG ThinQ
- Max. water temperature up to 75 °C with heating element
- Includes SG Ready function

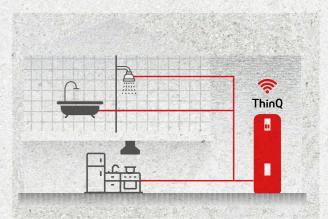

#### **Application**



#### Certifications



#### **Energy Label**








# THERMA V R290 HEAT PUMP WATER HEATER (100 / 150 l)

WH10ESF0 HA WH15ESF0 HA



#### **Key Components**

Heat Pump Water Heater (Wall Mount)

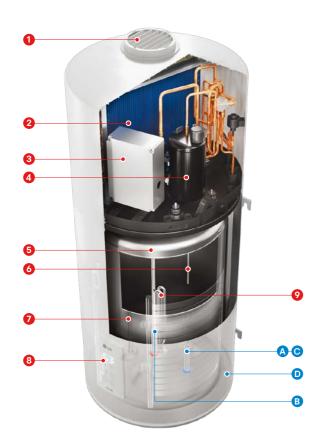

#### Components

- 1 Duct connector
- 2 Evaporator
- 3 Control box
- 4 Compressor
- Water tankICCP 1) (Ti)
- 7 Anode road (Mg)
- 8 Display
- Electric heater

#### Connections

- A Water inlet (G 1/2")
- B Water outlet (G 1/2")
- Pressure relief valve (accessory)
- D Condensate drain (G 3/4")

#### **Product Specification**

| Indoor Units        |   | Unit     | WH10ESF0.HA              | WH15ESF0.HA                  |  |
|---------------------|---|----------|--------------------------|------------------------------|--|
| Capacity            | Volume (nominal)                            | l        | 100                      | 150                          |  |
|                     | Туре  |          | R2                       | 90                           |  |
| Refrigerant         | GWP   | -        | :                        | 3                            |  |
|                     | Pre-charged amount                          | g        | 14                       | 48                           |  |
|                     | COP (7°C)                                   | -        | 2.70                     | 2.95                         |  |
| Efficiency          | Energy class (7°C)                          | -        | A+                       | A+                           |  |
|                     | Annual energy consumption (7°C)             | kWh      | 438                      | 812                          |  |
|                     | Operation range                             | °C       | -7 -                     | - 48                         |  |
|                     | Max. water temperature with heat pump       | °C       | 6                        | 0                            |  |
|                     | Max. water temperature with heating element | °C       | 7                        | 5                            |  |
|                     | Heating element                             | kW       | 1.2                      | 1.2                          |  |
| Performance         | Sound power level                           | dB(A)    | 45                       | 45                           |  |
|                     | Sound pressure level at 2 m (Auto mode)     | dB(A)    | 38                       | 38                           |  |
|                     | V40   | l        | 110                      | 173                          |  |
|                     | Load profile                                | -        | М                        | L                            |  |
|                     | Operation mode                              | -        | Turbo / Auto / Heat pump | / Vacation / Anti legionella |  |
| Compressor          | Туре  | -        | Constant speed rotary    |                              |  |
| Piping connections  | Water inlet / outlet                        | inch     | G 1                      | /2"                          |  |
| Dimension           | HxWxD                                       | mm       | 1,280 x 540 x 565        | 1,620 x 540 x 565            |  |
| Weight              | Net   | kg       | 64                       | 75                           |  |
| Exterior            | Color of chassis / RAL code                 | -        | Essence whit             | e / RAL 9003                 |  |
| Safety valve        | Туре  | -        | Pressure r               | relief valve                 |  |
| IP Class            |   | -        | IP.                      | X4                           |  |
| Anode type          |   | -        | Mg +                     | ICCP <sup>1)</sup>           |  |
| Tank material       |   | -        | Enamel                   | ed steel                     |  |
|                     | Voltage, phase, frequency                   | V, Ø, Hz | 230,                     | 1, 50                        |  |
| Power supply        | Recommended circuit breaker                 | А        | 1                        | 6                            |  |
|                     | Wi-Fi (ThinQ)                               | -        | (                        | )                            |  |
| Additional function | SG Ready                                    | -        | 0                        |                              |  |

<sup>1)</sup> Impressed current cathodic protection


# THERMA V R290 HEAT PUMP WATER HEATER (200 l)

WH20ESF0 CA



#### **Key Components**

Heat Pump Water Heater (Floor Standing)

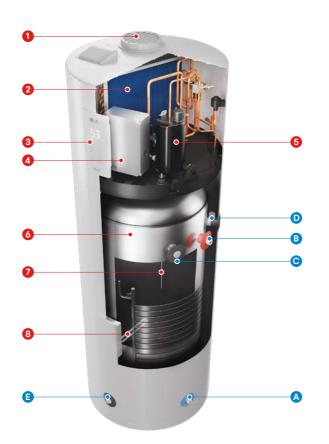

#### Components

- 1 Duct connector
- 2 Evaporator
- 3 Display
- 4 Control box5 Compressor
- 6 Water tank
- 7 ICCP 1) (Ti)
- 8 Electric heater

#### Connections

- A Water inlet (G 3/4")
- B Water outlet (G 3/4")
- T&P relief valve (accessory)
- O Condensate drain (G 3/4")
- Drain valve (accessory)

#### **Product Specification**


| Indoor Units        |   |          | WH20ESF0.CA   |  |  |
|---------------------|---|----------|---|--|--|
| Capacity            | Volume (nominal)                            | l        | 200   |  |  |
|                     | Туре  | -        | R290  |  |  |
| Refrigerant         | GWP   | -        | 3   |  |  |
|                     | Pre-charged amount                          | g        | 150   |  |  |
|                     | COP (15°C)                                  | -        | 3.20  |  |  |
| Efficiency          | Energy class (15°C)                         | -        | A+  |  |  |
|                     | Annual energy consumption (15°C)            | kWh      | 770   |  |  |
|                     | Operation range                             | °C       | -7 ~ 48   |  |  |
|                     | Max. water temperature with heat pump       | °C       | 60  |  |  |
|                     | Max. water temperature with heating element | °C       | 75  |  |  |
|                     | Heating element                             | kW       | 2.0   |  |  |
| Performance         | Sound power level                           | dB(A)    | 53  |  |  |
|                     | Sound pressure level at 2 m (Auto mode)     | dB(A)    | 38  |  |  |
|                     | V40   | l        | 260   |  |  |
|                     | Load profile                                | -        | L   |  |  |
|                     | Operation mode                              | -        | Turbo / Auto / Heat pump / Vacation / Anti legionella |  |  |
| Compressor          | Туре  | -        | Constant speed rotary                                 |  |  |
| Piping connections  | Water inlet / outlet                        | inch     | G 3/4"  |  |  |
| Dimension           | HxWxD                                       | mm       | 1,708 x 600 x 608                                     |  |  |
| Weight              | Net   | kg       | 92  |  |  |
| Exterior            | Color of chassis / RAL code                 | -        | Essence white / RAL 9003                              |  |  |
| Safety valve        | Туре  | -        | T&P relief valve                                      |  |  |
| IP Class            |   | -        | IPX1  |  |  |
| Anode type          |   | -        | ICCP <sup>1)</sup>                                    |  |  |
| Tank material       |   | -        | Enameled steel  |  |  |
| Davier aventy       | Voltage, phase, frequency                   | V, Ø, Hz | 230, 1, 50  |  |  |
| Power supply        | Recommended circuit breaker                 | А        | 16  |  |  |
| Additional function | Wi-Fi (ThinQ)                               | -        | 0   |  |  |
| Auditional function | SG Ready                                    | -        | 0   |  |  |


<sup>1)</sup> Impressed current cathodic protection


# THERMA V R290 HEAT PUMP WATER HEATER (100 / 150 / 200 l)


Drawings [Unit: mm]

WH10ESF0 HA WH15ESF0 HA WH20ESF0 CA

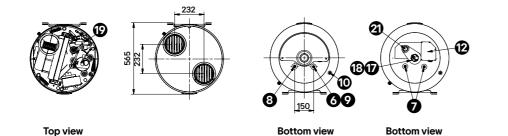

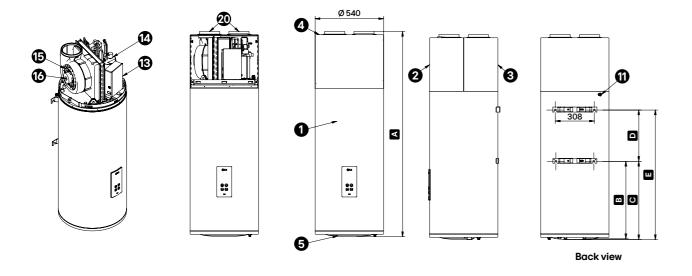

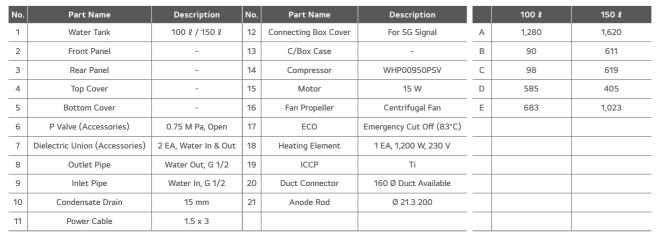

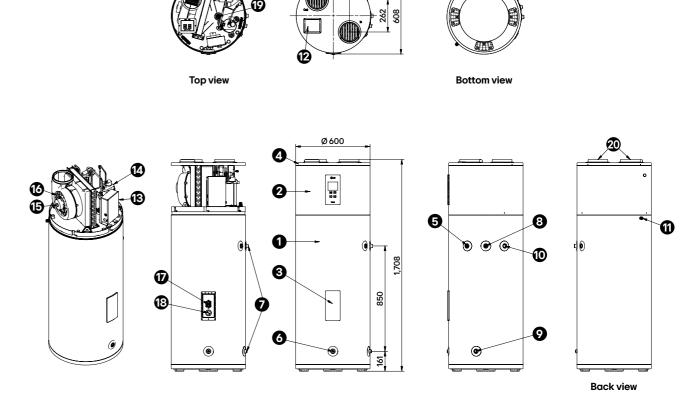

| No. | Part Name                      | Description                               |      | Part Name            | Description              |
|-----|--------------------------------|---|------|----------------------|--------------------------|
| 1   | Water Tank                     | 200 ℓ                                     | 11   | Power Cable          | 1.5 x 3                  |
| 2   | Front Panel                    | -   | 12   | Connecting Box Cover | For SG Signal            |
| 3   | Heater Cover                   | -   | - 13 |                      | -                        |
| 4   | Top Cover                      | -   | 14   | Compressor           | WHP01750PSV              |
| 5   | T/P Valve (Accessories)        | P Valve (Accessories) 1.0 M Pa, 80°C Open |      | Motor                | 30 W                     |
| 6   | Drain Valve (Accessories)      | ) G 3/4                                   |      | Fan Propeller        | Centrifugal Fan          |
| 7   | Dielectric Union (Accessories) | 2 EA, Water In & Out                      | 17   | ECO                  | Emergency Cut Off (90°C) |
| 8   | Outlet Pipe                    | Water Out, G 3/4                          | 18   | Heating Element      | 1 EA, 2,000 W, 230 V     |
| 9   | Inlet Pipe                     | Water In, G 3/4                           | 19   | ICCP                 | Ti                       |
| 10  | Condensate Drain               | 19 mm                                     | 20   | Duct Connector       | 160 Ø Duct Available     |







# **HEAT PUMP WATER HEATER** (200 / 270 l)









#### **Perfect Fit Maximum Efficiency**

Featuring a unique and elegant design, the R134a Heat Pump Water Heater is available in two capacity ranges of 200 and 270 l. It features outstanding efficiency and low noise thanks to the dual inverter compressor, and has excellent connectivity and controllability such as SG ready and LG ThinQ.

#### **Key Features**

- Capacity range from 200, 270 &
- LG's unique square design with luxury silver color
- High efficiency with dual inverter compressor
- Connect and control anytime, anywhere with LG ThinQ
- Fast hot water production using two heating elements in
- Includes SG Ready function (SG Ready models only)
- Red Dot and iF Design Award Winner in 2020



#### **Application**



#### Certifications





1) WH20S.F5 / WH27S.F5 2) WH20STR2.FA / WH27STR2.FA

#### **Energy Label**





200 / 270 &

# THERMA V R134a HEAT PUMP WATER HEATER (200 / 270 l)


WH20STR2FA<sup>1)</sup> WH27STR2 FA<sup>1)</sup> WH20S F5 WH27S F5



1) Available SG ready function

#### **Key Components**

**Heat Pump Water Heater** 

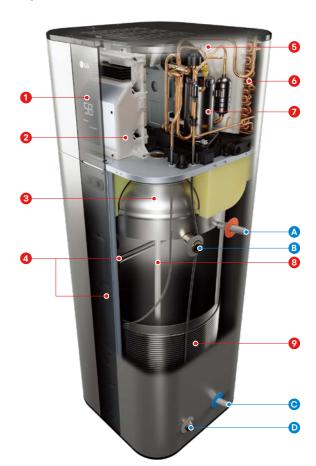

#### Components

- 1 Display screen
- 2 Inverter drive
- 3 Water tank
- 4 Electric heaters, 2 x 2 kW
- Fan
- 6 Evaporator
- 7 Dual inverter compressor
- 8 Anode (ICCP 1)
- Ref. piping coil

#### Connections

- A Water outlet (NPT 3/4")
- B Opening for T&P relief valve
- © Water inlet (NPT 3/4")
- Opening for drain valve

#### **Technical Specification**

| Indoor Units        |   |          | WH20STR2 FA<br>WH20S F5  | WH27STR2 FA<br>WH27S F5      |
|---------------------|---|----------|--------------------------|------------------------------|
| Capacity            | Volume (nominal)                            | l        | 200                      | 270                          |
|                     | Туре  | -        | R13                      | 34a                          |
| Refrigerant         | GWP   | -        | 1,4                      | 30                           |
|                     | Pre-charged amount                          | g        | 650                      | 750                          |
|                     | COP (7°C / 15°C)                            | -        | 3.30 / 3.50              | 3.45 / 3.85                  |
| Efficiency          | Energy class (7°C / 15°C)                   | -        | A+ / A+                  | A+ / A+                      |
|                     | Annual energy consumption (7°C / 15°C)      | kWh      | 756 / 709                | 712 / 646                    |
|                     | Operation range                             | °C       | -5 ~                     | · 48                         |
| Performance         | Max. water temperature with heat pump       | °C       | 5                        | 0                            |
|                     | Max. water temperature with heating element | °C       | 6                        | 0                            |
|                     | Heating element                             | kW       | 2.0 + 2.0                | 2.0 + 2.0                    |
|                     | Sound power level                           | dB(A)    | 55                       | 55                           |
|                     | Sound pressure level at 2 m (Auto mode)     | dB(A)    | 38                       | 38                           |
|                     | V40   | l        | 260                      | 360                          |
|                     | Load profile                                | -        | L                        | L                            |
|                     | Operation mode                              | -        | Turbo / Auto / Heat pump | / Vacation / Anti legionella |
| Compressor          | Туре  | -        | Inverter t               | win rotary                   |
| Piping connections  | Water inlet / outlet                        | inch     | G 3                      | /4"                          |
| Dimension           | HxWxD                                       | mm       | 1,625 x 580 x 582        | 2,008 x 580 x 582            |
| Weight              | Net   | kg       | 102                      | 119                          |
| Exterior            | Color of chassis / RAL code                 | -        | Luxury silver            | · / RAL 9006                 |
| Safety valve        | Туре  | -        | T&P reli                 | ef valve                     |
| IP Class            |   | -        | IP.                      | X1                           |
| Anode type          |   | -        | ICC                      | P 1)                         |
| Tank material       |   | -        | Enamel                   | ed steel                     |
| Dawes awards        | Voltage, phase, frequency                   | V, Ø, Hz | 230,                     | 1, 50                        |
| Power supply        | Recommended circuit breaker                 | А        | 1                        | 5                            |
| Power supply        | Wi-Fi (ThinQ)                               | -        | (                        | )                            |
| Additional function | SG Ready                                    | -        |                          | for WH**S.F5<br>WH**STR2.FA  |

THERMA V<sub>m</sub> (R134a) Heat Pump Water Heater


<sup>1)</sup> Impressed current cathodic protection

| Accessory Name | Model Name      | Figure | Applicable Product           | Feature  |
|----------------|-----------------|--------|------------------------------|--|
| Duct accessory | PHDCLA0.ELGTEEU |        | R134a Heat pump water heater | Duct accessories are necessary<br>for duct installation. |


# THERMA V R134a HEAT PUMP WATER HEATER (200 / 270 l)

Drawings [Unit: mm]


WH20STR2FA WH20SF5




Top view

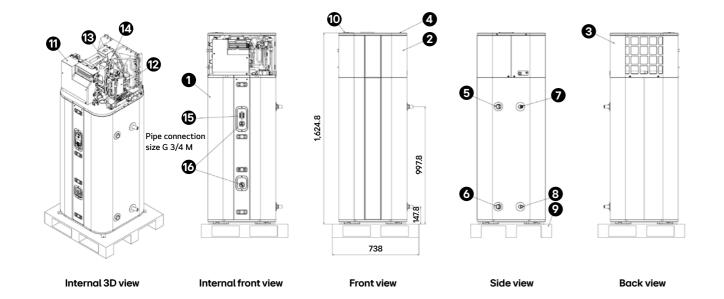

WH27STR2FA WH27SF5

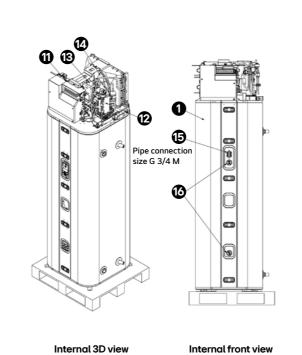

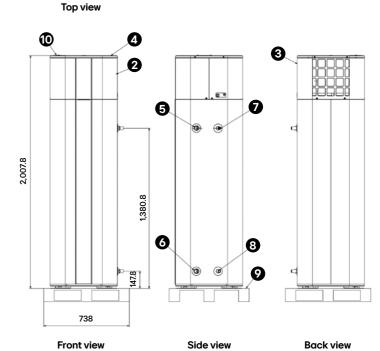

| NO. | Part Name   | Description            |    | Part Name       | Description                        |
|-----|-------------|------------------------|----|-----------------|------------------------------------|
| 1   | Water Tank  | 200 ℓ                  | 9  | Wooden Pallet   | -                                  |
| 2   | Front Panel | -                      |    | Junction Cover  | Power Input                        |
| 3   | Rear Panel  | -                      |    | C/B Case        | -                                  |
| 4   | Top Cover   | -                      |    | Compressor      | EST092MBA                          |
| 5   | T/P Valve   | 210 °F / 99 °C 3/4 NPT | 13 | Motor           | 43 W                               |
| 6   | Drain Valve | 3/4 NPT                |    | Fan Propeller   | 290 Ø                              |
| 7   | Outlet Pipe | Water Out, 3/4 NPT     | 15 | ECO             | Emergency Cut Off (77°C)           |
| 8   | Inlet Pipe  | Water In, 3/4 NPT      | 16 | Heating Element | 2 EA, 2,000 W+2,000 W, 220 ~ 240 V |

| No. | Part Name   | Description            |    | Part Name       | Description                      |  |
|-----|-------------|------------------------|----|-----------------|----------------------------------|--|
| 1   | Water Tank  | 270 ℓ                  | 9  | Wooden Pallet   | -                                |  |
| 2   | Front Panel | -                      | 10 | Junction Cover  | Power Input                      |  |
| 3   | Rear Panel  | -                      | 11 | C/B Case        | -                                |  |
| 4   | Top Cover   | -                      | 12 | Compressor      | EST092MBA                        |  |
| 5   | T/P Valve   | 210 °F / 99 °C 3/4 NPT | 13 | Motor           | 43 W                             |  |
| 6   | Drain Valve | 3/4 NPT                | 14 | Fan Propeller   | 290 Ø                            |  |
| 7   | Outlet Pipe | Water Out, 3/4 NPT     | 15 | ECO             | Emergency Cut Off (77°C)         |  |
| 8   | Inlet Pipe  | Water In, 3/4 NPT      | 16 | Heating Element | 2 EA, 2,000 W+2,000 W, 220 ~ 240 |  |

#### SOLUTIONS

#### **COLLECTIVE SOLUTIONS**

MONOBLOC 190 R32 Monobloc 51 kW

CASCADE SOLUTION

200 Cascade Control Unit








#### **Compact Yet Powerful**

The innovative Collective Solution R32 Monobloc 51 kW delivers efficient performance for large residential spaces with easy installation and inherently safe operation. Compact and lightweight, yet with high capacity and high efficiency, it is ideal for multi-family homes and light commercials.

#### What is R32 Monobloc 51 kW

The LG R32 Monobloc 51 kW is a large capacity heat pump that provides a collective central heating solution for multi-family houses or light commercial buildings. Ideal for locations that require reliable heating and cooling year-round, this air to water heat pump offers a versatile solution.

Operating efficiently as a single system, it is well-suited for various commercial spaces including multi family house, office buildings, schools and universities.

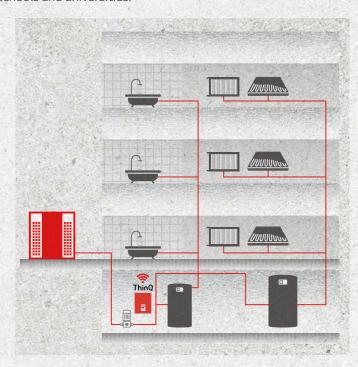

#### **Key Features**

- Fits to Multi-family homes (MFH) or light commercial buildings
- ErP Energy Labeling A++ / A++ for space heating (Average Climate 35°C / 55°C LWT)
- 100% Heating capacity at -10°C outdoor temperature
- Maximum flow temperature up to 60°C
- Operation range down to -25°C
- Compact size and light weight
- Easy installation with no refrigerant piping work
- · Convenient wiring with Control Unit installed indoor
- Enhanced control connectivity aligned with THERMA V lineup













#### **Product Range**

| Description |       | Indoor Unit    | Outdoor Unit |
|-------------|-------|----------------|--------------|
|             |       | Control Unit   | Outdoor Unit |
| 3 Ø         | 51 kW | PHCSL0 ENCXLEU | HM513MR UXC0 |

## HIGHLIGHT OF R32 MONOBLOC 51 kW



# Browse now Q

#### Large Capacity THERMA V

#### Just Simply Install a Large Capacity Heat Pump Instead of Multiple Small Heat Pumps

Installing a high-capacity heat pump system provides efficient and powerful heating while handling high thermal loads. The R32 Monobloc 51 kW ensures centralized heat production, simplify installation, and optimize space utilization. Perfect suitable solution for buildings with high & variable thermal loads (commercial, multi-residential, industrial).

- Well-suited large capacity heat pump for multi family house and various commercial spaces including office buildings, schools and universities
- Centralized solution for both new built and renovation projects
- No refrigerant work require (Plug and play concept)









#### **Excellent Performance**


#### **High Energy Efficiency**

- High heating efficiency SCOP 4.26 / 3.21 (Low / Mid temp.)
- High cooling efficiency SEER 5.0 (A35 / W7)
- 100% Heating capacity at -10°C outdoor temperature

Achieving the highest ErP energy grade A++ / A++ for space heating

THERMA V<sub>m</sub> R32 Monobloc 51 kW



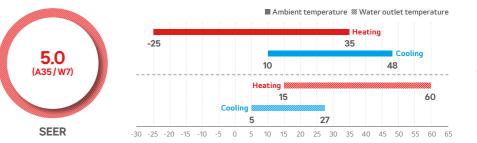

#### **Space Optimization**

**SCOP** 

#### Handy Installation with Small Size and Weight

- Light weight and small size, easy to install
- Ideal for buildings with limited space or where compact installation is required.



#### Simplified and Centralized Solution

- Easy to design and manage the entire system, with fewer points of failure and simpler hydraulic and electrical connections.
- Easy and cost effective to monitor and maintain with only one unit



## THERMA V R32 **MONOBLOC 51 kW**

Outdoor unit

HM513MR UXC0

Indoor unit

PHCSL0 ENCXLEU























#### **Key Components**

Outdoor Unit



#### Components

- 1 Black Fin heat exchanger (air / ref.)
- 2 Compressor
- 3 Accumulator 4 Receiver
- 6 Biomimetic fan
- 6 Air vent
- 7 Plate heat exchanger
- 8 Flow Switch
- Inlet / Outlet Temp. sensor

#### Connections

- A Leaving water pipe (male PT 1-1/2")
- B Entering water pipe (male PT 1-1/2")

#### Indoor Unit (Control Unit)



#### Components

1 Standard III remote controller 1)

1) Temperature control class (ERP class): V

#### **Product Specification**

| Efficiency Data   |   | Unit     | 51 kW (3 Ø)  |
|---|---|----------|--|
| Seasonal space heating eff. class (35°C / 55°C)                   |   | -        | A++ / A++  |
| Seasonal space heating efficiency (η <sub>s</sub> ) (35°C / 55°C) |   | %        | 167 / 125  |
| SCOP (35°C / 55°C)  |   | -        | 4.26 / 3.21  |
| Sound power level   | Rated / low noise mode (heating)              | dB(A)    | 82 / 75  |
| Sound pressure level at 10m                                       | Rated / low noise mode (heating)              | dB(A)    | 54 / 47  |
| Nominal Capacity and COP/EER                                      |   |          |  |
| Air +7°C / water +35°C  | Heating capacity / COP                        | kW / -   | 51.0 / 4.30  |
| Air +2°C / water +35°C  | Heating capacity / COP                        | kW / -   | 51.0 / 3.40  |
| Air -7°C / water +35°C  | Heating capacity / COP                        | kW / -   | 5.10 / 2.50  |
| Air +7°C / water +55°C  | Heating capacity / COP                        | kW / -   | 51.0 / 2.80  |
| Air -7°C / water +55°C  | Heating capacity / COP                        | kW / -   | 40.0 / 1.67  |
| Air +35°C / water +18°C   | Cooling capacity / EER                        | kW / -   | 51.0 / 4.50  |
| Air +35°C / water +7°C  | Cooling capacity / EER                        | kW / -   | 51.0 / 3.10  |
| Outdoor Units   |   | Unit     | HM513MR UXC0   |
| Operation range   | Heating & DHW (Min. ~ Max.)                   | °C       | -25 ~ 35   |
| (outdoor air temperature)   | Cooling (Min. ~ Max.)                         | °C       | 10 ~ 48  |
| Refrigerant   | Туре  | -        | R32  |
|   | GWP   | -        | 675  |
|   | Precharged amount                             | kg       | 10   |
| Piping connections (water)  | Inlet / outlet diameter                       | inch     | Male PT 1-1/2" according to ISO 7-1 (tapered pipe threads) |
|   | Rated water flow rate                         | LPM      | 146  |
| Plate heat exchanger  | Minimum flow rate (flow switch trigger point) | LPM      | 100  |
| Dimension   | HxWxD   | mm       | 1,690 x 1,640 x 825  |
| Weight  | Net   | kg       | 335  |
| Exterior  | Color of chassis / RAL code                   | -        | Morning gray & dawn gray / RAL 7038 & RAL 7037             |
|   | Voltage, phase, frequency                     | V, Ø, Hz | 380 ~ 415, 3, 50   |
| Power supply  | Standby power consumption                     | W        | 20   |
|   | Recommended circuit breaker                   | А        | 50   |
| Indoor Units  |   | Unit     | PHCSL0 ENCXLEU   |
|   | Heating (Min. ~ Max.)                         | °C       | 25 ~ 60 (65) <sup>7)</sup>                                 |
| Operation range (leaving water temperature)                       | Cooling (Min. ~ Max.)                         | °C       | 5 ~ 27   |
|   | DHW (Min. ~ Max.)                             | °C       | 25 ~ 80  |
| Dimension   | HxWxD   | mm       | 490 x 420 x 141  |
| Weight  | Net   | kg       | 6.8  |
| Exterior  | Color / RAL code                              | -        | Essence white / RAL 9003                                   |
| Power supply  | Voltage, phase, frequency                     | V, Ø, Hz | 220 ~ 240, 1, 50   |
| Tower suppry  | Recommended circuit breaker                   | А        | 10   |

THERMA V<sub>m</sub> R32 Monobloc 51 kW

- 1. Due to our policy of innovation, some specifications may be changed without notification.
- 2. Wiring cable size must comply with the applicable local and national codes. Especially the power cable and circuit breaker should be selected in accordance with that.
- 3. Sound power level is measured on the rated condition in accordance with EN 12102-1 and ISO 9614. Sound pressure level is not a value declared on Eurovent Program and is converted from sound power level based on a tonality penalty of 0 dB and installation in free-field. The directivity index (Q) is assumed as 2. Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is in accordance with EN12102-1 under condition of EN14825.
- 4. Performances are in accordance with EN14511 and reflect ErP testing conditions. Above gives the declared values at rated conditions according to ErP regulation.
- 5. This product contains fluorinated greenhouse gases.
- $6. \ All \ installation \ sites \ must \ be \ equipped \ with \ an \ earth \ leakage \ circuit \ breaker \ (ELCB).$
- 7. The leaving water temperature of  $65^{\circ}\text{C}$  is possible only when a backup heater is installed. 8. DHW 55~80°C Operating is available only when the booster heater is operating.

## THERMA V R32 **MONOBLOC 51 kW**

#### **Performance Table for Heating Operation**

Maximum heating capacity (including defrost effect)

#### HM513MR UXC0

| Outdoor Temp. | LWT 30 °C | LWT 35 °C | LWT 40 °C | LWT 45 °C     | LWT 50 °C | LWT 55 °C | LWT 60 °C |
|---------------|-----------|-----------|-----------|---------------|-----------|-----------|-----------|
| [°C DB]       |           |           |           | Capacity (kW) |           |           |           |
| -25           | 30.3      | 29.3      | 25.3      | 19.2          | -         | -         | -         |
| -22           | 34.0      | 32.0      | 27.0      | 23.0          | -         | -         | -         |
| -20           | 37.1      | 36.8      | 35.3      | 32.8          | 29.6      | -         | -         |
| -17           | 43.2      | 42.5      | 41.8      | 40.6          | 39.0      | -         | -         |
| -15           | 47.3      | 46.4      | 46.1      | 45.8          | 45.3      | 40.0      | -         |
| -12           | 49.5      | 49.2      | 47.9      | 47.8          | 46.3      | 41.9      | -         |
| -10           | 51.0      | 51.0      | 49.2      | 49.1          | 47.0      | 43.1      | 36.0      |
| -7            | 51.0      | 51.0      | 51.0      | 51.0          | 48.0      | 45.0      | 42.0      |
| -2            | 51.0      | 51.0      | 51.0      | 51.0          | 51.0      | 51.0      | 47.5      |
| 2             | 51.0      | 51.0      | 51.0      | 51.0          | 51.0      | 51.0      | 51.0      |
| 7             | 51.0      | 51.0      | 51.0      | 51.0          | 51.0      | 51.0      | 51.0      |
| 10            | 51.0      | 51.0      | 51.0      | 51.0          | 51.0      | 51.0      | 51.0      |
| 15            | 51.0      | 51.0      | 51.0      | 51.0          | 51.0      | 51.0      | 51.0      |
| 20            | 51.0      | 51.0      | 51.0      | 51.0          | 51.0      | 51.0      | 51.0      |
| 25            | 51.0      | 51.0      | 51.0      | 51.0          | 51.0      | 51.0      | 51.0      |
| 30            | -         | 51.0      | 51.0      | 51.0          | 51.0      | 51.0      | 51.0      |
| 35            | -         | -         | 51.0      | 51.0          | 51.0      | 51.0      | 51.0      |

#### **Performance Table for Cooling Operation**

Maximum cooling capacity

#### HM513MR UXC0

| LWT 5 °C      | LWT 7 °C                                     | LWT 10 °C   | LWT 13 °C   | LWT 15 °C   | LWT 18 °C   | LWT 20 °C   | LWT 22 °C  | LWT 27 °C  |  |
|---------------|--|---|---|---|---|---|--|--|--|
| Capacity (kW) |  |   |   |   |   |   |  |  |  |
| 51.0          | 51.0   | 51.0  | 51.0  | 51.0  | 51.0  | 51.0  | 51.0   | 51.0   |  |
| 51.0          | 51.0   | 51.0  | 51.0  | 51.0  | 51.0  | 51.0  | 51.0   | 51.0   |  |
| 51.0          | 51.0   | 51.0  | 51.0  | 51.0  | 51.0  | 51.0  | 51.0   | 51.0   |  |
| 48.0          | 51.0   | 51.0  | 51.0  | 51.0  | 51.0  | 51.0  | 51.0   | 51.0   |  |
| 46.5          | 48.8   | 51.0  | 51.0  | 51.0  | 51.0  | 51.0  | 51.0   | 51.0   |  |
| 44.0          | 48.5   | 50.5  | 51.0  | 51.0  | 51.0  | 51.0  | 51.0   | 51.0   |  |
| 42.5          | 43.8   | 45.8  | 48.3  | 51.0  | 51.0  | 51.0  | 51.0   | 51.0   |  |
|               | 51.0<br>51.0<br>51.0<br>48.0<br>46.5<br>44.0 | 51.0     51.0       51.0     51.0       51.0     51.0       48.0     51.0       46.5     48.8       44.0     48.5 | 51.0     51.0     51.0       51.0     51.0     51.0       51.0     51.0     51.0       48.0     51.0     51.0       46.5     48.8     51.0       44.0     48.5     50.5 | 51.0     51.0     51.0     51.0       51.0     51.0     51.0     51.0       51.0     51.0     51.0     51.0       48.0     51.0     51.0     51.0       46.5     48.8     51.0     51.0       44.0     48.5     50.5     51.0 | 51.0         51.0 <th< td=""><td>Capacity (kW)           51.0         51.0         51.0         51.0         51.0         51.0           51.0         51.0         51.0         51.0         51.0         51.0           51.0         51.0         51.0         51.0         51.0         51.0           48.0         51.0         51.0         51.0         51.0         51.0           46.5         48.8         51.0         51.0         51.0         51.0           44.0         48.5         50.5         51.0         51.0         51.0</td><td>Capacity (kW)           51.0         51.</td><td>Capacity (kW)           51.0         51.</td></th<> | Capacity (kW)           51.0         51.0         51.0         51.0         51.0         51.0           51.0         51.0         51.0         51.0         51.0         51.0           51.0         51.0         51.0         51.0         51.0         51.0           48.0         51.0         51.0         51.0         51.0         51.0           46.5         48.8         51.0         51.0         51.0         51.0           44.0         48.5         50.5         51.0         51.0         51.0 | Capacity (kW)           51.0         51. | Capacity (kW)           51.0         51. |  |

THERMA V<sub>m</sub> R32 Monobloc 51 kW

196

- 1. DB : Dry Bulb Temperature (°C), LWT : Leaving Water Temperature (°C), LPM : Liters Per Minute (\$\rho(m)\), TC : Total Capacity (kW)
- 2. Direct interpolation is permissible. Do not extrapolate.
- 3. Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- $\bullet \textbf{Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed. } \\$
- In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.


- 1. DB : Dry Bulb Temperature (°C), LWT : Leaving Water Temperature (°C), LPM : Liters Per Minute ( $\ell$ /min), TC : Total Capacity (kW)
- Direct interpolation is permissible. Do not extrapolate.
   Measuring procedure follows EN-14511.
- Rated values are based on standard conditions and it can be found on specifications.
- Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
- In accordance with the test standard (or nations), the rating will vary slightly.
- 4. The shaded areas are not guaranteed continuous operation.

[Unit: mm]

## **THERMA V R32 MONOBLOC 51 kW**


HM513MR UXC0


**Drawings** 

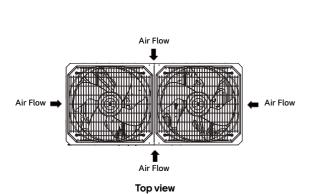



[Unit: mm]

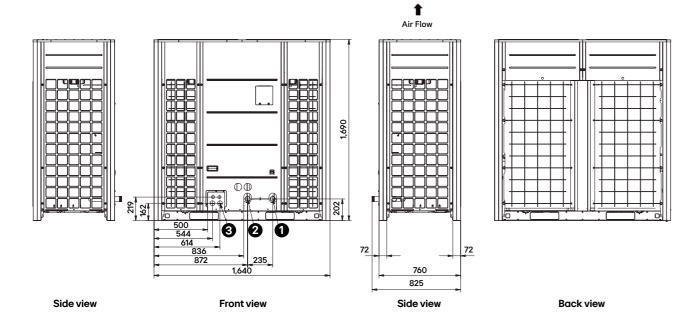





**Bottom view** 


| No. | Part Name                      | Description  |
|-----|--------------------------------|--|
| 1   | Entering Water Pipe            | Male PT 1-1/2" according to ISO 7-1 (Tapered pipe threads) |
| 2   | Leaving Water Pipe             | Male PT 1-1/2" according to ISO 7-1 (Tapered pipe threads) |
| 3   | Access to Electrical Terminals | Power, Communication cables                                |
| 3   | , ,                            |  |

#### PHCSL0 ENCXLEU

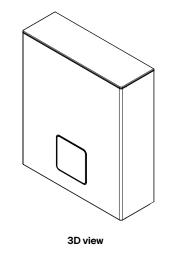









THERMA V<sub>III</sub> R32 Monobloc 51 kW



| No. | Part Name                  | Description                  |
|-----|----------------------------|------------------------------|
| 1   | Remote Controller Assembly | Built-in Remote Controller   |
| 2   | Panel Assembly.Front       | SGMCD1 M08 ESSENCE WHITE PCM |
| 3   | Panel Assembly.Indoor      | PCB and Terminal Blocks      |
| 4   | Cover                      | MOLD ABS                     |

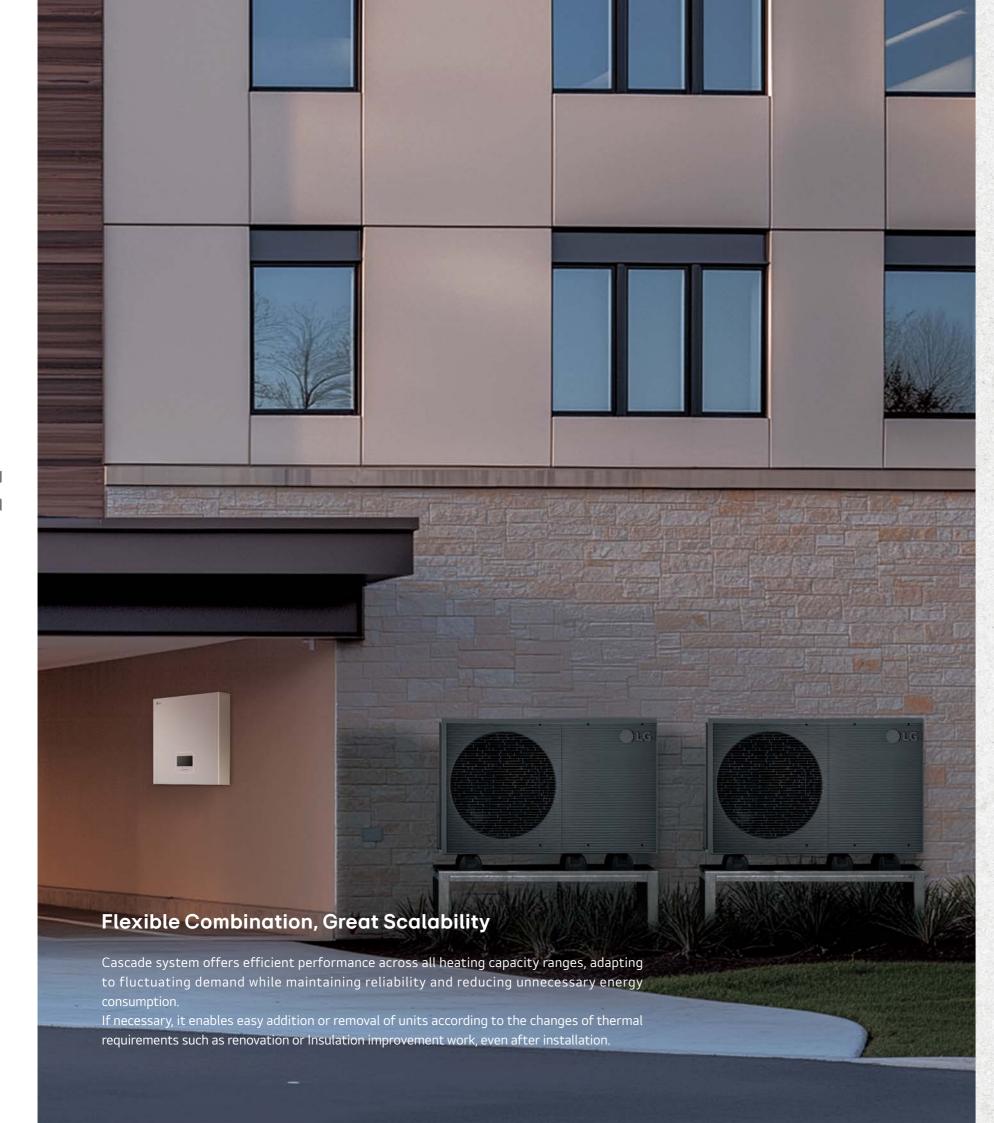

#### What is Cascade Control Unit

The LG Cascade Control Unit is an advanced heating solution designed to manage up to 8 units of the THERMA V system with a single controller. This centralized control enhances system efficiency and simplifies operation, making it an ideal choice for optimizing heat pump performance in multi-unit applications.



#### **Key Features**

- Up to 8 outdoor units 1) can be operated as one system
- Heating demands up to 128 kW can be covered through flexible combination in same capacity models <sup>1)</sup>
- Easy to configure as no separate indoor unit or control devices are required except for the cascade control unit
- Extremely quiet and high efficient operation combining with R290 Monobloc over wide heating capacity ranges
- Intuitive interface through a 4.3 inch full-touch / full-color display and motion graphics
- Optimized Runtime Control for stable operation and maintenance
- Alternating defrost operation that Individual units enter into the defrost operation sequentially
- Emergency operation for various emergency situations

#### Compatible Line-up

•R290 Monobloc 2)

| Description | R290 Monobloc Outdoor Unit |              |  |  |  |  |
|-------------|----------------------------|--------------|--|--|--|--|
| Description | 10                         | 30           |  |  |  |  |
| 7 kW        | HM071HF UB40               | HM073HF UB40 |  |  |  |  |
| 9 kW        | HM091HF UB40               | HM093HF UB40 |  |  |  |  |
| 12 kW       | HM121HF UB60               | HM123HF UB60 |  |  |  |  |
| 14 kW       | HM141HF UB60               | HM143HF UB60 |  |  |  |  |
| 16 kW       | HM161HF UB60               | HM163HF UB60 |  |  |  |  |

1) All units connected to Cascade Control Unit must be configured with models of the same capacity.
2) Only R290 Monobloc outdoor units manufactured after June of 2025 are compatible

 Only R290 Monobloc outdoor units manufactured after June of 2025 are compatible with Cascade Control Unit.

# THERMA V **CASCADE CONTROL UNIT**

#### Cascade Solution for THERMA V

#### No Need to Install Separate Indoor Units; Just Connect the Outdoor Units

The cascade system allows more than one heat pump unit to work together to meet a property's heating, cooling and hot water needs. It is the perfect solution for buildings with variable thermal loads. (Residential Collective Housing, light commercial) Installing a Cascade Heat Pump system offers several significant advantages in terms of Performance, Flexibility, and Energy efficiency.

- · Modularity and scalability
- Optimal operation
- Installation flexibility
- Built-in redundancy and maintenance









#### **High Efficient Operation**

#### Exceptional Efficiency Exceeding SCOP 5 1)



1) Based on Average Climate and Low Temperature (35°C) condition

#### High efficient operation over wide heating capacity ranges



As it uses the highly efficient R290 Monobloc outdoor units, LG Cascade system also provides excellent efficiency across a wide range of capacities.

#### **Easy Installation**

#### Simplified Configuration and Wiring

Customer can save significant costs by reducing the cost for of purchasing and installing multiple indoor units (Control Units).



16 kW (Total 32 kW)

#### **Extremely Quiet Operation**

#### Extremely Quiet Operation Using the R290 Monobloc



Extremely low noise level unit available today

The sound power level of 49 dB(A) @ 12kW is outstanding in the market.

| Sound power level  |      | R2   | 90 Monob | loc   |       |
|--------------------|------|------|----------|-------|-------|
| Souria power tevet | 7 kW | 9 kW | 12 kW    | 14 kW | 16 kW |
| Heating / Rated    | 49   | 50   | 49       | 51    | 52    |

1) The certification (Quite Mark) for R290 Monobloc is valid for UK & EU territories only until Dec. 31st of 2025.

LG Cascade system with R290 Monobloc outdoor units provides a significantly now noise level.







# **THERMA V CASCADE CONTROL UNIT**

Indoor unit

PHCM0 ENCXLEU




#### **Product Specification**


| Indoor Unit                     |                             | Unit     | PHCM0 ENCXLEU            |
|---------------------------------|-----------------------------|----------|--------------------------|
| Operation range                 | Heating (Min. ~ Max.)       | °C       | 15 ~ 70                  |
| (leaving water temperature when | Cooling (Min. ~ Max.)       | °C       | 5 ~ 27                   |
| combined to R290 Monobloc)      | DHW (Min. ~ Max.)           | °C       | 15 ~ 80                  |
| Dimension                       | HxWxD                       | mm       | 490 x 420 x 141          |
| Weight                          | Net                         | kg       | 6.9                      |
| Exterior                        | Color of chassis / RAL code | -        | Essence white / RAL 9003 |
| Dawar ayaali                    | Voltage, phase, frequency   | V, Ø, Hz | 220 ~ 240, 1, 50         |
| Power supply                    | Recommended circuit breaker | А        | 10                       |


- Note
  1. Due to our policy of innovation, some specifications may be changed without notification.
  2. Wiring cable size must comply with the applicable local and national codes. Especially the power cable and circuit breaker should be selected in accordance with that.
  3. DHW 65 ~ 80°C Operating is available only when the booster heater is operating.


**Drawings** [Unit: mm]

PHCM0 ENCXLEU

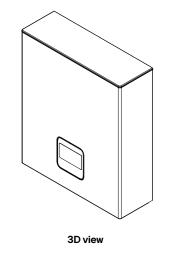

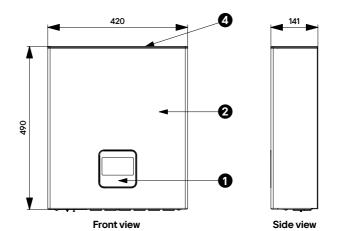





| No. | Part Name                  | Description                  |
|-----|----------------------------|------------------------------|
| 1   | Remote Controller Assembly | Built-in Remote Controller   |
| 2   | Panel Assembly.Front       | SGMCD1 M08 ESSENCE WHITE PCM |
| 3   | Base Assembly.Indoor       | PCB and Terminal Blocks      |
| 4   | Cover                      | MOLD ABS                     |
| 5   | PCB Assembly.Main          | AWHP Cascade_Main PCBA       |
| 6   | PCB Assembly.Sub           | AWHP Cascade_Sub PCBA        |

#### ACCESSORIES

208 Accessories Provided by LG

212 Electric Backup Heater

214 LG Wi-Fi Modem

215 Domestic Hot Water Tank



# THERMA V ACCESSORIES

### Accessories Provided by LG

| Category          | Model name  | Model number                     | Figure     | Applicable product  | Relevant function                           | Purpose  | Feature   |
|-------------------|---|----------------------------------|------------|---|---|--|---|
|                   | Room<br>temperature<br>sensor                               | PQRSTA0                          | 9          | All except for R32<br>Monobloc 51kW and<br>Cascade Control Unit | Room<br>temperature<br>based control        | To detect room air temperature for room temperature based control  | • Max. wire length: 15 m  |
|                   | Thermistor<br>for<br>2 <sup>nd</sup> circuit<br>or e/heater | PRSTAT5K10                       | 0          | All THERMA V products   | 2 <sup>nd</sup> circuit<br>(mixing circuit) | To detect 2 <sup>nd</sup> circuit temperature when using 2 <sup>nd</sup> circuit function  | • 5 kΩ thermistor, 10 m   |
| Sensors           | Outdoor air<br>temperature<br>sensor                        | PHATS0                           |            | R290 Monobloc,<br>R32 Monobloc S II,<br>R32 Monobloc 51 kW      | Weather-dependent operation                 | To detect outdoor air temperature more accurately for weather-dependent operation especially when the outdoor unit is exposed to sunlight    | Max. wire length: 12 m     optional accessory - i.e     pre-installed air sensor     (mounted at grille     of outdoor unit) will     be used for weather- dependent operation     if the outdoor air     temperature sensor is     not installed |
|                   |   |                                  |            | All except for<br>Combi Units                                   | Domestic<br>hot water<br>heating            | To detect DHW tank temperature   | Included in DHW tank kit Max. wire length: 12 m A harness that can be   |
|                   | Water tank<br>sensor  | PHRSTA0                          | <b>.</b> O | R290 Monobloc,<br>R32 Monobloc S II,<br>R32 Monobloc 51 kW      | Buffer tank<br>temperature<br>based control | To detect the temperature at the top of the buffer tank or at its outlet pipe if a big buffer tank is connected in parallel to the heat pump | connected to PCB-<br>connector<br>TB_SENSOR/BUFFER is<br>included in this<br>accessory produced<br>after 1st of March 2024.   |
|                   | 3 way valve   | OSHA-3 V                         |            | All except for<br>Combi Units                                   | Domestic<br>hot water<br>heating            | To divert water flow<br>between space heating<br>and DHW heating   | Size: DN 20 G 1"     connection, male     threaded  |
| Valves            | Thermostatic  | OSHA-MV                          | No.        | Regardless of   | Domestic                                    | To blend hot water with cold water for ensuring  | Size: 3/4" DN20 male<br>threaded  |
|                   | mixing valve  | OSHA-MV1                         |            | the model   | hot water<br>supply                         | constant, safe shower and bath outlet temp.  | Size: 1" DN25 male<br>threaded  |
|                   | Domestic<br>hot water<br>tank<br>(single coil)              | OSHW-200 F OSHW-300 F OSHW-500 F |            |   |   |  | • Storage volume: 200 ℓ,<br>300 ℓ, 500 ℓ<br>• Type: internal single coil<br>• Material: stainless steel<br>• Capacity of booster<br>heater: 24 kW   |
| DHW<br>Tanks      | Domestic<br>hot water<br>tank<br>(double coil)              | OSHW-300 FD                      |            | All except for<br>Combi Units                                   | Domestic<br>hot water<br>heating            | To generate and<br>store domestic<br>hot water   | Storage volume: 300 l Type: internal double coil Material: stainless steel Capacity of booster heater: 2.4 kW   |
|                   | Domestic  | PHLTA                            |            | Hydro Unit for Split<br>& Hydrosplit                            | Domestic                                    | To control an external   | Parts included:     DHW tank sensor     (thermistor), circuit     breaker, relay  |
| Installation kits | hot water<br>tank kit                                       | PHLTB                            | YHERMAN.   | R32 Monobloc S,<br>R32 Monobloc S II                            | hot water<br>heating                        | DHW booster heater   | Parts included:     DHW tank sensor     (thermistor), circuit     breaker, relay, multi     harness   |
|                   | Solar<br>thermal kit  | PHLLA                            |            | All except for<br>Combi Units                                   | Solar thermal<br>heat utilization           | To operate with<br>solar thermal<br>system   | • Length of thermistor: 12 m • Size of tube connector (W x H x D): 110 x 55 x 22  |

| Category             | Model name  | Model number | Figure        | Applicable product  | Relevant function                         | Purpose   | Feature   |
|----------------------|---|--------------|---------------|---|---|---|---|
|                      |   | HA031M E2    | філ           |   |   |   | Heater capacity: 3 kW     Number of heating coil: 1ea (3.0 kW)     Size (W x H x D): 210 x 607 x 217     Power: 220 ~ 240 V, 1 Ø              |
|                      |   | HA061M E2    |               | R32 Monobloc S,<br>R32 Monobloc S II  | Capacity back up<br>& emergency operation | To supplement<br>insufficient<br>capacity   | Heater capacity: 6 kW     Number of heating coil: 2 ea (3.0 + 3.0 kW)     Size (W x H x D): 210 x 607 x 217     Power: 220 ~ 240 V, 1 Ø       |
| Installation<br>kits | Electric<br>back-up<br>heater                         | HA063M E2    |               |   |   |   | Heater capacity: 6 kW     Number of heating coil: 3 ea (2.0 + 2.0 + 2.0 kW)     Size (W x H x D): 210 x 607 x 217     Power: 380 - 415 V, 3 Ø |
|                      |   | HA061C E1    | a -           | R32 Hydrosplit<br>Hydro Unit  | Capacity back Up<br>&                     | To supplement<br>insufficient   | Heater capacity: 6 kW     Number of heating coil: 2 ea (3.0 + 3.0 kW)     Power: 220-240 V, 1 Ø   |
|                      |   | HA063C E1    |               | (HN1600MC NK1)  | emergency operation                       | capacity  | • Heater capacity: 6 kW<br>• Number of heating coil:<br>3 ea (2.0 + 2.0 + 2.0 kW)<br>• Power: 380-415 V, 3 Ø                                  |
|                      | Buffer tank<br>for space<br>heating                   | OSHB-40KT    |               | R32 Hydrosplit<br>Combi Unit  | -   | To provide the buffer volume of water to the heating circuit  | • Volume: 40 <i>l</i><br>• Size (W x H x D):<br>518 x 560 x 175   |
| Vessel               | Buffer tank<br>for space<br>heating                   | OSHE-12KT    |               | R32 Hydrosplit<br>Combi Unit  | -   | To absorb the pressure<br>variations in the DHW<br>tank due to changing<br>temperatures                             | • Volume: 8 \( \epsilon \) • Connection: 3/4" • Max. pressure: 10 bar • Size (W x H x D): 416 x 238 x 502                                     |
|                      | Extension<br>wire for a<br>wired remote<br>controller | PZCWRC1      | a 0 }         | All THERMA V products   | -   | To extend the wire between the wired remote controller and the indoor unit  | • Length: 10 m  |
|                      | Extension<br>cable for<br>Wi-Fi modem                 | PWYREW000    |               | All THERMA V products   | Wi-Fi control<br>via LG ThinQ             | To extend a wire<br>between the WI-Fi<br>modem and the<br>indoor unit   | • Length: 10 m  |
|                      | 2-remote control wire                                 | PZCWRC2      |               | All except for<br>R32 Monobloc 51kW and<br>Cascade Control Unit   | 2 remote control                          | To connect an additional remote controller (Slave)  | • Length: 0.25 m  |
|                      |   | PHDPB        | -             | R32 Split Hydro<br>Unit (NK4 suffix),<br>R410A Split Hydro Unit<br>(NK3 suffix)                                       |   | To collect condensed  |   |
| ETC                  | Drain pan   | PHDPC        |               | R290 Monobloc,<br>R32 Hydrosplit ,<br>R32 Split Hydro Unit<br>(NK5 suffix),<br>R410A Split Hydro<br>Unit (NK5 suffix) | Cooling<br>operation                      | water in the indoor<br>unit during the cooling<br>operation   | -   |
|                      | Cover plate   | PDC-HK10     |               | All except for<br>Monobloc unit and<br>Cascade Control Unit   | -   | To fill the blank<br>space of the indoor unit<br>front panel when the<br>remote controller is<br>relocated indoors. | -   |
|                      | Downward  | PHDW36B0     | ما <u>و و</u> | R290 Monobloc   | -   | To change the piping direction from backside  | -   |
|                      | piping kit  | PHDW60B0     | 700           | 11250 Monobioc  |   | to downward   |   |

THERMA VIM

## THERMA V ACCESSORIES

#### Accessories Provided by LG

| Category              | Model name                    | Model number | Figure   | Applicable product  | Relevant function      | Purpose  | Feature   |
|-----------------------|-------------------------------|--------------|--|---|------------------------|--|---|
| Remote<br>Controller  | Wired<br>remote<br>controller | PREMTW101    | 2 ( = 2 6 )  | All except for<br>R32 Monobloc 51 kW<br>and<br>Cascade Control Unit   | 2 remote<br>control    | To control the<br>AWHP using<br>two remote<br>controllers<br>(an additional<br>remote<br>controller) | New modern design 4.3 inch color LCD display Information displayed with simple graphic, icon & text Built-in temperature sensor Size (W x H x D): 120 x 120 x 16 Extension cable (PZCWRC1, 9.6 m) and 2 remote cable (PZCWRC2, 0.25 m) are included   |
|                       | AC Ez Touch <sup>1)</sup>     | PACEZA000    | E O O  |   |                        |  | • 5 inch color display • User-friendly control with iconographic interface (touch screen) • Max, 32 unit control • Total 200 schedule events (weekly / monthly / yearly / exception day) • Operation history • Remote controller lock (all, temp, mode) • PC access supported (IPv6 supported) • DI 1 ea (emergency stop only) • Size (W x H x D): 137 x 121 x 25   |
| Central<br>Controller | AC Smart 5 <sup>1)</sup>      | PACS5A000    |  | All THERMA V<br>products except for<br>R290 Monobloc,<br>R32 Monobloc S II,<br>R32 Monobloc S Is with and<br>Cascade Control Unit | Centralized<br>control | To control the<br>AWHP using<br>LG central<br>controller   | • 10.2 inch color display • User-friendly control with iconographic interface (touch screen) • Max. IDU 64 • Total 100 schedule events (weekly / monthly / yearly / exception day) • History / operation trend • Interlock with 3 <sup>rd</sup> party equipment (ACS IO, ACU IO module is needed) • Error alarm by e-mail • Remote controller lock (all, temp, mode) • Map view (visual navigation) • Web access supported with HTML5 (PC, smartphone, tablet) • DI 2 ea, DO 2 ea • BACnet IP/ modbus TCP protocol support • Size (W x H x D): 253.2 x 167.7 x 28.9 |
|                       | ACP 5 <sup>-1)</sup>          | PACP5A000    | The state of the s |   |                        |  | Web access controller Max. 128 unit control Total 100 schedule events (weekly / monthly / yearly / exception day) History / operation trend Interlock with 3rd party equipment (ACS IO, ACU IO module is needed) Error alarm by e-mail Remote controller lock (all, temp, mode) Map view (visual navigation) DI 10 ea, DO 4 ea BACnet IP/ modbus TCP protocol support Lonworks protocol support* (max. 64 unit control) Size (W x H x D): 270 x 155 x 65  |

<sup>\*</sup> For using Lonworks protocol, only ACP 5 provides interface for BMS integration, and, need to U60FT module between ACP 5 and BMS system interface between Lonworks FT-10 BMS and LG HVAC unit. U60FT should be purchased separately from 3<sup>rd</sup> party supplier. Please contact regional LG office for more detailed information.

| Category       | Model name                                     | Model number | Figure    | Applicable product  | Relevant function             | Purpose  | Feature   |
|----------------|--|--------------|-----------|---|-------------------------------|--|---|
| Gateway        | Modbus<br>RTU<br>gateway                       | PMBUSB00A    | Y LINE HA | All except for<br>R32 Monobloc 51 kW  | Centralized<br>control        | To communicate and control through the central controller (providing modbus RTU connection between the AWHP and BMS)   | Modbus RTU slave<br>(RS485) / 9,600 bps     Size (W x H x D): 53.6 x 89.7 x 60.7     Max. 16 IDUs with single module /<br>Max. 64 IDUs with 4 modules     Power: DC 12 V  |
|                | PI485<br>gateway for<br>THERMA V <sup>1)</sup> | PP485A00T    |           | All except for<br>R290 Monobloc,<br>R32 Monobloc S II<br>and<br>R32 Monobloc 51 kW                        |                               | To communicate<br>and control<br>through the<br>central controller<br>(converting<br>LG protocol to<br>RS485 protocol) | • 1 for each outdoor unit<br>• Power: supplied by outdoor unit  |
|                | Simple<br>dry contact                          | PDRYCB000    | -         |   |                               |  | 1 Set per 1 unit     1 Input contact for turning on/off     Input power: 220 ~ 240 V     2 output contacts     Operation status - Error status  |
| Dry<br>contact | Dry<br>contact for<br>thermostat               | PDRYCB320    |           | All THERMA V products   | -                             | To connect<br>between the<br>AWHP and<br>external devices<br>to control various<br>functions                           | 1 Set per 1 unit     Non voltage or 12 ~ 24 V     8 digital input contacts for thermostat     - On/off, operation mode, DHW heating     - Emergency mode, silent mode     2 Output contacts     - Operation status  |
|                | LG Wi-Fi<br>modem                              | PWFMDD200    | • 16      | All THERMA V<br>products  | Wi-Fi control<br>via LG ThinQ | To control the<br>AWHP via a<br>smartphone   | Basic control function On/off, operation mode, set temp DHW heating and set temp Weekly on/off schedule Error status check Frequency: 2.4 GHz IEEE 802.11b/g/n supported  |
| ETC            | Cloud<br>gateway <sup>1)</sup>                 | PWFMDB200    | 64        | R290 Monobloc,<br>R32 Monobloc S II,<br>R32 Split Combi Unit,<br>New Hydro Unit for<br>Split & Hydrosplit | LG BECON<br>cloud service     | For remote control,<br>monitoring and<br>diagnosis   | Max 16 indoor units RS485: 1 channel (LGAP) Wired/wireless LAN Power: 12 V DC Size (W x H x D): 120 x 120 x 29  |
|                | Meter<br>interface                             | PENKTH000    | C A A     | All THERMA V<br>products  | Energy<br>monitoring          | To measure production / consumption power  | • Energy meter interface to monitor Electricity and Heat energy - Max. 3 watt - Hour meter - Max. 1 heat meter - Pulse width: 40 ms ~ 100 ms • Modbus RTU comm. with THERMA V - 2 wire RS485 / 9600 bps • Power: DC 12 V • Size (W x H x D): 54 x 90 x 61 |

<sup>1)</sup> PI485 Gateway (PP485A00T) should be installed on outdoor unit to use the central controller and cloud gateway.

In the case of R290 Monobloc and R32 Monobloc S II, PI485 G/W is built-in, so there is no need to purchase it separately.

## THERMA V ACCESSORIES **ELECTRIC BACKUP HEATER**

#### **Electric Backup Heater**

HA031M E2 HA061M E2 HA063ME2




#### **Backup Heater Specification**

| Electrical Specification |  | Unit        | HA031M E2        | HA061M E2 | HA063M E2        |
|--------------------------|--|-------------|------------------|-----------|------------------|
|                          | Туре   | -           |                  | Sheath    |                  |
|                          | Number of heating coil                       | EA          | 1                | 2         | 3                |
|                          | Capacity combination                         | kW          | 3.0              | 3.0 + 3.0 | 2.0 + 2.0 + 2.0  |
| Deels in bester          | Heating steps                                | Step        | 1                | 2         | 1                |
| Backup heater            | Power supply                                 | V, Ø, Hz    | 220 ~ 240, 1, 50 |           | 380 ~ 415, 3, 50 |
|                          | Rated running current                        | А           | 12.5             | 25.0      | 8.7              |
|                          | Dimensions (H x W x D)                       | mm          | 607 x 210 x 217  |           |                  |
|                          | Net weight (unit)                            | kg          | 12.8             | 13.4      | 13.1             |
| Wiring connections       | Power supply cable (included earth, H07RN-F) | mm² x cores | 1.5 x 3 C        | 4.0 x 3 C | 2.5 x 4 C        |
| wiring connections       | Communication cable (H07RN-F)                | mm² x cores | 0.75             | x 4 C     | 0.75 x 2 C       |


212


**Drawings** [Unit: mm]





Right side panel detail














3D view

Right side view **Back view** 

Internal front

Internal front

Internal right side



**8** 

Front view

| No.  | Part Name                      | Description   |  |  |  |  |
|--|--------------------------------|---|--|--|--|--|
| 1  | Leaving Water Pipe             | Male PT 1" according to ISO 7-1 (Tapered pipe threads)                      |  |  |  |  |
| 2 Entering Water Pipe Male PT 1" according to ISO 7-1 (Tapered pipe threads) |                                |   |  |  |  |  |
| 3 Control Box Circuit Breaker, Magnetic Switch, Terminal blocks              |                                |   |  |  |  |  |
| 4 Thermal Switch Cut-off Power Input to E/heater at 90°C                     |                                | Cut-off Power Input to E/heater at 90°C                                     |  |  |  |  |
| 5 Air Vent Air Purging when Charging Water                                   |                                |   |  |  |  |  |
| 6  | Electric Heater                | Support the Space Heating at Very Cold Temperature and in Case of Emergency |  |  |  |  |
| 7 Backup Heater Outlet Sensor Connect to Unit (Heat pump)                    |                                |   |  |  |  |  |
| 8  | Access Hole for Air Vent Valve | Access Hole for Operating the Air Vent Valve During Water Charging          |  |  |  |  |

<sup>\*</sup> Compatible with R32 Monobloc S and R32 Monobloc S II series

 $<sup>{\</sup>it 1.}\ {\it Due\ to\ our\ policy\ of\ innovation\ some\ specifications\ may\ be\ changed\ without\ notification.}$ 

 $<sup>2. \</sup> Wiring \ cable \ size \ must \ comply \ with \ the \ applicable \ local \ and \ national \ codes.$ 

Especially the power cable and circuit breaker should be selected in accordance with that.

215

## THERMA V **ACCESSORIES**

#### **LG Wi-Fi Modem**

#### **PWFMDD200 ENCXLEU**

Access LG THERMA V anytime and from anywhere with a Wi-Fi equipped device. LG's exclusive home appliances control app (LG ThinQ) offers simple operation and various functions.

- On / Off
- Operation mode selection
- Current temperature
- Set temperature
- On / Off reservation scheduling
- Energy monitoring
- ESS monitoring
- Silent mode reservation
- Holiday mode
- Quick DHW heating



| Model Name               | PWFMDD200 ENCXLEU   |  |  |  |  |
|--------------------------|---|--|--|--|--|
| Size (mm)                | 46 x 68 x 14  |  |  |  |  |
| Interfaceable products   | All THERMA V line-ups   |  |  |  |  |
| Connection type          | Indoor unit 1:1   |  |  |  |  |
| Communication frequency  | 2.4 GHz   |  |  |  |  |
| Wireless standards       | IEEE 802.11b/g/n  |  |  |  |  |
| Mobile application       | LG ThinQ (Android v7.0 (Nougat) or higher, iPhone iOS 11.0 or higher) |  |  |  |  |
| Optional extension cable | PWYREW000 (10 m extension)  |  |  |  |  |
|                          |   |  |  |  |  |

214

- 1. Functionality may be different according to each Indoor model.
- 2. User interface of application shall be revised for its design and contents improvement.
- 3. Application is optimized for smartphone use, so it may not be well functioning with tablet devices.

#### **Domestic Hot Water Tank**

OSHW-200F AEU OSHW-300F AEU OSHW-500F AEU OSHW-300FD AEU



| Technical Specification                  |                            | Unit           | OSHW-200F  | OSHW-300F            | OSHW-500F            | OSHW-300FD                   |  |
|--|----------------------------|----------------|--|----------------------|----------------------|------------------------------|--|
| General<br>characteristics               | Water volume               | l              | 200  | 300                  | 500                  | 300                          |  |
|  | Diameter                   | mm             | 640  | 640                  | 810                  | 640                          |  |
|  | Height                     | mm             | 1,350  | 1,850                | 1,900                | 1,850                        |  |
|  | Net weight                 | kg             | 61   | 100                  | 146                  | 106                          |  |
|  | Tank materials             | -              | STS: F18   | STS: F18             | STS: F18             | STS: F18                     |  |
|  | Color                      | -              | Gray (RAL 7035)  | Gray (RAL 7035)      | Gray (RAL 7035)      | Gray (RAL 7035)              |  |
| Specification of electric back up        | Additional electric heater | W              | 2,400  | 2,400                | 2,400                | 2,400                        |  |
|  | Power supply               | V, Ø, Hz       | 230, 1, 50 (60)  | 230, 1, 50 (60)      | 230, 1, 50 (60)      | 230, 1, 50 (60)              |  |
|  | Adjustable thermostat      | °C             | 0 ~ 90   | 0 ~ 90               | 0 ~ 90               | 0 ~ 90                       |  |
| Specification of heat exchanger          | Exchanger type             | -              | Internal single coil   | Internal single coil | Internal single coil | Internal double coil         |  |
|  | Material exchanger         | -              | STS: F18   | STS: F18             | STS: F18             | STS : F18                    |  |
|  | Maximum water temp.        | °C             | 90   | 90                   | 90                   | 90                           |  |
|  | Coil surface               | m <sup>2</sup> | 2.3  | 3.1                  | 4.8                  | 3.1 + 1                      |  |
| Water connections                        | Heat pump inlet            | inch           | 1 BSP female   | 1 BSP female         | 1 ¼ BSP female       | 1 BSP female<br>(upper coil) |  |
|  | Heat pump outlet           | inch           | 1 BSP female   | 1 BSP female         | 1 ¼ BSP female       | 1 BSP female<br>(upper coil) |  |
|  | Solar inlet                | inch           | -  | -                    | -                    | % BSP Female<br>(lower coil) |  |
|  | Solar outlet               | inch           | -  | -                    | -                    | % BSP Female<br>(lower coil) |  |
|  | City water inlet           | inch           | ¾ BSP male   | ¾ BSP male           | 1 BSP male           | ¾ BSP male                   |  |
|  | Hot water outlet           | inch           | ¾ BSP female   | 1 BSP female         | 1 BSP female         | 1 BSP female                 |  |
| Energy efficiency class (A+ to F scale)  |                            | -              | В  | В                    | В                    | В                            |  |
| Standing heat loss                       |                            | W              | 61   | 70                   | 83                   | 70                           |  |
| Technical Specification                  |                            |                |  |                      |                      |                              |  |
| Domestic hot water tank installation kit |                            |                | PHLTA (R290 Monobloc, Hydro Unit for Split & Hydrosplit), PHLTB (Monobloc) |                      |                      |                              |  |

OSHA-MV

OSHA-MV1

Technical Specification

Thermostatic mixing valve (3/4" DN20)

Thermostatic mixing valve (1" DN25)