


Convenient & Reasonable THE NEW ENHANCED DISPLAY WL30



PORTRAIT & LANDSCAPE

Flexible usage with landscape or portrait display according to the display environment.

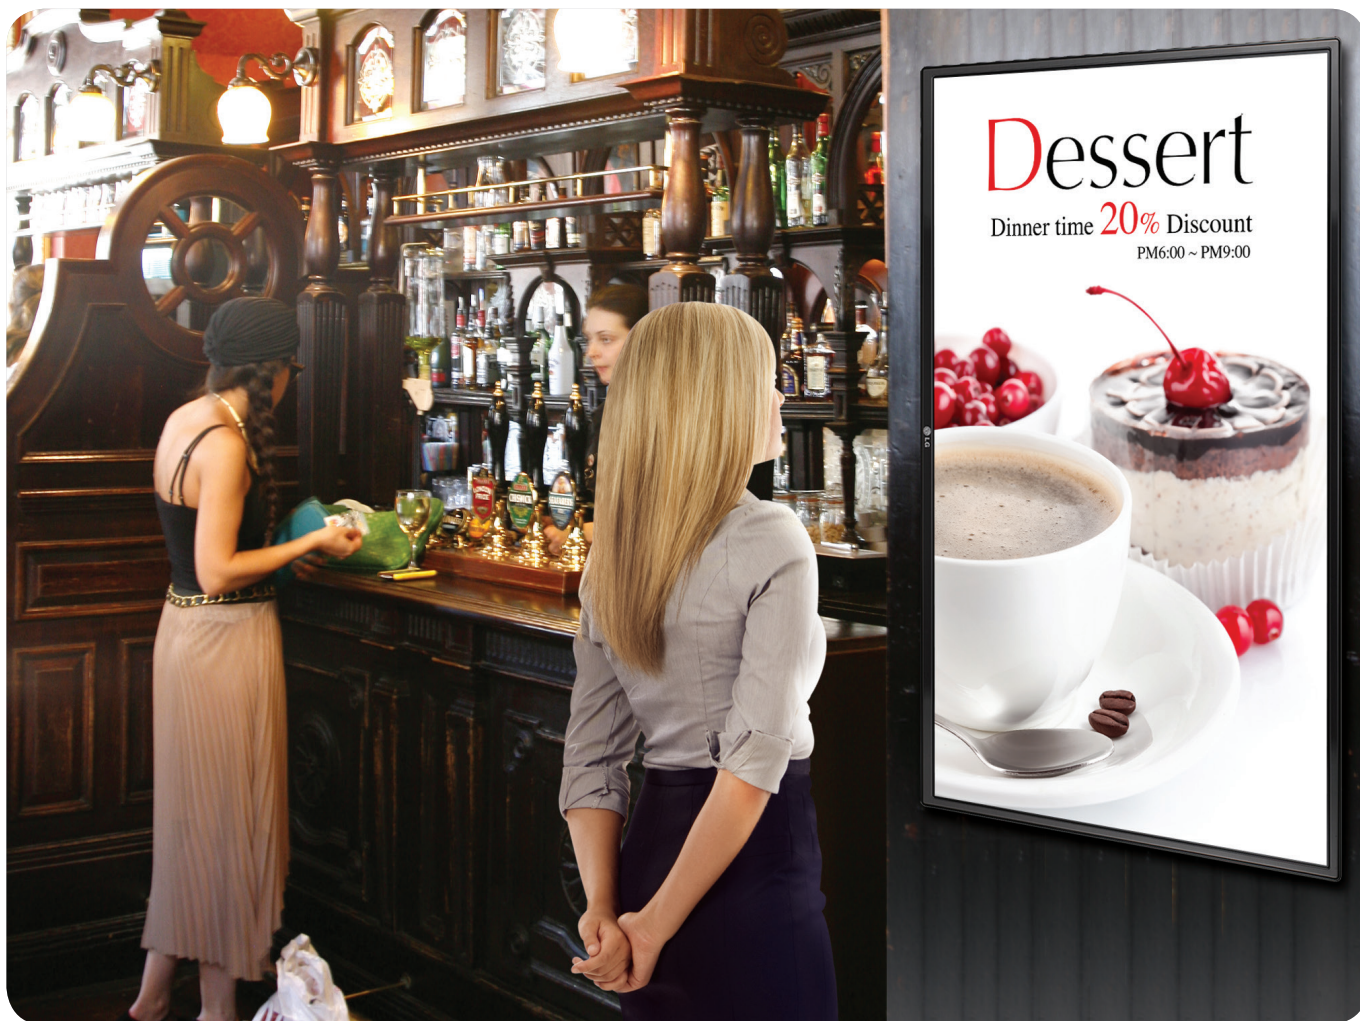

Portrait



Landscape

NARROW BEZEL & SLIM DEPTH

With narrower bezel and slimmer depth than those of competitor's, you can save space more efficiently with WL30.

Competitor



40": 17.4mm 93.5mm
46": 17.4mm 94.5mm
55": 17.5mm 94.5mm

WL30



42": 13.4mm 79mm
47": 13.4mm 84.5mm
55": 13.4mm 82.3mm

EXPANDABLE HD-SDI OPTION BOARD (55WL30, 60WL30)



HD-SDI

MEDIA PLAYER INTEGRATED SOLUTION

The solution integrated with media player foregoes the need for additional media players and allows you to cut down expenses.

Extra cost for a media player can be saved!



WL30 Series



8GB Internal Storage
Memory Built-in for WL30

+



Free Software
(SuperSign Elite-w lite)

THE NEW ENHANCED DISPLAY

WL30 42F", 47F", 55F", 60F"



FEATURES

- Portrait & Landscape
- 1,920 x 1,080 (FHD)
- Brightness : 400nit (42", 47", 60"), 350nit (55")
- 8GB Internal Storage Memory Built-in
- Expandable HD-SDI Option Board (55", 60")
- Low Power Consumption
- Narrow Bezel & Slim Depth :
 - 13.4mm (T/L/R), 18mm (B), 79mm(D) (42")
 - 13.4mm (T/L/R), 18mm (B), 84.5mm(D) (47")
 - 13.4mm (T/L/R), 18mm (B), 82.3mm(D) (55")
 - 13.4mm (T/L/R), 18mm (B), 68.3mm(D) (60")

SPECIFICATIONS

WL30


PANEL	Screen Size	42F", 47F", 55F", 60F"
	Panel Technology	IPS
	Aspect Ratio	16 : 9
	Native Resolution	1,920 x 1,080 (FHD)
	Brightness	400nit (42", 47", 60"), 350nit (55")
	Contrast Ratio	1,000 : 1
	Dynamic CR	500,000:1
	Viewing Angle (H x V)	178 x 178
	Response Time	42": 6ms (GTG) (TBD), 47": 9ms (GTG) (TBD), 55": 8ms (GTG) (TBD), 60": 10ms (GTG) (TBD)
	CONNECTIVITY	Input
Digital		HDMI (1), DVI-D (1), DP (1)
Analog		RGB (1)
Audio		RGB, DVI-D, Component (3.5Φ 1)
External Control		RS232C (1), RJ45 (1), IR (1)
USB		Yes (1)
Output		
Digital		DVI-D (1)
Audio		No
External Control		RS232C (1)
PHYSICAL SPECIFICATION	Bezel Width	13.4mm (T/L/R), 18mm (B)
	Monitor Dimension (W x H x D)	42": 96.34cm x 56.2cm x 7.9cm, 47": 107.50cm x 62.48cm x 8.45cm, 55": 124.44cm x 72.02cm x 8.23cm, 60": 135.38cm x 78.14cm x 6.83cm
	Weight (Head)	42": 10kg, 47": 13kg, 55": 19kg, 60": 23kg (TBD)
	Carton Dimensions (W x H x D)	42": 105.0cm x 16.0cm x 70cm, 47": 118.0cm x 16.5cm x 77.0cm, 55": 134.5cm x 19.1cm x 87cm, 60": 146.5cm x 19.1cm x 93.2cm
	Packed Weight	42": 13.6kg, 47": 17kg, 55": 24.5kg, 60": 30kg (TBD)
	VESA™ Standard Mount Interface	42": 200mm x 200mm, 47"/55"/60": 400mm x 400mm
ENVIRONMENT CONDITIONS	Operation Temperature	0 °C to 40 °C
	Operation Humidity	10 % to 80 %
POWER	Power Supply	100-240V~, 50/60Hz
	Power Consumption	
	Typical / Smart Energy Saving	42": 90W/60W, 47": 100W/70W, 55": 140W/110W, 60": 180W/150W
	DPMS	0.7W (DP)
	Power Off	0.5W

STANDARD (CERTIFICATION)	Safety	UL, cUL, CB scheme, TUV
	EMC	FCC Class "A", VCCI, C-tick, CE, KCC
	ErP / Energy Star	Yes / Yes (Energy Star 6.0)
MEDIA PLAYER COMPATIBILITY	Slot PC Compatible (optional)	No
	External Media Player Attachable	Yes (NC1100 / NA1100 / NA1000)
SOFTWARE COMPATIBILITY	SuperSign Elite-w lite / Elite-c	Yes (Editing, Scheduling, Distribution & Play, Control) / Yes
ACCESSORY	Included	Remote Controller (include battery 2ea), Power Cord, IR Receiver, CD (Owner's Manual, SuperSign Program / Manual), ESG, RGB Cable
	Optional	42": SP-420T, SP-2100, LSW230B, 47": SP-470T, SP2100, LSW430B, 55"/60": SP-550T, SP-2100, LSW430B

* Image may differ slightly from actual product. Specifications are subject to change without prior notice.

INTERFACE

(42F", 47F", 55F", 60F")

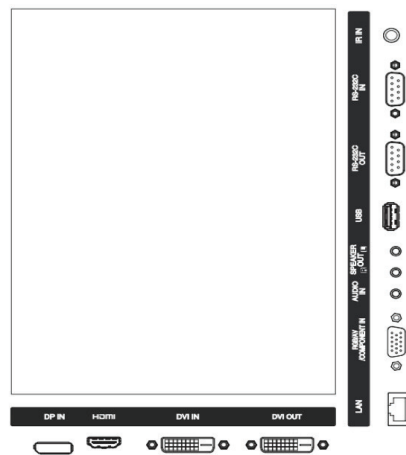

DIMENSION (unit : mm)

