

High Readability with Shine-Out film


# HIGH BRIGHTNESS OUTDOOR DISPLAY WX50MF



WX50MF 47"


## HIGH BRIGHTNESS

The high brightness 47" outdoor display maintains high picture quality and image readability in an outdoor environment.

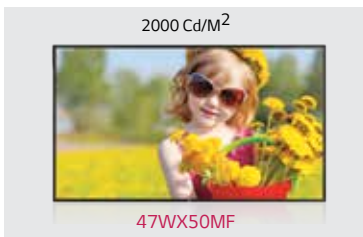

## SHINE-OUT FILM

Shine-out film enhances the image quality by reducing sun glare for vivid and clear images.

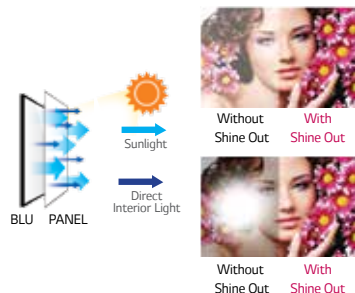

## OPEN FRAME

Flexible to customise according to customer's needs and circumstances with its open frame.



## HIGH BRIGHTNESS OUTDOOR DISPLAY

# WX50MF 47"



### FEATURES

- 1,920 x 1,080 (FHD)
- High Brightness: 2,000 cd/m<sup>2</sup>
- High Resistance to Blackening Effect
- Shine-Out Film
- Open Frame
- 24/7 Operation
- Landscape/Portrait support

### SPECIFICATIONS

		WX50MF
PANEL	Screen Size	47" (119cm)
	Panel Technology	IPS
	Aspect Ratio	16 : 9
	Native Resolution	1,920 x 1,080 (FHD)
	Brightness	2,000 cd/m <sup>2</sup>
	Contrast Ratio	1,300 : 1
	Dynamic CR	500,000 : 1
	Viewing Angle (H x V)	178 x 178
	Response Time	10ms(GTG), 8ms(GTG, WOT)
	CONNECTIVITY	Input (Rear)
Digital		HDMI(1), DVI(1), Display Port(1) with HDCP for all input
Analogue		Component(1), AV(1), RGB(1) (Shared with D-Sub)
Audio		PC / AV / Component Audio In(1)
External Control		RS232C(1), RJ45(1)
USB		USB(1)
Output (Rear)		
Digital		DVI-D(1)
Analogue		Component(1), AV, RGB(1) (Shared with D-Sub)
Audio		External Speaker
External Control		RS232C
Audio		
Auto Volume		No
Balance		Yes
Audio Power	20W (10W x 2)	
Speaker On / Off	Yes	
Clear Voice II	Yes	
Sound Mode	Standard, Music, Cinema, Sports, Game	
PHYSICAL SPECIFICATION	Bezel Width	11mm (even bezel)
	Monitor Dimension (W x H x D)	107cm x 67cm x 16cm
	Weight (head)	23.9kg

	Carton Dimensions (W x H x D)	120cm x 77cm x 29cm
	Packed Weight	29.1kg
	VESA™ Standard Mount Interface	N/A
SPECIAL FEATURES	Additional	Temperature Sensor, Auto Brightness sensor, Cooling FAN, Tile Mode, Image Zoom, Brightness/Contrast/Backlight
ENVIRONMENT CONDITIONS	Operation Temperature	0°C - 40°C
	Operation Humidity	10% - 80%
POWER	Power Supply	100-240V~, 50/60Hz
	Power Consumption	
	Typical / Smart Energy Saving	240W/170W
	DPMS	1.0W (Set only)
	Power Off	0.7W
STANDARD(CERTIFICATION)	Safety	UR / cUR / CB scheme / TUV-Type
	EMC	FCC Class "A" / CE / KCC, C-tick
	ErP / Energy Star	No
MEDIA PLAYER COMPATIBILITY	Slot PC Compatible (optional)	No
	External Media Player Attachable	No
SOFTWARE COMPATIBILITY	SuperSign W/C	Yes / Yes
ACCESSORY	Included	Remote Controller, Power Cable, RGB Cable, Manual

\* WOT : Within Operation Temperature

※ Image may differ slightly from actual product. Specifications are subject to change without prior notice.

### INTERFACE



### DIMENSION (unit : mm)

