


High Readability & Wonderful Colour Expression

HIGH BRIGHTNESS SEMI-OUTDOOR DISPLAY WX30




SHINE-OUT FILM

• Shine-out film enhances the image quality by reducing sun glare for vivid and clear images.

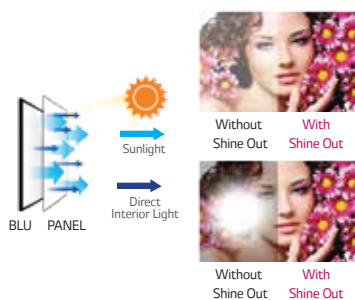

RESISTANT TO HOT SPOTS

• LG's IPS Premium Display minimises Gravity Defect in both landscape and portrait orientations. Also whilst screen surface temperature is below 110°C, it presents clearer images without hot spots.

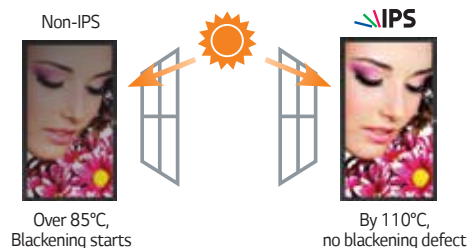

SLIM BEZEL DESIGN DISPLAY

• Slim Even Bezel (42", 47": 11.5mm, 55": 11.2mm)
• Landscape / Portrait mode



Semi-Outdoor Display with Shine-Out Film

WX30 42", 47", 55"



FEATURES

IPS Panel

- Low Screen Temperature on Standard Mode
- High Resistance to Blackening Effect
- Wide Viewing Angle

High Visibility

- 700 cd/m² + Shine-Out Film

SPECIFICATIONS

WX30

PANEL		Screen Size	42" / 47" / 55"	SPECIAL FEATURES		Brightness / Contrast / Backlight	Yes
		Panel Technology	IPS			Position / Size	Yes
		Aspect Ratio	16 : 9			Auto Config / Phase	Yes
		Native Resolution	1920 x 1080 (FHD)			Energy Saving	Yes (Minimum, Medium, Maxium)
		Brightness	700 cd/m ²			Smart Energy Saving	Yes
		Contrast Ratio	1,300:1			Operation Temperature	0 °C to 40 °C
		Dynamic CR	500,000:1			Operation Humidity	10 % to 80 %
		Viewing Angle (H x V)	178 x 178			Power Supply	100-240V, 50/60Hz
		Response Time	42"/47":12ms (GTG), 8ms (GTG, WOT) 55":12ms (GTG)			Typ / Smart Energy Saving	42" : 115W / 75W, 47" : 120W / 85W 55" : 130W / 90W
CONNECTIVITY		Digital	HDMI(1), DVI-D(1), Display Port(1) with HDCP for all input	ENVIRONMENT CONDITIONS		Power Consumption	0.7W
		Analog	Component(1), Composite(1), RGB(1) (Shared with D-Sub)			DPM	0.5W
		Audio	RGB/DVI-D/AV/Component (3.5Ø 1)			Power off	0.5W
		External Control	RS232C(1), RJ45(1), IR(1)	STANDARD (CERTIFICATION)		Safety	UL, cUL, CB scheme, TUV
		USB	USB 2.0 x 1			EMC	FCC Class "A", VCCI, CE, KCC, C-tick
		HDTV Formats	Component : 720p, 1080i, 1080p HDMI : 720p, 1080i, 1080p			ErP / Energy Star	Yes / Yes (Energy Star 6.0)
Output (Rear)		Digital	DVI-D(1)	MEDIA PLAYER COMPATIBILITY		Slot PC Compatible (Optional)	No
		Analog	Component(1), Composite(1), RGB(1) (Shared with D-Sub)			External Media Player Attatchable	No
		Audio	External Speaker	SOFTWARE COMPATIBILITY		SuperSign elite-w & lite	Yes (Editing, Scheduling, Distribution & Play, Control)
PHYSICAL SPECIFICATION		External Control	RS232C(1), IR(1)			SuperSign elite -c	Yes
		Bezel Width	42", 47" : 11.5mm, 55" : 11.2mm	ACCESSORY		Included	Remote Controller / Power Cable / RGB Cable / Manual / ESG / IR Receiver
		Monitor Dimension (W x H x D)	42" : 96.16cm x 55.45cm x 3.2cm 47" : 107.18cm x 61.6cm x 3.1cm 55" : 124.2cm x 71.3cm x 3.2cm			Option	Speaker Stand Wall Mount
		Weight (Head)	42" : 13.7kg, 47" : 15.7kg, 55" : 23.5kg				AP-WX60 / AP-WX70
		Carton Dimensions (W x H x D)	42" : 108.5cm x 74.0cm x 12.5cm 47" : 119.7cm x 77.0cm x 14.0cm 55" : 132.4cm x 85.8cm x 15.9cm				
		Packed Weight	42" : 17.2kg, 47" : 19.4kg, 55" : 28.5kg				
		VESA™ Standard Mount Interface	400mm x 400mm				
		Temperature Sensor	Yes				
		Auto Brightness Sensor	No				

* Image may differ slightly from actual product. Specifications are subject to change without prior notice.

DIMENSION (unit : mm)

