

NO.	NEW FUNCTION NAME (4 TH GENERATION INDOOR)	FUNCTION DESCRIPTION	REQUIRED CONTROLLER		REMARKS
			WIRED REMOTE CONTROLLER	CENTRALIZED CONTROLLER	
1	Energy Monitoring (Accumulated Electric Energy Check)	Monitoring accumulated power consumption by Wired Remote Controller	○	○	* Necessary to install the PDI (Power Distribution Indicator) and central controller * Combined with Multi V Water S outdoor unit, this function is not available.
		Monitoring accumulated power consumption by Central Control Device / PDI	-	○	* Necessary to install the PDI (Power Distribution Indicator) * To make a report, central controller must be installed
2	2 Set Point	1) 2 set point control by Indoor and central controller 2) Synchronization function with remote control (Synchronization Setting and Monitoring)	○	○	* Wired remote controller and central controller must be installed * Combined with Multi V Water S outdoor unit, this function is not available.
3	Occupied / Unoccupied Scheduling Function (Sub Func. Enable)	1) Synchronization according to occupied / unoccupied by Indoor and Central control 2) Synchronization icon with remote controller (Synchronization Monitoring)	○	○	* Centralized control is able to when you combine only 4th generation indoor units (Use together with 2nd generation and 4th generation indoors, only wired remote controller is able to set this function as existing way) * Wired remote controller or central controller must be installed (Function can be activated using just one control device.) * Combined with Multi V Water S outdoor unit, this function is not available.
4	Group Control	Group Control can use Additional function	○	○	* Check more details in PDB (Product Data Book) * Central controller can create and control group.
5	Test Run (Heating)	Test run mode can be operated in cooling mode and heating mode for easy service	○	-	
6	Model Information Monitoring	Product Type / Indoor Type / Indoor capacity information can be monitored by remote controller	○	-	
7	Indoor unit address checking	Wired remote controller can check indoor unit address information	○	-	
8	Refrigerant Leakage Detection	Function error sign display when refrigerant leakage occurred	○	○	* Central controller has been installed, CH230 error code can be recognized (Old / New Same) * Without Central Controller, it is able to recognize with wired remote controller (CH230) * Combined with Multi V Water S outdoor unit, this function is not available. * Accessory PRLDNVS0 must be separately ordered
9	Thermo On / Off range Setting (Cooling)	User can set cooling thermo on/off range with wired remote controller for prevention overcooling	○	-	* Thermo On / Off temperature setting (3 step)
10	Thermo On / Off range Setting (Heating)	User can set heating thermo on/off range with wired remote controller for prevention overheating. (4 Step)	○	-	* Thermo On / Off temperature setting (4 step)
11	Static Pressure 11 Step Control (Only for Ceiling Concealed Duct Type)	Depends on the installation environment, 4th generation Ceiling Concealed Duct can control the static pressure by 11 steps for providing comfortable environment	○	-	* Only applied in Ceiling Concealed Duct
12	1 point External Input (On / Off control)	Indoor unit can be controlled by external devices without purchasing Dry contact as an accessory (All 4th generation indoors)	○	-	* Simple On/Off control by Dry Contact at Indoor [Example of Contact port by product type] * 2 Way Cassette : CN-CC Port (Wired remote controller installation function mode 41 is required) * 1 Way / 4 Way Cassette / Ceiling Concealed Duct / Wall Mounted Unit / Console / FAU / Floor Standing (with case / without case) : CN-EXT Port
13	Filter Sign (Remaining Time)	The alarm activates when the filter needs to be cleaned, and the time remaining for cleaning is displayed on the screen.	○	○	* The alarm activates on the central controller, but the remaining time is not displayed.
14	Auto restart function Disable / Enable	After the power failure compensation, stand by at OFF mode Restore the operation for the status before the power off	○	-	
15	Indoor Humidity display	Monitoring indoor humidity Wired Remote Controller	○	○	* Available only with Multi V 5
16	Comfort Cooling setting	set the outdoor unit comfort cooling operation value	○	○	* Available only with Multi V 5
17	Smart Load Control setting	Change the outdoor unit's Smart Load Control stage value.	○	○	* Available only with Multi V 5
18	ODU Refrigerant Noise Reduction setting	set the outdoor unit's refrigerant noise reduction function	○	○	* Available only with Multi V 5
19	Low noise mode time setting	set the start and end time of the outdoor unit's low noise mode operation	○	○	* Available only with Multi V 5

Note : 1) No.1, 2, 3, 8 : Functions are available to use together with 4th generation Indoor units only. If used together 2nd generation indoor unit and 4th generation indoor unit functions will not be activate. Combined with MULTI V Water S outdoor unit this function is not available
2) No. 4, 5, 6, 7, 9, 10, 11, 12, 13, 14 : If used together 2nd generation indoor unit and 4th generation indoor unit these functions will be activate only in 4th generation indoor
3) 2nd generation indoor unit : Ceiling & Floor Convertible Unit, Ceiling Suspended Unit, HYDRO KIT (Low Temp. / High Temp.), ERV DX (with Humidifier, without Humidifier), AHU Communication Kit

WIRED REMOTE CONTROLLER					CENTRALIZED CONTROLLER				
PREMIUM (PREMTA000 PREMTA000A PREMTA000B)	STANDARD III (PREMTB100) (PREMTB10)	STANDARD II (PREMTBB01) (PREMTB001)	SIMPLE		AC EZ (PQCSZ250S0)	AC EZ TOUCH (PACEZA000)	AC SMART 5 (PACSS5A000)	ACP 5 (PACP5A000)	AC MANAGER 5 (PACM5A000)
			SIMPLE FOR HOTEL (PQRCHCA0Q / QW)	SIMPLE (PQRCVCL0Q / QW)					
○	○	○	-	-	-	○	○	○	○
-	-	-	-	-	-	○	○	○	○
○	○	-	-	-	-	○	○	○	○
○	○	-	-	-	-	○	○	○	○
○	○	○	-	-	-	-	-	-	-
○	○	○	-	-	-	-	-	-	-
○	○	○	-	-	-	-	-	-	-
○	○	○	-	-	-	-	○	○	-
○	○	○	-	-	-	-	-	-	-
○ (4 step)	○ (4 step)	○ (3 step)	○ (3 step)	○ (3 step)	-	-	-	-	-
○	○	○	○	○	-	-	-	-	-
○	○	○	-	-	-	-	-	-	-
○	○	○	-	-	○	○	○	○	○
○	○	○	-	-	-	-	-	-	-
○	○	-	-	-	-	-	○	○	-
○	○	-	-	-	-	-	○	○	-
○	○	-	-	-	-	○	○	○	-

※ ○ : Applied, - : Not applied

Controller \ Product		Premium	Standard III		Standard II		Simple		Simple for Hotel		Wireless	Dry Contact			
		 PREMTA000 PREMTA000A PREMTA000B	 PREMTBB10	 PREMTB100	 PREMTB01	 PREMTB001	 PQRCVCL0Q	 PQRCVCL0QW	 PQRCHCA0Q	 PQRCHCA0QW	 PWLSSB21H (H/P)	 Simple Dry Contact PDRYCB000	 2 points Dry Contact PDRYCB400	 Dry Contact for Thermostat PDRYCB320	 For Modbus PDRYCB500
Ceiling Mounted Cassette	 4 Way	ARNU-A4 ARNU-B4	○	○	○		○		○		○	○	○	○	○
	 2 Way / 1 Way	ARNU-B4 ARNU-C4	○	○	○		○		○		○	○	○	○	○
	 Round CST	ARNU-A4	○	○	○		○		○		○	○	○	○	○
Ceiling Concealed Duct	 High Sensible	ARNU-A4	○	○	○		○		○		△	○	○	○	○
	 High / Mid Statics	ARNU-A4	○	○	○		○		○		△	○	○	○	○
	 Low Statics	ARNU-G4	○	○	○		○		○		△	○	○	○	○
FAU (Fresh Air intake)	 FAU (Fresh Air intake)	ARNU-Z4	○	○	○		○		○		△	○	○	○	○
Convertible & Ceiling Suspended	 Convertible & Ceiling Suspended	ARNU-A4	○	○	○		○		○		○	○	○	○	○
MULTI V	Console	ARNU-A4	○	○	○		○		○		○	○	○	○	○
	Floor Standing	ARNU-A4 ARNU-U4	○	○	○		○		○		○	○	○	○	○
Wall Mounted	 ARNU-A4	ARNU-A4	○	○	○		○		○		○	○	○	○	○
	 ARNU-R4	ARNU-R4	○	○	○		○		○		○	○	○	○	○
	 ARNU-A4 ARNU-C4 ARNU-N4	ARNU-A4 ARNU-C4 ARNU-N4	○	○	○		○		○		○	○	○	○	○
HYDRO KIT ¹⁾	 HYDRO KIT ¹⁾	ARNH-A4	-	-	-		-		-		-	○	-	○	-
Ventilation	 Energy Recovery Ventilator	Energy Recovery Ventilator	○	○	○		-		-		-	○	-	-	○
	 Energy Recovery Ventilator with DX coil	Energy Recovery Ventilator with DX coil	○	○	○		-		-		-	○	-	-	○
AHU Communication Kit	 AHU Communication Kit	AHU Communication Kit	○	○	○		-		-		△	-	-	-	-

※ ○ : Compatible, △ : Need wired remote controller / IR receiver, - : Not compatible
1) It has a separate remote controller


Controller Name	Wired Remote Controller					Wireless Remote Controller	Wi-Fi Modem
	Premium	Standard III	Standard II	Simple	Simple (Hotel)		
Model Name	 PREMTA000 PREMTA000A PREMTA000B	 PREMTB100 PREMTBB10	 PREMTB001 PREMTBB01	 PQRCVCL0Q PQRCVCL0QW	 PQRCHCA0Q PQRCHCA0QW	 PWLSSB21H (H/P)	 PWFMD200
Basic	On / Off	○	○	○	○	○	○
	Fan Speed Control	○	○	○	○	○	○
	Temperature Setting	○	○	○	○	○	○
	Mode Change	○	○	○	○	-	○
	Auto Swing	○	○	○	○	○	
	Vane Control (Louver Angle)	○	○	○	○	○	○
	E.S.P (External Static Pressure)	○	○	○	○	-	-
	Electric Failure Compensation	○	○	○	○	-	○
	Indoor Temperature Display	○	○	○	○	○	
	ALL Button Lock (Child Lock)	○	○	○	○	-	-
Advanced	Schedule / Timer	Weekly - Yearly	Weekly - Yearly	Weekly	-	-	Sleep / On / Off Weekly
	Additional Mode Setting ¹⁾	○	○	○	-	-	-
	Time Display	○	○	○	-	-	○
	Humid. Display	○	○	-	-	-	-
	Advanced Lock (mode, set point, set point range, on/off Lock)	Advanced Lock	Advanced Lock	-	-	-	-
	Filter Sign	○	○	○	-	-	-
	Energy Management ²⁾	○	○	○	-	-	-
	Dual Set Point	○	○	-	-	-	-
	Human Detection	-	○	-	-	-	-
	Temp, Humidity Compensation	○	○	-	-	-	-
ETC	Wi-Fi AP mode setting	○	○	○	○	○	-
	Operation Status LED	○	○	○	○	○	-
	Wireless Remote Controller Receiver	○3)	-	○3)	○3)	○3)	-
	Display	5 inch Color	4.3 inch Color	4.3 inch mono	2.6 inch mono	2.6 inch mono	2 inch mono
	Size (W x H x D, mm)	137 x 121 x 16.5	120 x 120 x 16	120 x 121 x 16	70 x 121 x 16	70 x 121 x 16	51 x 153 x 26
	Black Control for Screen Saver	○	○	-	-	-	-

※ ○ : Applied, - : Not Applied
1) It might not be indicated or operated at the partial product
2) Centralized control (PACEZA000 / PACS5A000 / PACP5A000 / PLNWKB000) and PDI (PQNUD1S40 / PPWRDB000) should be installed for this function
3) For ceiling type duct
Note
- Indoor unit should have functions requested by the controller
- If you need more detail, please refer to the manual of product. (<http://partnerlge.com: Home> DocLibrary> Manual>)




Necessity of ERV

Energy Recovery Ventilation (ERV)




Comfort air + Energy Saving
Compare to natural ventilation
Heat exchanger collects wasted energy while ventilating.

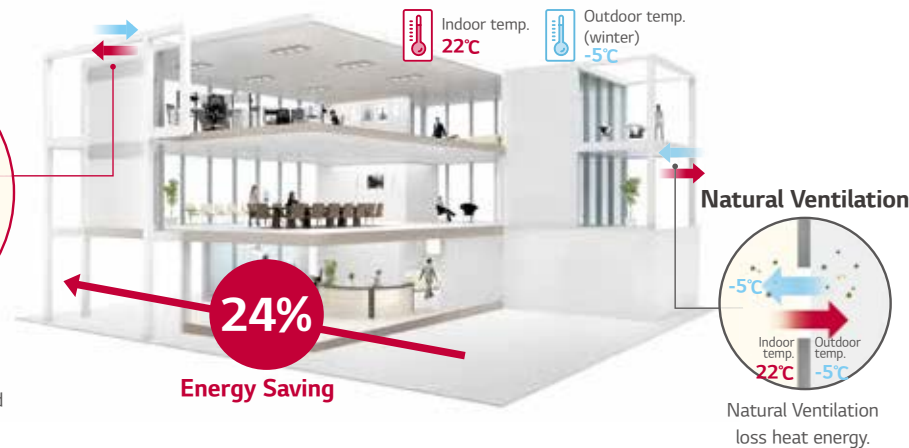


High Efficiency Heat Exchanger

Efficiency and comfort is ensured through the high-efficiency energy recovery central core which recovers energy from the indoor air and transfers it to the fresh incoming air without mixing the air stream.

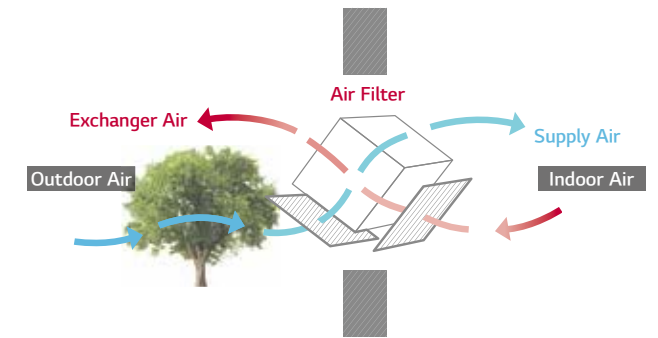


Exhaust System

The exhaust system uses a high static sirocco fan to effectively remove contaminants from indoor air. Supply and exhaust air flows are completely separated in the heat exchanger, allowing the LG ERV to filter out impurities before supplying outdoor air to ensure indoor air is fresh and healthy.

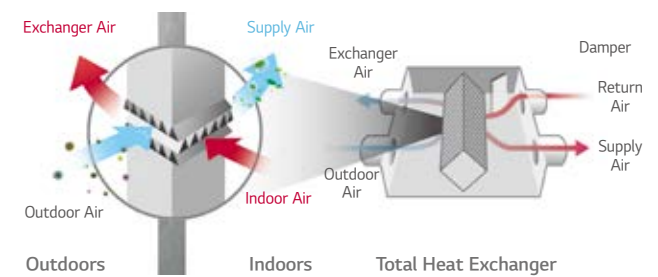

Night Time Free Cooling

During summer nights, indoor heat can be discharged outdoors and cool outdoor air can be brought indoors for energy savings.

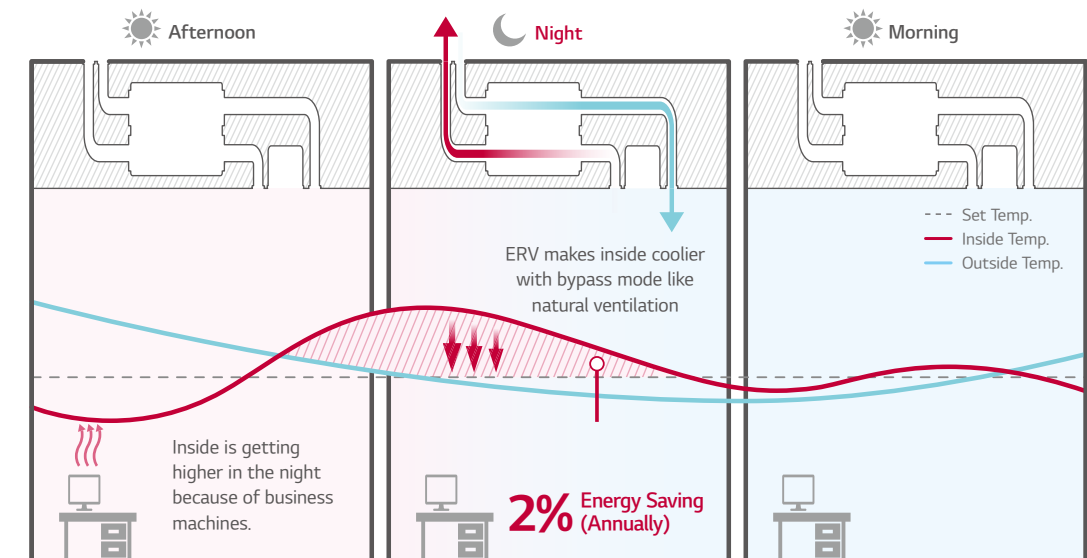


※ This function is operated with 'Night Time Free Cooling' on remote controller (with MULTI V only)
※ Energy saving ratio can be differed by weather condition.
※ Test Condition
- Office (49,000ft²) / Occupancy : 30 / Area : London, UK
- ERV (1000 CMH) + MULTI V 4 (12HP) Unit Combination
- Other conditions are subject to BREEAM.

CO₂ Auto Operation


LG ERV reduces energy loss with auto fan speed control following CO₂ level.

※ This function is operated with 'Night Time Free Cooling' on remote controller.
(with MULTI V only)
※ Energy saving ratio can be differed by weather condition.
※ Test Condition - Office (49,000ft²) / Occupancy : 30 / Area : London, UK
- ERV (1000 CMH) + MULTI V 4 (12HP) Unit Combination
- Other conditions are subject to BREEAM

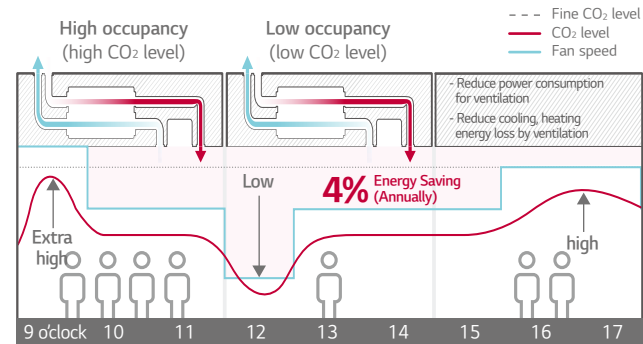

Seasonal Auto Operation

LG ERV senses outdoor temperature and operates automatically following weather conditions.

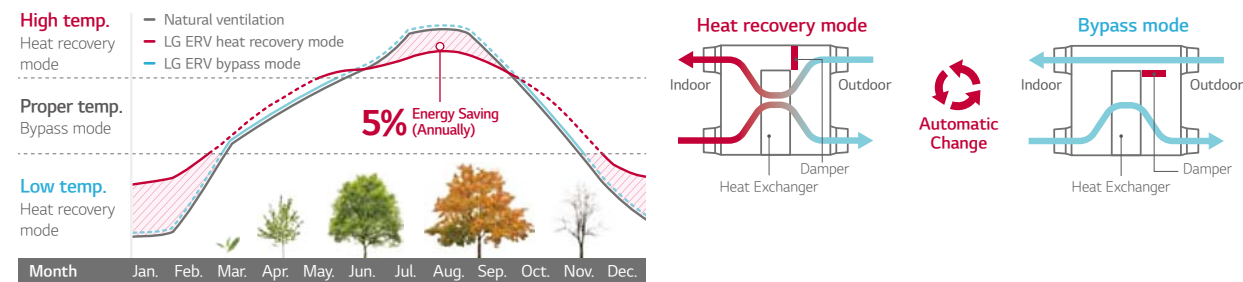


※ This function is operated with 'Auto' mode by wired remote control.
※ Energy saving ratio can be differed by weather condition.
※ Test Condition - Office (49,000ft²) / Occupancy : 30 / Area : London, UK
- ERV (1,000 CMH) + MULTI V 4 (12HP) Unit Combination
- Other conditions are subject to BREEAM

Delay Operation

When the air conditioner and ERV are switched on simultaneously, delay operation can reduce unnecessary heating and cooling energy loss by slowing down automatic ERV operation.

※ This function is operated with 'Night Time Free Cooling' on remote controller.
(with MULTI V only)
※ Energy saving ratio can be differed by weather condition.
※ Test Condition - Office (49,000ft²) / Occupancy : 30 / Area : London, UK
- ERV (1000 CMH) + MULTI V 4 (12HP) Unit Combination
- Other conditions are subject to BREEAM

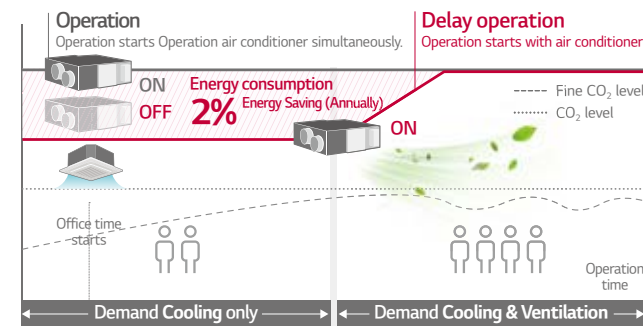

CO₂ Level Monitoring

CO₂ sensor senses CO₂ level in the room. Users can monitor CO₂ level on new wired remote controller, and ERV controls the fan speed automatically following the level.

CO₂ Level Visualization

CO₂ sensor senses indoor CO₂ level and displays it on new wired remote controller.




Main display

If the CO₂ level is above 900ppm in the room, the red mark is on.



Further information


CO₂ level and room condition are displayed continuously.



※ The remote controller screen image may change.
※ Applicable to only Standard III, Premium remote controller.


CO₂ Concentration Control

Using CO₂ sensor, LG ERV controls exhaust air flow automatically to keep indoor air fresh under settled CO₂ concentration.

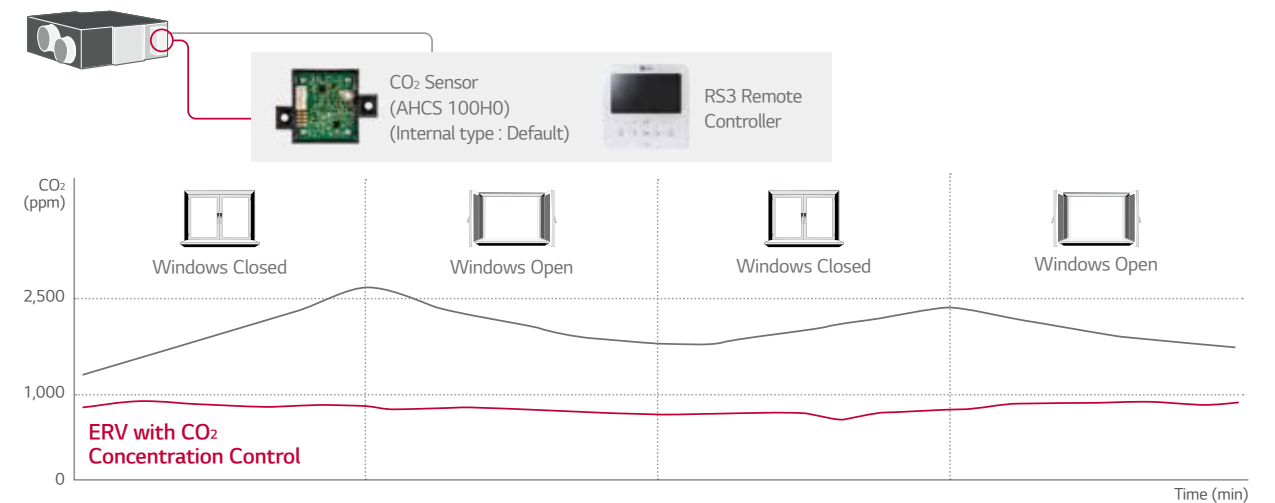

High Durability

LG ERV durability is increased through bacteria-resistant material of heat exchanger and corrosion protection coating. It prevents shortening of product life due to corrosion or mold, and supplies high quality air inside by minimizing bacteria.

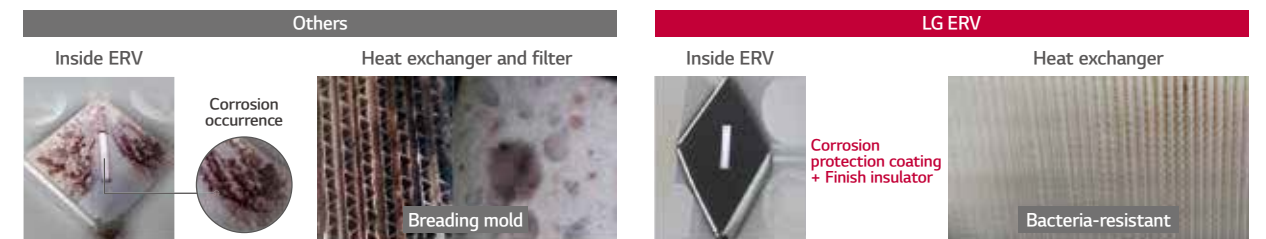

Easy Control

Wired remote controller is easy for usage.



Easy

- Navigation buttons, easy to use.
- Easy installation setting

Visible

- Indoor CO₂ level
- Alarm for filter change / remaining time to change filters

Convenient


- Flexible display
- Dual display with air conditioner
- Zoom selected directory to increase legibility

Group Control

1 wired remote controller up to 16 ERV (Including air conditioner). It is convenient for large common space such as lobby.


Several units combination

16 units group control is available with 1 remote controller.

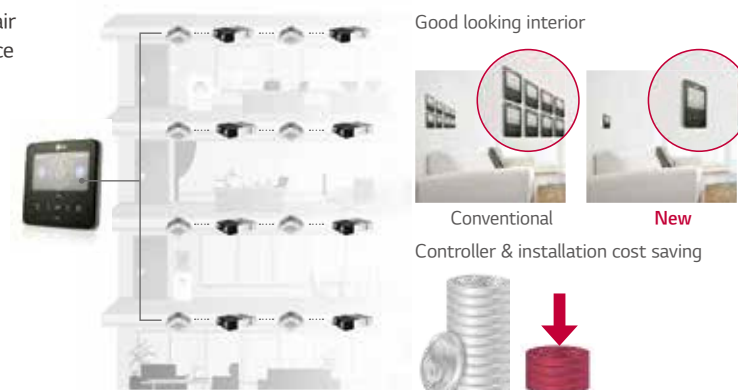

Interlocking with Air Conditioning System


- LG ERV can be interlocked with air conditioners and controlled individually.
- This function can be operated when the system is connected with 1 remote controller.

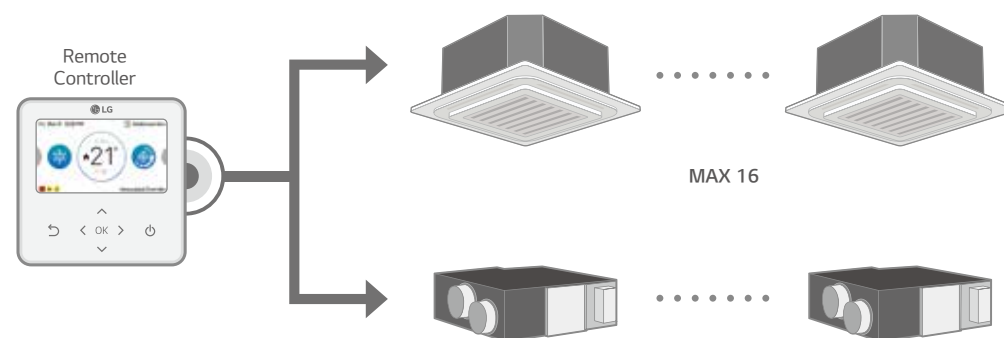

Fast Ventilation Mode


Fast ventilation mode prevents the spread of contaminants under negative indoor pressure, and makes indoor air fresh and comfortable quickly.

Only Exhausting

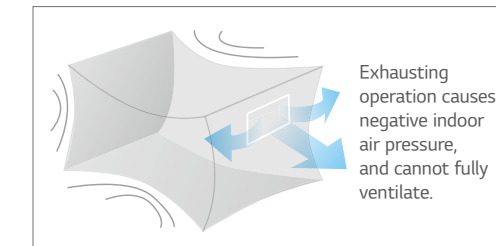


Exhausting and Supplying Simultaneously

Fast Ventilation Mode

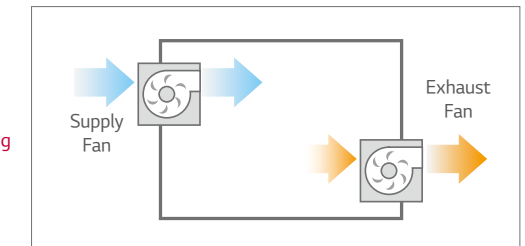


External Static Pressure Control

The high static pressure fan can control the air volume depending on the length of the duct. It is also easy to control the pressure level by using the remote controller for a more flexible duct installation and easier testing.

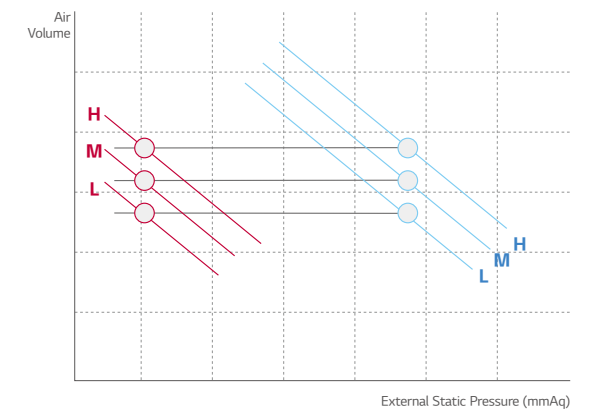

Easy Cleaning and Filter Change

Filter can be conveniently changed and cleaned.

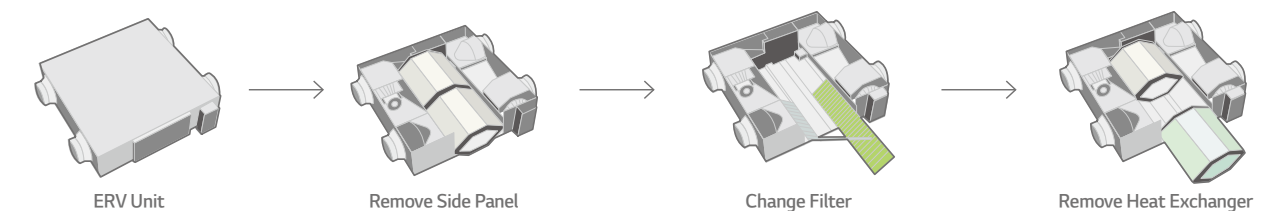

LZ-H025GBA4 / LZ-H035GBA5
LZ-H050GBA5



MODEL		UNIT	LZ-H025GBA4	LZ-H035GBA5	LZ-H050GBA5
Dimensions (W x H x D)	Body	mm	988 x 273 x 1,014		
	Body	kg	44		
Power Supply		Ø, V, Hz	1, 220-240, 50		
Normal Air flow		m³/h	250	350	500
ERV Mode	Operating Step		Super-high / High / Low		
	Current	SH / H / L A	0.70 / 0.60 / 0.42	1.05 / 0.90 / 0.50	1.65 / 1.56 / 0.80
	Power Input	SH / H / L W	97 / 87 / 52	150 / 125 / 60	247 / 230 / 95
	Air Flow	SH / H / L m³/h	250 / 250 / 150	350 / 350 / 210	500 / 500 / 320
	External Static Pressure	SH / H / L Pa	100 / 70 / 50	150 / 100 / 50	150 / 100 / 50
	Temperature Exchange Efficiency	SH / H / L %	80 / 80 / 83	80 / 80 / 82	79 / 79 / 82
	Enthalpy Exchange Efficiency	Heating (SH / H / L) %	70 / 70 / 72	75 / 75 / 80	75 / 75 / 78
		Cooling (SH / H / L) %	66 / 66 / 68	71 / 71 / 75	68 / 68 / 75
	Energy Label	A+ to G Scale	A	B	B
	Sound Pressure Level	SH / H / L dB(A)	29 / 28/ 24	35 / 32 / 26	37 / 36 / 28
	Sound Power Level	SH / H / L dB(A)	50	53 / 50 / 42	57 / 56 / 46
Bypass Mode	Operating Step		Super-high / High / Low		
	Current	SH / H / L A	0.70 / 0.60 / 0.42	1.05 / 0.90 / 0.50	1.65 / 1.56 / 0.80
	Power Input	SH / H / L W	97 / 87 / 52	150 / 125 / 60	247 / 230 / 95
	Air Flow	SH / H / L m³/h	250 / 250 / 150	350 / 350 / 210	500 / 500 / 320
	External Static Pressure	SH / H / L Pa	100 / 70 / 50	150 / 100 / 50	150 / 100 / 50
	Sound Pressure Level	SH / H / L dB(A)	29 / 29/ 25	35 / 33 / 26	37 / 37 / 28
Duct Work	Qty	EA	4		
	Size (Ø)	mm	Ø200		
Supply Air Fan	Qty	EA	1		
	Type		Direct-Drive Sirocco		
Exhaust Air Fan	Qty	EA	1		
	Type		Direct-Drive Sirocco		
Filters	Qty	EA	2		
	Type		Cleanable fibrous fleeces		
	Size (W x H x D)	mm	855 x 10 x 166		

Note :
1. ERV mode : Total Heat Recovery Ventilation mode
2. Refer to dimensional drawings.
3. Noise level :
- The operating conditions are assumed to be standard
- Sound measured at 1.5m below the center the body.
- Sound level will vary depending on a range of factors such as the construction(acoustic absorption coefficient) of particular room in which the equipment is installed.
- The sound level at the air discharge port is about 8 dB(A) higher than the unit's operating sound.
4. Temperature and Enthalpy Exchange Efficiency at cooling Indoor Temperature : 26.5°C DB, 64.5% RH, Outdoor Temperature : 34.5°C DB, 75% RH
5. Temperature and Enthalpy Exchange Efficiency at heating Indoor Temperature : 20.5°C DB, 59.5% RH, Outdoor Temperature : 5°C DB, 65% RH
6. Temperature Exchange efficiency is tested at heating condition.

Accessories

CHASSIS	LZ-H025GBA4	LZ-H035GBA5	LZ-H050GBA5
Drain Pump		-	
Cassette Cover		-	
Refrigerant Leakage Detector		-	
EEV Kit		-	
Independent Power Module		-	
Robot Cleaner		-	
Pre Filter (Washable)		-	
Ion Generator		-	
CO ₂ Sensor		○	
Ventilation Kit		-	
IR Receiver		-	
Zone Controller		-	
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB500 (Modbus)		
External Input (1 point)		-	
Wi-Fi		-	

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

LZ-H080GBA5 / LZ-H100GBA5
LZ-H150GBA5 / LZ-H200GBA5



MODEL		UNIT	LZ-H080GBA5	LZ-H100GBA5	LZ-H150GBA5	LZ-H200GBA5
Dimensions (W x H x D)	Body	mm	1,101 x 405 x 1,230		1,353 x 815 x 1,230	
	Body	kg	63		130	
Power Supply		Ø, V, Hz	1, 220-240, 50		1, 220-240, 50	
Normal Air flow		m³/h	800	1,000	1,500	2,000
ERV Mode	Operating Step		Super-high / High / Low		Super-high / High / Low	
	Current	SH / H / L A	2.13 / 1.75 / 1.00	2.92 / 2.38 / 1.40	4.26 / 3.50 / 2.00	5.92 / 4.76 / 2.80
	Power Input	SH / H / L W	328 / 266 / 144	463 / 370 / 208	660 / 530 / 290	926 / 740 / 420
	Air Flow	SH / H / L m³/h	800 / 800/ 660	1,000 / 1,000 / 800	1,500 / 1,500 / 1,200	2,000 / 2,000 / 1,600
	External Static Pressure	SH / H / L Pa	160 / 100 / 50	160 / 100 / 50	160 / 100 / 50	160 / 100 / 50
	Temperature Exchange Efficiency	SH / H / L %	82 / 82 / 83	80 / 80 / 81	82 / 82 / 83	80 / 80 / 81
	Enthalpy Exchange Efficiency	Heating (SH / H / L) %	73 / 73 / 76	71 / 71/ 73	73 / 73 / 76	71 / 71/ 73
		Cooling (SH / H / L) %	66 / 66 / 70	64 / 64 / 67	66 / 66 / 70	64 / 64 / 67
	Sound Pressure Level	SH / H / L dB(A)	40 / 36 / 32	40 / 37 / 33	43 / 39 / 35	43 / 40 / 36
	Sound Power Level	SH / H / L dB(A)	56 / 53 / 47	59 / 56 / 52	59 / 56 / 50	62 / 59 / 55
Bypass Mode	Operating Step		Super-high / High / Low		Super-high / High / Low	
	Current	SH / H / L A	2.13 / 1.75 / 1.00	2.92 / 2.38 / 1.40	4.26 / 3.50 / 2.00	5.92 / 4.76 / 2.80
	Power Input	SH / H / L W	328 / 266 / 144	463 / 370 / 208	660 / 530 / 290	926 / 740 / 420
	Air Flow	SH / H / L m³/h	800 / 800/ 660	1,000 / 1,000 / 800	1,500 / 1,500 / 1,200	2,000 / 2,000 / 1,600
	External Static Pressure	SH / H / L Pa	160 / 100 / 50	160 / 100 / 50	160 / 100 / 50	160 / 100 / 50
	Sound Pressure Level	SH / H / L dB(A)	41 / 37 / 33	41 / 38 / 34	44 / 40 / 36	44/ 41 / 37
Duct Work	Qty	EA	4		4 + 2	
	Size (Ø)	mm	Ø250		Ø250 + Ø350	
Supply Air Fan	Qty	EA	1		2	
	Type		Direct-Drive Sirocco		Direct-Drive Sirocco	
Exhaust Air Fan	Qty	EA	1		2	
	Type		Direct-Drive Sirocco		Direct-Drive Sirocco	
Filters	Qty	EA	2		4	
	Type		Cleanable fibrous fleeces		Cleanable fibrous fleeces	
	Size (W x H x D)	mm	1,148 x 6 x 245		1,148 x 6 x 245	

Note :
1. ERV mode : Total Heat Recovery Ventilation mode
2. Refer to dimensional drawings.
3. Noise level :
- The operating conditions are assumed to be standard
- Sound measured at 1.5m below the center the body.
- Sound level will vary depending on a range of factors such as the construction(acoustic absorption coefficient) of particular room in which the equipment is installed.
- The sound level at the air discharge port is about 8 dB(A) higher than the unit's operating sound.
4. Temperature and Enthalpy Exchange Efficiency at cooling Indoor Temperature : 26.5°C DB, 64.5% RH, Outdoor Temperature : 34.5°C DB, 75% RH
5. Temperature and Enthalpy Exchange Efficiency at heating Indoor Temperature : 20.5°C DB, 59.5% RH, Outdoor Temperature : 5°C DB, 65% RH
6. Temperature Exchange efficiency is tested at heating condition.


Accessories

CHASSIS	LZ-H080GBA5	LZ-H100GBA5	LZ-H150GBA5	LZ-H200GBA5
Drain Pump			-	
Cassette Cover			-	
Refrigerant Leakage Detector			-	
EEV Kit			-	
Independent Power Module			-	
Robot Cleaner			-	
Pre Filter (Washable)			-	
Ion Generator			-	
CO ₂ Sensor			○	
Ventilation Kit			-	
IR Receiver			-	
Zone Controller			-	
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB500 (Modbus)			
External Input (1 point)			-	
Wi-Fi			-	

※ ○ : Applied, - : Not applied
Option : Refer to model name in table


Providing Cool & Warm Fresh Air

During the summer, ERV DX can transform outdoor warm air into cool air for indoors, and it can prevent cold draft during the winter by supplying warm air.

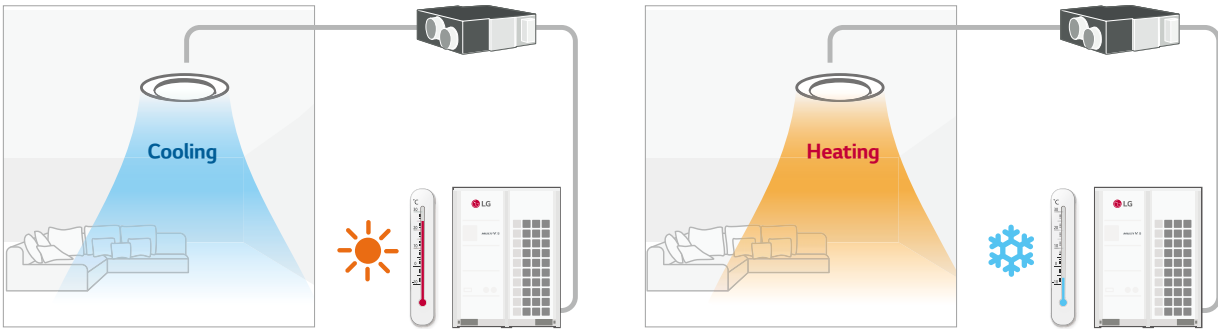


Total Air Conditioning Solution

LG ERV DX can be used as a Total Air Conditioning Solution. It can control condition of incoming air with the DX coil and humidifier for making comfortable indoor air. In the summer, LG ERV DX provides air conditioning by cooling and dehumidifying incoming air. During winter, warm air is provided by heating and humidifying incoming air.

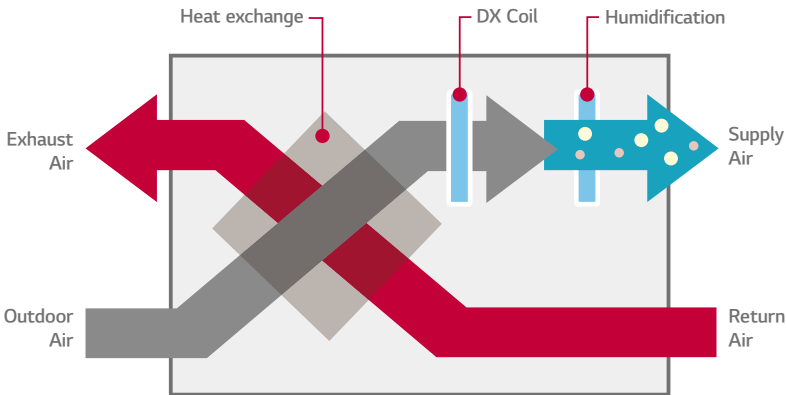

Interlocking with MULTI V

LG ERV DX can be interlocked with MULTI V. It can be controlled individually by a wired remote controller connected to MULTI V indoor units.

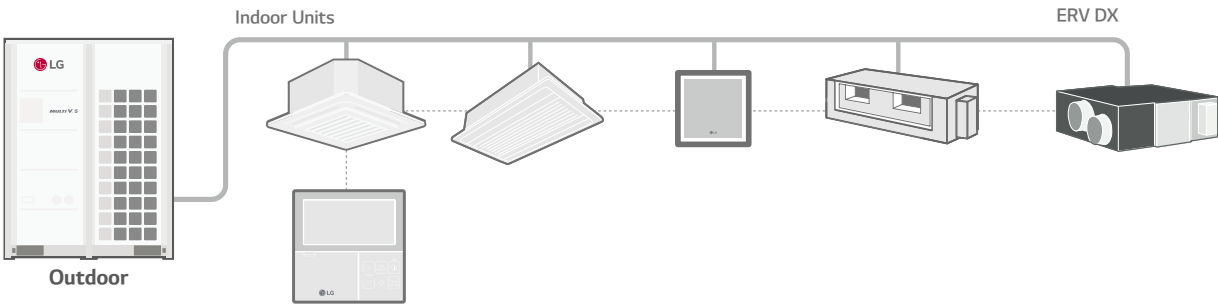

LZ-H050GXH4 / LZ-H080GXH4
LZ-H100GXH4 / LZ-H050GXN4
LZ-H080GXN4 / LZ-H100GXN4



MODEL			LZ-H050GXH4	LZ-H080GXH4	LZ-H100GXH4	LZ-H050GXN4	LZ-H080GXN4	LZ-H100GXN4
Fresh Air	Cooling	kW	4.93	7.46	9.12	4.93	7.46	9.12
Conditioning Load	Heating	kW	6.73	9.80	11.72	6.73	9.80	11.72
Temperature	SH / H / L	%	86 / 86 / 87	80 / 80 / 81	76 / 76 / 78	86 / 86 / 87	80 / 80 / 81	76 / 76 / 78
Exchange Efficiency	Cooling (SH / H / L)	%	61 / 61 / 63	50 / 50 / 53	45 / 45 / 50	61 / 61 / 63	50 / 50 / 53	45 / 45 / 50
Enthalpy Exchange	Heating (SH / H / L)	%	76 / 76 / 77	67 / 67 / 69	64 / 64 / 66	76 / 76 / 77	67 / 67 / 69	64 / 64 / 66
Efficiency	Outdoor air Temperature	°C	-15 ~ 45	-15 ~ 45	-15 ~ 45	-15 ~ 45	-15 ~ 45	-15 ~ 45
Operation Range	Heat Exchange Mode (SH / H / L)	CMH	500 / 500 / 440	800 / 800 / 640	1,000 / 1,000 / 820	500 / 500 / 440	800 / 800 / 640	1,000 / 1,000 / 820
Air Flow Rate	Bypass Mode (SH / H / L)	CMH	500 / 500 / 440	800 / 800 / 640	1,000 / 1,000 / 820	500 / 500 / 440	800 / 800 / 640	1,000 / 1,000 / 820
	External Static Pressure (SH / H / L)	Pa	160 / 120 / 100	140 / 90 / 70	110 / 70 / 60	180 / 150 / 110	170 / 120 / 80	150 / 100 / 70
Fan	System		Natural Evaporating Type			-		
	Amount	kg/h	2.70	4.00	5.40	-		
Humidifier	Pressure Feed Water	Mpa	0.02 ~ 0.49			-		
	Heat Exchange Mode (SH / H / L)	dB(A)	38 / 36 / 33	39 / 37 / 34	40 / 38 / 35	39 / 37 / 35	41 / 38 / 36	41 / 39 / 36
Sound Pressure	Bypass Mode (SH / H / L)	dB(A)	39 / 37 / 34	40 / 38 / 35	40 / 38 / 35	39 / 37 / 35	41 / 38 / 36	41 / 39 / 36
Refrigerant			R410A					
Power Supply			Ø, V, Hz					
Power Input (Nominal)	Heat Exchange Mode (SH / H / L)	kW	0.25 / 0.20 / 0.15	0.42 / 0.35 / 0.25	0.48 / 0.42 / 0.27	0.25 / 0.20 / 0.15	0.42 / 0.35 / 0.25	0.48 / 0.42 / 0.27
	Bypass Mode (SH / H / L)	kW	0.25 / 0.20 / 0.15	0.42 / 0.35 / 0.25	0.48 / 0.42 / 0.27	0.25 / 0.20 / 0.15	0.42 / 0.35 / 0.25	0.48 / 0.42 / 0.27
Nominal Running Current (RLA)	Heat Exchange Mode (SH / H / L)	A	1.5 / 1.3 / 1.0	2.5 / 2.0 / 1.5	3.6 / 3.2 / 2.3	1.5 / 1.3 / 1.0	2.5 / 2.0 / 1.5	3.6 / 3.2 / 2.3
	Bypass Mode (SH / H / L)	A	1.5 / 1.3 / 1.0	2.5 / 2.0 / 1.5	3.6 / 3.2 / 2.3	1.5 / 1.3 / 1.0	2.5 / 2.0 / 1.5	3.6 / 3.2 / 2.3
Heat Exchange System			Air to air cross flow total heat (Sensible + Latent heat) exchange			Air to air cross flow total heat (Sensible + Latent heat) exchange		
Heat Exchange Element			Specially processed non-flammable paper			Specially processed non-flammable paper		
Air Filter			Multidirectional fibrous fleeces			Multidirectional fibrous fleeces		
Dimensions			W x H x D			mm		
Net Weight			kg			mm		
Piping Connection	Liquid	mm	Ø6.35			Ø6.35		
	Gas	mm	Ø12.7			Ø12.7		
	Water	mm	Ø6.35			-		
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)			Ø25 (1)		
Connection Duct Diameter			mm			Ø250		

Note :
1. Cooling Capacity Test condition - Indoor temperature : 27°C DB, 19°C WB / Outdoor temperature : 35°C DB
2. Heating Capacity Test condition - Indoor temperature : 20°C DB / Outdoor temperature : 7°C DB, 6°C WB
3. Humidifying capacity is based on the following conditions - Indoor temperature : 20°C DB, 15°C WB / Outdoor temperature : 7°C DB, 6°C WB
4. Cooling and heating capacities are based on the following conditions : Fan is based on High and Super-high.
5. The operating sound measured at the point 1.5 m below the center of the unit is converted to that measured at an anechoic chamber.
6. The specifications, designs and information here are subject to change without notice.

Accessories

CHASSIS	LZ-H050GXH4	LZ-H080GXH4	LZ-H100GXH4	LZ-H050GXN4	LZ-H080GXN4	LZ-H100GXN4
Drain Pump	-					
Cassette Cover	-					
Refrigerant Leakage Detector	PRLDNVS0					
EEV Kit	-					
Independent Power Module	-					
Robot Cleaner	-					
Pre Filter (Washable)	-					
Ion Generator	-					
CO ₂ Sensor	AHCS100H0					
Ventilation Kit	-					
IR Receiver	-					
Zone Controller	-					
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB500 (Modbus)					
External Input (1 point)	○					
Wi-Fi	-					

※ ○ : Applied, - : Not applied
Option : Refer to model name in table