INDIVIDUAL CONTROL



# **Feature Functions**

Controller Name		Wired Remote Controller				Wireless Remote	Wi-Fi	
Model Name		Premium	Standard III	Standard II	Simple	Simple (Hotel)	Controller	Modem
		250   1 0 0 0			**************************************		4 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	<b>⊕</b> re
		PREMTA000 PREMTA000A PREMTA000B	PREMTB100 PREMTBB10	PREMTB001 PREMTBB01	PQRCVCL0Q PQRCVCL0QW	PQRCHCA0Q PQRCHCA0QW	PWLSSB21H (H/P) PWLSSB21C (C/0)	PWFMDD200
	On / Off	0	0	0	0	0	0	0
	Fan Speed Control	0	0	0	0	0	0	0
	Temperature Setting	0	0	0	0	0	0	0
	Mode	0	0	0	0	-	0	0
	Auto Swing	0	0	0	0	0	0	0
	Vane Control (Louver Angle)	0	0	0	0	0	0	0
Basic	E.S.P (External Static Pressure)	0	0	0	0	0	-	-
	Electric Failure Compensation	0	0	0	0	0	-	0
	Indoor Temperature Display	0	0	0	0	0	0	0
	All Button Lock (Child Lock)	0	0	0	0	0	-	-
	Schedule / Timer	Weekly - Yearly	Weekly - Yearly	Weekly	-	-	Sleep / On / Off	Weekly
	Wi-Fi AP Mode Setting	0	0	0	0	0	0	-
	Additional Mode Setting 1)	0	0	0	-	-	-	-
	Time Display	0	0	0	-	-	0	-
	Humidity Display	0	0	-	-	-	-	-
	Advanced Lock (Mode, Set point, Set point range, On / Off Lock)	Advanced Lock	Advanced Lock	-	-	-	-	-
	Filter Sign	0	0	0	-	-	-	-
Advanced	Energy Management 2)	0	0	0	-	-	-	-
	Dual Set Point	0	0	-	-	-	-	-
	Human Detection	-	0	-	-	-	-	-
	Temp, Humidity Compensation	0	0	-	-	-	-	-
	Air Purify Control	-	0	-	-	-	0	0
	Air Quality Level	-	0	-	-	-	-	0
	Dual Vane (6 Airflows mode)	-	0	-	-	-	0	0
ETC	Operation Status LED	0	0	0	0	0	-	-
	Wireless Remote Controller Receiver	O 3)	-	O 3)	O 3)	O 3)	-	-
	Display	5 inch Color	4.3 inch Color	4.3 inch mono	2.6 inch mono	2.6 inch mono	2 inch mono	-
	Size (W x H x D, mm)	137 x 121 x 16.5	120 x 120 x 16	120 x 121 x 16	70 x 121 x 16	70 x 121 x 16	51 x 153 x 26	48 x 68 x 14
	Black Control for Screen Saver	0	0	-	-	-	-	-

 <sup>※ ○:</sup> Applied, -: Not Applied
 1) It might not be indicated or operated at the partial product.
 2) Centralized control (PACEZA000 / PACSSA000 / PACPSA000 / PLNWKB000) and PDI (PQNUD1S40 / PPWRDB000) should be installed for this function.
 3) For ceiling type duct
 Note:
 1. Indoor unit should have functions requested by the controller.
 2. If you need more detail, please refer to the manual of product (http://partnerlge.com: Home > DocLibrary > Manual)

INDIVIDUAL CONTROL



## Design

- 4.3 inch color LCD / Intuitive GUI
- Seamless design / Touch button
- Humidity sensor embedded

## Comfort & Air Purification

- CO<sub>2</sub> level monitoring (For ERV)
- Air quality level monitoring
- Air purify control

# **Energy Contents**

- Power consumption monitoring
- Operation time monitoring
- Temperature setback
- Time limit control

## **Advanced Functions**

- Comfort cooling setting
- Smart Load Control setting
- Outdoor unit low noise setting
- Defrost noise setting
- ODU capacity control
- Schedule functions







Cool











Energy Contents

Error History	□ Back
06.19 21:15	
06:19 21:15	>
06:19 14:08	>
06:19 14:04	>
Error His	tony

# Standard III Wired Remote Controller

# PREMTB100 (White) / PREMTBB10 (Black)

4.3 inch colored screen with modern design.







Convenience





(Air Purify)



New Modern Design



Energy Management

Interlocking

MODEL NAME	PREMTB100 / PREMTBB10		
On / Off	0		
Fan Speed Control	0		
Temperature Setting	0		
Mode	Cool / Heat / Dry / Fan / Auto		
Additional Mode Setting 1)	Energy-Saving Cooling / Robot Cleaning / Heater / Humidification / Comfort Cooling		
Auto Swing	0		
Vane Control (Louver direction)	0		
E.S.P (External Static Pressure) <sup>2)</sup>	0		
Reservation	Simple / Sleep / On & Off timer / Weekly / Yearly / Holiday		
Time Display	0		
Electric Failure Compensation	0		
Lock	All / On & Off / Mode / Set temperature range		
Filter Sign	○ (Remain time + Alarm)		
Energy Management	Check Energy Usage <sup>3)</sup> / Check Operation Time / Target Setting (Energy, Operation Time) / Time Limit Operation / Alarm Popup / Initialization Usage Data		
Operation Status LED	0		
Air Purify Control <sup>4)</sup>	0		
Air Quality Level 4)	0		
Indoor Temperature Display	0		
Indoor Humidity Display	0		
Human Detection	0		
Display	4.3 inch TFT color LCD (480 x 272)		
Size (W x H x D, mm)	120 x 120 x 16		
Black Light for Screen Saver	0		
Home Leave	2 set points control		

- O: Applied, -: Not Applied
   The function is available in some product. (Refer to the product data Book).
   This function is available for duct type.
   This function requires PDI (PQNUD1S40 / PPWRDB000) to be installed.
   This function is available for indoor units that provide corresponding function.

- 1. Indoor unit needs to have functions requested by the controller.
  2. 2 set points control works normally with MULTI V Heat Recovery and Single Split Heat Pump. But in case of MULTI V Heat Pump, It may not work properly.

224 225


CONTROL

# Standard III Wired Remote Controller

# Air Quality Level Display

## Easy check for indoor air quality

PM10 / PM2.5 / PM1.0 · Status / Monitoring

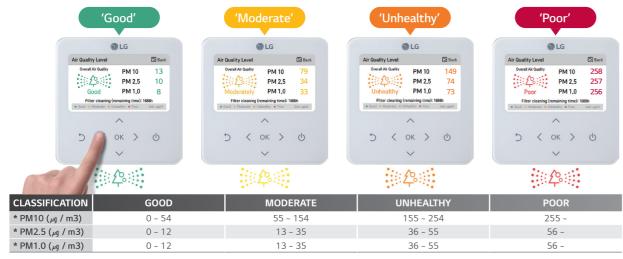


- Note: Display color may change depending on the region / country. This function is available for indoor units that provide corresponding function. 
  \* PM (Particulate matter)
- PM10 : Coarse Particulate matter / PM2.5 : Fine Particulate matter / PM1.0 : Ultra Fine Particulate matter
- PM designated as a carcinogen as like an asbestos, widely known as carcinogen.

  If the dust diameter is under 10 micrometers, it is PM10. And under 2.5 micrometers, it's PM2.5.

### **Environment Display**

#### Displaying environment information for the more user comfort

Temperature / Humidity / Comfort level / CO<sub>2</sub> concentration








## **Dual Set Point**

## Auto changeover for convenience

- Indoor unit will keep the indoor temperature within the range of dual set point by automatically switching the unit operation.

# Setback for energy savings and comfort

- In the user's absence, the room temperature will remain between two set points rather than switching off, providing quick comfort when the mode is changed to 'occupied'.
- % This function is for Heat Recovery system or Single heat pump. Otherwise it is not guaranteed.



# **Energy Savings**

## **Energy Management**

- Energy Monitoring & Alarm Real-time and day / week / month / year energy usage monitoring is possible. In addition, it can set target for energy usage and operation time, and alarm will be displayed when exceeded.

※ PDI (PONUD1S40 / PPWRDB000) is required.



Instantaneous Power Check

Energy Usage Target Setting

#### Time Limit Control

- Monitoring the unit's continuous running time. And prevent the wasting energy by turning the unit off automatically.



#### **Schedule Function**


#### Simple Schedule Status

Standard III remote controller provides clock type daily schedule.



#### **Exception Day Settings**

Possible to set up exceptional date on regular schedule.



# External Device On / Off

# External Equipment Control

User can control the external equipment through additional contact signal output.



#### **Customized Interlocking Control**

User can create a automatic control pattern. For example, turning the temperature drops below or rises above a certain temperature.



CONTROL

# **Premium Wired Remote Controller**





#### PREMTA000 1) / PREMTA000A 2) / PREMTA000B 3)

5 inch full touch screen with a premium design.



\* Supported languages list 1) English / Portuguese / Spanish / French 2) English / Italian / Russian / Chinese 3) English / German / Polish / Czech

MODEL NAME	PREMTA000 / PREMTA000A / PREMTA000B		
On / Off	0		
Fan Speed Control	0		
Temperature Setting	0		
Mode	Cool / Heat / Dry / Fan / Auto		
Additional Mode Setting 1)	Energy-Saving Cooling / Robot Cleaning / Heater / Humidification		
Auto Swing	0		
Vane Control (Louver direction)	0		
E.S.P (External Static Pressure) 2)	0		
Reservation	Simple / Sleep / On / Off / Weekly / Yearly / Holiday		
Time Display	0		
Electric Failure Compensation	0		
Child Lock	0		
Filter Sign	O (Remain time + Alarm)		
Energy Management	Check Energy Usage <sup>3)</sup> / Check Operation Time / Target Setting (Energy, Operation Time) / Time Limit Operation / Alarm Popup / Initialization Usage Data		
Operation Status LED	0		
Indoor Temperature Display	0		
Wireless Remote Controller Receiver	○ 4)		
Display	5 inch TFT color LCD (480 x 272)		
Size (W x H x D, mm)	137 x 121 x 16.5		
Black Light for Screen Saver	0		
Home Leave	2 set points control		

- ※ ○: Applied, -: Not Applied
   1) It might not be indicated or operated at the partial product.
   2) This function is available for duct type.
   3) This function requires PDI (PQNUD1S40 / PPWRDB000) to be installed.
   4) For ceiling type ducted unit
   Note: 1. Indoor unit needs to have functions requested by the controller
   2. 2 set points control works normally with MULT V Heat Recovery and Single Split Heat Pump. But in case of MULTI V Heat Pump, It may not work properly

# Easy Energy Management

- Check the operation hour or electricity usage
- Comparison of usage by year
- Set the target usage and time





#### Easy Scheduling


- Daily, Weekly, Yearly schedule function
- Schedule pattern setting
- Schedule copy






#### **Dual Set Point**

- Auto changeover switching the operation mode automatically
- Setback (Leave Home) Changing status by occupied / unoccupied
- $\ensuremath{^{\star}}$  This function is only for Heat Recovery system and Single heat pump.



# **Group Control**

- Max. 16 Indoor units by one remote controller

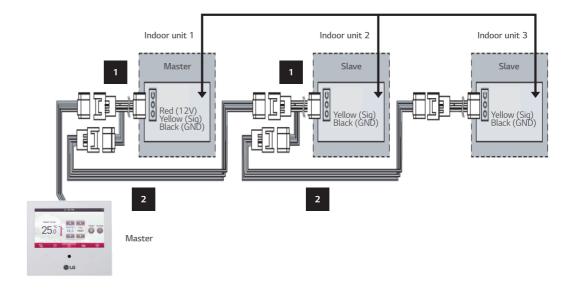

CONTROL

# **Standard II Wired Remote Controller**

## PREMTB001 / PREMTBB01

Providing easy control of one or a group of indoor units with various functions.





#### Features & Benefits

• Wired remote controller that can implement various functions such as scheduling or filter alert.

MODEL NAME	PREMTB001 / PREMTBB01
On / Off	0
Fan Speed Control	0
Temperature Setting	0
Mode	Cool / Heat / Dry / Fan / Auto
Additional Mode Setting	Energy-Saving Cooling / Robot Cleaning / Heater / Humidification
Auto Swing	0
Vane Control (Louver direction)	0
E.S.P (External Static Pressure)	0
Reservation	Simple / Sleep / On / Off / Weekly / Holiday
Time Display	0
Electric Failure Compensation	0
Child Lock	0
Filter Sign	○ (Remain time + Alarm)
Operation Status LED	0
Indoor Temperature Display	0
Wireless Remote Controller Receiver	O 1)
Size (W x H x D, mm)	120 x 121 x 16
Black Light	0
Power Consumption Monitoring	○ <sup>2)</sup>
Check Model Information	0

# **Simple Wired Remote Controller**

# PQRCVCLOQW (White) / PQRCVCLOQ (Black) / PQRCHCAOQW (White) / PQRCHCAOQ (Black)

A simple way to control office or hotel systems in a compact design.







#### Features & Benefits

• Small remote control with minimal functionality.

MODEL NAME	PQRCVCL0QW / PQRCVCL0Q	PQRCHCA0QW / PQRCHCA0Q
On / Off	0	0
Fan Speed Control	0	0
Temperature Setting	0	0
Mode	Cool / Heat / Dry / Fan / Auto	-
Auto Swing	0	0
Vane Control (Louver direction)	0	0
E.S.P (External Static Pressure)	0	0
Electric Failure Compensation	0	0
Child Lock	0	0
Indoor Temperature Display	0	0
Wireless Remote Controller Receiver	O 1)	O 1)
Size (W x H x D, mm)	70 x 121 x 16	70 x 121 x 16
Black Light	0	0

# **Wireless Remote Controller**

# PWLSSB21H (Heat Pump), PWLSSB21C (Cooling Only)

Handy and portable wireless type.



# Features & Benefits

• Easy to use while moving. • Main functions are available.

MODEL NAME	PWLSSB21H (H/P), PWLSSB21C (C/O)
On / Off	0
Fan Speed Control	O 1)
Temperature Setting	0
Mode	Cool / Heat / Dry / Fan / Auto
Additional Mode Setting	Air Purification / Energy-Saving Cooling / Robot Cleaning / Auto Dry
Auto Swing	0
Vane Control (Louver direction)	0
Reservation	Sleep / On / Off
Time Display	0
Indoor Temperature Display	0
Sleep Mode Auto	Max. 7 hours
Size (W x H x D, mm)	51 x 153 x 26

230

<sup>※</sup> O : Applied, - : Not Applied

 For ceiling type ducted unit
 This function requires PDI (PQNUD1S40 / PPWRDB000) to be installed.

Note: Indoor unit needs to have functions requested by the controller.

O : Applied, -: Not Applied
 For ceiling type ducted unit
 Note : Indoor unit needs to have functions requested by the controller.

<sup>%</sup> O : Applied, - : Not Applied 1) For some products, you can use "slow" fan speed function.

CONTROL

# Wi-Fi Modem



## PWFMDD200

Control conditioners by using internet devices as Android or iOS smartphones.



#### **Features & Benefits**


- User can enjoy anytime, anywhere access with Wi-Fi equipped device through LG's ThinQ mobile app.
- This allows the user to access the unit remotely to switch unit on or off before or after leaving the vicinity.
- LG's exclusive Home Appliances control app (ThinQ) is available.
- Simple operation for various functions.
- Operation Mode
- Current / Set Temperature
- Fan Speed
- Vane Control 1

- Reservation (Sleep, Weekly On / Off)
- Energy Monitoring 2)
- Filter Management
- Error Check - Air Purify 3)

MODEL NAME	PWFMDD200	
Size (W x H x D, mm)	48 x 68 x 14	
Interfaceable Products	System Air Conditioner 3)	
Connection Type	Indoor unit 1:1	
Communication Frequency	2.4 GHz	
Wireless Standards	IEEE 802.11b / g / n	
Mobile Application	ThinQ (Android v4.1(Jellybean) or higher, iPhone iOS 9.0 or higher)	
Optional Extension Cable	PWYREW000 (10m extension)	

- 1) Vane Control may not be possible according to the type of Indoor unit. 2) LG Centralized controller and PDI installation is required for this function 3) For the compatibility with Indoor unit, please contact regional LG office.

- 1. Functionality may be different according to each IDU model.
- User interface of application shall be revised for its design and contents improvement.
   Application is optimized for smartphone use, so it may not be well functioning with tablet devices.
- **Installation Scene**

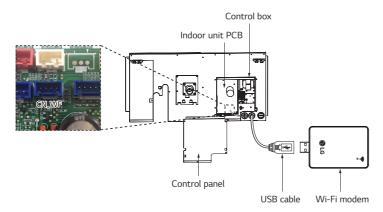


\*\* The Wi-Fi communication distance and reliability may be vary due to the type of Wi-Fi router and the installation environment, Please refer to the manual.

## ThinQ Connectivity

#### Connection (Pairing) Order

- Make LG account on ThinQ (Application) and login.
- ② Select the installed product and set AP (Access Point) mode by wired / wireless remote controller.
- 3 Select the Wi-Fi network that will be used and insert the passwords.
- Product registration progress is completed.
- \* 5GHz networks may not be supported.

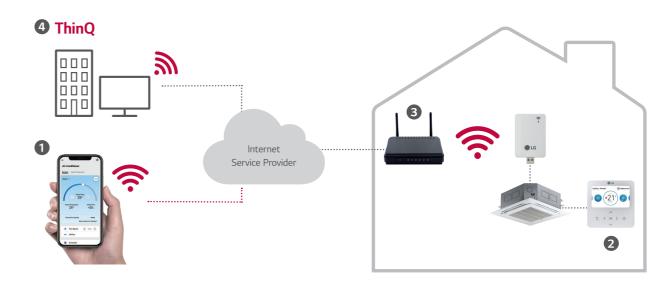


# ThinQ Mobile App

# Simple operation for various functions


On, Off, Current Temp., Mode, Set Temp.









Filter Management



#### Easy Management

#### **Energy Monitoring**





Smart Diagnosis

# ← Filter Management Get Started

% For our policy of continuous ThinQ App improvement, specification, design and features are subject to change without prior notice.