



Features & Benefits

- 6 way flexible piping
- Cold draft window protection
- Condensation protection

Key Applications

- Residential building
- Historical building
- Hotel

FLOOR STANDING		CONSOLE	FLOOR STANDING
Smart	Wi-Fi	○	○
Energy Efficiency	Jet Cool	-	○
Health	Ionizer	○	-
Fast Cooling & Heating	Jet Cool	○	-
	Sleep Mode	○	○
	Timer (On / Off)	○	○
	Timer (Weekly)	○	○
	Two Thermistor Control	○	○
	Group Control	○	○


※ ○: Applied, -: Not applied

Wi-Fi Control

Access your air conditioner anytime and from anywhere.

ThinQ

Search “ThinQ” on Google market or the App Store to download the app.

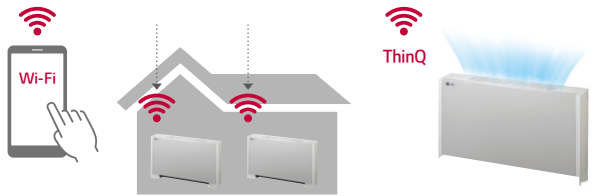


※ For our policy of continuous ThinQ App improvement, specification, design and features are subject to change without prior notice.


Air Flow Direction Change

During the cooling operation, the vane adjusts upwards to direct the air flow towards the ceiling. When heating, the vane directs the warm air downwards to balance the room temperature especially for floor.


Cooling

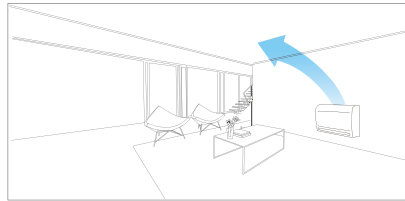

Heating (Normal)

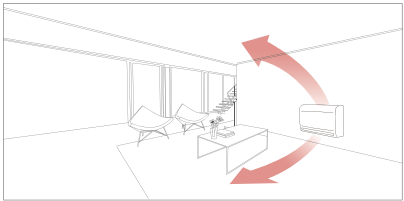


Heating (Option)

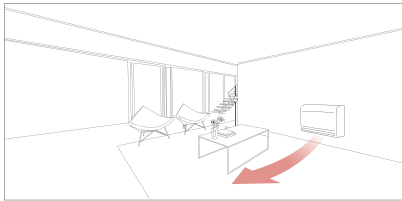


Cold Draft Protection

The console protects cold draft from windows to provide comfortable environment.

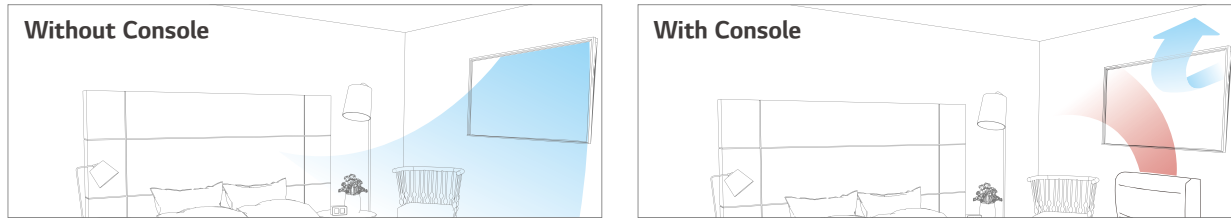


5-Step Vane Control

There are 5 different stages to control air flow direction.

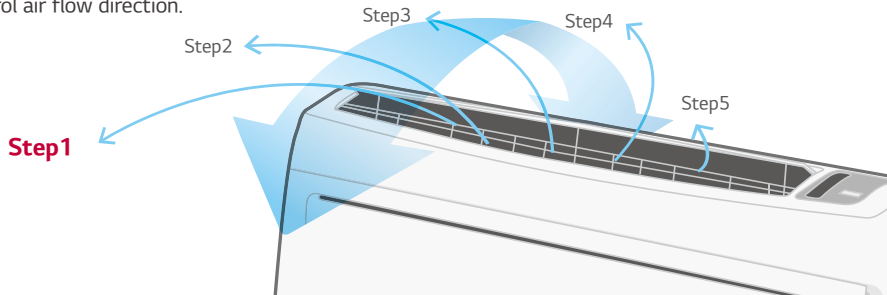

6 Way Flexible Piping


It is possible to install and connect the outdoor unit in 6 different ways. (Right Side, Right Back, Right Floor, Left Side, Left Back, Left Floor)




Protect Cold Draft

The floor standing unit protects cold draft coming from window and preventing condensation.

Without Floor Standing

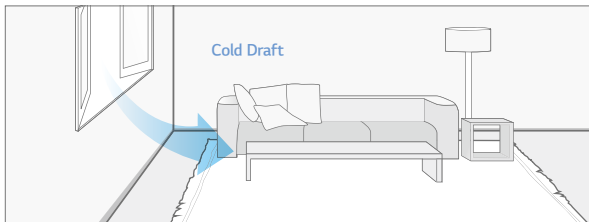


With Floor Standing

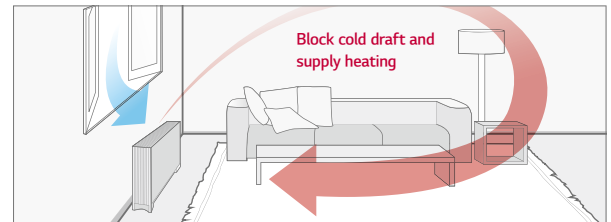

3 Way Flexible Piping


It is possible to install and connect the outdoor unit in 3 different ways. (Side, Back, Floor)

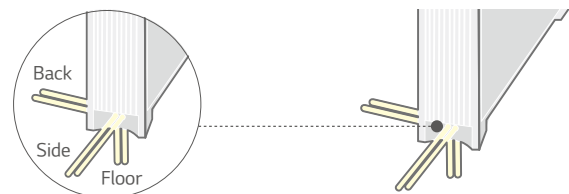


Sliding Type Filter

Easy maintenance and extended product life with sliding type filter.

Sliding type



Easy cleaning

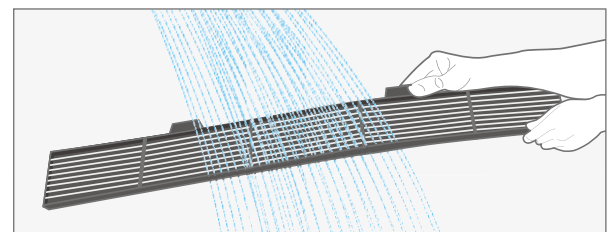

ARNU07GQAA4 / ARNU09GQAA4



MODEL		UNIT	ARNU07GQAA4	ARNU09GQAA4
Cooling Capacity		kW	2.2	2.8
Heating Capacity		kW	2.5	3.2
Power Input (H / M / L)	Nominal	W	15 / 12 / 10	15 / 12 / 10
Exterior Color			Morning Fog	Morning Fog
RAL Code			RAL 9001	RAL 9001
Dimensions (W x H x D)	Body	mm	700 x 600 x 210	700 x 600 x 210
	Shipping	mm	775 x 662 x 284	775 x 662 x 284
Fan	Type		Turbo fan	Turbo fan
	Motor Output x Number	W x No.	48 x 1	48 x 1
	Air Flow Rate (H / M / L)	m³/min	6.7 / 5.9 / 4.8	6.7 / 5.9 / 4.8
	Motor Type		BLDC	BLDC
Air Filter			Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø12 (15/32)	Ø12 (15/32)
Weight	Body	kg	14.0	14.0
Sound Pressure Levels (H / M / L)		dB(A)	37 / 34 / 28	37 / 34 / 28
Sound Power Levels (H / M / L)		dB(A)	53 / 50 / 44	53 / 50 / 44
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Transmission Cable		mm²	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note :
1. Performance tested under EN14511
2. Capacities are based on the following conditions
- Cooling : Indoor temp. 27℃ (80.6℉) DB / 19℃ (66.2℉) WB, Outdoor temp. 35℃ (95℉) DB / 24℃ (75.2℉) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20℃ (68℉) DB / 15℃ (59℉) WB, Outdoor temp. 7℃ (44.6℉) DB / 6℃ (42.8℉) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification

Accessories

CHASSIS	ARNU07GQAA4	ARNU09GQAA4
Drain Pump	-	
Cassette Cover	-	
Refrigerant Leakage Detector	PRLDNVS0	
EEV Kit	PRGK024A0	
Multi-tenant Power Module	PINPMB001	
Robot Cleaner	-	
Pre Filter (Washable)	○	
Ion Generator	○	
CO ₂ Sensor	-	
Ventilation Kit	-	
IR Receiver	-	
Zone Controller	-	
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 point)	○	
Wi-Fi	PWFMD200	

※ ○ : Applied, - : Not Applied
Option: Refer to model name in table

ARNU12GQAA4 / ARNU15GQAA4



MODEL		UNIT	ARNU12GQAA4	ARNU15GQAA4
Cooling Capacity		kW	3.6	4.5
Heating Capacity		kW	4.0	5.0
Power Input (H / M / L)	Nominal	W	18 / 15 / 13	24 / 19 / 17
Exterior Color			Morning Fog	Morning Fog
RAL Code			RAL 9001	RAL 9001
Dimensions (W x H x D)	Body	mm	700 x 600 x 210	700 x 600 x 210
	Shipping	mm	775 x 662 x 284	775 x 662 x 284
Fan	Type		Turbo fan	Turbo fan
	Motor Output x Number	W x No.	48 x 1	48 x 1
	Air Flow Rate (H / M / L)	m³/min	7.5 / 5.9 / 4.8	8.7 / 6.7 / 5.9
	Motor Type		BLDC	BLDC
Air Filter			Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø12 (15/32)	Ø12 (15/32)
Weight	Body	kg	14.0	14.0
Sound Pressure Levels (H / M / L)		dB(A)	39 / 34 / 28	42 / 37 / 31
Sound Power Levels (H / M / L)		dB(A)	56 / 50 / 44	58 / 53 / 50
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Transmission Cable		mm²	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note :
1. Performance tested under EN14511
2. Capacities are based on the following conditions
- Cooling : Indoor temp. 27℃ (80.6℉) DB / 19℃ (66.2℉) WB, Outdoor temp. 35℃ (95℉) DB / 24℃ (75.2℉) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20℃ (68℉) DB / 15℃ (59℉) WB, Outdoor temp. 7℃ (44.6℉) DB / 6℃ (42.8℉) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification

Accessories

CHASSIS	ARNU12GQAA4	ARNU15GQAA4
Drain Pump	-	
Cassette Cover	-	
Refrigerant Leakage Detector	PRLDNVS0	
EEV Kit	PRGK024A0	
Multi-tenant Power Module	PINPMB001	
Robot Cleaner	-	
Pre Filter (Washable)	○	
Ion Generator	○	
CO ₂ Sensor	-	
Ventilation Kit	-	
IR Receiver	-	
Zone Controller	-	
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 point)	○	
Wi-Fi	PWFMD200	

※ ○ : Applied, - : Not Applied
Option: Refer to model name in table

NO.	NEW FUNCTION NAME (4 TH GENERATION INDOOR)	FUNCTION DESCRIPTION	REQUIRED CONTROLLER		REMARKS
			WIRED REMOTE CONTROLLER	CENTRALIZED CONTROLLER	
1	Energy Monitoring (Accumulated Electric Energy Check)	Monitoring accumulated power consumption by Wired Remote Controller	○	○	* Necessary to install the PDI (Power Distribution Indicator) and central controller * Combined with Multi V Water S outdoor unit, this function is not available.
		Monitoring accumulated power consumption by Central Control Device / PDI	-	○	* Necessary to install the PDI (Power Distribution Indicator) * To make a report, central controller must be installed
2	2 Set Point	1) 2 set point control by Indoor and central controller 2) Synchronization function with remote control (Synchronization Setting and Monitoring)	○	○	* Wired remote controller and central controller must be installed * Combined with Multi V Water S outdoor unit, this function is not available.
3	Occupied / Unoccupied Scheduling Function (Sub Func. Enable)	1) Synchronization according to occupied / unoccupied by Indoor and Central control 2) Synchronization icon with remote controller (Synchronization Monitoring)	○	○	* Centralized control is able to when you combine only 4th generation indoor units (Use together with 2nd generation and 4th generation indoors, only wired remote controller is able to set this function as existing way) * Wired remote controller or central controller must be installed (Function can be activated using just one control device.) * Combined with Multi V Water S outdoor unit, this function is not available.
4	Group Control	Group Control can use Additional function	○	○	* Check more details in PDB (Product Data Book) * Central controller can create and control group.
5	Test Run (Heating)	Test run mode can be operated in cooling mode and heating mode for easy service	○	-	
6	Model Information Monitoring	Product Type / Indoor Type / Indoor capacity information can be monitored by remote controller	○	-	
7	Indoor unit address checking	Wired remote controller can check indoor unit address information	○	-	
8	Refrigerant Leakage Detection	Function error sign display when refrigerant leakage occurred	○	○	* Central controller has been installed, CH230 error code can be recognized (Old / New Same) * Without Central Controller, it is able to recognize with wired remote controller (CH230) * Combined with Multi V Water S outdoor unit, this function is not available. * Accessory PRLDNVS0 must be separately ordered
9	Thermo On / Off range Setting (Cooling)	User can set cooling thermo on/off range with wired remote controller for prevention overcooling	○	-	* Thermo On / Off temperature setting (3 step)
10	Thermo On / Off range Setting (Heating)	User can set heating thermo on/off range with wired remote controller for prevention overheating. (4 Step)	○	-	* Thermo On / Off temperature setting (4 step)
11	Static Pressure 11 Step Control (Only for Ceiling Concealed Duct Type)	Depends on the installation environment, 4th generation Ceiling Concealed Duct can control the static pressure by 11 steps for providing comfortable environment	○	-	* Only applied in Ceiling Concealed Duct
12	1 point External Input (On / Off control)	Indoor unit can be controlled by external devices without purchasing Dry contact as an accessory (All 4th generation indoors)	○	-	* Simple On/Off control by Dry Contact at Indoor [Example of Contact port by product type] * 2 Way Cassette : CN-CC Port (Wired remote controller installation function mode 41 is required) * 1 Way / 4 Way Cassette / Ceiling Concealed Duct / Wall Mounted Unit / Console / FAU / Floor Standing (with case / without case) : CN-EXT Port
13	Filter Sign (Remaining Time)	The alarm activates when the filter needs to be cleaned, and the time remaining for cleaning is displayed on the screen.	○	○	* The alarm activates on the central controller, but the remaining time is not displayed.
14	Auto restart function Disable / Enable	After the power failure compensation, stand by at OFF mode Restore the operation for the status before the power off	○	-	
15	Indoor Humidity display	Monitoring indoor humidity Wired Remote Controller	○	○	* Available only with Multi V 5
16	Comfort Cooling setting	set the outdoor unit comfort cooling operation value	○	○	* Available only with Multi V 5
17	Smart Load Control setting	Change the outdoor unit's Smart Load Control stage value.	○	○	* Available only with Multi V 5
18	ODU Refrigerant Noise Reduction setting	set the outdoor unit's refrigerant noise reduction function	○	○	* Available only with Multi V 5
19	Low noise mode time setting	set the start and end time of the outdoor unit's low noise mode operation	○	○	* Available only with Multi V 5

Note : 1) No.1, 2, 3, 8 : Functions are available to use together with 4th generation Indoor units only. If used together 2nd generation indoor unit and 4th generation indoor unit functions will not be activate. Combined with MULTI V Water S outdoor unit this function is not available
2) No. 4, 5, 6, 7, 9, 10, 11, 12, 13, 14 : If used together 2nd generation indoor unit and 4th generation indoor unit these functions will be activate only in 4th generation indoor
3) 2nd generation indoor unit : Ceiling & Floor Convertible Unit, Ceiling Suspended Unit, HYDRO KIT (Low Temp. / High Temp.), ERV DX (with Humidifier, without Humidifier), AHU Communication Kit

WIRED REMOTE CONTROLLER					CENTRALIZED CONTROLLER				
PREMIUM (PREMTA000 PREMTA000A PREMTA000B)	STANDARD III (PREMTB100) (PREMTB10)	STANDARD II (PREMTBB01) (PREMTB001)	SIMPLE		AC EZ (PQCSZ250S0)	AC EZ TOUCH (PACEZA000)	AC SMART 5 (PACSS5A000)	ACP 5 (PACP5A000)	AC MANAGER 5 (PACM5A000)
			SIMPLE FOR HOTEL (PQRCHCA0Q / QW)	SIMPLE (PQRCVCL0Q / QW)					
○	○	○	-	-	-	○	○	○	○
-	-	-	-	-	-	○	○	○	○
○	○	-	-	-	-	○	○	○	○
○	○	-	-	-	-	○	○	○	○
○	○	○	-	-	-	-	○	○	○
○	○	○	-	-	-	-	-	-	-
○	○	○	-	-	-	-	-	-	-
○	○	○	-	-	-	-	○	○	-
○	○	○	-	-	-	-	-	-	-
○ (4 step)	○ (4 step)	○ (3 step)	○ (3 step)	○ (3 step)	-	-	-	-	-
○	○	○	○	○	-	-	-	-	-
○	○	○	-	-	-	-	-	-	-
○	○	○	-	-	○	○	○	○	○
○	○	○	-	-	-	-	-	-	-
○	○	-	-	-	-	-	○	○	-
○	○	-	-	-	-	-	○	○	-
○	○	-	-	-	-	-	○	○	-
○	○	-	-	-	-	○	○	○	-

※ ○ : Applied, - : Not applied

COMPATIBILITY

Controller Product		Controller														
		Premium	Standard III	Standard II	Standard I	Simple	Simple for Hotel	Wireless	Dry Contact							
																
		PREMTA000 PREMTA000A PREMTA000B	PREMTB010	PREMTB100	PREMTB001	PREMTB001	PQRCVCLOQ	PQRCVCLOQW	PQRCHCA0Q	PQRCHCA0QW	PWLSSB21H (H/P)	Simple Dry Contact PDRYCB000	2 points Dry Contact PDRYCB400	Dry Contact for Thermostat PDRYCB320	For Modbus PDRYCB500	
Ceiling Mounted Cassette	 4 Way	ARNU-A4 ARNU-B4	○	○	○	○	○	○	○	○	○	○	○	○	○	
	 2 Way / 1 Way	ARNU-B4 ARNU-C4	○	○	○	○	○	○	○	○	○	○	○	○	○	
	 Round CST	ARNU-A4	○	○	○	○	○	○	○	○	○	○	○	○	○	
Ceiling Concealed Duct	 High Sensible	ARNU-A4	○	○	○	○	○	○	○	△	○	○	○	○	○	
	 High / Mid Statics	ARNU-A4	○	○	○	○	○	○	○	△	○	○	○	○	○	
	 Low Statics	ARNU-G4	○	○	○	○	○	○	○	△	○	○	○	○	○	
FAU (Fresh Air intake)		ARNU-Z4	○	○	○	○	○	○	○	△	○	○	○	○	○	
Convertible & Ceiling Suspended		ARNU-A4	○	○	○	○	○	○	○	○	○	○	○	○	○	
MULTIV	Console		ARNU-A4	○	○	○	○	○	○	○	○	○	○	○	○	○
	Floor Standing		ARNU-A4 ARNU-U4	○	○	○	○	○	○	○	○	○	○	○	○	○
		ARNU-A4	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Wall Mounted		ARNU-R4	○	○	○	○	○	○	○	○	○	○	○	○	○	
HYDRO KIT ¹⁾		ARNU-A4 ARNU-C4 ARNU-N4	○	○	○	○	○	○	○	○	○	○	○	○	○	
		ARNH-A4	-	-	-	-	-	-	-	-	○	-	○	-	-	
		ARNH-A4	-	-	-	-	-	-	-	-	-	○	-	-	○	
Ventilation		Energy Recovery Ventilator	○	○	○	-	-	-	-	-	○	-	-	-	○	
		Energy Recovery Ventilator with DX coil	○	○	○	-	-	-	-	-	○	-	-	-	○	
AHU Communication Kit			○	○	○	-	-	-	△	-	-	-	-	-	-	

※ ○ : Compatible, △ : Need wired remote controller / IR receiver, - : Not compatible
1) It has a separate remote controller

FEATURE FUCTIONS

Controller Name	Wired Remote Controller					Wireless Remote Controller	Wi-Fi Modem
	Premium	Standard III	Standard II	Simple	Simple (Hotel)		
Model Name							
	PREMTA000 PREMTA000A PREMTA000B	PREMTB100 PREMTBB10	PREMTB001 PREMTBB01	PQRCVCLOQ PQRCVCLOQW	PQRCHCA0Q PQRCHCA0QW	PWLSSB21H (H/P)	PWFMD200
Basic	On / Off	○	○	○	○	○	○
	Fan Speed Control	○	○	○	○	○	○
	Temperature Setting	○	○	○	○	○	○
	Mode Change	○	○	○	○	-	○
	Auto Swing	○	○	○	○	○	
	Vane Control (Louver Angle)	○	○	○	○	○	○
	E.S.P (External Static Pressure)	○	○	○	○	-	-
	Electric Failure Compensation	○	○	○	○	-	○
	Indoor Temperature Display	○	○	○	○	○	
	ALL Button Lock (Child Lock)	○	○	○	○	-	-
Advanced	Schedule / Timer	Weekly - Yearly	Weekly - Yearly	Weekly	-	-	Sleep / On / Off Weekly
	Additional Mode Setting ¹⁾	○	○	○	-	-	-
	Time Display	○	○	○	-	-	○
	Humid. Display	○	○	-	-	-	-
	Advanced Lock (mode, set point, set point range, on/off Lock)	Advanced Lock	Advanced Lock	-	-	-	-
	Filter Sign	○	○	○	-	-	-
	Energy Management ²⁾	○	○	○	-	-	-
	Dual Set Point	○	○	-	-	-	-
	Human Detection	-	○	-	-	-	-
	Temp, Humidity Compensation	○	○	-	-	-	-
ETC	Wi-Fi AP mode setting	○	○	○	○	○	-
	Operation Status LED	○	○	○	○	○	-
	Wireless Remote Controller Receiver	○ ³⁾	-	○ ³⁾	○ ³⁾	○ ³⁾	-
	Display	5 inch Color	4.3 inch Color	4.3 inch mono	2.6 inch mono	2.6 inch mono	2 inch mono
	Size (W x H x D, mm)	137 x 121 x 16.5	120 x 120 x 16	120 x 121 x 16	70 x 121 x 16	70 x 121 x 16	51 x 153 x 26
	Black Control for Screen Saver	○	○	-	-	-	-

※ ○ : Applied, - : Not Applied
1) It might not be indicated or operated at the partial product
2) Centralized control (PACEZA000 / PACS5A000 / PACP5A000 / PLNWKB000) and PDI (PQNUD1S40 / PPWRDB000) should be installed for this function
3) For ceiling type duct
Note
- Indoor unit should have functions requested by the controller
- If you need more detail, please refer to the manual of product. (<http://partner.lge.com>: Home> DocLibrary> Manual)