


ERV WITH DX COIL


Providing Cool & Warm Fresh Air

During the summer, ERV DX can transform outdoor warm air into cool air for indoors, and it can prevent cold drafts during the winter by supplying warm air.

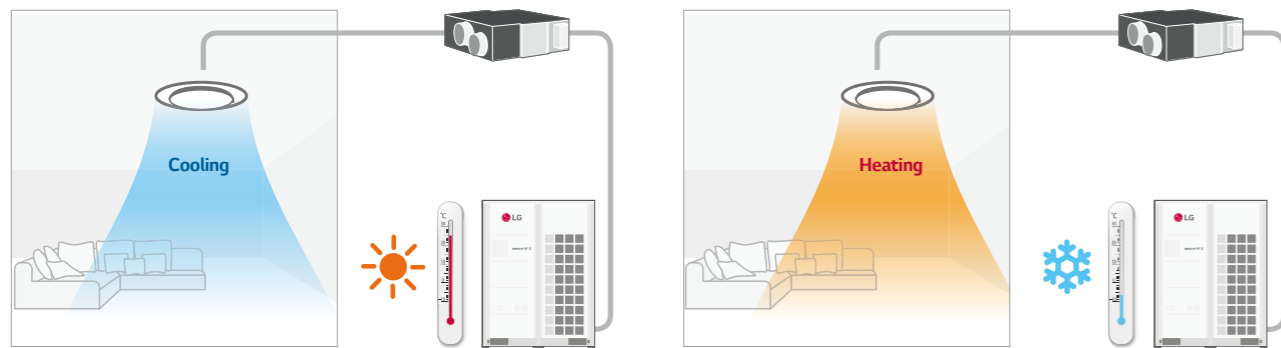


Total Air Conditioning Solution

LG ERV DX can be used as a Total Air Conditioning Solution. It can control condition of incoming air with the DX coil and humidifier for making comfortable indoor air. In the summer, LG ERV DX controls the air indoors by cooling and dehumidifying incoming air. In winter, it can provide warm air by heating and humidifying the incoming air.

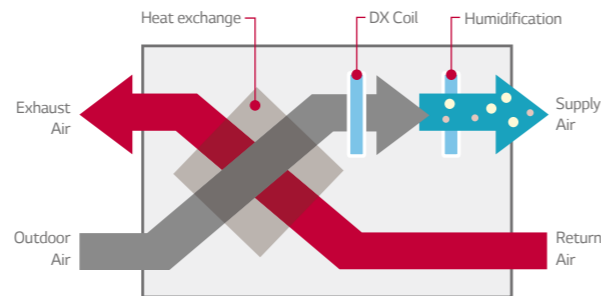

Interlocking with MULTI V

LG ERV DX can be interlocked with MULTI V. It can be controlled individually by a wired remote controller connected to MULTI V indoor units.

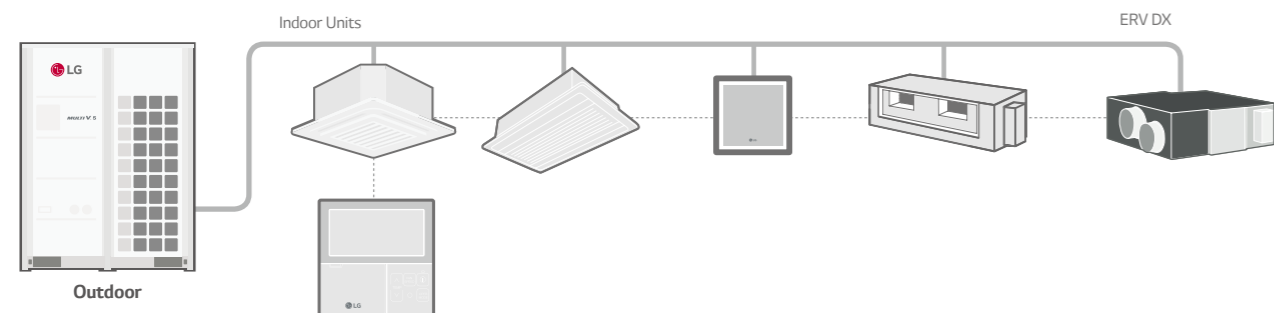

ERV WITH DX COIL

LZ-H050GXH4 / LZ-H080GXH4 / LZ-H100GXH4
LZ-H050GXN4 / LZ-H080GXN4 / LZ-H100GXN4



Model		LZ-H050GXH4	LZ-H080GXH4	LZ-H100GXH4	LZ-H050GXN4	LZ-H080GXN4	LZ-H100GXN4	
Fresh Air Conditioning Load	Cooling ¹⁾	4.93	7.46	9.12	4.93	7.46	9.12	
	Heating ²⁾	6.73	9.80	11.72	6.73	9.80	11.72	
Temperature Exchange Efficiency	SH / H / L	86 / 86 / 87	80 / 80 / 81	76 / 76 / 78	86 / 86 / 87	80 / 80 / 81	76 / 76 / 78	
	Enthalpy Exchange Efficiency	61 / 61 / 63	50 / 50 / 53	45 / 45 / 50	61 / 61 / 63	50 / 50 / 53	45 / 45 / 50	
	Heat Exchange Mode (SH / H / L)	CMH	500 / 500 / 440	800 / 800 / 640	1,000 / 1,000 / 820	500 / 500 / 440	800 / 800 / 640	1,000 / 1,000 / 820
Air Flow Rate	Bypass Mode (SH / H / L)	CMH	500 / 500 / 440	800 / 800 / 640	1,000 / 1,000 / 820	500 / 500 / 440	800 / 800 / 640	
	Fan	External Static Pressure (SH / H / L)	Pa	160 / 120 / 100	140 / 90 / 70	110 / 70 / 60	180 / 150 / 110	170 / 120 / 80
Humidifier	System	Natural Evaporating Type						
	Amount ³⁾	kg/h	2.70	4.00	5.40	-	-	
	Pressure Feed Water	Mpa	0.02 - 0.49					
Sound Pressure	Heat Exchange Mode (SH / H / L)	dB (A)	38 / 36 / 33	39 / 37 / 34	40 / 38 / 35	39 / 37 / 35	41 / 38 / 36	41 / 39 / 36
	Bypass Mode (SH / H / L)	dB (A)	39 / 37 / 34	40 / 38 / 35	40 / 38 / 35	39 / 37 / 35	41 / 38 / 36	41 / 39 / 36
Refrigerant		R410A						
Power Supply	Ø / V / Hz	1 / 220-240 / 50, 60						
Power Input (Nominal)	Heat Exchange Mode (SH / H / L)	kW	0.25 / 0.20 / 0.15	0.42 / 0.35 / 0.25	0.48 / 0.42 / 0.27	0.25 / 0.20 / 0.15	0.42 / 0.35 / 0.25	0.48 / 0.42 / 0.27
	Bypass Mode (SH / H / L)	kW	0.25 / 0.20 / 0.15	0.42 / 0.35 / 0.25	0.48 / 0.42 / 0.27	0.25 / 0.20 / 0.15	0.42 / 0.35 / 0.25	0.48 / 0.42 / 0.27
Nominal Running Current (RLA)	Heat Exchange Mode (SH / H / L)	A	1.5 / 1.3 / 1.0	2.5 / 2.0 / 1.5	3.6 / 3.2 / 2.3	1.5 / 1.3 / 1.0	2.5 / 2.0 / 1.5	3.6 / 3.2 / 2.3
	Bypass Mode (SH / H / L)	A	1.5 / 1.3 / 1.0	2.5 / 2.0 / 1.5	3.6 / 3.2 / 2.3	1.5 / 1.3 / 1.0	2.5 / 2.0 / 1.5	3.6 / 3.2 / 2.3
Dimensions	W x H x D	mm	1,667 x 365 x 1,140			1,667 x 365 x 1,140		
Net Weight		kg	105			98		
	Liquid	mm	Ø6.35			Ø6.35		
Piping Connection	Gas	mm	Ø12.7			Ø12.7		
	Water	mm	Ø6.35			-		
	Drain (Outer Diameter)	mm	Ø25.4			Ø25.4		
Connection Duct Diameter	mm		Ø250			Ø250		
Remote Controller		Refer to the below Wired Remote Controller table						
Dry Contact	Simple (1 Contact Point with Case)		PDRYCB000					
	2 Contact Point		PDRYCB400					
	For Thermostat (On-Off / Mode / Fan Speed)		PDRYCB300					
	Modbus Communication		PDRYCB500					
Filters (Optional)	Mode	-	AHFT100H0					
	Qty	EA	2					
	Type	-	F7					
	Size (W x H x D)	mm	520 x 192 x 25					

Note :

- Cooling Capacity Test condition - Indoor temperature : 27°C DB, 19°C WB / Outdoor temperature : 35°C DB
- Heating Capacity Test condition - Indoor temperature : 20°C DB / Outdoor temperature : 7°C DB, 6°C WB
- Humidifying capacity is based on the following conditions - Indoor temperature : 20°C DB, 15°C WB / Outdoor temperature : 7°C DB, 6°C WB
 - * Cooling and heating capacities are based on the following conditions. - Fan is based on High and Super-high. The figures in the parenthesis indicate the heat reclaimed from the heat recovery ventilator.
 - * The operating sound measured at the point 1.5 m below the center of the unit is converted to that measured at an anechoic chamber built in accordance with the KS B 6879 conditions.
 - * The actual operating sound varies depending on the surrounding conditions (near running unit's sound, reflected sound and so on) and is normally higher than this value.
 - * Air flow rate can be changed over to low mode or high mode.
 - * The specifications, designs and information here are subject to change without notice.
 - * This product contains Fluorinated Greenhouse Gases. (R410A)
- F7 Filter is 2 pieces in 1 filter package

Premium	Standard III		Standard II		CO ₂ Sensor	
PREMTA000 PREMTA000A PREMTA000B	PREMTB100	PREMTBB10	PREMTBB01	PREMTB001	PES-CORV0 (External Type)	AHCS100H0 (Internal Type : Default)