
INDOOR UNITS

WALL MOUNTED

CEILING MOUNTED CASSETTE

CEILING MOUNTED ROUND CASSETTE

CEILING CONCEALED DUCT

FRESH AIR INTAKE

CEILING SUSPENDED

CONSOLE



WALL MOUNTED



Features & Benefits

- 6 Different discharge angles can be programmed via the remote controller.
- Easily detachable full surface cover helps to clean the air conditioner.
- Drain pipe can be easily hidden from sight.

Key Applications

- Retail
 - Restaurant
 - Office
- Hotel
 - Multi-family Residence

	Wall Mounted	Standard
Smart	Wi-Fi	○
Energy Efficiency	Energy Display	○
Fast Cooling & Heating	Jet Cool	○
	Auto Swing (Up & Down)	○
	Ionizer	○
Health	Pre Filter	○
	Auto Cleaning	○
	Sleep Mode	○
	Timer (On / Off)	○
Comfort	Timer (Weekly)	○
	Two Thermistor Control	○
	Group Control	○

※ ○: Applied, - : Not applied

SMART

Wi-Fi Control

Anytime, anywhere access to the unit with Android & iOS-based smartphones.



LG ThinQ

Search "LG ThinQ" on Google market or the App Store to download the app.


Integrated Home Appliances Control

Control / Monitor all your LG appliances from one place.



Easy Registration and Log-in

Follow the easy set-up steps that will activate LG ThinQ's user-friendly features.

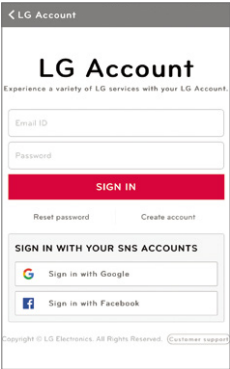


* Wi-Fi modem (Option) is necessary for this function

Simple operation for various functions



Straight forward Management

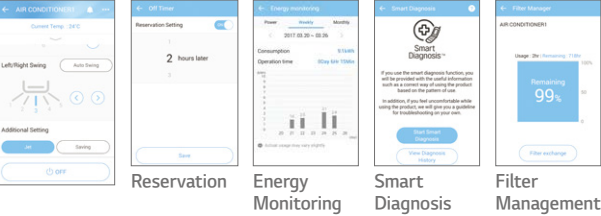

Access your air conditioner anytime and from anywhere

With a Wi-Fi equipped device and LG's exclusive control app, LG ThinQ.



Wi-Fi Connectivity

Each user can set and save temperature and fan speed preferences in the LG ThinQ app. If a household has more than one indoor unit, separate temperature settings can be set for each.

Multiple Devices



※ Can be controlled by multiple users, but not simultaneously.

Multi-Control



FRESH AIR


Ionizer^{PLUS}

The powerful Ionizer protects you from bad odors and Escherichia coli and Staphylococcus in the surface with over 3 million ions to sterilize to make a safer, and cleaner environment.

※ Specifications may vary for each model.
※ Depending on the experimental conditions.


Sterilization and Deodorization (Utilizes Over 3 Million Ions)

Ionizer^{PLUS} reduces E.coli and Staphylococcus in the surface with over 3 million ions.

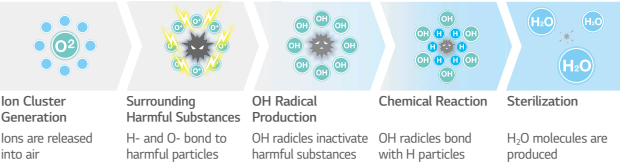


Sterilization Performance Evaluations

Sterilize Bacteria E.coli over 99.9% in 30 min. and staphylococcus over 99.6% in 60min.

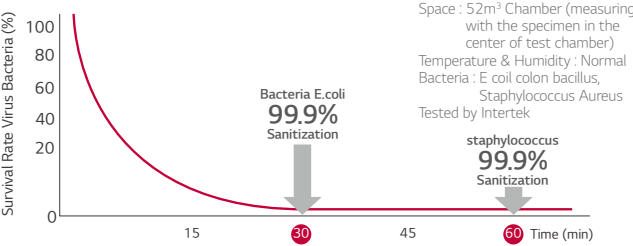

2.1 odor strength decrease in 60 minutes

An odor of measured as 2 European odor units (ouE/m³) or less indicates that the level of odor falls within permissible limits.

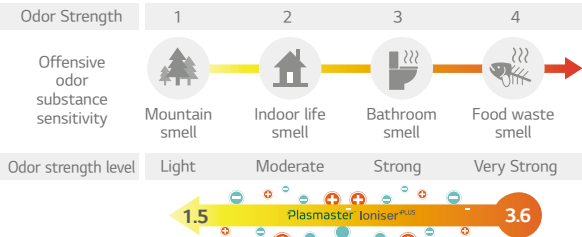

Odor strength reduce 3.6 → 1.5 / The Odor floating in the room as well as curtain and clothes.

※ Test conditions :
Space: 8m³ Chamber
Temperature & Humidity : Normal
Tested by Intertek

Auto Cleaning

The unit has a self-cleaning function that dries the heat exchanger before sterilizing the interior.



Pain Point

The main cause of odor within air conditioners is mold and bacteria growing on the heat exchanger. These germs can spread when the heat exchanger is wet.




Cleans Filter with Regular Airflow

The comprehensive auto cleaning function prevents the formation of bacteria and mold on the heat exchanger.

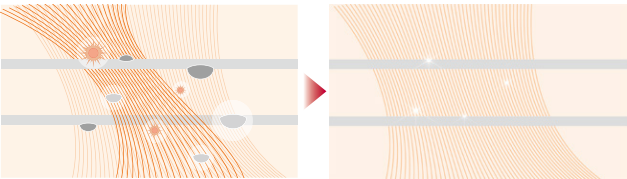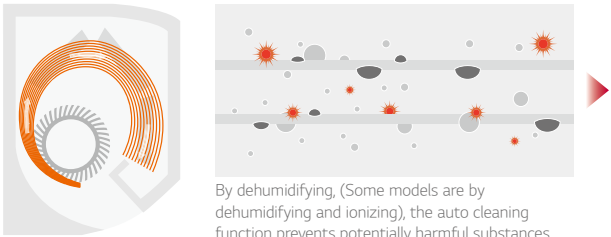

Auto cleaning


Auto Cleaning provides clean air by preventing bacteria, mold and odors that can otherwise accumulate in an indoor unit.

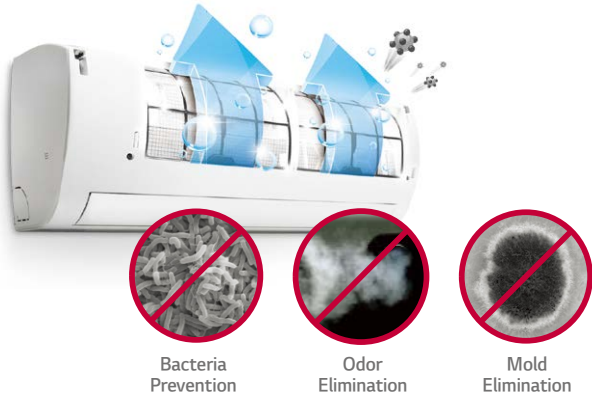

Installation

Installation Support Clip

A support clip creates adequate space between the wall and the unit for easier installation.

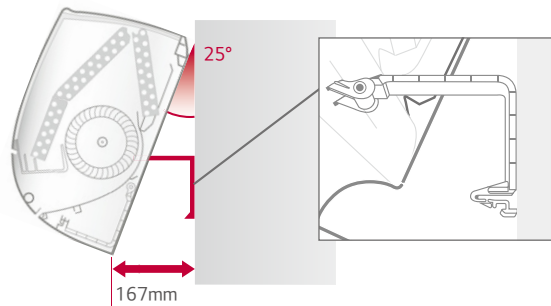

FAST COOLING & HEATING


Auto Swing

Cool air extends to the entire room regardless of where the unit is situated.

※ Specifications may vary for each model.

6-Step Vane Control up to 70°


The vertical vane, which moves up and down, has 6 different settings including full-auto swing.

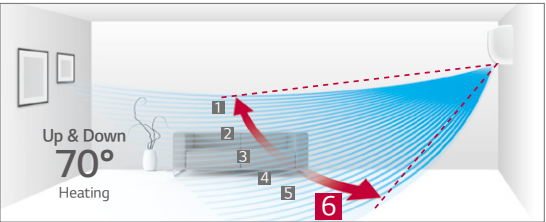

※ Angle can be different from each model and working mode.

Control up to 110°

Louver can be adjusted manually to extend left and right swing to 110 degrees.

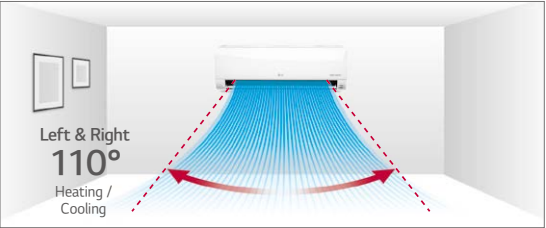

※ Angle can be different from each model and working mode.

Easy and Simple Control

Airflow direction can be changed by LG ThinQ Wi-Fi app.




Jet Cool

LG air conditioners provide optimized high-speed airflow, which can cool rooms faster while delivering cool air evenly in every direction.

※ Specifications may vary for each model.
※ Depending on the experimental conditions.


One Click “Jet Mode”

Reduces the temperature of outflowing air to 18°C for 30 minutes with just one click.

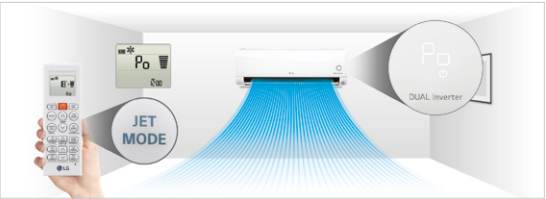

More Powerful Performance

By reducing the second vortex, which decreases airflow within the air outlet, and enlarging the fan size, the amount of air flow is increased to 13 CMM.




COMFORT

Scheduled Operation


You can set the daily temperature, fan speed, the operation mode and automatic On / Off time for two weeks. It will keep running on that time until cancelled by the user.

※ This function is for wired remote controller only.
※ Wired remote controller is need to be separately purchased.

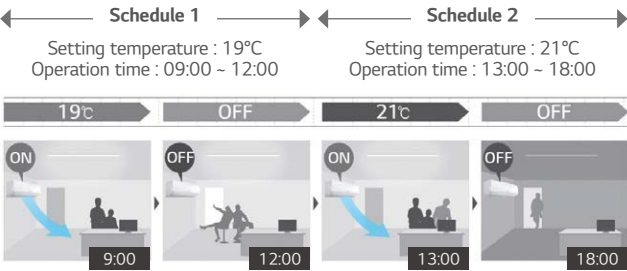

Two Thermistors Control

The indoor temperature can be checked using the thermistors in the remote controller as well as from the indoor unit. There may be a significant difference between ceiling and floor air temperature. Two thermistors can optimize indoor air temperature for a more comfortable environment.

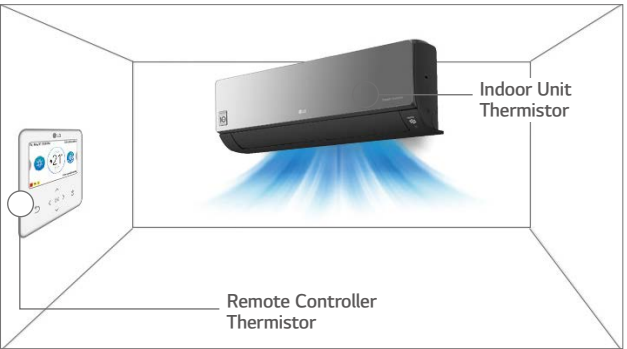

Group Control

Group control by new remote controller (PREMTB100 / PREMTBB10) has more functions than previous model.



STANDARD

ARNU05GSJN4 / ARNU07GSJN4
ARNU09GSJN4 / ARNU12GSJN4
ARNU15GSJN4



Model		Unit	ARNU05GSJN4	ARNU07GSJN4	ARNU09GSJN4	ARNU12GSJN4	ARNU15GSJN4
Cooling Capacity		kW	1.6	2.2	2.8	3.6	4.5
Heating Capacity		kW	1.8	2.5	3.2	4.0	5.0
Power Input (H / M / L)	Nominal	W	11 / 10 / 9	12 / 11 / 9	13 / 12 / 9	15 / 13 / 11	23 / 18 / 11
Exterior Color			White	White	White	White	White
RAL Code			RAL 9016	RAL 9016	RAL 9016	RAL 9016	RAL 9016
Dimensions (W x H x D)	Body	mm	818 x 316 x 189	818 x 316 x 189	818 x 316 x 189	818 x 316 x 189	818 x 316 x 189
	Shipping	mm	892 x 381 x 249	892 x 381 x 249	892 x 381 x 249	892 x 381 x 249	892 x 381 x 249
	Type		Cross Flow Fan	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan
Fan	Motor Output x Number	W x No.	30 x 1	30 x 1	30 x 1	30 x 1	30 x 1
	Air Flow Rate (H / M / L)	m³/min	6.8 / 6.5 / 5.9	7.2 / 6.8 / 5.9	7.8 / 7.2 / 5.9	8.5 / 7.8 / 6.8	10.5 / 9.5 / 6.8
	Motor Type		BLDC	BLDC	BLDC	BLDC	BLDC
Air Filter			Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø16 (5/8)	Ø16 (5/8)	Ø16 (5/8)	Ø16 (5/8)	Ø16 (5/8)
Weight	Body	kg	8.4	8.4	8.4	8.4	8.4
Sound Pressure Levels (H / M / L)		dB(A)	30 / 29 / 28	32 / 30 / 28	34 / 32 / 28	37 / 34 / 30	42 / 39 / 32
Sound Power Levels (H / M / L)		dB(A)	54 / 53 / 52	54 / 53 / 52	55 / 54 / 52	55 / 54 / 53	58 / 56 / 54
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Communication Cable		mm² x No.	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note : 1. Performance tested under EN14511
2. Capacities are based on the following conditions.
- Cooling : Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

Chassis	ARNU05GSJN4	ARNU07GSJN4	ARNU09GSJN4	ARNU12GSJN4	ARNU15GSJN4
Drain Pump			-		
Cassette Cover			-		
Refrigerant Leakage Detector			PRLDNV50		
EEV Kit			PRGK024A0		
Independent Power Module			PRIPO		
Robot Cleaner			-		
Pre Filter (Washable)			○		
Ion Generator			○		
CO ₂ Sensor			-		
Ventilation Kit			-		
IR Receiver			-		
Zone Controller			-		
Dry Contact (with additional accessory)			PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)		
External Input (1 point)			○		
Wi-Fi			○		

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

STANDARD

ARNU18GSK*4 / ARNU24GSK*4
ARNU30GSVA4 / ARNU36GSVA4



Model		Unit	ARNU18GSK*4	ARNU24GSK*4	ARNU30GSVA4	ARNU36GSVA4
Cooling Capacity		kW	5.6	7.1	8.8	10.4
Heating Capacity		kW	6.3	7.5	9.4	10.8
Power Input (H / M / L)	Nominal	W	32 / 26 / 16	39 / 26 / 16	54 / 43 / 31	85 / 51 / 36
Exterior Color			White	White	White	White
RAL Code			RAL 9016	RAL 9016	RAL 9016	RAL 9016
Dimensions (W x H x D)	Body	mm	975 x 354 x 209	975 x 354 x 209	1,190 x 346 x 265	1,190 x 346 x 265
	Shipping	mm	1,063 x 420 x 274	1,063 x 420 x 274	1,265 x 432 x 335	1,265 x 432 x 335
	Type		Cross Flow Fan	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan
Fan	Motor Output x Number	W x No.	58 x 1	58 x 1	113 x 1	113 x 1
	Air Flow Rate (H / M / L)	m³/min	14.0 / 12.0 / 10.5	15.2 / 12.7 / 10.5	23.0 / 20.0 / 17.0	26.0 / 23.0 / 19.0
	Motor Type		BLDC	BLDC	BLDC	BLDC
Air Filter			Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø16 (5/8)	Ø16 (5/8)	Ø16 (5/8)	Ø16 (5/8)
Weight	Body	kg	12.2	12.2	16.6	16.6
Sound Pressure Levels (H / M / L)		dB(A)	43 / 39 / 34	46 / 41 / 34	49 / 44 / 42	52 / 47 / 43
Sound Power Levels (H / M / L)		dB(A)	63 / 57 / 54	65 / 60 / 54		
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Communication Cable		mm² x No.	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

* : N or C can be applied which has little bit different shape of panel.
Note : 1. Performance tested under EN14511
2. Capacities are based on the following conditions.
- Cooling : Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

Chassis	ARNU18GSK*4	ARNU24GSK*4	ARNU30GSVA4	ARNU36GSVA4
Drain Pump	-		-	
Cassette Cover	-		-	
Refrigerant Leakage Detector	PRLDNV50		PRLDNV50	
EEV Kit	PRGK024A0		-	
Independent Power Module	PRIPO		PRIPO	
Robot Cleaner	-		-	
Pre Filter (Washable)	○		○	
Ion Generator	○		-	
CO ₂ Sensor	-		-	
Ventilation Kit	-		-	
IR Receiver	-		-	
Zone Controller	-		-	
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)			
External Input (1 point)	○		○	
Wi-Fi	○		PWFMDD200	

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

CEILING MOUNTED CASSETTE



Features & Benefits

- New Dual Vane 4 Way cassette allows comfortable air flow.
- Full 3D Turbo fan decreases air resistance, providing high air flow and low sound levels.
- 5-Step air cleaning process removes invisible, ultra fine dust, odor and germs to ensure a clean and healthy living

Key Applications

- Retail
- School
- Office
- Hotel
- Dormitory
- Restaurant

Cassette		4 Way	2 Way	1 Way
Smart	Wi-Fi	○	○	○
	Human Detect Sensor	○	-	-
	Drain Pump	○	○	○
	Sleep Mode	○	○	○
Comfort	Timer (On / Off)	○	○	○
	Timer (Weekly)	○	○	○
	Two Thermistor Control	○	○	○
	Group Control	○	○	○
Air purification		○	-	○


NEW DESIGN

4 Way Air Flow with New Design


New Excellent Technology (NET) certifies new 4 Way dual vane design that promotes comfortable and convenient airflow.



*New types wind

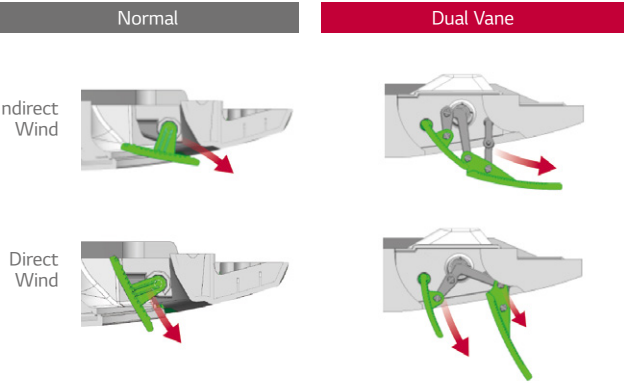


*6 Airflows mode

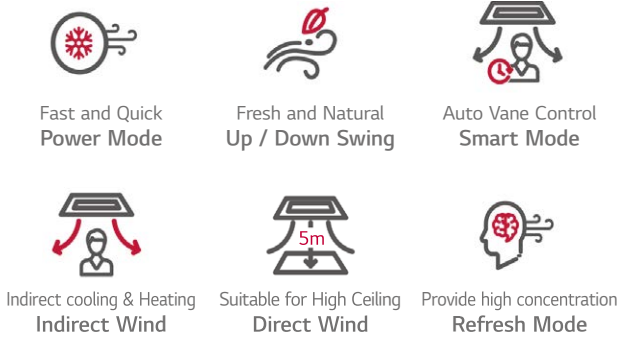


Brighter Color

Color enhancement allows cassette to blend in to most interior ceiling spaces.

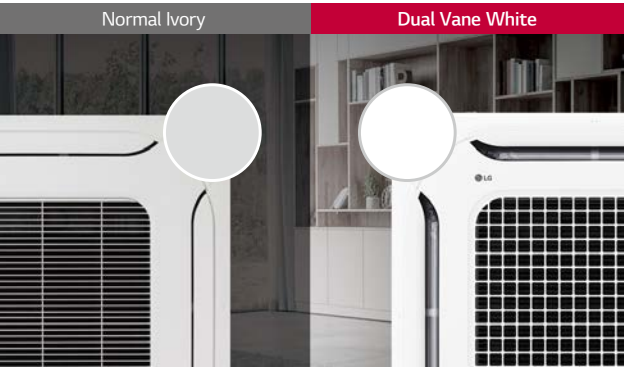

Wide Design

Bigger inlet and outlet make faster cooling / heating airflow.

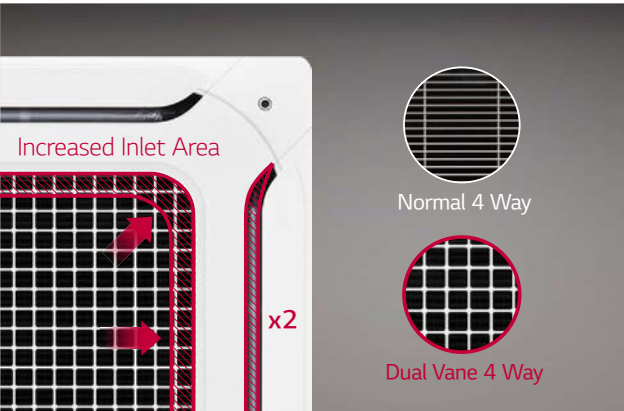


Full 3D Turbo Fan

Full 3D Turbo fan decreases air resistance, so it makes High Efficient and reduces noise level.



High Efficiency Heat Exchanger (HEX)


Ø5 High Density Heat Exchanger increases cooling / heating efficiency by 10%.

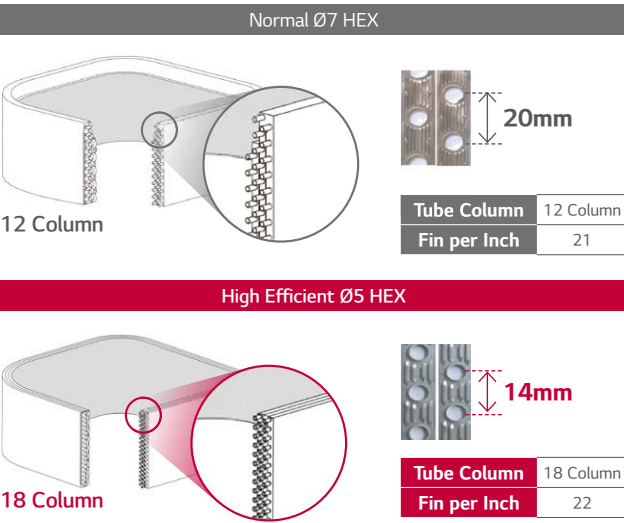

SMART

Ceiling to Floor Temperature Sensing

With a special sensor that sense both ceiling and floor temperature, Dual Vane 4 Way cassette provides comfort air.

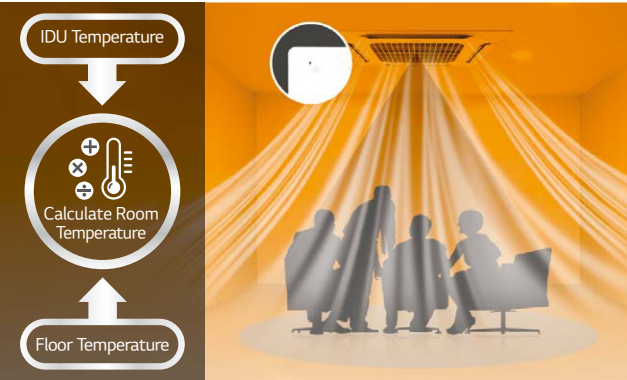

※ Available only for products with floor temperature sensor.

Human-detection Air Flow

Human detection provides users with direct or indirect air flow preferences.

Indirect comfort

Provides air flow that blows away from user for comfort.




Direct cooling

Provides air flow that blows directly onto user for cooling.



Human Detection for Optimized Efficiency

Indoor unit senses human presence to switch on or off for maximum power savings of 54%.

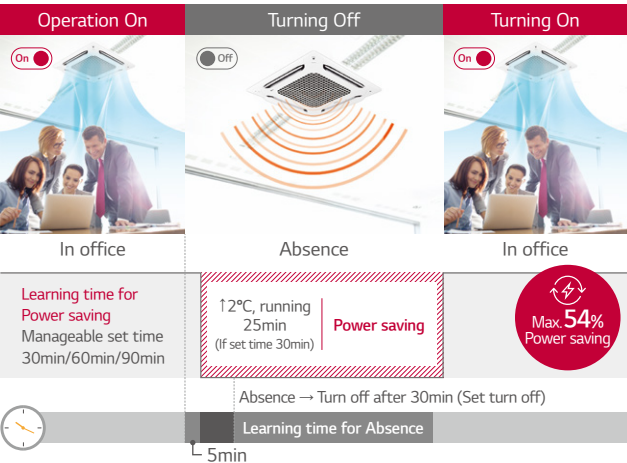

※ Smart Dual Vane Indoor Unit '20 Line up.
※ Data Based on actual test of LG, single product 2 hours measurement result.
(Cooling 26 °C, strong wind)


High-performance Air purification

Air cleaning function provides fresh, filtered air.



Convenient & Powerful 5-Step Air purification

It captures 99% of microfine dust (PM1.0)
Besides, Easy-to-maintain system with washable filters

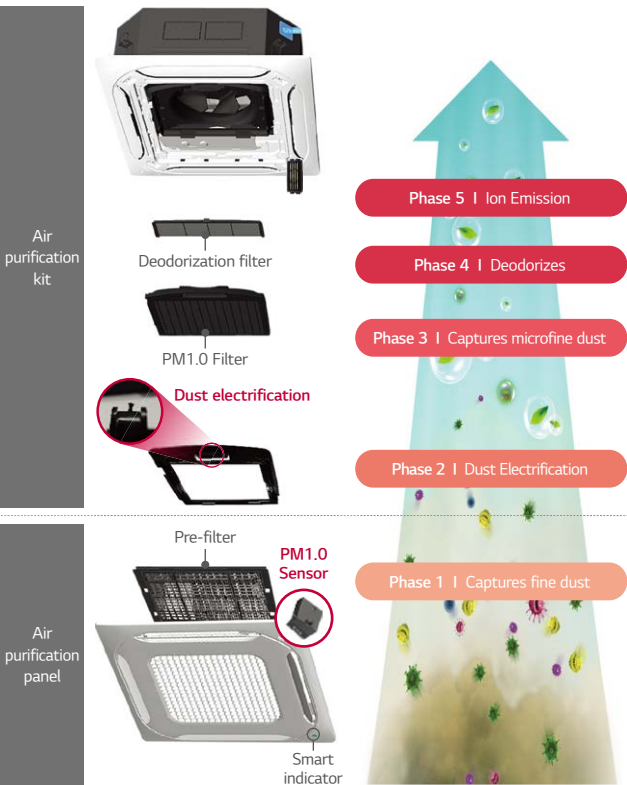


Cycle Management

Pre-filter	PM1.0 Filter	Deodorization Filter
Easy removable pre-filter	6 months / Washable	6 months / Dry in sunlight

SMART


Real-time Air Quality Monitoring

Wi-Fi functionality for anytime, anywhere indoor unit control and air quality level display.

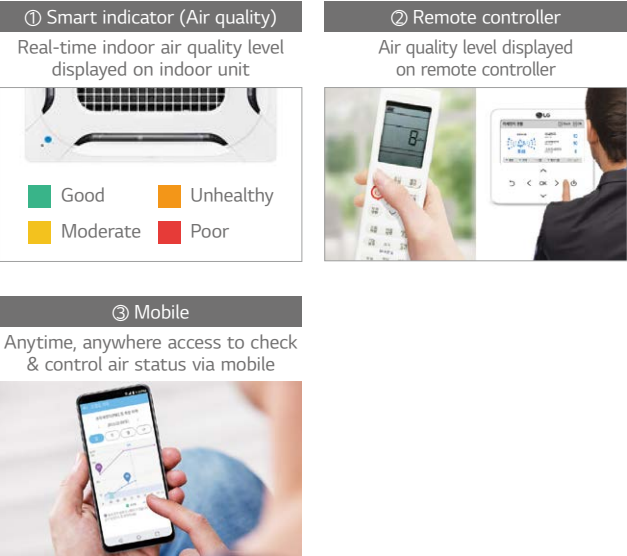


Dual Elevating Grille

Grille automatically detaches and re-attaches with 4 touchpoints for enhanced stability & convenient filter management.

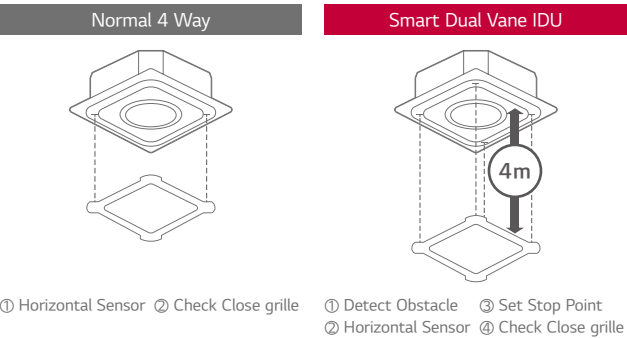

LG ThinQ Connectivity

Anytime anywhere access to indoor units with LG ThinQ mobile app.

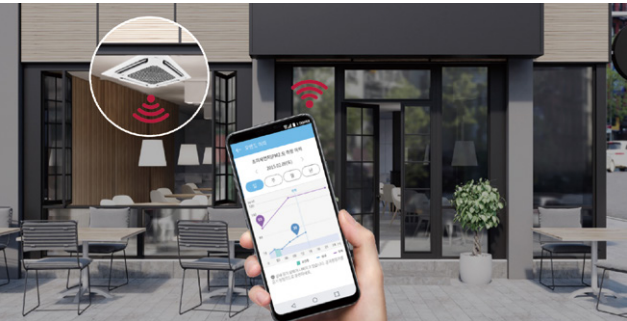


- ① Monitoring Air status
Easy to check indoor air status
• Ultra Fine / Extra Fine / Fine Dust
• Day / Week / Month / Yearly
- ② Mobile Remote Control
Remote control by using mobile phone
• Control Mode / Temperature / Air flow etc.
- ③ Display Power Consumption
Check power consumption of A/C
• Check energy display
• Set target energy consumption level

INSTALLATION

Minimized Height

With a height of 132mm, the LG 1 Way cassette is the ideal solution for limited-space installations.

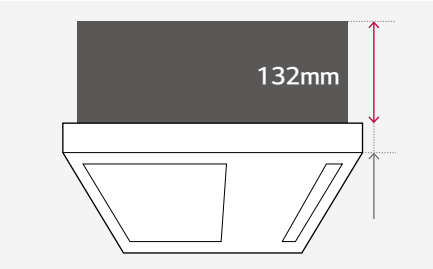


Size Comparison (Unit : mm)


	A Company	B Company	LG
1 Way Cassette	215	230	132

Flexible Installation

1 Way cassette doesn't require the inspection access hole, so that simple installation is possible.

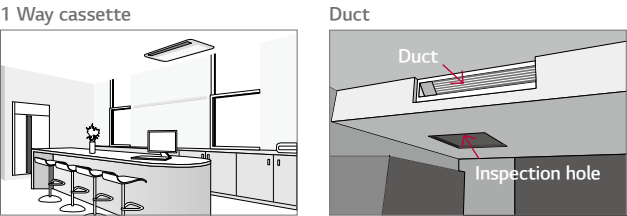

Installation Standard

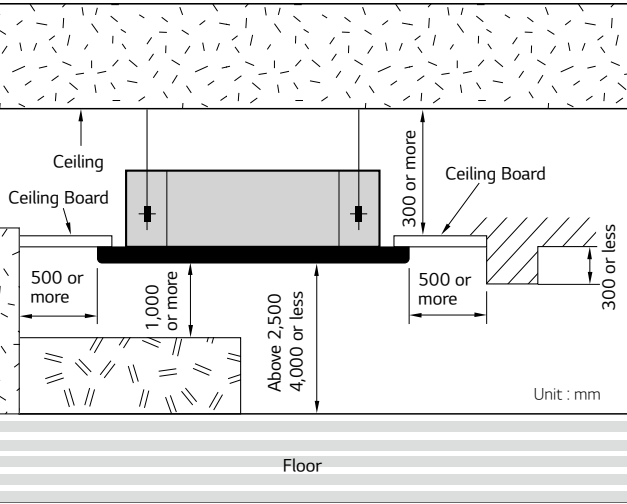

DUAL VANE 4 Way CASSETTE (840 X 840)

ARNU24GTBB4 / ARNU28GTBB4
ARNU30GTBB4



Model		Unit	ARNU24GTBB4	ARNU28GTBB4	ARNU30GTBB4
Cooling Capacity		kW	7.1	8.2	9.0
Heating Capacity		kW	8.0	9.2	10.0
Power Input (H / M / L)	Nominal	W	32 / 27 / 20	37 / 30 / 22	48 / 36 / 25
Dimensions (W x H x D)	Body	mm	840 x 204 x 840	840 x 204 x 840	840 x 204 x 840
	Shipping	mm	922 x 276 x 917	922 x 276 x 917	922 x 276 x 917
Fan	Type		Full 3D Turbo Fan	Full 3D Turbo Fan	Full 3D Turbo Fan
	Motor Output x Number	W x No.	51 x 1	51 x 1	51 x 1
	Air Flow Rate (H / M / L)	m³/min	18 / 17 / 15	19 / 17 / 15	21 / 19 / 16
	Motor Type		BLDC	BLDC	BLDC
Air Filter			Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)	Ø25 (1)
Weight	Body	kg	21	21	21
Sound Pressure Level (H / M / L)		dB(A)	36 / 34 / 31	39 / 35 / 34	40 / 36 / 33
Sound Power Level (H / M / L)		dB(A)	46 / 44 / 42	50 / 46 / 43	53 / 50 / 45
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Communication Cable		mm² x No.	1.25 x 2C	1.25 x 2C	1.25 x 2C
Decoration Panel (Accessory)	Model Name		PT-AAGW0 PT-AFGW0 PT-AEGW0	PT-AAGW0 PT-AFGW0 PT-AEGW0	PT-AAGW0 PT-AFGW0 PT-AEGW0
	Exterior Color		White	White	White
	RAL Code		RAL 9003	RAL 9003	RAL 9003
	Net Dimensions (W x H x D)	mm	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950
	Net Weight	kg	7.1 / 7.5 / 8.5	7.1 / 7.5 / 8.5	7.1 / 7.5 / 8.5

Note : 1. Performance tested under EN14511
2. Capacities are based on the following conditions.
- Cooling : Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

Chassis	ARNU24GTBB4	ARNU28GTBB4	ARNU30GTBB4
Drain Pump		○	
Cassette Cover		PTDCA	
Refrigerant Leakage Detector		PRLDNVSO	
EEV Kit		-	
Independent Power Module		PRIP0	
Robot Cleaner		-	
Pre Filter (Washable)		○	
Ion Generator		-	
CO ₂ Sensor		-	
Ventilation Kit		-	
IR Receiver		-	
Zone Controller		-	
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)		
External Input (1 Point)		○	
Wi-Fi		PWFMDD200	
Human detection sensor		PTVSA0	
Floor Temperature Sensor		PT-AFGW0 : ○	
Air Purification kit		PT-AFGW0 : PTAHMP0	
Elevation Grille		PT-AEGW0 : ○	

DUAL VANE 4 Way CASSETTE (840 X 840)

ARNU36GTAB4 / ARNU42GTAB4
ARNU48GTAB4



Model		Unit	ARNU36GTAB4	ARNU42GTAB4	ARNU48GTAB4
Cooling Capacity		kW	10.6	12.3	14.1
Heating Capacity		kW	11.9	13.8	15.9
Power Input (H / M / L)	Nominal	W	69 / 49 / 37	97 / 69 / 49	110 / 76 / 61
Dimensions (W x H x D)	Body	mm	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840
	Shipping	mm	922 x 360 x 917	922 x 360 x 917	922 x 360 x 917
Fan	Type		Full 3D Turbo Fan	Full 3D Turbo Fan	Full 3D Turbo Fan
	Motor Output x Number	W x No.	135 x 1	135 x 1	135 x 1
	Air Flow Rate (H / M / L)	m³/min	29 / 26 / 22	33 / 29 / 26	34 / 30 / 28
	Motor Type		BLDC	BLDC	BLDC
Air Filter			Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)	Ø25 (1)
Weight	Body	kg	26	26	26
Sound Pressure Level (H / M / L)		dB(A)	42 / 39 / 36	44 / 41 / 39	46 / 43 / 41
Sound Power Level (H / M / L)		dB(A)	54 / 51 / 47	56 / 53 / 49	58 / 54 / 53
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Communication Cable		mm² x No.	1.25 x 2C	1.25 x 2C	1.25 x 2C
Decoration Panel (Accessory)	Model Name		PT-AAGW0 PT-AFGW0 PT-AEGW0	PT-AAGW0 PT-AFGW0 PT-AEGW0	PT-AAGW0 PT-AFGW0 PT-AEGW0
	Exterior Color		White	White	White
	RAL Code		RAL 9003	RAL 9003	RAL 9003
	Net Dimensions (W x H x D)	mm	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950
	Net Weight	kg	7.1 / 7.5 / 8.5	7.1 / 7.5 / 8.5	7.1 / 7.5 / 8.5

Note : 1. Performance tested under EN14511
2. Capacities are based on the following conditions.
- Cooling : Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

Chassis	ARNU36GTAB4	ARNU42GTAB4	ARNU48GTAB4
Drain Pump		○	
Cassette Cover		PTDCA	
Refrigerant Leakage Detector		PRLDNVSO	
EEV Kit		-	
Independent Power Module		PRIP0	
Robot Cleaner		-	
Pre Filter (Washable)		○	
Ion Generator		-	
CO ₂ Sensor		-	
Ventilation Kit		-	
IR Receiver		-	
Zone Controller		-	
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)		
External Input (1 Point)		○	
Wi-Fi		PWFMDD200	
Human detection sensor		PTVSA0	
Floor Temperature Sensor		PT-AFGW0 : ○	
Air Purification kit		PT-AFGW0 : PTAHMP0	
Elevation Grille		PT-AEGW0 : ○	

DUAL VANE 4 Way CASSETTE (840 X 840) HIGH SENSIBLE

ARNU07GTAA4 / ARNU09GTAA4
ARNU12GTAA4 / ARNU15GTAA4
ARNU18GTAA4



Model	Unit		ARNU07GTAA4	ARNU09GTAA4	ARNU12GTAA4	ARNU15GTAA4	ARNU18GTAA4
Cooling Capacity		kW	2.2	2.8	3.6	4.5	5.6
Heating Capacity		kW	2.5	3.2	4.0	5.0	6.3
Power Input (H / M / L)	Nominal	W	23 / 16 / 11	25 / 18 / 11	26 / 19 / 13	29 / 20 / 15	31 / 23 / 16
Dimensions (W x H x D)	Body	mm	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840
	Shipping	mm	922 x 360 x 917	922 x 360 x 917	922 x 360 x 917	922 x 360 x 917	922 x 360 x 917
Fan	Type		Full 3D Turbo Fan	Full 3D Turbo Fan	Full 3D Turbo Fan	Full 3D Turbo Fan	Full 3D Turbo Fan
	Motor Output x Number	W x No.	166 x 1	166 x 1	166 x 1	166 x 1	166 x 1
	Running Current	A	0.23	0.25	0.25	0.27	0.28
	Air Flow Rate (H / M / L)	m³/min	19 / 16 / 13	19 / 16 / 13	20 / 17 / 15	20 / 17 / 15	21 / 19 / 16
	Motor Type		BLDC	BLDC	BLDC	BLDC	BLDC
Air Filter			Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)	Ø25 (1)	Ø25 (1)	Ø25 (1)
Weight	Body	kg	26	26	26	26	26
Sound Pressure Level (H / M / L)		dB(A)	32 / 30 / 26	33 / 30 / 26	34 / 31 / 27	34 / 32 / 29	35 / 32 / 30
Sound Power Level (H / M / L)		dB(A)	41 / 38 / 34	42 / 39 / 34	42 / 40 / 36	43 / 40 / 37	44 / 41 / 38
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Communication Cable		mm² x No.	1.25 x 2C	1.25 x 2C	1.25 x 2C	1.25 x 2C	1.25 x 2C
Decoration Panel (Accessory)	Exterior Color		White	White	White	White	White
	RAL Code		RAL 9003	RAL 9003	RAL 9003	RAL 9003	RAL 9003
	Net Dimensions (W x H x D)	mm	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950
	Net Weight	kg	7.1 / 7.5 / 8.5	7.1 / 7.5 / 8.5	7.1 / 7.5 / 8.5	7.1 / 7.5 / 8.5	7.1 / 7.5 / 8.5

Note : 1. Performance tested under EN14511
2. Capacities are based on the following conditions.
- Cooling : Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

Chassis	ARNU07GTAA4	ARNU09GTAA4	ARNU12GTAA4	ARNU15GTAA4	ARNU18GTAA4
Drain Pump			○		
Cassette Cover			PTDCA		
Refrigerant Leakage Detector			PRLDNVSO		
EEV Kit			-		
Independent Power Module			PRIP0		
Robot Cleaner			-		
Pre Filter (Washable)			○		
Ion Generator			-		
CO ₂ Sensor			-		
Ventilation Kit			-		
IR Receiver			-		
Zone Controller			-		
Dry Contact (with additional accessory)			PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)		
External Input (1 Point)			○		
Wi-Fi			PWFMD200		
Human detection sensor			PTVSA0		
Floor Temperature Sensor			PT-AFGW0 : ○		
Air Purification kit			PT-AFGW0 : PTAHMP0		
Elevation Grille			PT-AEGW0 : ○		

DUAL VANE 4 Way CASSETTE (840 X 840) HIGH SENSIBLE

ARNU24GTAA4 / ARNU28GTAA4
ARNU36GTAA4 / ARNU42GTAA4
ARNU48GTAA4



Model	Unit		ARNU24GTAA4	ARNU28GTAA4	ARNU36GTAA4	ARNU42GTAA4	ARNU48GTAA4
Cooling Capacity	kW		7.1	8.2	10.6	12.3	14.1
Heating Capacity	kW		8.0	9.2	11.9	13.8	15.9
Power Input (H / M / L)	Nominal	W	35 / 29 / 20	40 / 31 / 25	65 / 43 / 31	86 / 65 / 43	100 / 67 / 53
Dimensions (W x H x D)	Body	mm	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840
	Shipping	mm	922 x 360 x 917	922 x 360 x 917	922 x 360 x 917	922 x 360 x 917	922 x 360 x 917
Fan	Type		Full 3D Turbo Fan	Full 3D Turbo Fan	Full 3D Turbo Fan	Full 3D Turbo Fan	Full 3D Turbo Fan
	Motor Output x Number	W x No.	166 x 1	166 x 1	166 x 1	166 x 1	166 x 1
	Running Current	A	0.38	0.46	0.60	0.80	0.88
	Air Flow Rate (H / M / L)	m³/min	23 / 21 / 19	24 / 22 / 20	28 / 24 / 21	31 / 28 / 24	33 / 28 / 26
	Motor Type		BLDC	BLDC	BLDC	BLDC	BLDC
Air Filter			Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)	Ø25 (1)	Ø25 (1)	Ø25 (1)
Weight	Body	kg	26	26	26	26	26
Sound Pressure Level (H / M / L)	dB(A)		39 / 36 / 33	40 / 37 / 34	42 / 39 / 35	46 / 42 / 39	47 / 43 / 41
Sound Power Level (H / M / L)	dB(A)		47 / 45 / 42	48 / 46 / 42	51 / 48 / 44	54 / 51 / 48	56 / 52 / 50
Power Supply	Ø, V, Hz		1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Communication Cable	mm² x No.		1.25 x 2C	1.25 x 2C	1.25 x 2C	1.25 x 2C	1.25 x 2C
Decoration Panel (Accessory)	Model Name		PT-AAGW0	PT-AAGW0	PT-AAGW0	PT-AAGW0	PT-AAGW0
			PT-AFGW0	PT-AFGW0	PT-AFGW0	PT-AFGW0	PT-AFGW0
			PT-AEGW0	PT-AEGW0	PT-AEGW0	PT-AEGW0	PT-AEGW0
	Exterior Color		White	White	White	White	White
	RAL Code		RAL 9003	RAL 9003	RAL 9003	RAL 9003	RAL 9003
Net Dimensions (W x H x D)	mm	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950	
Net Weight	kg	7.1 / 7.5 / 8.5	7.1 / 7.5 / 8.5	7.1 / 7.5 / 8.5	7.1 / 7.5 / 8.5	7.1 / 7.5 / 8.5	

Note : 1. Performance tested under EN14511
2. Capacities are based on the following conditions.
- Cooling : Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

Chassis	ARNU24GTAA4	ARNU28GTAA4	ARNU36GTAA4	ARNU42GTAA4	ARNU48GTAA4
Drain Pump			○		
Cassette Cover			PTDCA		
Refrigerant Leakage Detector			PRLDNVSO		
EEV Kit			-		
Independent Power Module			PRIP0		
Robot Cleaner			-		
Pre Filter (Washable)			○		
Ion Generator			-		
CO ₂ Sensor			-		
Ventilation Kit			-		
IR Receiver			-		
Zone Controller			-		
Dry Contact (with additional accessory)			PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)		
External Input (1 Point)			○		
Wi-Fi			PWFMD200		
Human detection sensor			PTVSA0		
Floor Temperature Sensor			PT-AFGW0 : ○		
Air Purification kit			PT-AFGW0 : PTAHMP0		
Elevation Grille			PT-AEGW0 : ○		

4 Way CASSETTE (570 X 570)

ARNU05GTRB4 / ARNU07GTRB4
ARNU09GTRB4 / ARNU12GTRB4



Model		Unit	ARNU05GTRB4	ARNU07GTRB4	ARNU09GTRB4	ARNU12GTRB4
Cooling Capacity		kW	1.6	2.2	2.8	3.6
Heating Capacity		kW	1.8	2.5	3.2	4.0
Power Input (H / M / L)	Nominal	W	13 / 12 / 11	13 / 12 / 11	14 / 13 / 12	17 / 15 / 13
Dimensions (W x H x D)	Body	mm	570 x 214 x 570	570 x 214 x 570	570 x 214 x 570	570 x 214 x 570
	Shipping	mm	667 x 285 x 646	667 x 285 x 646	667 x 285 x 646	667 x 285 x 646
Fan	Type		Turbo Fan	Turbo Fan	Turbo Fan	Turbo Fan
	Motor Output x Number	W x No.	43 x 1	43 x 1	43 x 1	43 x 1
	Air Flow Rate (H / M / L)	m³/min	7.5 / 7.0 / 6.6	7.5 / 7.0 / 6.6	8.0 / 7.5 / 7.1	8.7 / 8.0 / 7.0
	Motor Type		BLDC	BLDC	BLDC	BLDC
Air Filter			Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)	Ø25 (1)	Ø25 (1)
Weight	Body	kg	12.6	12.6	13.7	13.7
Sound Pressure Levels (H / M / L)		dB(A)	29 / 27 / 26	29 / 27 / 26	30 / 29 / 27	32 / 30 / 27
Sound Power Levels (H / M / L)		dB(A)	45 / 43 / 42	45 / 43 / 42	46 / 43 / 42	48 / 46 / 43
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Communication Cable		mm² x No.	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C
Decoration Panel (Accessory)	Model Name		PT-QCHW0	PT-QCHW0	PT-QCHW0	PT-QCHW0
	Exterior Color		Morning Fog	Morning Fog	Morning Fog	Morning Fog
	RAL Code		RAL 9001	RAL 9001	RAL 9001	RAL 9001
	Net Dimensions (W x H x D)	mm	700 x 22 x700 620 x 20 x 620	700 x 22 x700 620 x 20 x 620	700 x 22 x700 620 x 20 x 620	700 x 22 x700 620 x 20 x 620
	Net Weight	kg	3.0 / 3.0	3.0 / 3.0	3.0 / 3.0	3.0 / 3.0

Note : 1. Performance tested under EN14511
2. Capacities are based on the following conditions.
- Cooling : Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

Chassis	ARNU05GTRB4	ARNU07GTRB4	ARNU09GTRB4	ARNU12GTRB4
Drain Pump		○		
Cassette Cover		PTDCQ		
Refrigerant Leakage Detector		PRLDNVSO		
EEV Kit		PRGK024A0 (-4.5kW)		
Independent Power Module		PRIP0		
Robot Cleaner		-		
Pre Filter (Washable)		○		
Ion Generator		-		
CO ₂ Sensor		-		
Ventilation Kit		PTVK430		
IR Receiver		-		
Zone Controller		-		
Dry Contact (with additional accessory)		PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)		
External Input (1 point)		○		
Wi-Fi		PWFMD200		

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

4 Way CASSETTE (570 X 570)

ARNU15GTQB4 / ARNU18GTQB4
ARNU21GTQB4



Model		Unit	ARNU15GTQB4	ARNU18GTQB4	ARNU21GTQB4
Cooling Capacity		kW	4.5	5.6	6.0
Heating Capacity		kW	5.0	6.3	6.8
Power Input (H / M / L)	Nominal	W	24 / 21 / 18	25 / 22 / 19	28 / 23 / 20
Dimensions (W x H x D)	Body	mm	570 x 256 x 570	570 x 256 x 570	570 x 256 x 570
	Shipping	mm	667 x 327 x 646	667 x 327 x 646	667 x 327 x 646
Fan	Type		Turbo Fan	Turbo Fan	Turbo Fan
	Motor Output x Number	W x No.	43 x 1	43 x 1	43 x 1
	Air Flow Rate (H / M / L)	m³/min	11.0 / 10.0 / 9.3	11.2 / 11.0 / 10.0	12.0 / 11.1 / 9.4
	Motor Type		BLDC	BLDC	BLDC
Air Filter			Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)	Ø25 (1)
Weight	Body	kg	15.0	15.0	15.0
Sound Pressure Levels (H / M / L)		dB(A)	36 / 34 / 32	37 / 35 / 34	40 / 38 / 34
Sound Power Levels (H / M / L)		dB(A)	50 / 48 / 46	51 / 50 / 46	53 / 51 / 46
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Communication Cable		mm² x No.	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C
Decoration Panel (Accessory)	Model Name		PT-QCHW0	PT-QCHW0	PT-QCHW0
	Exterior Color		Morning Fog	Morning Fog	Morning Fog
	RAL Code		RAL 9001	RAL 9001	RAL 9001
	Net Dimensions (W x H x D)	mm	700 x 22 x700 620 x 20 x 620	700 x 22 x700 620 x 20 x 620	700 x 22 x700 620 x 20 x 620
	Net Weight	kg	3.0 / 3.0	3.0 / 3.0	3.0 / 3.0

Note : 1. Performance tested under EN14511
2. Capacities are based on the following conditions.
- Cooling : Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

Chassis	ARNU15GTQB4	ARNU18GTQB4	ARNU21GTQB4
Drain Pump		○	
Cassette Cover		PTDCQ	
Refrigerant Leakage Detector		PRLDNVSO	
EEV Kit		PRGK024A0 (-4.5kW)	
Independent Power Module		PRIP0	
Robot Cleaner		-	
Pre Filter (Washable)		○	
Ion Generator		-	
CO ₂ Sensor		-	
Ventilation Kit		PTVK430	
IR Receiver		-	
Zone Controller		-	
Dry Contact (with additional accessory)		PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 point)		○	
Wi-Fi		PWFMD200	

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

4 Way CASSETTE (840 X 840)

ARNU24GTPA4 / ARNU28GTPA4
ARNU30GTPA4 / ARNU36GTNA4



Model		Unit	ARNU24GTPA4	ARNU28GTPA4	ARNU30GTPA4	ARNU36GTNA4
Cooling Capacity		kW	7.1	8.2	9.0	10.6
Heating Capacity		kW	8.0	9.2	10.0	11.9
Power Input (H / M / L)	Nominal	W	18 / 16 / 14	20 / 17 / 15	26 / 24 / 21	70 / 53 / 43
Dimensions (W x H x D)	Body	mm	840 x 204 x 840	840 x 204 x 840	840 x 204 x 840	840 x 246 x 840
	Shipping	mm	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950
Fan	Type		Turbo Fan	Turbo Fan	Turbo Fan	Turbo Fan
	Motor Output x Number	W x No.	30 x 1	30 x 1	30 x 1	135 x 1
	Air Flow Rate (H / M / L)	m³/min	17.0 / 15.0 / 13.0	19.0 / 16.0 / 14.0	24.3 / 22.8 / 19.5	25 / 21 / 19
	Motor Type		BLDC	BLDC	BLDC	BLDC
Air Filter			Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	25 (1)	25 (1)	25 (1)	25 (1)
Weight	Body	kg	20.8 (45.8)	20.8 (45.8)	20.8 (45.8)	23.5 (51.8)
Sound Pressure Levels (H / M / L)		dB(A)	36 / 34 / 31	39 / 35 / 33	40 / 36 / 33	43 / 40 / 37
Sound Power Levels (H / M / L)		dB(A)	46 / 44 / 43	52 / 46 / 44	58 / 57 / 54	56 / 53 / 51
Power Supply		Ø, V, Hz	1, 220-230-240, 50/60	1, 220-230-240, 50/60	1, 220-230-240, 50/60	1, 220-230-240, 50/60
Communication Cable		mm² x No.	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C
Decoration Panel (Accessory)	Model Name		PT-MCGW0 PT-MPGW0	PT-MCGW0 PT-MPGW0	PT-MCGW0 PT-MPGW0	PT-MCGW0 PT-MPGW0
	Exterior Color		Morning Fog	Morning Fog	Morning Fog	Morning Fog
	RAL Code		RAL 9001	RAL 9001	RAL 9001	RAL 9001
	Net Dimensions (W x H x D)	mm	950 x 25 x 950 950 x 35 x 950	950 x 25 x 950 950 x 35 x 950	950 x 25 x 950 950 x 35 x 950	950 x 25 x 950 950 x 35 x 950
	Net Weight	kg	5.0 / 6.3	5.0 / 6.3	5.0 / 6.3	5.0 / 6.3

Note : 1. Performance tested under EN14511
2. Capacities are based on the following conditions.
- Cooling : Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

Chassis	ARNU24GTPA4	ARNU28GTPA4	ARNU30GTPA4	ARNU36GTNA4
Drain Pump			○	
Cassette Cover			PTDCM	
Refrigerant Leakage Detector			PRLDNVSO	
EEV Kit			-	
Independent Power Module			PRIP0	
Robot Cleaner			-	
Pre Filter (Washable)			○	
Ion Generator			-	
CO ₂ Sensor			-	
Ventilation Kit			PTVK430	
IR Receiver			-	
Zone Controller			-	
Dry Contact (with additional accessory)			PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 point)			○	
Wi-Fi			PWFMD200	
Air Purification Kit			PT-MPGW0 : PTAHMP0	
Human detection sensor			PTVSA00	

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

4 Way CASSETTE (840 X 840)

ARNU42GTMA4 / ARNU48GTMA4
ARNU54GTMA4



Model		Unit	ARNU42GTMA4	ARNU48GTMA4	ARNU54GTMA4
Cooling Capacity		kW	12.3	14.1	15.8
Heating Capacity		kW	13.8	15.9	18.0
Power Input (H / M / L)	Nominal	W	86 / 78 / 69	89 / 84 / 78	98 / 92 / 78
Dimensions (W x H x D)	Body	mm	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840
	Shipping	mm	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950
Fan	Type		Turbo Fan	Turbo Fan	Turbo Fan
	Motor Output x Number	W x No.	135 x 1	135 x 1	135 x 1
	Air Flow Rate (H / M / L)	m³/min	30 / 27 / 24	31 / 29 / 27	34 / 32 / 27
	Motor Type		BLDC	BLDC	BLDC
Air Filter			Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	25 (1)	25 (1)	25 (1)
Weight	Body	kg	25.6 (56.4)	25.6 (56.4)	26.5 (58.4)
Sound Pressure Levels (H / M / L)		dB(A)	44 / 41 / 38	46 / 43 / 41	50 / 48 / 44
Sound Power Levels (H / M / L)		dB(A)	58 / 55 / 50	60 / 56 / 55	60 / 58 / 55
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Communication Cable		mm² x No.	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C
Decoration Panel (Accessory)	Model Name		PT-MCGW0 PT-MPGW0	PT-MCGW0 PT-MPGW0	PT-MCGW0 PT-MPGW0
	Exterior Color		Morning Fog	Morning Fog	Morning Fog
	RAL Code		RAL 9001	RAL 9001	RAL 9001
	Net Dimensions (W x H x D)	mm	950 x 25 x 950 950 x 35 x 950	950 x 25 x 950 950 x 35 x 950	950 x 25 x 950 950 x 35 x 950
	Net Weight	kg	5.0 / 6.3	5.0 / 6.3	5.0 / 6.3

Note : 1. Performance tested under EN14511
2. Capacities are based on the following conditions.
- Cooling : Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

Chassis	ARNU42GTMA4	ARNU48GTMA4	ARNU54GTMA4
Drain Pump		○	
Cassette Cover		PTDCM	
Refrigerant Leakage Detector		PRLDNVSO	
EEV Kit		-	
Independent Power Module		PRIP0	
Robot Cleaner		-	
Pre Filter (Washable)		○	
Ion Generator		-	
CO ₂ Sensor		-	
Ventilation Kit		PTVK430	
IR Receiver		-	
Zone Controller		-	
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)		
External Input (1 point)		○	
Wi-Fi		PWFMD200	
Air Purification Kit		PT-MPGW0 : PTAHMP0	
Human detection sensor		PTVSAA0	

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

2 Way CASSETTE

ARNU09GTSA4 / ARNU12GTSA4



Model		Unit	ARNU09GTSA4	ARNU12GTSA4
Cooling Capacity		kW	2.8	3.6
Heating Capacity		kW	3.2	4.0
Power Input (H / M / L)	Nominal	W	16 / 14 / 11	18 / 14 / 11
Dimensions (W x H x D)	Body	mm	830 x 225 x 600	830 x 225 x 600
	Shipping	mm	1,055 x 290 x 682	1,055 x 290 x 682
Fan	Type		Turbo Fan	Turbo Fan
	Motor Output x Number	W x No.	37 x 1	37 x 1
	Air Flow Rate (H / M / L)	m³/min	10.8 / 9.8 / 9.1	11.1 / 10.3 / 9.1
	Motor Type		BLDC	BLDC
Air Filter			Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)
	Drain Pipe (Internal Dia.)	mm (inch)	25 (1)	25 (1)
Weight	Body	kg	18.1	18.1
Sound Pressure Levels (H / M / L)		dB(A)	33 / 31 / 29	34 / 32 / 29
Sound Power Levels (H / M / L)		dB(A)	42 / 40 / 38	43 / 41 / 39
Power Supply		Ø, V, Hz	1, 220-230-240, 50/60	1, 220-230-240, 50/60
Communication Cable		mm² x No.	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C
Decoration Panel (Accessory)	Model Name		PT-USC	PT-USC
	Exterior Color		Morning Fog	Morning Fog
	RAL Code		RAL 9001	RAL 9001
	Net Dimensions (W x H x D)	mm	1,100 x 28 x 690	1,100 x 28 x 690
	Net Weight	kg	4.65	4.65

Note : 1. Performance tested under EN14511
2. Capacities are based on the following conditions.
- Cooling : Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

Chassis	ARNU09GTSA4	ARNU12GTSA4
Drain Pump		○
Cassette Cover		-
Refrigerant Leakage Detector		PRLDNVS0
EEV Kit		PRGK024A0 (~5.6kW)
Independent Power Module		PRIP0
Robot Cleaner		-
Pre Filter (Washable)		○
Ion Generator		-
CO ₂ Sensor		-
Ventilation Kit		-
IR Receiver		-
Zone Controller		-
Dry Contact (with additional accessory)		PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)
External Input (1 point)		○
Wi-Fi		PWFMD200

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

2 Way CASSETTE

ARNU18GTSA4 / ARNU24GTSA4



Model		Unit	ARNU18GTSA4	ARNU24GTSA4
Cooling Capacity		kW	5.6	7.1
Heating Capacity		kW	6.3	8.0
Power Input (H / M / L)	Nominal	W	19 / 16 / 14	31 / 22 / 14
Dimensions (W x H x D)	Body	mm	830 x 225 x 600	830 x 225 x 600
	Shipping	mm	1,055 x 290 x 682	1,055 x 290 x 682
Fan	Type		Turbo Fan	Turbo Fan
	Motor Output x Number	W x No.	37 x 1	37 x 1
	Air Flow Rate (H / M / L)	m³/min	11.8 / 10.8 / 9.8	14.5 / 12.4 / 10.3
	Motor Type		BLDC	BLDC
Air Filter			Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	25 (1)	25 (1)
Weight	Body	kg	18.1	18.1
Sound Pressure Levels (H / M / L)		dB(A)	35 / 33 / 31	40 / 37 / 33
Sound Power Levels (H / M / L)		dB(A)	44 / 42 / 40	48 / 45 / 40
Power Supply		Ø, V, Hz	1, 220-230-240, 50/60	1, 220-230-240, 50/60
Communication Cable		mm² x No.	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C
Decoration Panel (Accessory)	Model Name		PT-USC	PT-USC
	Exterior Color		Morning Fog	Morning Fog
	RAL Code		RAL 9001	RAL 9001
	Net Dimensions (W x H x D)	mm	1,100 x 28 x 690	1,100 x 28 x 690
	Net Weight	kg	4.65	4.65

Note : 1. Performance tested under EN14511
2. Capacities are based on the following conditions.
- Cooling : Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

Chassis	ARNU18GTSA4	ARNU24GTSA4
Drain Pump		○
Cassette Cover		-
Refrigerant Leakage Detector		PRLDNVS0
EEV Kit		PRGK024A0 (~5.6kW)
Independent Power Module		PRIP0
Robot Cleaner		-
Pre Filter (Washable)		○
Ion Generator		-
CO ₂ Sensor		-
Ventilation Kit		-
IR Receiver		-
Zone Controller		-
Dry Contact (with additional accessory)		PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)
External Input (1 point)		○
Wi-Fi		PWFMD200

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

1 Way CASSETTE

ARNU07GTUB4 / ARNU09GTUB4
ARNU12GTUB4



Model		Unit	ARNU07GTUB4	ARNU09GTUB4	ARNU12GTUB4
Cooling Capacity		kW	2.2	2.8	3.6
Heating Capacity		kW	2.5	3.2	4.0
Power Input (H / M / L)	Nominal	W	20 / 18 / 16	22 / 20 / 18	24 / 22 / 20
Dimensions (W x H x D)	Body	mm	860 x 132 x 450	860 x 132 x 450	860 x 132 x 450
	Shipping	mm	1,129 x 259 x 538	1,129 x 259 x 538	1,129 x 259 x 538
Fan	Type		Cross Flow Fan	Cross Flow Fan	Cross Flow Fan
	Motor Output x Number	W x No.	30 x 1	30 x 1	30 x 1
	Air Flow Rate (H / M / L)	m³/min	8.2 / 7.3 / 6.4	9.2 / 8.6 / 8.2	10.0 / 9.2 / 8.2
	Motor Type		BLDC	BLDC	BLDC
Air Filter			Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)	Ø25 (1)
Weight	Body	kg	13.6	13.6	13.6
Sound Pressure Levels (H / M / L)		dB(A)	32 / 29 / 25	35 / 34 / 32	38 / 35 / 32
Sound Power Levels (H / M / L)		dB(A)	47 / 44 / 41	50 / 48 / 47	52 / 50 / 47
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Communication Cable		mm² x No.	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C
Decoration Panel (Accessory)	Model Name		PT-UAHW0, PT-UPHG0	PT-UAHW0, PT-UPHG0	PT-UAHW0, PT-UPHG0
	Exterior Color		Noble White	Noble White	Noble White
	RAL Code		RAL 9003	RAL 9003	RAL 9003
	Net Dimensions (W x H x D)	mm	1,160 x 34 x 500	1,160 x 34 x 500	1,160 x 34 x 500
	Net Weight	kg	3.3 / 4.1	3.3 / 4.1	3.3 / 4.1

Note : 1. Performance tested under EN14511
2. Capacities are based on the following conditions.
- Cooling : Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

Chassis	ARNU07GTUB4	ARNU09GTUB4	ARNU12GTUB4
Drain Pump		○	
Cassette Cover		-	
Refrigerant Leakage Detector		PRLDNVS0	
EEV Kit		PRGK024A0	
Independent Power Module		PRIP0	
Robot Cleaner		-	
Pre Filter (Washable)		○	
Ion Generator		-	
CO ₂ Sensor		-	
Ventilation Kit		-	
IR Receiver		-	
Zone Controller		-	
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)		
External Input (1 point)		○	
Wi-Fi		PWFMDD200	
Air Purification Kit		PT-UPHG0 : PTAHTP0	

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

1 Way CASSETTE

ARNU18GTTB4 / ARNU24GTTB4



Model		Unit	ARNU18GTTB4	ARNU24GTTB4
Cooling Capacity		kW	5.6	7.1
Heating Capacity		kW	6.3	7.1
Power Input (H / M / L)	Nominal	W	38 / 28 / 24	51 / 33 / 26
Dimensions (W x H x D)	Body	mm	1,180 x 132 x 450	1,180 x 132 x 450
	Shipping	mm	1,499 x 259 x 538	1,499 x 259 x 538
Fan	Type		Cross Flow Fan	Cross Flow Fan
	Motor Output x Number	W x No.	30 x 1	30 x 1
	Air Flow Rate (H / M / L)	m³/min	13.3 / 12.1 / 10.9	14.6 / 13.3 / 11.5
	Motor Type		BLDC	BLDC
Air Filter			Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)
Weight	Body	kg	15.6	15.6
Sound Pressure Levels (H / M / L)		dB(A)	40 / 37 / 35	43 / 40 / 36
Sound Power Levels (H / M / L)		dB(A)	56 / 51 / 48	59 / 53 / 50
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Communication Cable		mm² x No.	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C
Decoration Panel (Accessory)	Model Name		PT-TAHW0, PT-TPHG0	PT-TAHW0, PT-TPHG0
	Exterior Color		Noble White	Noble White
	RAL Code		RAL 9003	RAL 9003
	Net Dimensions (W x H x D)	mm	1,480 x 34 x 500	1,480 x 34 x 500
	Net Weight	kg	4.5 / 4.9	4.5 / 4.9

Note : 1. Performance tested under EN14511
2. Capacities are based on the following conditions.
- Cooling : Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

Chassis	ARNU18GTTB4	ARNU24GTTB4
Drain Pump		○
Cassette Cover		-
Refrigerant Leakage Detector		PRLDNVS0
EEV Kit		-
Independent Power Module		PRIP0
Robot Cleaner		-
Pre Filter (Washable)		○
Ion Generator		-
CO ₂ Sensor		-
Ventilation Kit		-
IR Receiver		-
Zone Controller		-
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 point)		○
Wi-Fi		PWFMDD200
Air Purification Kit		PT-UPHG0 : PTAHTP0

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

CEILING MOUNTED ROUND CASSETTE



Features & Benefits

- Luxury round design can make a luxurious space with a round design considering side view.
- Perfect round air flow without blind spots.

Key Applications

- Retail
- Restaurant
- Office
- Hotel

	Cassette	Round
Smart	Wi-Fi	○
Energy Efficiency	Human Detect Sensor	-
	Drain Pump	○
	Sleep Mode	○
Comfort	Timer (On / Off)	○
	Timer (Weekly)	○
	Two Thermistor Control	○
	Group Control	○

NEW DESIGN


Slim and Compact design

Reduce the height of the body by 15% save space and maximize the openness of the interior space.




Minimal exposure design

Pipes are brought together in one place to minimize exposure. Hanger covers hide installations to add a clean look.

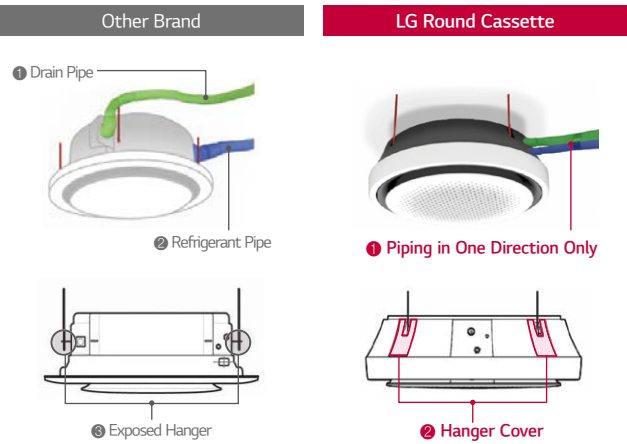


Perfect round air flow

Perfect round flow without blind spots.

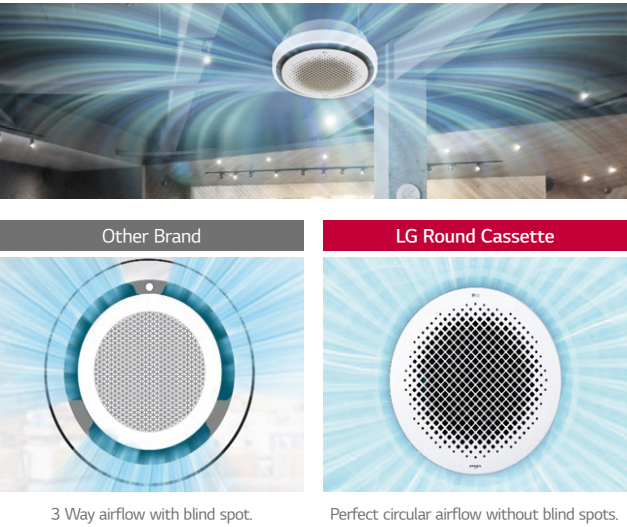


Visible air flow

With crystal vein for 6-step precision control, you can send cool / heated air wherever you want.

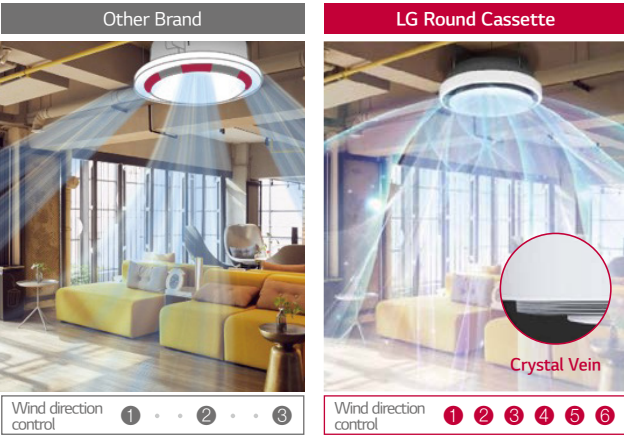


Powerful and Quiet air flow

3D fan increases airflow by 5% and noise reduction technology makes a quieter, more comfortable space.

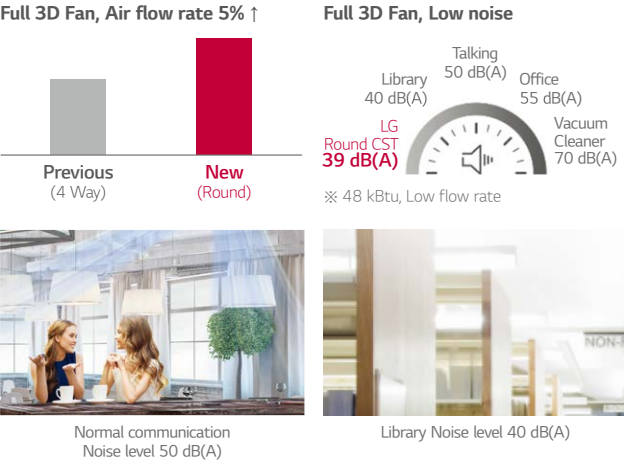

30% Faster in cooling

Larger airflow rate, cooling rate is faster than 30%.

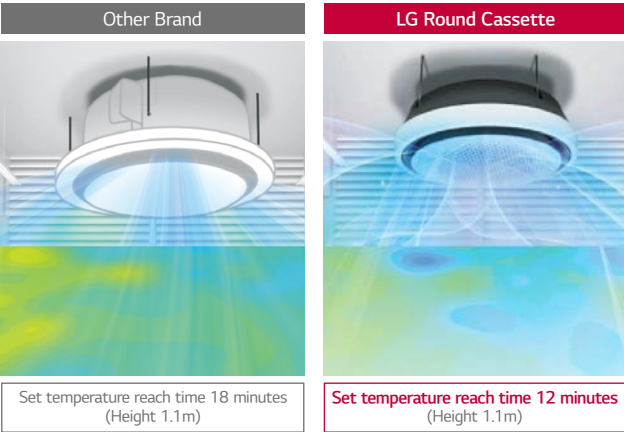

※ Based on test results from LG chamber, this image is designed to help customers understand. Experimental environment: height 3.2m, 48 kBtu, cooling mode, high flow rate, horizontal air flow direction

ROUND CEILING CASSETTE

ARNU24GTYA4 / ARNU36GTYA4
ARNU48GTYA4



Model		Unit	ARNU24GTYA4	ARNU36GTYA4	ARNU48GTYA4
Cooling Capacity		kW	7.1	10.6	14.1
Heating Capacity		kW	8.0	11.9	15.9
Power Input (H / M / L)	Nominal	W	44 / 36 / 29	63 / 47 / 36	98 / 70 / 44
Dimensions (W x H x D)	Body	mm	1,050 x 330 x 1,050	1,050 x 330 x 1,050	1,050 x 330 x 1,050
	Shipping	mm	1,137 x 395 x 1,132	1,137 x 395 x 1,132	1,137 x 395 x 1,132
Fan	Type		3D Turbo Fan	3D Turbo Fan	3D Turbo Fan
	Motor Output x Number	W x No.	157 x 1	157 x 1	157 x 1
	Air Flow Rate (H / M / L)	m³/min	22 / 21 / 19	27 / 24 / 21	32 / 28 / 23
	Motor Type		BLDC	BLDC	BLDC
Air Filter			Long life	Long life	Long life
Pipe Connections	Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)	Ø25 (1)
Weight	Body	kg	30	30	30
Sound Pressure Level (H / M / L)		dB(A)	39 / 37 / 34	43 / 39 / 37	47 / 44 / 39
Sound Power Level (H / M / L)		dB(A)	48 / 46 / 43	52 / 48 / 46	56 / 53 / 48
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Communication Cable		mm² x No.	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note : 1. Performance tested under EN14511
2. Capacities are based on the following conditions.
- Cooling : Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

Chassis	ARNU24GTYA4	ARNU36GTYA4	ARNU48GTYA4
Drain Pump		○	
Cassette Cover		-	
Refrigerant Leakage Detector		PRLDNVS0	
EEV Kit		-	
Independent Power Module		PRIP0	
Robot Cleaner		-	
Pre Filter (Washable)		○	
Ion Generator		-	
CO2 Sensor		-	
Ventilation Kit		-	
IR Receiver		-	
Zone Controller		-	
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)		
External Input (1 Point)		○	
Wi-Fi		PWFMDD200	
Human detection sensor		-	
Floor Temperature Sensor		-	
Air Purification kit		-	
Elevation Grille		-	

※ ○ : Applied, - : Not applied
Option : Refer to model name in table



CEILING CONCEALED DUCT



Features & Benefits

- Easy and flexible duct adjusts air volume with External Static Pressure (ESP) control function.
- Minimalist visibility (Hidden within ceiling) to blend seamlessly into any interior

Key Applications

- Office
- Hotel
- Retail
- Residential building

	Duct	High	Middle	Low
Smart	Wi-Fi	○	○	○
Energy Efficiency	E.S.P Control	○	○	○
	Drain Pump	○	○	○
Comfort	Timer (On / Off)	○	○	○
	Timer (Weekly)	○	○	○
	Two Thermistor Control	○	○	○
	Group Control	○	○	○

※ ○ : Applied, - : Not applied


SMART

Wi-Fi Control

Anytime, anywhere access with LG ThinQ mobile app.




Search “LG ThinQ” on Google market or Appstore then download the app.

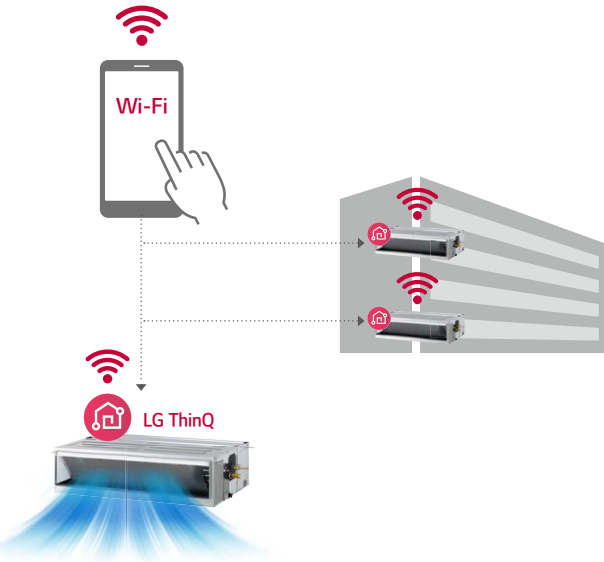

* Wi-Fi modem (Option) is necessary for this function

Easy Registration and Log-in

Follow the easy set-up steps that will activate LG ThinQ's user-friendly features.

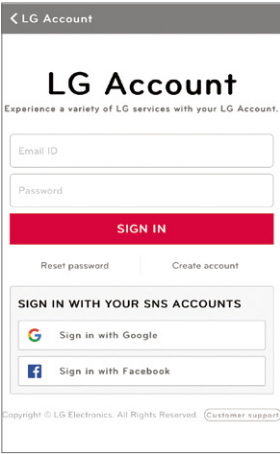

Simple operation for various functions




On/Off, Current Temp Mode, Set Temp Vane Control

ENERGY EFFICIENCY


External Static Pressure (ESP) Control

User has easy access to air volume selection via remote controller using the ESP control function. The BLDC motor can control fan speed and air volume. No additional accessories are necessary to control air flow.

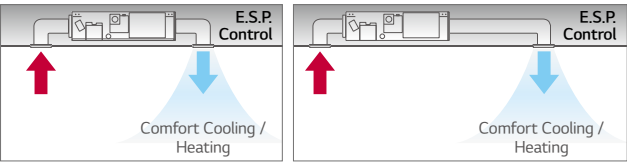


Static Pressure 11- Step Control

Depending on the installation environment, LG's ceiling concealed duct controls the static pressure with 11 steps to provide maximized comfort to any environment.

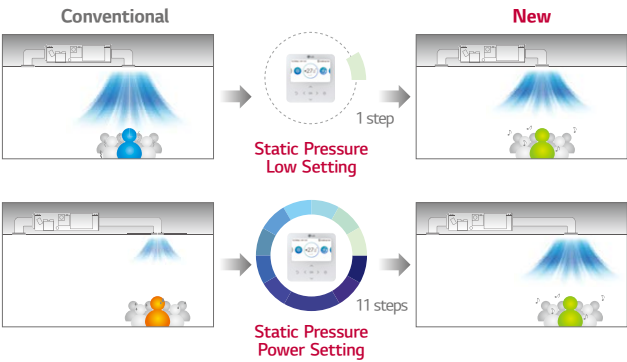

Energy Monitoring

Accumulated electric energy of the indoor unit can be identified with wired remote control, as well as with the central controller. This function is an advantage for energy management.

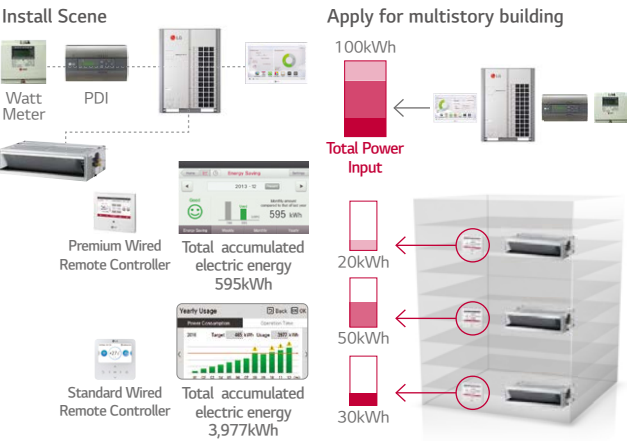


※ Outdoor unit's accumulated electric energy / using rate of individual indoor unit + indoor unit's accumulated electric energy is displayed in wired remote controller, only when central controller, digital integrating electricity meter and PDI are installed and PDI, outdoor unit and indoor unit are connected with power wire. Only total accumulated electric energy is displayed in standard wired remote controller. In premium wired remote controller, that are displayed into week / month / year.

COMFORT

Multiple Room Operation


Using a spiral duct (Embedded or flexible type) and stream chamber, it is possible to operate cooling / heating for several rooms simultaneously.

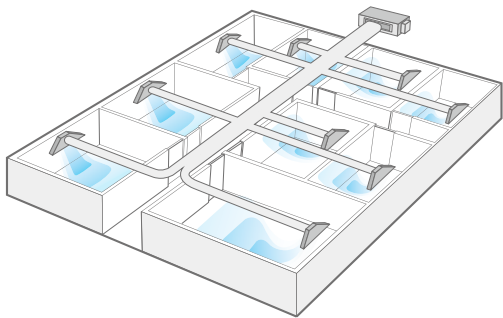



Filter Alert

The alarm is activated when the filter needs to be cleaned, and the time remaining for cleaning is displayed on the creen.

Remain Time Until Indoor Filter Cleaning + Alarm



Remain time until indoor filter cleaning 2,400hr.




Remain time until indoor filter cleaning 1,729hr.

Flexible Installation (Low Static Duct Only)


The low static duct allows the air intake at the rear or bottom under specific installation conditions.

Air intake at the rear or bottom

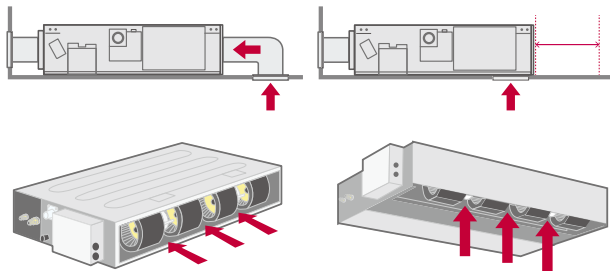


Minimized Height

New mid-static ducts provide ideal solution for installation in limited space.

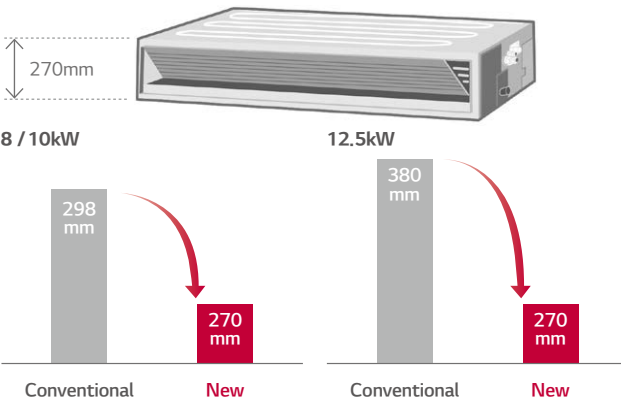

Two Thermistors Control

The indoor temperature can be checked using the thermistors in the remote controller as well as from the indoor unit. There may be a significant difference between ceiling and floor air temperature. Two thermistors can optimize indoor air temperature for a more comfortable environment.

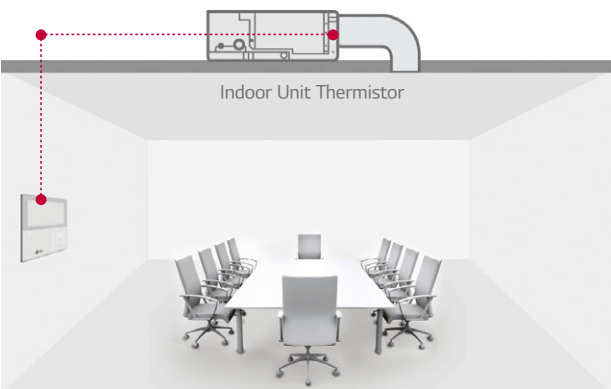


Remote Controller Thermistor

1 Point External Input (On / Off Control)

Indoor unit can be controlled by external devices without dry contact, so customer can save cost of installation.

Connection between an indoor unit and external devices directly

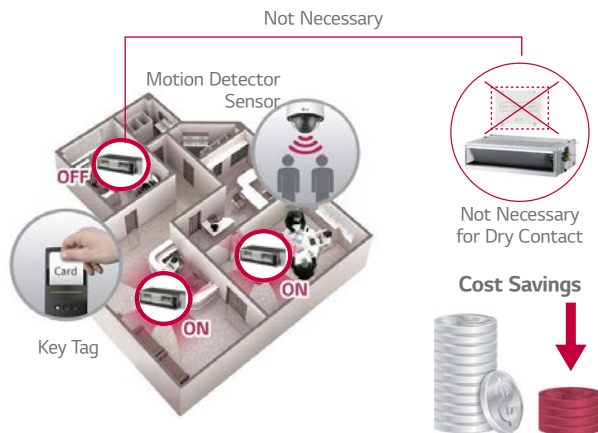

※ In case of needing more functions beside on / off control, a dry contact is required to be installed.



MID STATIC

ARNU07GM1A4 / ARNU09GM1A4
ARNU12GM1A4 / ARNU15GM1A4
ARNU18GM1A4 / ARNU24GM1A4



Model		Unit	ARNU07GM1A4	ARNU09GM1A4	ARNU12GM1A4	ARNU15GM1A4	ARNU18GM1A4	ARNU24GM1A4
Cooling Capacity		kW	2.2	2.8	3.6	4.5	5.6	7.1
Heating Capacity		kW	2.5	3.2	4.0	5.0	6.3	8.0
Power Input (H / M / L)	Nominal	W	39 / 30 / 25	40 / 32 / 26	46 / 38 / 31	67 / 53 / 46	85 / 63 / 55	91 / 74 / 58
Dimensions (W x H x D)	Body	mm	900 x 270 x 700	900 x 270 x 700	900 x 270 x 700	900 x 270 x 700	900 x 270 x 700	900 x 270 x 700
	Shipping	mm	1,100 x 338 x 773	1,100 x 338 x 773	1,100 x 338 x 773	1,100 x 338 x 773	1,100 x 338 x 773	1,100 x 338 x 773
Fan	Type		Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan
	Motor Output x Number	W x No.	136 x 1	136 x 1	136 x 1	136 x 1	136 x 1	136 x 1
	Air Flow Rate (H / M / L)	m³/min	9.0 / 7.5 / 6.0	9.5 / 7.5 / 6.0	11.0 / 9.0 / 7.0	16.0 / 12.0 / 9.0	17.0 / 14.5 / 12.0	19.0 / 16.0 / 14.0
	External Static Pressure (High Mode)	mmAq (Pa)	6 (59)	6 (59)	6 (59)	6 (59)	6 (59)	6 (59)
	Air Flow Rate (H / M / L) (Standard Mode)	m³/min	9.0 / 7.5 / 6.0	9.5 / 7.5 / 6.0	11.0 / 9.0 / 7.0	16.0 / 12.0 / 9.0	17.0 / 14.5 / 12.0	19.0 / 16.0 / 14.0
	External Static Pressure (Standard Mode)	mmAq (Pa)	2.5 (25)	2.5 (25)	2.5 (25)	2.5 (25)	2.5 (25)	2.5 (25)
	Motor Type		BLDC	BLDC	BLDC	BLDC	BLDC	BLDC
Air Filter			Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	25 (1)	25 (1)	Ø25 (1)	Ø25 (1)	Ø25 (1)	Ø25 (1)
Weight	Body	kg	25.5	25.5	25.5	25.5	25.5	26.5
Sound Pressure Levels (H / M / L)		dB(A)	26 / 24 / 23	27 / 25 / 23	27 / 25 / 23	30 / 27 / 23	31 / 28 / 25	32 / 29 / 26
Sound Power Levels (H / M / L)		dB(A)	55 / 54 / 51	55 / 54 / 52	56 / 54 / 52	59 / 57 / 55	59 / 57 / 55	59 / 58 / 56
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Communication Cable		mm² x No.	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note : 1. Performance tested under EN14511
2. Capacities are based on the following conditions.
- Cooling : Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

Chassis	ARNU07GM1A4	ARNU09GM1A4	ARNU12GM1A4	ARNU15GM1A4	ARNU18GM1A4	ARNU24GM1A4
Drain Pump				○		
Cassette Cover				-		
Refrigerant Leakage Detector			PRLDNVSO			
EEV Kit			PRGK024A0 (~5.6kW)			
Independent Power Module			PRIP0			
Robot Cleaner				-		
Pre Filter (Washable)				○		
Ion Generator				-		
CO ₂ Sensor				-		
Ventilation Kit				-		
IR Receiver			PWLRVN000			
Zone Controller			ABZCA			
Dry Contact (with additional accessory)			PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)			
External Input (1 point)				○		
Wi-Fi			PWFMD200			

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

HIGH STATIC

ARNU28GM2A4 / ARNU36GM2A4
ARNU42GM2A4 / ARNU48GM3A4
ARNU54GM3A4



Model		Unit	ARNU28GM2A4	ARNU36GM2A4	ARNU42GM2A4	ARNU48GM3A4	ARNU54GM3A4
Cooling Capacity		kW	8.2	10.6	12.3	14.1	15.8
Heating Capacity		kW	9.2	11.9	13.8	15.9	18.0
Power Input (H / M / L)	Nominal	W	123 / 81 / 57	184 / 123 / 81	231 / 162 / 111	172 / 105 / 65	260 / 215 / 172
Dimensions (W x H x D)	Body	mm	1,250 x 270 x 700	1,250 x 270 x 700	1,250 x 270 x 700	1,250 x 360 x 700	1,250 x 360 x 700
	Shipping	mm	1,450 x 338 x 773	1,450 x 338 x 773	1,450 x 338 x 773	1,450 x 428 x 773	1,450 x 428 x 773
Fan	Type		Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan
	Motor Output x Number	W x No.	350 x 1	350 x 1	350 x 1	350 x 1	350 x 1
	Air Flow Rate (H / M / L)	m³/min	28.0 / 24.0 / 21.0	32.0 / 28.0 / 24.0	38.0 / 33.0 / 28.0	40.0 / 34.0 / 28.0	50.0 / 45.0 / 40.0
	External Static Pressure (High Mode)	mmAq (Pa)	6 (59)	6 (59)	6 (59)	6 (59)	6 (59)
	Air Flow Rate (H / M / L) (Standard Mode)	m³/min	28.0 / 24.0 / 21.0	32.0 / 28.0 / 24.0	38.0 / 33.0 / 28.0	40.0 / 34.0 / 28.0	50.0 / 45.0 / 40.0
	External Static Pressure (Standard Mode)	mmAq (Pa)	5 (49)	5 (49)	5 (49)	5 (49)	5 (49)
	Motor Type		BLDC	BLDC	BLDC	BLDC	BLDC
Air Filter			Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø19.05 (3/4)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)	Ø25 (1)	Ø25 (1)	Ø25 (1)
Weight	Body	kg	38.0	38.0	39.5	44.0	44.0
Sound Pressure Levels (H / M / L)		dB(A)	36 / 34 / 33	37 / 36 / 34	38 / 37 / 36	39 / 37 / 35	42 / 40 / 39
Sound Power Levels (H / M / L)		dB(A)	59 / 57 / 55	60 / 59 / 57	62 / 61 / 60	63 / 60 / 59	65 / 64 / 62
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Communication Cable		mm² x No.	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note : 1. Performance tested under EN14511
2. Capacities are based on the following conditions.
- Cooling : Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

Chassis	ARNU28GM2A4	ARNU36GM2A4	ARNU42GM2A4	ARNU48GM3A4	ARNU54GM3A4
Drain Pump				○	
Cassette Cover				-	
Refrigerant Leakage Detector			PRLDNVSO		
EEV Kit				-	
Independent Power Module			PRIP0		
Robot Cleaner				-	
Pre Filter (Washable)				○	
Ion Generator				-	
CO ₂ Sensor				-	
Ventilation Kit				-	
IR Receiver			PWLRVN000		
Zone Controller			ABZCA		
Dry Contact (with additional accessory)			PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)		
External Input (1 point)				○	
Wi-Fi			PWFMD200		

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

HIGH STATIC

ARNU76GB8A4 / ARNU96GB8A4



Model		Unit	ARNU76GB8A4	ARNU96GB8A4
Cooling Capacity		kW	22.4	28.0
Heating Capacity		kW	25.2	31.5
Power Input (H / M / L)	Nominal	W	765 / 500 / 500	800 / 750 / 750
Dimensions (W x H x D)	Body	mm	1,562 x 460 x 688	1,562 x 460 x 688
	Shipping	mm	1,806 x 537 x 825	1,806 x 537 x 825
Fan	Type		Sirocco Fan	Sirocco Fan
	Motor Output x Number	W x No.	375 x 2	375 x 2
	Air Flow Rate (H / M / L) (High Mode-Factory Set)	m³/min	60.0 / 50.0 / 50.0	72.0 / 64.0 / 64.0
	External Static Pressure (High Mode)	mmAq (Pa)	22 (216)	22 (216)
	Air Flow Rate (H / M / L) (Standard Mode)	m³/min	64.0 / 50.0 / 50.0	76.0 / 64.0 / 64.0
	External Static Pressure (Standard Mode)	mmAq (Pa)	15 (147)	15 (147)
	Motor Type		BLDC	BLDC
Air Filter			Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø19.05 (3/4)	Ø22.2 (7/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)
Weight	Body	kg	87.0	87.0
Sound Pressure Levels (H / M / L)		dB(A)	45 / 41 / 40	47 / 42 / 41
Sound Power Levels (H / M / L)		dB(A)	70 / 68 / 68	72 / 69 / 68
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Communication Cable		mm² x No.	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note : 1. Performance tested under EN14511
2. Capacities are based on the following conditions.
- Cooling : Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

Chassis	ARNU76GB8A4	ARNU96GB8A4
Drain Pump		○
Cassette Cover		-
Refrigerant Leakage Detector		PRLDNVS0
EEV Kit		○
Independent Power Module		PRIP0
Robot Cleaner		-
Pre Filter (Washable)		○
Ion Generator		-
CO ₂ Sensor		-
Ventilation Kit		-
IR Receiver		PWLRVN000
Zone Controller		ABZCA
Dry Contact (with additional accessory)		PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)
External Input (1 point)		○
Wi-Fi		PWFMD200

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

LOW STATIC

ARNU05GL1G4 / ARNU07GL1G4
ARNU09GL1G4



Model		Unit	ARNU05GL1G4	ARNU07GL1G4	ARNU09GL1G4
Cooling Capacity		kW	1.7	2.2	2.8
Heating Capacity		kW	1.9	2.5	3.2
Power Input (H / M / L)	Nominal	W	29 / 26 / 24	31 / 28 / 24	39 / 29 / 24
Dimensions (W x H x D)	Body	mm	700 x 190 x 700	700 x 190 x 700	700 x 190 x 700
	Shipping	mm	862 x 255 x 781	862 x 255 x 781	862 x 255 x 781
Fan	Type		Sirocco Fan	Sirocco Fan	Sirocco Fan
	Motor Output x Number	W x No.	19 x 1	19 x 1	19 x 1
	Air Flow Rate (H / M / L) (High Mode-Factory Set)	m³/min	6.7 / 6.2 / 5.5	7.5 / 6.5 / 5.5	9.0 / 7.0 / 5.5
	External Static Pressure (High Mode)	mmAq (Pa)	2.54 (25)	2.54 (25)	2.54 (25)
	Air Flow Rate (H / M / L) (Standard Mode)	m³/min	6.7 / 6.2 / 5.5	7.5 / 6.5 / 5.5	9.0 / 7.0 / 5.5
	External Static Pressure (Standard Mode)	mmAq (Pa)	0 (0)	0 (0)	0 (0)
	Motor Type		BLDC	BLDC	BLDC
Air Filter			Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)	Ø25 (1)
Weight	Body	kg	17.5	17.5	17.5
Sound Pressure Levels (H / M / L)		dB(A)	25 / 24 / 22	26 / 24 / 22	28 / 25 / 22
Sound Power Levels (H / M / L)		dB(A)	48 / 46 / 45	50 / 47 / 45	53 / 49 / 45
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Communication Cable		mm² x No.	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note : 1. Performance tested under EN14511
2. Capacities are based on the following conditions.
- Cooling : Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

Chassis	ARNU05GL1G4	ARNU07GL1G4	ARNU09GL1G4
Drain Pump			○
Cassette Cover			-
Refrigerant Leakage Detector			PRLDNVS0
EEV Kit			PRGK024A0
Independent Power Module			PRIP0
Robot Cleaner			-
Pre Filter (Washable)			○
Ion Generator			-
CO ₂ Sensor			-
Ventilation Kit			-
IR Receiver			PWLRVN000
Zone Controller			ABZCA
Dry Contact (with additional accessory)			PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)
External Input (1 point)			○
Wi-Fi			PWFMD200

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

LOW STATIC

ARNU12GL2G4 / ARNU15GL2G4
ARNU18GL2G4



Model		Unit	ARNU12GL2G4	ARNU15GL2G4	ARNU18GL2G4
Cooling Capacity		kW	3.6	4.5	5.6
Heating Capacity		kW	4.0	5.0	6.3
Power Input (H / M / L)	Nominal	W	41 / 34 / 29	56 / 41 / 34	71 / 56 / 41
Dimensions (W x H x D)	Body	mm	900 x 190 x 700	900 x 190 x 700	900 x 190 x 700
	Shipping	mm	1,062 x 255 x 781	1,062 x 255 x 781	1,062 x 255 x 781
Fan	Type		Sirocco Fan	Sirocco Fan	Sirocco Fan
	Motor Output x Number	W x No.	19 x 1, 5 x 1	19 x 1, 5 x 1	19 x 1, 5 x 1
	Air Flow Rate (H / M / L) (High Mode-Factory Set)	m³/min	10.0 / 8.5 / 7.0	12.5 / 10.0 / 8.5	15.0 / 12.5 / 10.0
	External Static Pressure (High Mode)	mmAq (Pa)	2.54 (25)	2.54 (25)	2.54 (25)
	Air Flow Rate (H / M / L) (Standard Mode)	m³/min	10.0 / 8.5 / 7.0	12.5 / 10.0 / 8.5	15.0 / 12.5 / 10.0
	External Static Pressure (Standard Mode)	mmAq (Pa)	0 (0)	0 (0)	0 (0)
	Motor Type		BLDC	BLDC	BLDC
Air Filter			Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)	Ø25 (1)
Weight	Body	kg	23.0	23.0	23.0
Sound Pressure Levels (H / M / L)		dB(A)	30 / 27 / 25	33 / 30 / 28	35 / 32 / 29
Sound Power Levels (H / M / L)		dB(A)	50 / 47 / 46	54 / 51 / 47	56 / 54 / 51
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Communication Cable		mm² x No.	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note : 1. Performance tested under EN14511
2. Capacities are based on the following conditions.
- Cooling : Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

Chassis	ARNU12GL2G4	ARNU15GL2G4	ARNU18GL2G4
Drain Pump		○	
Cassette Cover		-	
Refrigerant Leakage Detector		PRLDNVSO	
EEV Kit		-	
Independent Power Module		PRIP0	
Robot Cleaner		-	
Pre Filter (Washable)		○	
Ion Generator		-	
CO ₂ Sensor		-	
Ventilation Kit		-	
IR Receiver		PWLRVN000	
Zone Controller		ABZCA	
Dry Contact (with additional accessory)		PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 point)		○	
Wi-Fi		PWFMDD200	

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

LOW STATIC

ARNU21GL3G4 / ARNU24GL3G4



Model		Unit	ARNU21GL3G4	ARNU24GL3G4
Cooling Capacity		kW	6.2	7.1
Heating Capacity		kW	7.0	8.0
Power Input (H / M / L)	Nominal	W	72 / 53 / 48	103 / 63 / 48
Dimensions (W x H x D)	Body	mm	1,100 x 190 x 700	1,100 x 190 x 700
	Shipping	mm	1,262 x 255 x 781	1,262 x 255 x 781
Fan	Type		Sirocco Fan	Sirocco Fan
	Motor Output x Number	W x No.	19 x 2	19 x 2
	Air Flow Rate (H / M / L) (High Mode-Factory Set)	m³/min	17.5 / 14.0 / 12.0	20.0 / 16.0 / 12.0
	External Static Pressure (High Mode)	mmAq (Pa)	2.54 (25)	2.54 (25)
	Air Flow Rate (H / M / L) (Standard Mode)	m³/min	17.5 / 14.0 / 12.0	20.0 / 16.0 / 12.0
	External Static Pressure (Standard Mode)	mmAq (Pa)	0 (0)	0 (0)
	Motor Type		BLDC	BLDC
Air Filter			Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)
Weight	Body	kg	27.0	27.0
Sound Pressure Levels (H / M / L)		dB(A)	35 / 29 / 28	36 / 33 / 28
Sound Power Levels (H / M / L)		dB(A)	59 / 55 / 54	63 / 59 / 55
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Communication Cable		mm² x No.	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note : 1. Performance tested under EN14511
2. Capacities are based on the following conditions.
- Cooling : Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories


Chassis	ARNU21GL3G4	ARNU24GL3G4
Drain Pump		○
Cassette Cover		-
Refrigerant Leakage Detector		PRLDNVSO
EEV Kit		PRGK024A0
Independent Power Module		PRIP0
Robot Cleaner		-
Pre Filter (Washable)		○
Ion Generator		-
CO ₂ Sensor		-
Ventilation Kit		-
IR Receiver		PWLRVN000
Zone Controller		ABZCA
Dry Contact (with additional accessory)		PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)
External Input (1 point)		○
Wi-Fi		PWFMDD200

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

FRESH AIR INTAKE

Fresh Outdoor Air Supply

The LG Fresh Air Intake Unit (FAU) is the alternative solution for ventilation, which supplies the fresh outdoor air indoors as well as being able to cool and heat air inside simultaneously. It means the indoor space can have positive air pressure consistently, which can block cold, hot or contaminated air from outside. This allows the indoor space to have consistent positive air pressure blocking cold.

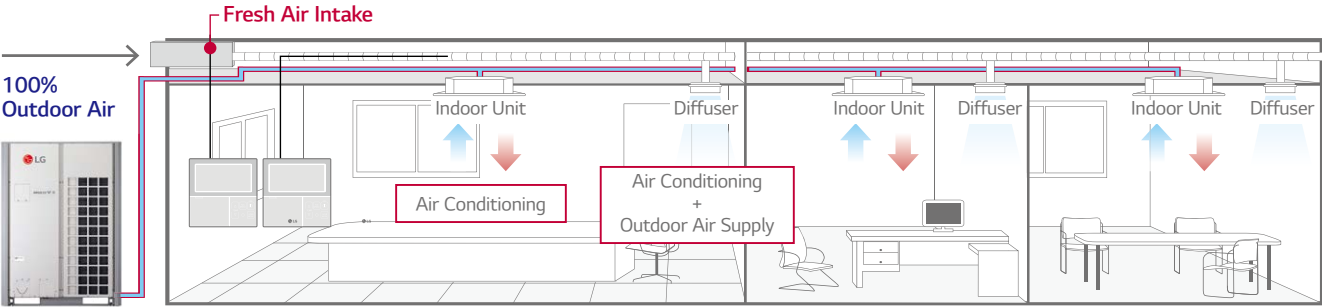


MULTI V 5 Outdoor Unit

Economic Operation


Natural outdoor air is utilized as seasons change for cost efficiency.

Spring Season

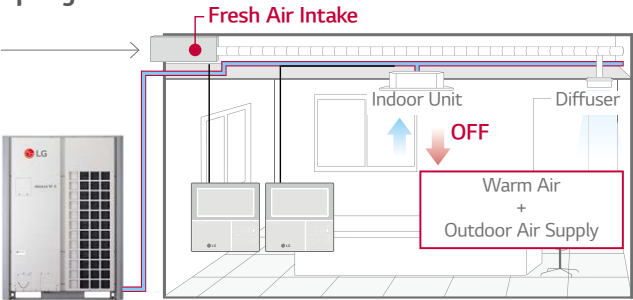


MULTI V 5 Outdoor Unit

Autumn Season

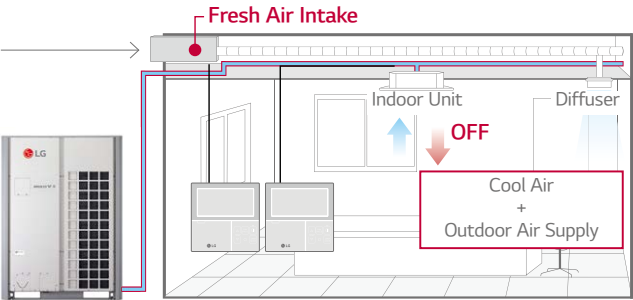

MULTI V 5 Outdoor Unit

Installation Scene

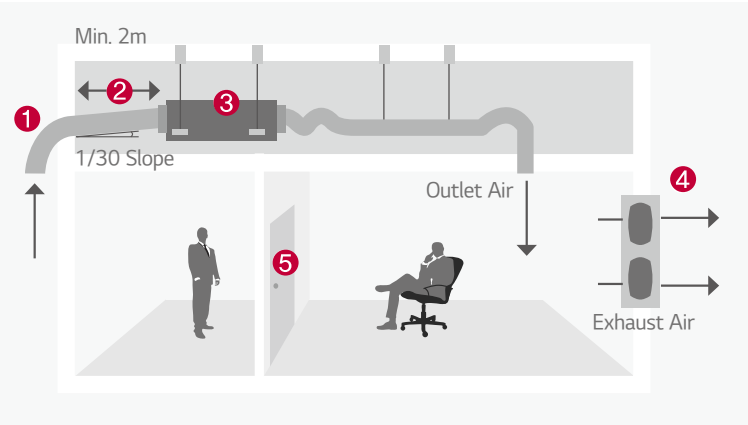

- 1 Inlet Hood
- 2 Intake Air Duct
- 3 Fresh Air Intake Unit
- 4 Exhaust Fan
- 5 Door

FRESH AIR INTAKE

ARNU76GB8Z4 / ARNU96GB8Z4



Model	Unit	ARNU76GB8Z4	ARNU96GB8Z4
Cooling Capacity	kW	22.4	28.0
Heating Capacity	kW	21.4	26.7
Power Input (H / M / L)	Nominal W	230 / 200 / 200	360 / 230 / 230
Dimensions (W x H x D)	Body mm	1,562 x 460 x 688	1,562 x 460 x 688
	Shipping mm	1,806 x 537 x 825	1,806 x 537 x 825
Fan	Type	Sirocco Fan	Sirocco Fan
	Motor Output x Number	W x No.	375 x 1
	Air Flow Rate (H / M / L) (High Mode-Factory Set)	m³/min	23.7 / 13.2 / 13.2
	External Static Pressure	mmAq (Pa)	22 (216)
	Motor Type	BLDC	BLDC
Air Filter		Long Life Filter	Long Life Filter
Pipe Connections	Liquid Side	mm (inch)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø19.05 (3/4)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)
Weight	Body kg	73.0	73.0
Sound Pressure Levels (H / M / L)	dB(A)	45 / 43 / 43	47 / 45 / 45
Sound Power Levels (H / M / L)	dB(A)	70 / 67 / 67	72 / 70 / 70
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Communication Cable	mm² x No.	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note : 1. Performance tested under EN14511
2. Capacities are based on the following conditions.
- Cooling : Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification.

CAUTION

- 1. Operation range (Cooling : 5°C ~ 43°C, Heating : -5°C ~ 43°C)
- 2. Installation of exhaust fan is recommended for a sealed room.
- 3. Indoor Unit Connection

No	Connection Condition	Combination
1	Fresh air intake units only are connected with outdoor units	1) The total capacity of fresh air intake unit should be 50 ~ 100% of outdoor unit. 2) The max. quantity of fresh air intake is 4 units.
2	Mixture connection with general indoor unit and fresh intake units	1) The total capacity of indoor units (Standard Indoor Unit + Fresh Air Intake Unit) should be 50 ~ 100% of outdoor unit. 2) The total capacity of fresh air intake unit should be less than 30% of the total capacity of indoor units.

Accessories

Chassis	ARNU76GB8Z4	ARNU96GB8Z4
Drain Pump		○
Cassette Cover		-
Refrigerant Leakage Detector		PRLDNVSO
EEV Kit		-
Independent Power Module		PRIPQ
Robot Cleaner		-
Pre Filter (Washable)		○
Ion Generator		-
CO ₂ Sensor		-
Ventilation Kit		-
IR Receiver		PWLRVN000
Zone Controller		-
Dry Contact (with additional accessory)		PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)
External Input (1 point)		○
Wi-Fi		PWFMD200

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

CEILING SUSPENDED



Features & Benefits

- Modern design with V-shape and black vane
- Powerful air speed and volume can reach up to 15m

Key Applications

- Retail
- Shop
- Restaurant

	Ceilings	Ceiling & Floor Convertible	Ceiling Suspended
Smart	Wi-Fi	○	○
Fast Cooling & Heating	Jet Cool	○	○
	Sleep mode	○	○
	Timer (On / Off)	○	○
Comfort	Timer (Weekly)	○	○
	Two thermistor control	○	○
	Group control	○	○

※ ○ : Applied, - : Not applied

SMART


Wi-Fi Control

Access your air conditioner anytime and from anywhere.




LG ThinQ

Search “LG ThinQ” on Google market or Appstore then download the app.

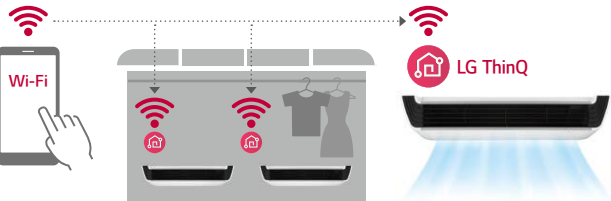

Easy Registration and Log-in

Follow the easy set-up steps that will activate LG ThinQ's impressive feature.




* Wi-Fi modem (Option) is necessary for this function

COMFORT (CONSOLE)


Flexible

The ceiling and floor models can be installed either on the ceiling or on the floor.

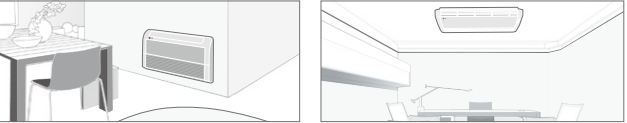

Air flow Direction Control

Vertical air flow direction can be adjusted using remote controller, and horizontal Air flow direction can be adjusted manually.

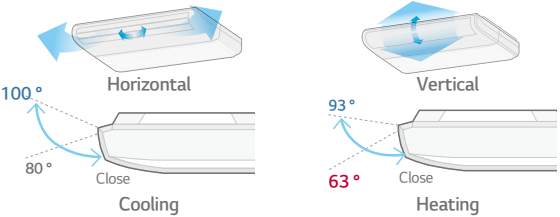

Filter Change Alarm

The filter change alarm informs you when the unit has been operating for 2,400 hours.



One Touch Filter

Filter Change Alarm

COMFORT (CEILING SUSPENDED)

Differentiated Design

Modern elegance design with V-shape and black vane is appropriate for any commercial space. It received iF Design Award.




Powerful Cooling & Heating

High ceiling mode provides powerful cooling and heating up to 4.2m in height from floor, 15m away from ceiling.



One Touch & 2 Piece Filter


Easy in / out filter structure as well as a simplified two-piece filter, which slides out for easy cleaning and maintenance.

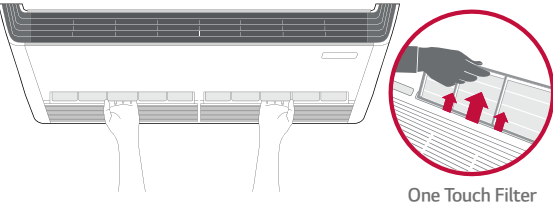

One Touch Filter

Two Thermistors Control

Users can purchase a wired remote controller that includes a second thermistor, allowing for temperature checks from multiple locations.

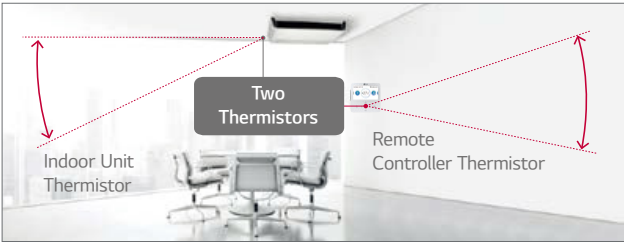

CEILING SUSPENDED

ARNU18GV1A4 / ARNU24GV1A4



Model		Unit	ARNU18GV1A4	ARNU24GV1A4
Cooling Capacity		kW	5.6	7.1
Heating Capacity		kW	6.3	8.0
Power Input (H / M / L)	Nominal	W	23 / 20 / 17	25 / 21 / 17
Exterior Color			Morning Fog	Morning Fog
RAL Code			RAL 9001	RAL 9001
Dimensions (W x H x D)	Body	mm	1,200 x 235 x 690	1,200 x 235 x 690
	Shipping	mm	1,315 x 320 x 772	1,315 x 320 x 772
	Type		Cross Flow Fan	Cross Flow Fan
Fan	Motor Output x Number	W x No.	85.9 x 1	85.9 x 1
	Air Flow Rate (H / M / L)	m³/min	13.5 / 12.5 / 12.0	14.0 / 13.0 / 12.0
	Motor Type		BLDC	BLDC
Air Filter			Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø16 (5/8)	Ø16 (5/8)
Weight	Body	kg	29.0	29.0
Sound Pressure Levels (H / M / L)		dB(A)	36 / 34 / 33	37 / 35 / 33
Sound Power Levels (H / M / L)		dB(A)	61 / 59 / 56	62 / 59 / 56
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Communication Cable		mm² x No.	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note : 1. Performance tested under EN14511
2. Capacities are based on the following conditions.
- Cooling : Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

Chassis	ARNU18GV1A4	ARNU24GV1A4
Drain Pump	-	-
Cassette Cover	-	-
Refrigerant Leakage Detector	PRLDNVSO	
EEV Kit	-	
Independent Power Module	PRIP0	
Robot Cleaner	-	
Pre Filter (Washable)	○	
Ion Generator	-	
CO ₂ Sensor	-	
Ventilation Kit	-	
IR Receiver	-	
Zone Controller	-	
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 point)	○	
Wi-Fi	PWFMDD200	

※ ○ : Applied, - : Not Applied
Option : Refer to model name in table

CEILING SUSPENDED

ARNU36GV2A4 / ARNU48GV2A4



Model		Unit	ARNU36GV2A4	ARNU48GV2A4
Cooling Capacity		kW	10.6	14.1
Heating Capacity		kW	11.9	15.9
Power Input (H / M / L)	Nominal	W	84 / 77 / 66	91 / 79 / 66
Exterior Color			Morning Fog	Morning Fog
RAL Code			RAL 9001	RAL 9001
Dimensions (W x H x D)	Body	mm	1,600 x 235 x 690	1,600 x 235 x 690
	Shipping	mm	1,715 x 320 x 772	1,715 x 320 x 772
	Type		Cross Flow Fan	Cross Flow Fan
Fan	Motor Output x Number	W x No.	125 x 1	125 x 1
	Air Flow Rate (H / M / L)	m³/min	27.0 / 24.0 / 20.0	29.0 / 24.0 / 20.0
	Motor Type		BLDC	BLDC
Air Filter			Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø16 (5/8)	Ø16 (5/8)
Weight	Body	kg	37.0	37.0
Sound Pressure Levels (H / M / L)		dB(A)	48 / 46 / 44	49 / 47 / 44
Sound Power Levels (H / M / L)		dB(A)	68 / 66 / 64	68 / 67 / 66
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Communication Cable		mm² x No.	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note : 1. Performance tested under EN14511
2. Capacities are based on the following conditions.
- Cooling : Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

Chassis	ARNU36GV2A4	ARNU48GV2A4
Drain Pump	-	-
Cassette Cover	-	-
Refrigerant Leakage Detector	PRLDNVSO	
EEV Kit	-	
Independent Power Module	PRIP0	
Robot Cleaner	-	
Pre Filter (Washable)	○	
Ion Generator	-	
CO ₂ Sensor	-	
Ventilation Kit	-	
IR Receiver	-	
Zone Controller	-	
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 point)	○	
Wi-Fi	PWFMDD200	

※ ○ : Applied, - : Not Applied
Option : Refer to model name in table

CONSOLE



Features & Benefits

- 6 Way flexible piping
- Cold draft window protection
- Condensation protection

Key Applications

- Residential building
- Hotel
- Historical building

	Floor standing	Console
Smart	Wi-Fi	○
Energy Efficiency	Jet Cool	-
Health	Ionizer	○
Fast Cooling & Heating	Jet Cool	○
	Sleep Mode	○
	Timer (On / Off)	○
Comfort	Timer (Weekly)	○
	Two Thermistor Control	○
	Group Control	○

※ ○ : Applied, - : Not applied

SMART


Wi-Fi Control

Access your air conditioner anytime and from anywhere.



LG ThinQ

Search “LG ThinQ” on Google market or Appstore then download the app.

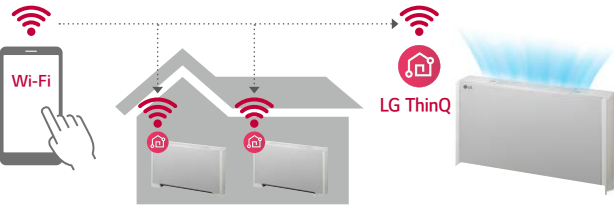


* Wi-Fi modem (Option) is necessary for this function

COMFORT


Air Flow Direction Change

During the cooling operation, the vane adjusts upwards to direct the air flow towards the ceiling. When heating, the vane directs the warm air downwards to balance the room temperature especially for floor.


Cooling

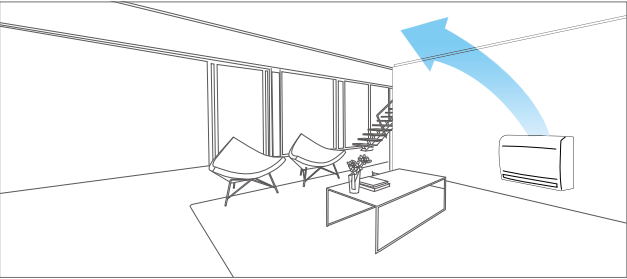

Heating (Normal)

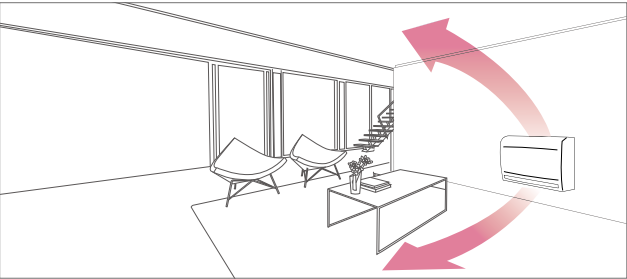

Heating (Option)

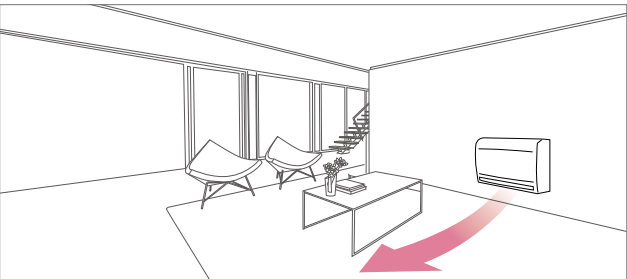

COMFORT

Cold Draft Protection

The console protects cold draft from windows to provide comfortable environment.

Without Console




Without Console




5-Step Vane Control

There are 5 different stages to control air flow direction.

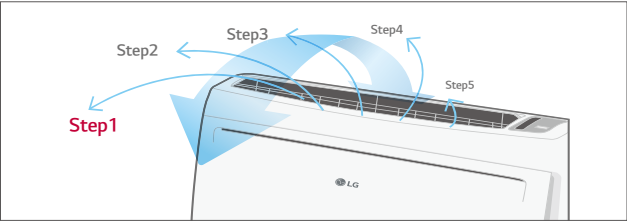

6 Way Flexible Piping

It is possible to install and connect the outdoor unit in 6 different ways. (Right Side, Right Back, Right Floor, Left Side, Left Back, Left Floor)



CONSOLE

ARNU07GQAA4 / ARNU09GQAA4



Model		Unit	ARNU07GQAA4	ARNU09GQAA4
Cooling Capacity		kW	2.2	2.8
Heating Capacity		kW	2.5	3.2
Power Input (H / M / L)	Nominal	W	15 / 12 / 10	15 / 12 / 10
Exterior Color			Morning Fog	Morning Fog
RAL Code			RAL 9001	RAL 9001
Dimensions (W x H x D)	Body	mm	700 x 600 x 210	700 x 600 x 210
	Shipping	mm	775 x 662 x 284	775 x 662 x 284
	Type		Turbo fan	Turbo fan
Fan	Motor Output x Number	W x No.	48 x 1	48 x 1
	Air Flow Rate (H / M / L)	m³/min	6.7 / 5.9 / 4.8	6.7 / 5.9 / 4.8
	Motor Type		BLDC	BLDC
Air Filter			Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø12 (15/32)	Ø12 (15/32)
Weight	Body	kg	14.0	14.0
Sound Pressure Levels (H / M / L)		dB(A)	37 / 34 / 28	37 / 34 / 28
Sound Power Levels (H / M / L)		dB(A)	53 / 50 / 44	53 / 50 / 44
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Communication Cable		mm² x No.	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note : 1. Performance tested under EN14511
2. Capacities are based on the following conditions.
- Cooling : Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

Chassis	ARNU07GQAA4	ARNU09GQAA4
Drain Pump	-	-
Cassette Cover	-	-
Refrigerant Leakage Detector	PRLDNVSO	
EEV Kit	PRGK024A0	
Independent Power Module	PRIP0	
Robot Cleaner	-	-
Pre Filter (Washable)	○	
Ion Generator	○	
CO ₂ Sensor	-	-
Ventilation Kit	-	-
IR Receiver	-	-
Zone Controller	-	-
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 point)	○	
Wi-Fi	PWFMDD200	

※ ○ : Applied, - : Not Applied
Option : Refer to model name in table

CONSOLE

ARNU12GQAA4 / ARNU15GQAA4



Model		Unit	ARNU12GQAA4	ARNU15GQAA4
Cooling Capacity		kW	3.6	4.5
Heating Capacity		kW	4.0	5.0
Power Input (H / M / L)	Nominal	W	18 / 15 / 13	24 / 19 / 17
Exterior Color			Morning Fog	Morning Fog
RAL Code			RAL 9001	RAL 9001
Dimensions (W x H x D)	Body	mm	700 x 600 x 210	700 x 600 x 210
	Shipping	mm	775 x 662 x 284	775 x 662 x 284
	Type		Turbo fan	Turbo fan
Fan	Motor Output x Number	W x No.	48 x 1	48 x 1
	Air Flow Rate (H / M / L)	m³/min	7.5 / 5.9 / 4.8	8.7 / 6.7 / 5.9
	Motor Type		BLDC	BLDC
Air Filter			Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø12 (15/32)	Ø12 (15/32)
Weight	Body	kg	14.0	14.0
Sound Pressure Levels (H / M / L)		dB(A)	39 / 34 / 28	42 / 37 / 31
Sound Power Levels (H / M / L)		dB(A)	56 / 50 / 44	58 / 53 / 50
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Communication Cable		mm² x No.	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note : 1. Performance tested under EN14511
2. Capacities are based on the following conditions.
- Cooling : Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

Chassis	ARNU12GQAA4	ARNU15GQAA4
Drain Pump	-	-
Cassette Cover	-	-
Refrigerant Leakage Detector	PRLDNVSO	
EEV Kit	PRGK024A0	
Independent Power Module	PRIP0	
Robot Cleaner	-	-
Pre Filter (Washable)	○	
Ion Generator	○	
CO ₂ Sensor	-	-
Ventilation Kit	-	-
IR Receiver	-	-
Zone Controller	-	-
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 point)	○	
Wi-Fi	PWFMDD200	

※ ○ : Applied, - : Not Applied
Option : Refer to model name in table

COMPATIBILITY

Controller Product		Controller													
		Premium	Standard III			Standard II		Simple		Simple for Hotel		Wireless	Dry Contact		
															
		PREMTA000 PREMTA000A PREMTA000B	PREMTBB10	PREMTB100	PREMTBB01	PREMTB001	PQRCVCLOQ	PQRCVCQOW	PQRCHCA0Q	PQRCHCA0QW	NEW PWLSSB21H (H/P)	Simple Dry Contact PDRYCB000	2 points Dry Contact PDRYCB400	Dry Contact for Thermostat PDRYCB300 NEW PDRYCB320	For Modbus PDRYCB500
MULTI V	 4 Way	ARNU-A4 ARNU-B4	○	○	○	○	○	○	○	○	○	○	○	○	○
	 2 Way / 1 Way	ARNU-B4 ARNU-C4	○	○	○	○	○	○	○	○	○	○	○	○	○
	 Round CST	ARNU-A4	○	○	○	○	○	○	○	○	○	○	○	○	○
	 High Sensible	ARNU-A4	○	○	○	○	○	○	○	△	○	○	○	○	○
	 High / Mid Statics	ARNU-A4	○	○	○	○	○	○	○	△	○	○	○	○	○
	 Low Statics	ARNU-G4	○	○	○	○	○	○	○	△	○	○	○	○	○
	 FAU (Fresh Air intake)	ARNU-Z4	○	○	○	○	○	○	○	△	○	○	○	○	○
	 Convertible & Ceiling Suspended	ARNU-A4	○	○	○	○	○	○	○	○	○	○	○	○	○
	 Console	ARNU-A4	○	○	○	○	○	○	○	○	○	○	○	○	○
	 Wall Mounted	ARNU-A4 ARNU-C4 ARNU-N4	○	○	○	○	○	○	○	○	○	○	○	○	○
HYDRO KIT ¹⁾	ARNH-A4 	-	-	-	-	-	-	-	-	○	-	○	-	-	
Ventilation	Energy Recovery Ventilator 	○	○	○	-	-	-	-	○	-	-	○	-	○	
	Energy Recovery Ventilator with DX coil 	○	○	○	-	-	-	-	○	-	-	○	-	○	
AHU Communication Kit 		○	○	○	-	-	-	△	-	-	-	-	-		

※ ○ : Compatible, △ : Need wired remote controller / IR receiver, - : Not compatible
1) It has a separate remote controller.

FEATURE FUNCTIONS

Controller Name		Wired Remote Controller					Wireless Remote Controller	Wi-Fi Modem
		Premium	Standard III	Standard II	Simple	Simple(Hotel)		
Model Name								
		PREMTA000 PREMTA000A PREMTA000B	PREMTB100 PREMTBB10	PREMTB001 PREMTBB01	PQRCVCLOQ PQRCVCL0QW	PQRCHCA0Q PQRCHCA0QW	NEW PWLSSB21H (H/P)	PWFMD200
Basic	On / Off	○	○	○	○	○	○	○
	Fan Speed Control	○	○	○	○	○	○	○
	Temperature Setting	○	○	○	○	○	○	○
	Mode Change	○	○	○	○	-	○	○
	Auto Swing	○	○	○	○	○	○	○
	Vane Control (Louver Angle)	○	○	○	○	○	○	○
	E.S.P (External Static Pressure)	○	○	○	○	○	-	-
	Electric Failure Compensation	○	○	○	○	○	-	○
	Indoor Temperature Display	○	○	○	○	○	○	○
	ALL Button Lock (Child Lock)	○	○	○	○	○	-	-
Advanced	Schedule / Timer	Weekly - Yearly	Weekly - Yearly	Weekly	-	-	Sleep / On / Off	Weekly
	Additional Mode Setting ¹⁾	○	○	○	-	-	-	-
	Time Display	○	○	○	-	-	○	-
	Humid. Display	○	○	-	-	-	-	-
	Advanced Lock (mode, set point, set point range, on/off Lock)	Advanced Lock	Advanced Lock	-	-	-	-	-
	Filter Sign	○	○	○	-	-	-	-
	Energy Management ²⁾	○	○	○	-	-	-	-
	Dual Set Point	○	○	-	-	-	-	-
	Human Detection	-	○	-	-	-	-	-
	Temp, Humidity Compensation	○	○	-	-	-	-	-
ETC	Wi-Fi AP mode setting	○	○	○	○	○	○	-
	Operation Status LED	○	○	○	○	○	-	-
	Wireless Remote Controller Receiver	○ ³⁾	-	○ ³⁾	○ ³⁾	○ ³⁾	-	-
	Display	5 inch Color	4.3 inch Color	4.3 inch mono	2.6 inch mono	2.6 inch mono	2 inch mono	-
	Size (W x H x D, mm)	137 x 121 x 16.5	120 x 120 x 16	120 x 120 x 16	64 x 120 x 15	64 x 120 x 15	51 x 153 x 26	-
		Black Light Control for Screen Saver	○	○	-	-	-	-

※ ○ : Applied, - : Not Applied
1) It might not be indicated or operated at the partial product.
2) Centralized control (PACEZA000 / PACSSA000 / PACPSA000 / PLNWKB000) and PDI (PQNUD1S40 / PPWRDB000) should be installed for this function.
3) For ceiling type duct.
Note
- Indoor unit should have functions requested by the controller.
- If you need more detail, please refer to the manual of product. (<http://partner.lge.com>: Home> DocLibrary> Manual)

HOT WATER SOLUTION

HYDRO KIT





HYDRO KIT

Features & Benefits

- Lower operation cost compared to fossil fuel-based systems such as boilers.
- More energy saving through MULTI V heat recovery system.

Key Applications


- Where Hot Water is needed such as domestic Hot Water, In-floor or radiant heat. Where cold water is needed such as Fan coil unit and chilled beam.

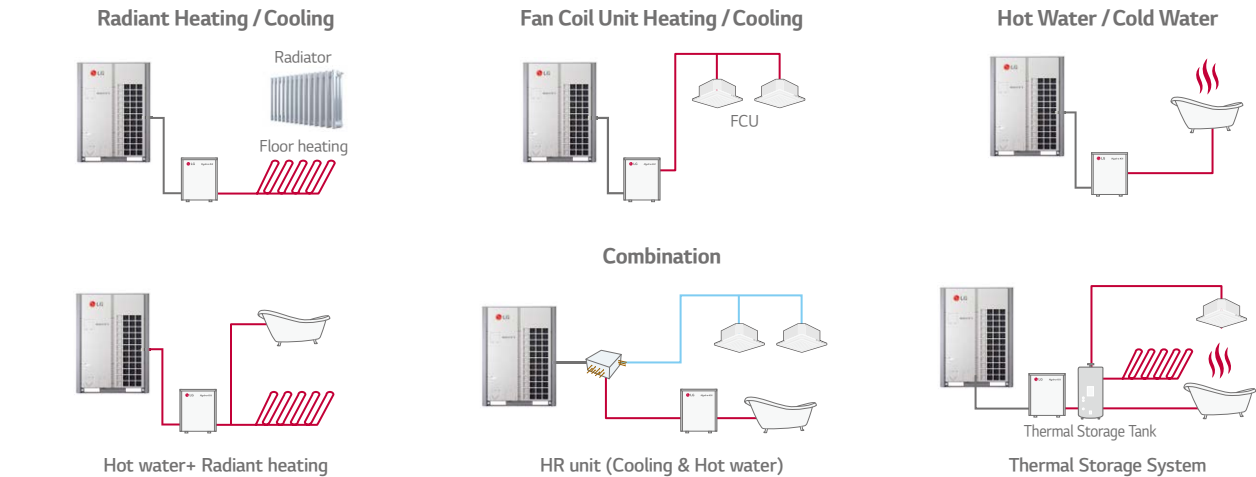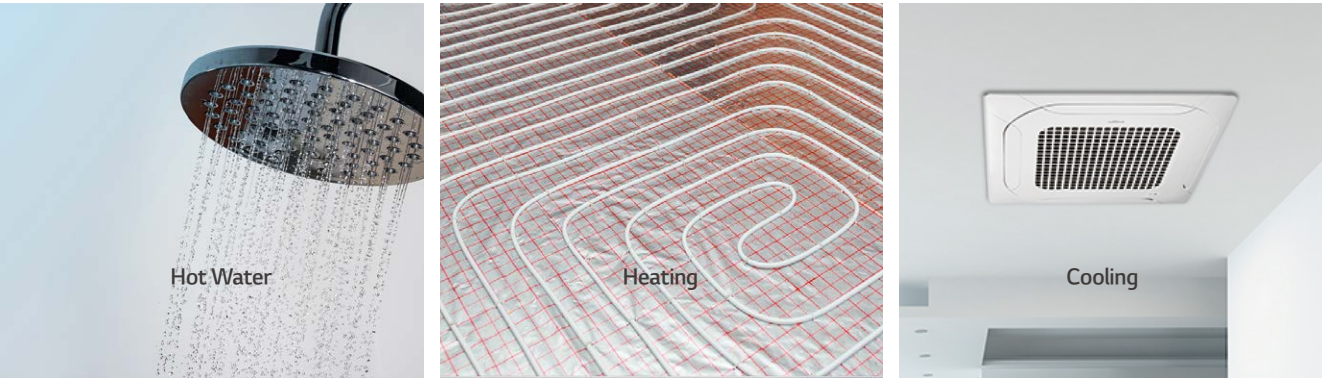

CONVENIENCE


Total Solution

Total solution provided with heat pump, air conditioning (Cooling by refrigerant and cold water / heating by refrigerant hot water) and domestic hot water supply.

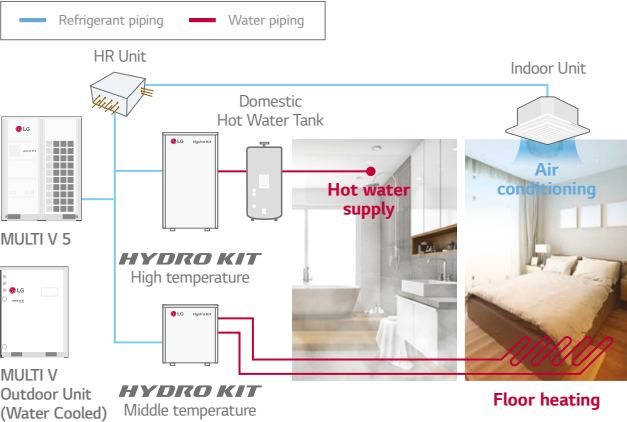

Eco-friendly Solution

Green energy solution through the reduction of CO₂ emissions.

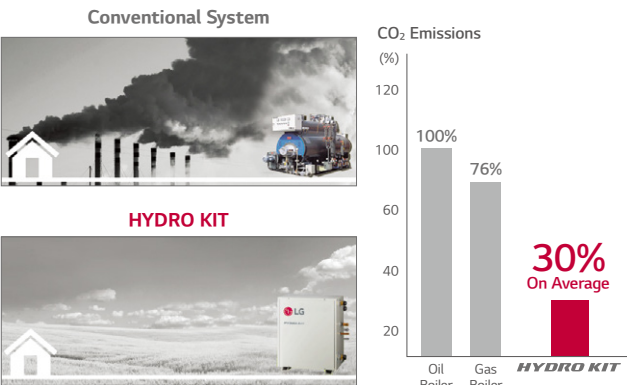


EFFICIENCY

Cost Savings with High Efficiency

Equivalent installation cost of traditional boiler with reduced operational costs.

- 1st Proposal MULTI V 5 HYDRO KIT** (Air Conditioning + Hot Water Supply + Floor Heating)
- 2nd Proposal MULTI V 5 Air-Conditioning + Gas Boiler** (Hot Water Supply + Floor Heating)
- 3rd Proposal MULTI V 5 Air-Conditioning + Oil Boiler** (Hot Water Supply + Floor Heating)

- Analysis Conditions**
- Building Type : Dormitory, Flats
 - Cooling / Floor Heating / Sanitary Hot Water for 10 years
 - Cooling : MULTI V IV Indoor Unit
 - Floor Heating : Medium Temp. HYDRO KIT (1ea)
 - Sanitary Hot Water : High Temp. HYDRO KIT (2ea), Sanitary Hot Water Tanks
 - Electricity Cost : Average Cost in EU
 - Gas Cost : Average Cost in EU
 - Oil Cost : Average Cost in EU

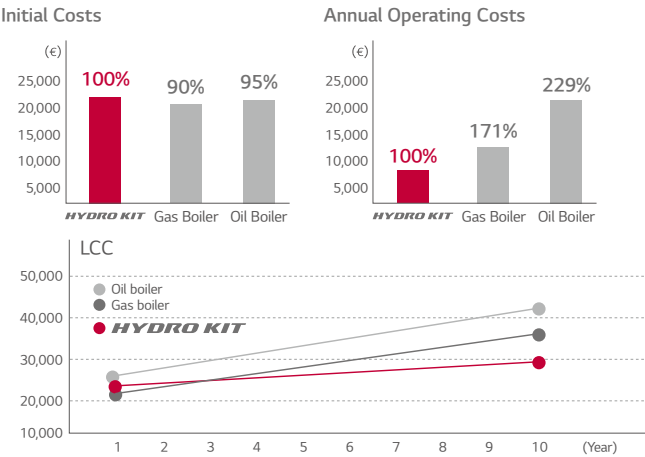


Energy Savings through Heat Recovery

Energy costs can be minimized by reusing the wasted heat from indoor units.


Conventional

Absorbed heat is released to outdoor air.

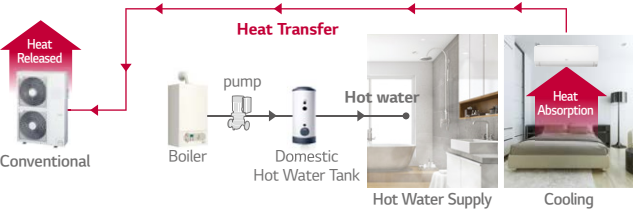


HYDRO KIT

Absorbed heat from indoor space is used for making hot water.

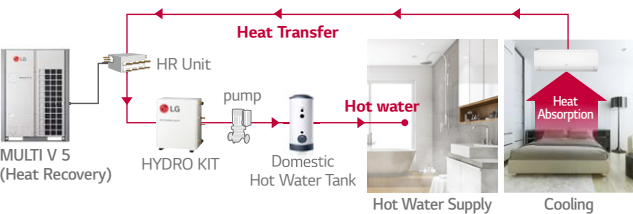


High Temperature HYDRO KIT Cycle Diagram

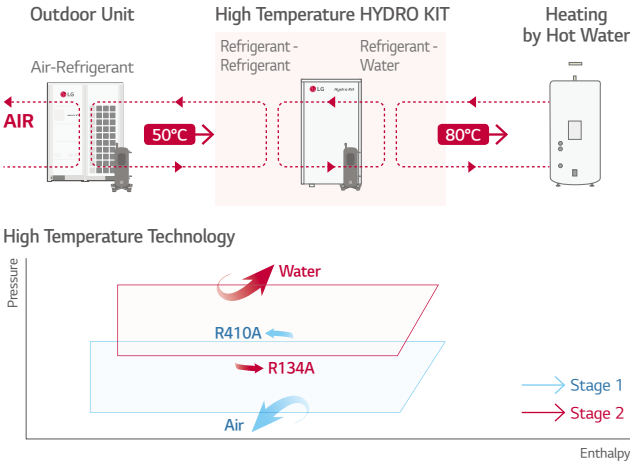


Various Applications

Applicable to a variety of facilities including hospitals, residences and resorts that need floor heating and domestic hot water supply.

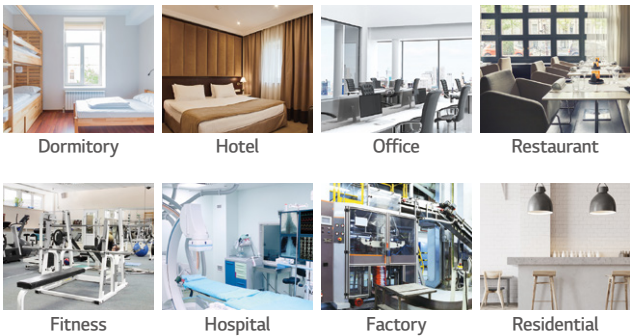


Hotel Application

Constant simultaneous cooling and heating operating during summer to provide hot water by using wasted heat energy from indoor cooling process.



Office Application

Hot water can be supplied at all times in the office by cooling the HR unit to warm up the sanitary tank, using waste energy.



HYDRO KIT

ARNH04GK2A4 / ARNH10GK2A4



Model		Unit	ARNH04GK2A4	ARNH10GK2A4
Cooling Capacity		kW	12.3	28.0
Heating Capacity		kW	13.8	31.5
Power Input Nominal ¹⁾		W	10	10
Exterior Color			Morning Gray	Morning Gray
RAL Code			RAL 7030	RAL 7030
Dimensions (W x H x D)	Body	mm	520 x 631 x 330	520 x 631 x 330
	Shipping	mm	677 x 687 x 418	677 x 687 x 418
Pipe Connections	Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø15.88 (5/8)	Ø22.2 (7/8)
	Drain Pipe (Internal Dia.)	A (inch)	25A (Male PT 1)	25A (Male PT 1)
Water Pipe Connections	Inlet	A (inch)	25A (Male PT 1)	25A (Male PT 1)
	Outlet	A (inch)	25A (Male PT 1)	25A (Male PT 1)
Weight	Body	kg	29.2	33.7
Sound Pressure Levels (H / M / L)		dB(A)	26	26
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Communication Cable		mm² x No.	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

1) Nominal : Performance tested under EN14511
Note : 1. Capacities are based on the following conditions :
- Cooling : Indoor 27°C (80.6°F) DB / 19° C (66.2°F) WB, Outdoor 35°C (95°F) DB / 24°C (75.2°F) WB, Water Inlet 23°C (73.4°F) / Outlet 18°C (64.4°F)
- Heating : Indoor 20°C (68°F) DB / 15°C (59°F) WB, Outdoor 7°C (44.6°F) DB / 6°C (42.8°F) WB, Water Inlet 30°C (86°F) / Outlet 35°C (95°F)
2. Piping Length : Interconnected Pipe Length = 7.5m
3. Difference Limit of Elevation (Outdoor ~ Indoor Unit) is Zero.
4. MULTI V S 4HP (ARUN040GSS0, ARUN040LSS0) cannot be connected to HYDRO KIT.
5. MULTI V Water S cannot be connected to HYDRO KIT.
6. Anti freezing liquid should be added under 10°C (outdoor temp.) during cooling mode.

Accessories

Chassis	ARNH04GK2A4	ARNH10GK2A4
Drain Pump	-	-
Cassette Cover	-	-
Refrigerant Leakage Detector	PRLDNVS0	
EEV Kit	-	-
Independent Power Module	○	
Robot Cleaner	-	-
Pre Filter (Washable)	-	-
Ion Generator	-	-
CO ₂ Sensor	-	-
Ventilation Kit	-	-
IR Receiver	-	-
Zone Controller	-	-
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible) PDRYCB320 (Universal input)	
External Input (1 point)	○	
Wi-Fi	PWFMDD200	

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

HYDRO KIT

ARNH04GK3A4 / ARNH08GK3A4



Model		Unit	ARNH04GK3A4	ARNH08GK3A4
Heating Capacity		kW	13.8	25.2
Power Input Nominal ¹⁾		W	2,300	5,000
Exterior Color			Morning Gray	Morning Gray
RAL Code			RAL 7030	RAL 7030
Dimensions (W x H x D)	Body	mm	520 x 1,080 x 330	520 x 1,080 x 330
	Shipping	mm	682 x 1,168 x 423	682 x 1,168 x 423
Pipe Connections	Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø15.88 (5/8)	Ø19.05 (3/4)
	Drain Pipe (Internal Dia.)	A (inch)	25A (Male PT 1)	25A (Male PT 1)
Water Pipe Connections	Inlet	A (inch)	25A (Male PT 1)	25A (Male PT 1)
	Outlet	A (inch)	25A (Male PT 1)	25A (Male PT 1)
Weight	Body	kg	87.0	91.0
Sound Pressure Levels (H / M / L)		dB(A)	43	46
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Communication Cable		mm² x No.	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

1) Nominal : Performance tested under EN14511
Note : 1. Capacities are based on the following conditions :
- Heating : Indoor 20°C (68°F) DB / 15°C (59°F) WB, Outdoor 7°C (44.6°F) DB / 6°C (42.8°F) WB, Water Inlet 55°C (131°F) / Outlet 65°C (149°F)
2. Piping Length : Interconnected Pipe Length = 7.5m
3. Difference Limit of Elevation (Outdoor ~ Indoor Unit) is Zero.
4. MULTI V S 4HP (ARUN040GSS0, ARUN040LSS0) cannot be connected to HYDRO KIT.
5. MULTI V Water S cannot be connected to HYDRO KIT.

Accessories

Chassis	ARNH04GK3A4	ARNH08GK3A4
Drain Pump	-	-
Cassette Cover	-	-
Refrigerant Leakage Detector	PRLDNVS0	
EEV Kit	-	-
Independent Power Module	○	
Robot Cleaner	-	-
Pre Filter (Washable)	-	-
Ion Generator	-	-
CO ₂ Sensor	-	-
Ventilation Kit	-	-
IR Receiver	-	-
Zone Controller	-	-
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible) PDRYCB320 (Universal input)	
External Input (1 point)	○	
Wi-Fi	PWFMDD200	

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

VENTILATION SOLUTIONS


ERV



ENERGY RECOVERY VENTILATION (ERV)




NECESSITY OF ERV

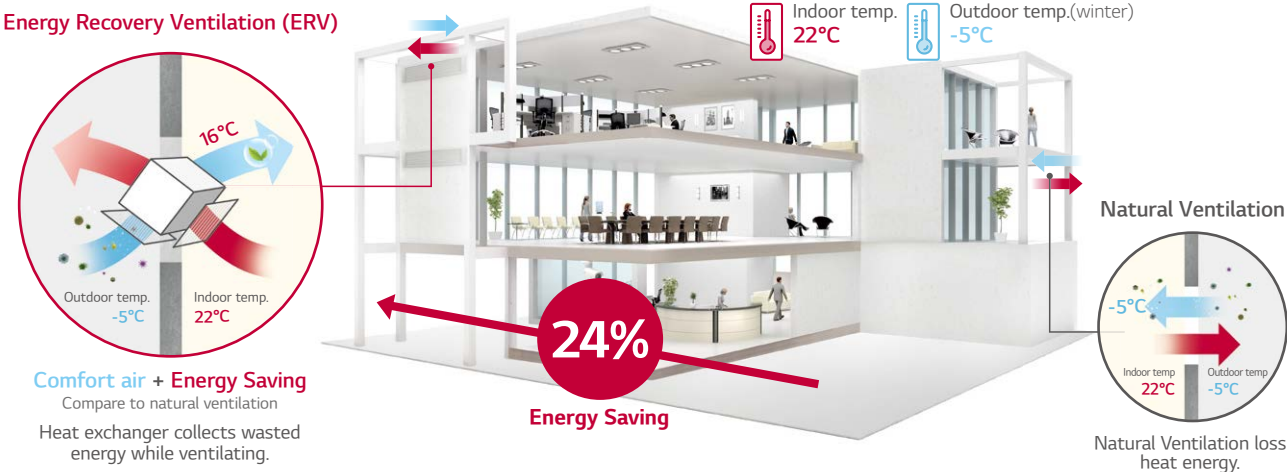


HIGH EFFICIENCY


High Efficiency Heat Exchanger
Efficiency and comfort is ensured through the high-efficiency energy recovery central core which recovers energy from the indoor air and transfers it to the fresh incoming air without mixing the air stream.

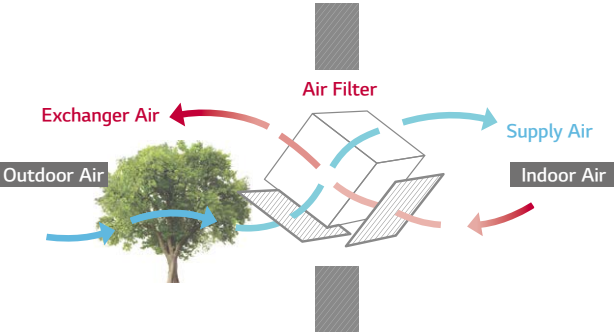

Compulsory Exhaust System
The exhausting system using high static and sirocco fan removes contaminants effectively from indoor air. Supply and exhaust air flows are completely separated in the total heat exchanger, LG ERV can filter out the impurities before supplying outdoor air and make indoor air fresh and healthy.

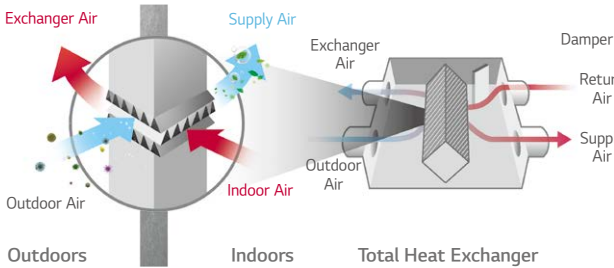


Night Time Free Cooling
During summer nights, indoor heat can be discharged outdoors and cool outdoor air can be brought indoors for energy savings.

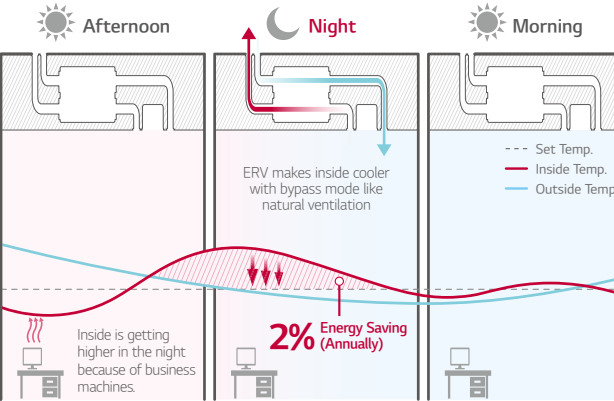


※ This function is operated with 'Night Time Free Cooling' on remote controller. (with MULTI V only)
※ Energy saving ratio can be differed by weather condition.
※ Test Condition
- Office (49,000ft²) / Occupancy : 30 / Area : London, UK
- ERV (1,000 CMH) + MULTI V IV (12HP) Unit Combination
- Other conditions are subject to BREEAM.

CO₂ Auto Operation
LG ERV reduces energy loss with auto fan speed control following CO₂ level

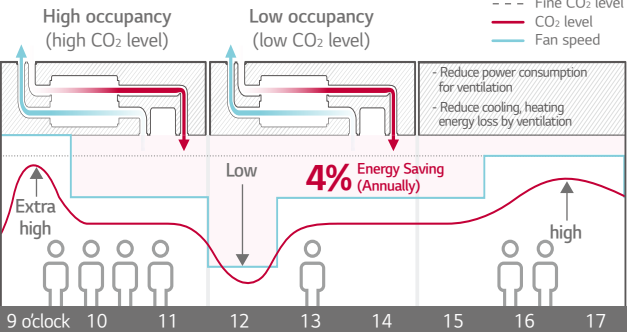


※ This function is operated with 'Night Time Free Cooling' on remote controller. (with MULTI V only)
※ Energy saving ratio can be differed by weather condition.
※ Test Condition - Office (49,000ft²) / Occupancy : 30 / Area : London, UK
- ERV (1,000 CMH) + MULTI V IV (12HP) Unit Combination
- Other conditions are subject to BREEAM.

Seasonal Auto Operation
LG ERV senses outdoor temperature and operates automatically following weather condition.

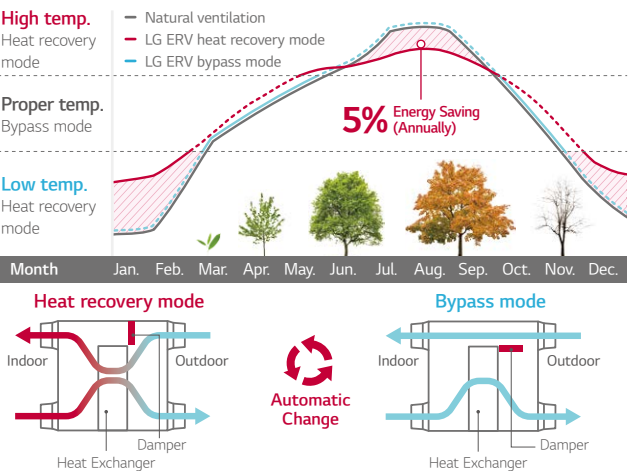

※ This function is operated with 'Auto' mode by wired remote control.
※ Energy saving ratio can be differed by weather condition.
※ Test Condition - Office (49,000ft²) / Occupancy : 30 / Area : London, UK
- ERV (1,000 CMH) + MULTI V IV (12HP) Unit Combination
- Other conditions are subject to BREEAM.

Delay Operation
When the air conditioner and ERV are switched on simultaneously, delay operation can reduce unnecessary heating and cooling energy loss by slowing down automatic ERV operation.

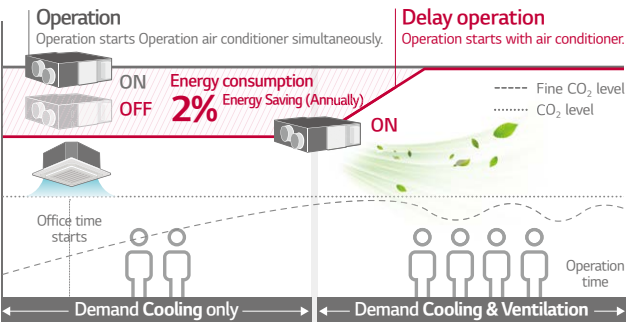

※ This function is operated with 'Night Time Free Cooling' on remote controller. (with MULTI V only)
※ Energy saving ratio can be differed by weather condition.
※ Test Condition - Office (49,000ft²) / Occupancy : 30 / Area : London, UK
- ERV (1,000 CMH) + MULTI V IV (12HP) Unit Combination
- Other conditions are subject to BREEAM.

COMFORT & RELIABILITY

CO₂ Level Monitoring

CO₂ sensor senses CO₂ level in the room. Users can monitor CO₂ level on new wired remote controller, and ERV controls the fan speed automatically following the level.


CO₂ Level Visualization

CO₂ sensor senses indoor CO₂ level and displays it on new wired remote controller.




Main display
If the CO₂ level is above 900ppm in the room, the red mark is on.

Further information
CO₂ level and room condition are displayed continuously.

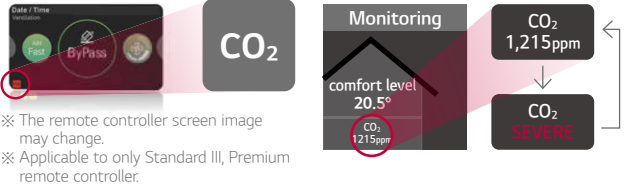


CO₂ Concentration Control

Using CO₂ sensor, LG ERV controls exhaust air flow automatically to keep indoor air fresh under settled CO₂ concentration.

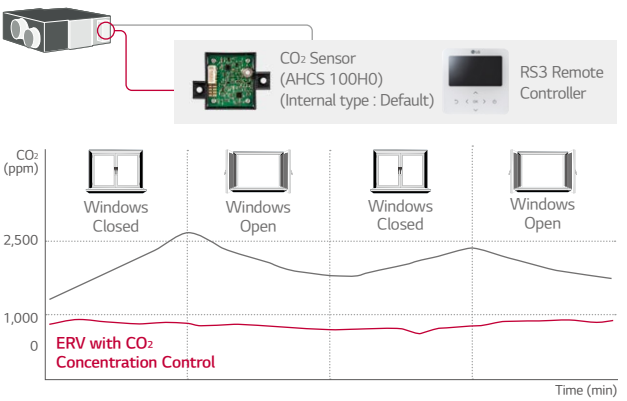

High Durability


LG ERV durability is increased through bacteria-resistant material of heat exchanger and corrosion protection coating. It prevents shortening product life due to corrosion and mold and supplies high quality air to inside by minimizing the bacteria.

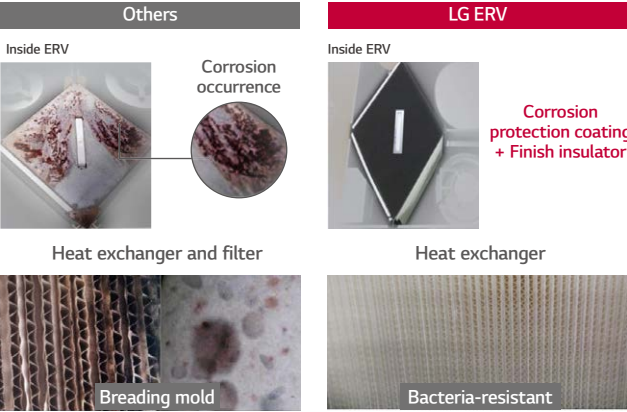

CONVENIENCE

Easy Control

Wired remote controller is easy for usage.

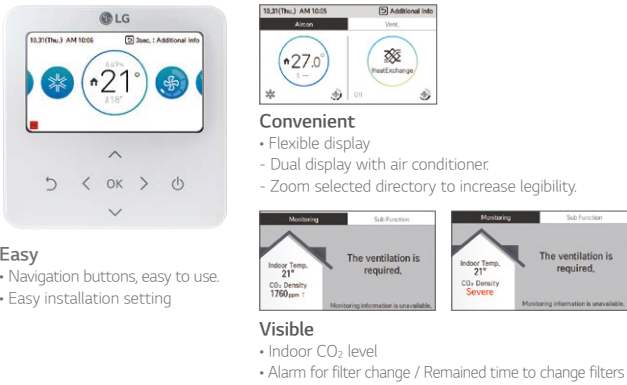

Easy
• Navigation buttons, easy to use.
• Easy installation setting

Convenient
• Flexible display
• Dual display with air conditioner.
• Zoom selected directory to increase legibility.


Visible
• Indoor CO₂ level
• Alarm for filter change / Remained time to change filters

Group Control

1 wired remote controller up to 16 ERV (Including air conditioner). It is convenient for large common space such as lobby.


Several units combination

16 units group control is available with 1 remote controller.

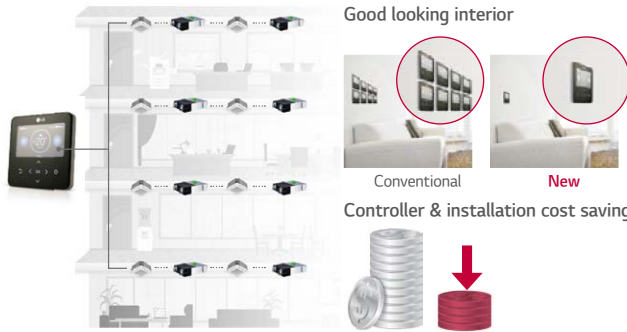

Interlocking with Air Conditioning System


- LG ERV can be interlocked with air conditioners and controlled individually.
- This function can be operated when the system is connected with 1 remote controller.

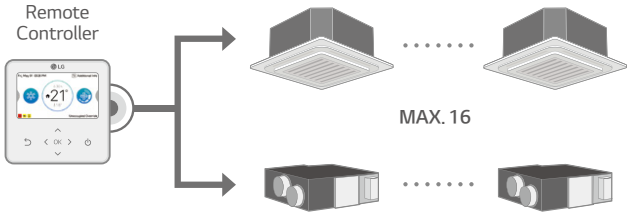

CONVENIENCE


Fast Ventilation Mode

Fast ventilation mode prevents the spread of contaminants under negative indoor pressure and makes indoor air fresh and comfortable quickly.

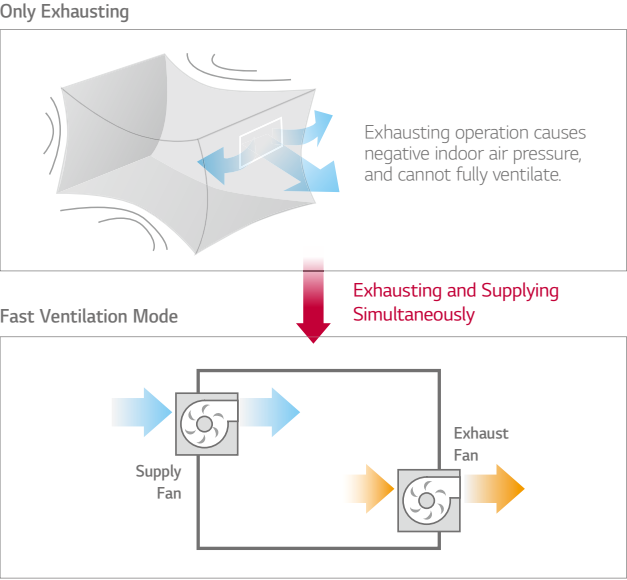


External Static Pressure Control

The high static pressure fan can control the air volume depending on the length of the duct. It is also easy to control the pressure level by using the remote controller for a more flexible duct installation and easier testing.

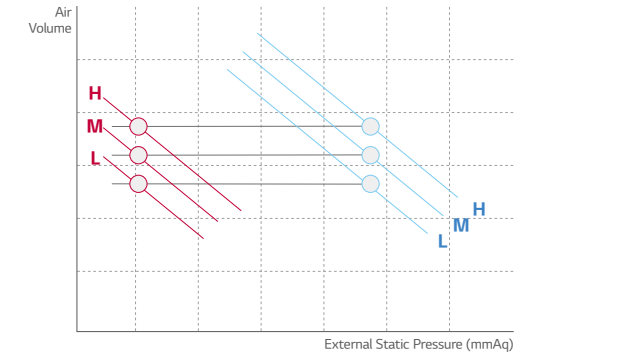


Easy Cleaning and Filter Change

Filter can be conveniently changed and cleaned.

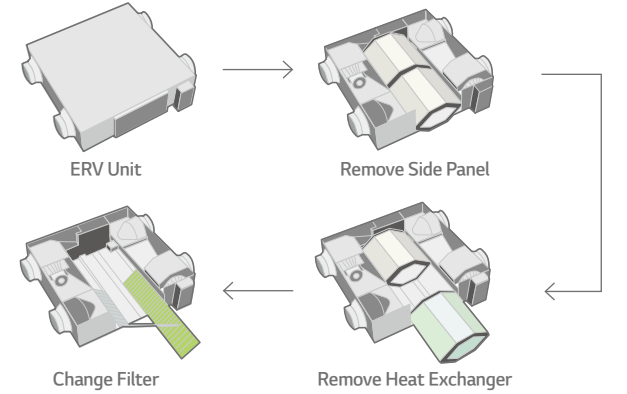


Providing Cool & Warm Fresh Air

During the summer, ERV DX can transform outdoor warm air into cool air for indoors and it can prevent cold drafts during the winter by supplying warm air.

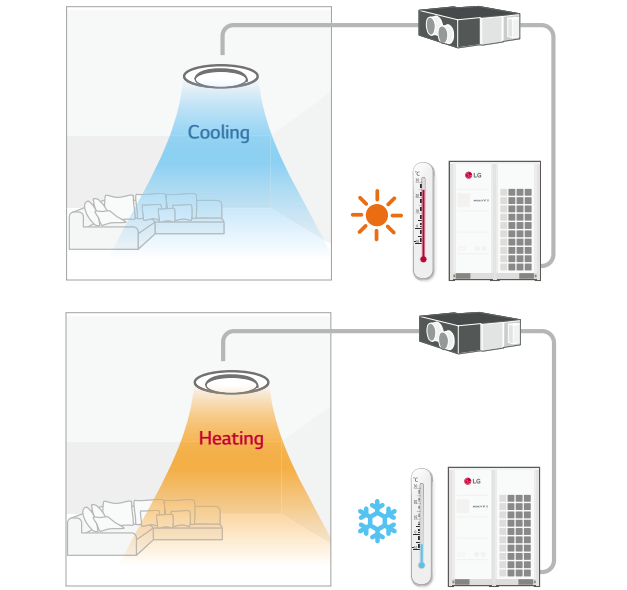


Total Air Conditioning Solution

LG ERV DX can be used as a Total Air Conditioning Solution. It can control condition of incoming air with the DX coil and humidifier for making comfortable indoor air. In the summer, LG ERV DX controls the air indoors by cooling and dehumidifying incoming air. In winter, it can provide warm air by heating and humidifying the incoming air.

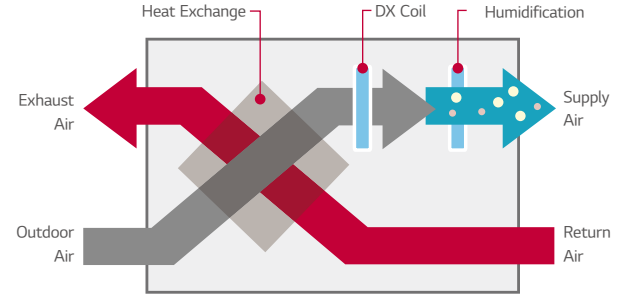

Interlocking with MULTI V

LG ERV DX can be interlocked with MULTI V. It can be controlled individually by a wired remote controller connected to MULTI V indoor units.

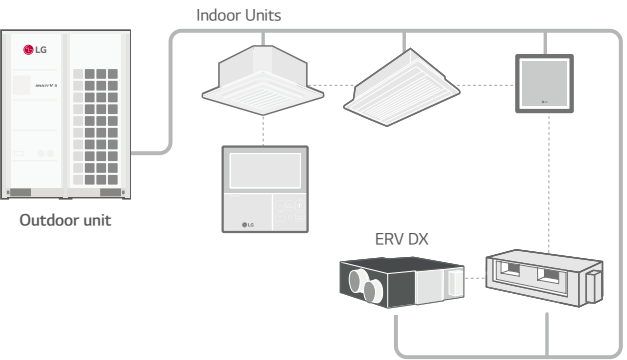

ERV

LZ-H025GBA4 / LZ-H035GBA4
LZ-H050GBA4



Model				LZ-H025GBA4	LZ-H035GBA4	LZ-H050GBA4
Nominal Capacity		CMH (CFM)		250 (147)	350 (206)	500 (294)
Power Supply		Ø, V, Hz		1, 220-240, 50 / 60		
ERV Mode	Step	-		SUPER-HIGH / HIGH / LOW		
	Current	SH / H / L	Amps	0.70 / 0.60 / 0.42	1.10 / 0.95 / 0.60	1.92 / 1.58 / 0.79
	Power Input	SH / H / L	W	97 / 78 / 52	180 / 163 / 88	240 / 220 / 90
	Air Flow	SH / H / L	CMH (CFM)	250 / 250 / 150 (147 / 147 / 88)	350 / 350 / 210 (206 / 206 / 123)	500 / 500 / 320 (294 / 294 / 124)
	External Static Pressure	SH / H / L	Pa (inWTR)	100 / 70 / 50 (0.40 / 0.28 / 0.20)	150 / 130 / 100 (0.60 / 0.52 / 0.40)	150 / 100 / 50 (0.60 / 0.40 / 0.20)
	Temperature Exchange Efficiency	SH / H / L	%	80 / 80 / 83	75 / 75 / 77	78 / 78 / 79
	Enthalpy Exchange Efficiency	Heating (SH / H / L)	%	70 / 70 / 72	68 / 68 / 70	73 / 73 / 75
		Cooling (SH / H / L)	%	66 / 66 / 68	63 / 63 / 65	66 / 66 / 69
	Noise Level (Sound Level, 1.5m)	SH / H / L	dB(A)	29 / 28 / 24	32 / 30 / 27	34 / 32 / 25
Bypass Mode	Step	-		SUPER-HIGH / HIGH / LOW		
	Current	SH / H / L	Amps	0.70 / 0.60 / 0.42	1.10 / 0.95 / 0.60	1.92 / 1.58 / 0.79
	Power Input	SH / H / L	W	97 / 78 / 52	180 / 163 / 88	240 / 220 / 90
	Air Flow	SH / H / L	CMH (CFM)	250 / 250 / 150 (147 / 147 / 88)	350 / 350 / 210 (206 / 206 / 123)	500 / 500 / 320 (294 / 294 / 124)
	External Static Pressure	SH / H / L	Pa (inWTR)	100 / 70 / 50 (0.40 / 0.28 / 0.20)	150 / 130 / 100 (0.60 / 0.52 / 0.40)	150 / 100 / 50 (0.60 / 0.40 / 0.20)
	Noise Level (Sound Level, 1.5m)	SH / H / L	dB(A)	29 / 29 / 25	32 / 30 / 27	35 / 33 / 25
Heat Exchanger		Type	-	Air to air cross flow heat exchange		
Net Weight		kg		44	44	44
Dimension		W x H x D	mm	988 x 273 x 1,014	988 x 273 x 1,014	988 x 273 x 1,014
Duct Work	Qty	EA		4		
	Size (Ø)	mm		Ø200		
Supply Air Fan	Qty	EA		1		
	Type	-		Direct-Drive (Sirocco Fan)		
Exhaust Air Fan	Qty	EA		1		
	Type	-		Direct-Drive (Sirocco Fan)		
Filters (Default)	Qty	EA		2		2
	Type	-		Cleanable fibrous fleeces		
	Size (W x H x D)	mm		855 x 10 x 160		855 x 6 x 230
Filters (Optional)	Model	-		AHFT035H0		AHFT050H0
	Qty	EA		2		2
	Type	-		F7		F7
	Size (W x H x D)	mm		423.5 x 132 x 25		425 x 194 x 25
Dry Contact				PDRYCB000		

Note : 1. ERV mode : Total Heat Recovery Ventilation mode
2. Refer to dimensional drawings.
3. Noise level :
- The operating conditions are assumed to be standard.
- Sound measured at 1.5m below the center the body.
- Sound level will vary depending on a range of factors such as the construction (acoustic absorption coefficient) of particular room in which the equipment is installed.
- The sound level at the air discharge port is about 8 dB(A) higher than the unit's operating sound.
4. Temperature and Enthalpy Exchange Efficiency at cooling Indoor Temperature : 26.5°C DB, 64.5% RH, Outdoor Temperature : 34.5°C DB, 75% RH
5. Temperature and Enthalpy Exchange Efficiency at heating Indoor Temperature : 20.5°C DB, 59.5% RH, Outdoor Temperature : 5°C DB, 65% RH
6. Temperature Exchange efficiency is tested at heating condition.

ERV

LZ-H080GBA4 / LZ-H100GBA4
LZ-H150GBA4 / LZ-H200GBA4



Model				LZ-H080GBA4	LZ-H100GBA4	LZ-H150GBA4	LZ-H200GBA4
Nominal Capacity			CMH (CFM)	800 (471)	1,000 (589)	1,500 (883)	2,000 (1,177)
Power Supply			Ø, V, Hz	1, 220-240, 50 / 60			
ERV Mode	Step	-		SUPER-HIGH / HIGH / LOW			
	Current	SH / H / L	Amps	2.77 / 2.16 / 1.44	3.41 / 2.90 / 1.76	5.60 / 5.40 / 2.90	6.80 / 5.90 / 3.60
	Power Input	SH / H / L	W	390 / 280 / 187	480 / 385 / 210	780 / 540 / 377	960 / 770 / 420
	Air Flow	SH / H / L	CMH (CFM)	800 / 800 / 660 (471 / 471 / 388)	1,000 / 1,000 / 800 (589 / 589 / 471)	1,500 / 1,500 / 1,200 (883 / 883 / 706)	2,000 / 2,000 / 1,600 (1,177 / 1,177 / 942)
	External Static Pressure	SH / H / L	Pa (inWTR)	200 / 110 / 60 (0.80 / 0.44 / 0.24)	160 / 90 / 50 (0.64 / 0.36 / 0.20)	200 / 110 / 60 (0.80 / 0.44 / 0.24)	160 / 90 / 50 (0.64 / 0.36 / 0.20)
	Temperature Exchange Efficiency	SH / H / L	%	79 / 79 / 82	77 / 77 / 78	79 / 79 / 82	77 / 77 / 78
	Enthalpy Exchange Efficiency	Heating (SH / H / L)	%	72 / 72 / 74	70 / 70 / 72	72 / 72 / 74	70 / 70 / 72
		Cooling (SH / H / L)	%	63 / 63 / 66	59 / 59 / 63	63 / 63 / 66	59 / 59 / 63
	Noise Level (Sound Level, 1.5m)	SH / H / L	dB(A)	40 / 37 / 31	41 / 38 / 32	43 / 40 / 34	44 / 41 / 35
Bypass Mode	Step	-		SUPER-HIGH / HIGH / LOW			
	Current	SH / H / L	Amps	2.77 / 2.16 / 1.44	3.41 / 2.90 / 1.76	5.60 / 5.40 / 2.90	6.80 / 5.90 / 3.60
	Power Input	SH / H / L	W	390 / 280 / 187	480 / 385 / 210	780 / 540 / 377	960 / 770 / 420
	Air Flow	SH / H / L	CMH (CFM)	800 / 800 / 660 (471 / 471 / 388)	1,000 / 1,000 / 800 (589 / 589 / 471)	1,500 / 1,500 / 1,200 (883 / 883 / 706)	2,000 / 2,000 / 1,600 (1,177 / 1,177 / 942)
	External Static Pressure	SH / H / L	Pa (inWTR)	200 / 110 / 60 (0.80 / 0.44 / 0.24)	160 / 90 / 50 (0.64 / 0.36 / 0.20)	200 / 110 / 60 (0.80 / 0.44 / 0.24)	160 / 90 / 50 (0.64 / 0.36 / 0.20)
	Noise Level (Sound Level, 1.5m)	SH / H / L	dB(A)	41 / 38 / 32	41 / 39 / 33	44 / 41 / 35	44 / 42 / 36
Heat Exchanger		Type	-	Air to air cross flow heat exchange			
Net Weight		kg		62		140	
Dimension		W x H x D	mm	1,062 x 365 x 1,140		1,313 x 738 x 1,140	
Duct Work	Qty	EA		4		4 + 2	
	Size (Ø)	mm		Ø250		Ø250 + Ø350	
Supply Air Fan	Qty	EA		1		2	
	Type	-		Direct-Drive (Sirocco Fan)			
Exhaust Air Fan	Qty	EA		1		2	
	Type	-		Direct-Drive (Sirocco Fan)			
Filters (Default)	Qty	EA		2		4	
	Type	-		Cleanable fibrous fleeces			
Filters (Optional)	Size (W x H x D)	mm		1,056 x 6 x 212.5			
	Model	-		AHFT100H0			
	Qty	EA		2		4	
	Type	-		F7			
	Size (W x H x D)	mm		520 x 192 x 25			
Dry Contact				PDRYCB000			

Note : 1. ERV mode : Total Heat Recovery Ventilation mode
2. Refer to dimensional drawings.
3. Noise level :
- The operating conditions are assumed to be standard.
- Sound measured at 1.5m below the center the body.
- Sound level will vary depending on a range of factors such as the construction (acoustic absorption coefficient) of particular room in which the equipment is installed.
- The sound level at the air discharge port is about 8 dB(A) higher than the unit's operating sound.
4. Temperature and Enthalpy Exchange Efficiency at cooling Indoor Temperature : 26.5°C DB, 64.5% RH, Outdoor Temperature : 34.5°C DB, 75% RH
5. Temperature and Enthalpy Exchange Efficiency at heating Indoor Temperature : 20.5°C DB, 59.5% RH, Outdoor Temperature : 5°C DB, 65% RH
6. Temperature Exchange efficiency is tested at heating condition.

ERV WITH DX COIL

LZ-H050GXH4 / LZ-H080GXH4
LZ-H100GXH4



Model			LZ-H050GXH4	LZ-H080GXH4	LZ-H100GXH4
Fresh Air Conditioning Load	Cooling	kW	4.93	7.46	9.12
	Heating	kW	6.73	9.80	11.72
Temperature Exchange Efficiency	SH / H / L	%	86 / 86 / 87	80 / 80 / 81	76 / 76 / 78
Enthalpy Exchange Efficiency	Cooling (SH / H / L)	%	61 / 61 / 63	50 / 50 / 53	45 / 45 / 50
	Heating (SH / H / L)	%	76 / 76 / 77	67 / 67 / 69	64 / 64 / 66
Operation Range	Outdoor air Temperature	°C	-15 ~ 45	-15 ~ 45	-15 ~ 45
Air Flow Rate	Heat Exchange Mode (SH / H / L)	CMH	500 / 500 / 440	800 / 800 / 640	1,000 / 1,000 / 820
	Bypass Mode (SH / H / L)	CMH	500 / 500 / 440	800 / 800 / 640	1,000 / 1,000 / 820
Fan	External Static Pressure (SH / H / L)	Pa	160 / 120 / 100	140 / 90 / 70	110 / 70 / 60
	System		Natural Evaporating Type		
Humidifier	Amount	kg/h	2.70	4.00	5.40
	Pressure Feed Water	Mpa		0.02 ~ 0.49	
Sound Pressure	Heat Exchange Mode (SH / H / L)	dB(A)	38 / 36 / 33	39 / 37 / 34	40 / 38 / 35
	Bypass Mode (SH / H / L)	dB(A)	39 / 37 / 34	40 / 38 / 35	40 / 38 / 35
Refrigerant			R410A		
Power Supply	Ø, V, Hz		1, 220-240, 50 / 60		
Power Input (Nominal)	Heat Exchange Mode (SH / H / L)	kW	0.25 / 0.20 / 0.15	0.42 / 0.35 / 0.25	0.48 / 0.42 / 0.27
	Bypass Mode (SH / H / L)	kW	0.25 / 0.20 / 0.15	0.42 / 0.35 / 0.25	0.48 / 0.42 / 0.27
Nominal Running Current (RLA)	Heat Exchange Mode (SH / H / L)	A	1.5 / 1.3 / 1.0	2.5 / 2.0 / 1.5	3.6 / 3.2 / 2.3
	Bypass Mode (SH / H / L)	A	1.5 / 1.3 / 1.0	2.5 / 2.0 / 1.5	3.6 / 3.2 / 2.3
Heat exchange system			Air to air cross flow total heat (Sensible + Latent heat) exchange		
Heat exchange element			Specially processed non-flammable paper		
Air Filter			Multidirectional fibrous fleeces		
Dimensions	W x H x D	mm	1,667 x 365 x 1,140		
Net Weight		kg	105		
Piping Connection	Liquid	mm	Ø6.35		
	Gas	mm	Ø12.7		
	Water	mm	Ø6.35		
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)		
Connection Duct Diameter			mm Ø250		

Note : 1. Cooling Capacity Test condition - Indoor temperature : 27°C DB, 19°C WB / Outdoor temperature : 35°C DB
2. Heating Capacity Test condition - Indoor temperature : 20°C DB / Outdoor temperature : 7°C DB, 6°C WB
3. Humidifying capacity is based on the following conditions - Indoor temperature : 20°C DB, 15°C WB / Outdoor temperature : 7°C DB, 6°C WB
4. Cooling and heating capacities are based on the following conditions. : Fan is based on High and Super-high.
5. The operating sound measured at the point 1.5 m below the center of the unit is converted to that measured at an anechoic chamber.
6. The specifications, designs and information here are subject to change without notice.

Accessories

Chassis	LZ-H050GXH4	LZ-H080GXH4	LZ-H100GXH4
Drain Pump		-	
Cassette Cover		-	
Refrigerant Leakage Detector		PRLDNVS0	
EEV Kit		-	
Independent Power Module		-	
Robot Cleaner		-	
Pre Filter (Washable)		-	
Ion Generator		-	
CO ₂ Sensor		AHCS100H0	
Ventilation Kit		-	
IR Receiver		-	
Zone Controller		-	
Dry Contact (with additional accessory)		PDRYCB000 (1 point contact) PDRYCB500 (Modbus)	
External Input (1 point)		○	
Wi-Fi		-	

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

ERV WITH DX COIL

LZ-H050GXN4 / LZ-H080GXN4
LZ-H100GXN4



Model			LZ-H050GXN4	LZ-H080GXN4	LZ-H100GXN4
Fresh Air Conditioning Load	Cooling	kW	4.93	7.46	9.12
	Heating	kW	6.73	9.80	11.72
Temperature Exchange Efficiency	SH / H / L	%	86 / 86 / 87	80 / 80 / 81	76 / 76 / 78
Enthalpy Exchange Efficiency	Cooling (SH / H / L)	%	61 / 61 / 63	50 / 50 / 53	45 / 45 / 50
	Heating (SH / H / L)	%	76 / 76 / 77	67 / 67 / 69	64 / 64 / 66
Operation Range	Outdoor air Temperature	°C	-15 ~ 45	-15 ~ 45	-15 ~ 45
Air Flow Rate	Heat Exchange Mode (SH / H / L)	CMH	500 / 500 / 440	800 / 800 / 640	1,000 / 1,000 / 820
	Bypass Mode (SH / H / L)	CMH	500 / 500 / 440	800 / 800 / 640	1,000 / 1,000 / 820
Fan	External Static Pressure (SH / H / L)	Pa	180 / 150 / 110	170 / 120 / 80	150 / 100 / 70
	System		-		
Humidifier	Amount	kg/h		-	
	Pressure Feed Water	Mpa		-	
Sound Pressure	Heat Exchange Mode (SH / H / L)	dB(A)	39 / 37 / 35	41 / 38 / 36	41 / 39 / 36
	Bypass Mode (SH / H / L)	dB(A)	39 / 37 / 35	41 / 38 / 36	41 / 39 / 36
Refrigerant			R410A		
Power Supply	Ø, V, Hz		1, 220-240, 50 / 60		
Power Input (Nominal)	Heat Exchange Mode (SH / H / L)	kW	0.25 / 0.20 / 0.15	0.42 / 0.35 / 0.25	0.48 / 0.42 / 0.27
	Bypass Mode (SH / H / L)	kW	0.25 / 0.20 / 0.15	0.42 / 0.35 / 0.25	0.48 / 0.42 / 0.27
Nominal Running Current (RLA)	Heat Exchange Mode (SH / H / L)	A	1.5 / 1.3 / 1.0	2.5 / 2.0 / 1.5	3.6 / 3.2 / 2.3
	Bypass Mode (SH / H / L)	A	1.5 / 1.3 / 1.0	2.5 / 2.0 / 1.5	3.6 / 3.2 / 2.3
Heat exchange system			Air to air cross flow total heat (Sensible + Latent heat) exchange		
Heat exchange element			Specially processed non-flammable paper		
Air Filter			Multidirectional fibrous fleeces		
Dimensions	W x H x D	mm	1,667 x 365 x 1,140		
Net Weight		kg	98		
Piping Connection	Liquid	mm	Ø6.35		
	Gas	mm	Ø12.7		
	Water	mm	-		
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)		
Connection Duct Diameter			mm Ø250		

Note : 1. Cooling Capacity Test condition - Indoor temperature : 27°C DB, 19°C WB / Outdoor temperature : 35°C DB
2. Heating Capacity Test condition - Indoor temperature : 20°C DB / Outdoor temperature : 7°C DB, 6°C WB
3. Humidifying capacity is based on the following conditions - Indoor temperature : 20°C DB, 15°C WB / Outdoor temperature : 7°C DB, 6°C WB
4. Cooling and heating capacities are based on the following conditions. : Fan is based on High and Super-high.
5. The operating sound measured at the point 1.5 m below the center of the unit is converted to that measured at an anechoic chamber.
6. The specifications, designs and information here are subject to change without notice.

Accessories

Chassis	LZ-H050GXN4	LZ-H080GXN4	LZ-H100GXN4
Drain Pump		-	
Cassette Cover		-	
Refrigerant Leakage Detector		PRLDNVS0	
EEV Kit		-	
Independent Power Module		-	
Robot Cleaner		-	
Pre Filter (Washable)		-	
Ion Generator		-	
CO ₂ Sensor		AHCS100H0	
Ventilation Kit		-	
IR Receiver		-	
Zone Controller		-	
Dry Contact (with additional accessory)		PDRYCB000 (1 point contact) PDRYCB500 (Modbus)	
External Input (1 point)		○	
Wi-Fi		-	

※ ○ : Applied, - : Not applied
Option : Refer to model name in table