

LOOKBOOK *Transportation*



LOOKBOOK

Transportation

- a Super Narrow Bezel Video Wall - 55LV35A**
- 55" class 54.6" diagonal
 - Tile Mode up to 15 x 15 {Natural mode}
 - IPS Panel Technology
 - 1920 x 1080 {FHD}
 - Brightness 500cd/m²
 - Bezel Width 2.25mm {L/T} / 1.25mm {R/B}
 - 24 Hours Guaranteed Operating Hour
 - Portrait and landscape orientation
 - SuperSign® VS
- b Ultra-Narrow Bezel Video Wall - 49VM5C**
- 49" class 48.5" diagonal
 - IPS Panel Technology
 - 1920 x 1080 {FHD}
 - Brightness 500 cd/m²
 - Bezel Width: 0.9 mm {T/B/L/R}; 1.8 mm PB+PB
 - Built-in SoC and Synced Playback
 - webOS 3.0
 - Portrait and landscape orientation
 - 24 Hours Guaranteed Operating Hour
- c Ultra-Stretch Signage- 86BH5C**
- 86" class 85.6" diagonal
 - IPS Panel Technology
 - 3840 x 600 Ultra HD Resolution
 - 58:9 Extended Wide Format
 - 4 Divided PBP in Landscape or Portrait
 - Brightness 500cd/m², Min : 400cd/m²
 - Built-in SoC and Synced Playback
 - Portrait and landscape orientation
- d Open-Frame Curved OLED Displays - 55EF5C**
- 55" class
 - 1920 x 1080 FHD
 - Brightness 100/400cd/m² {APL100% | 25%}
 - Bezel Width: 7.2mm {T,B,L,R off-bezel}
 - Available in arched, curved, concave and convex
 - Maximum Curvature in Portrait: 1,500R
Radius: 1,500mm | Circumference: 9,420mm
 - Maximum Curvature in Landscape: 2,000R
Radius: 2,000mm | Circumference: 12,560mm
- e Touch Overlay Kit - KT-T550**
- 55" class
 - Compatible Products: 55SE3B, 55SM5B, 55SE3KB, 55SM5KB, 55SM3B, 55SL5B
 - Portrait and landscape orientation



Layout 2
LOOKBOOK
Transportation

- a** **Open-Frame Curved OLED Displays - 55EF5C**
 - 55" class
 - 1920 x 1080 FHD
 - Brightness 100/400cd/m² {APL100% | 25% average picture level}
 - Bezel Width: 7.2mm {T,B,L,R off-bezel}
 - Available in arched, curved, concave and convex by using OLED Module | Signage Box and T-Con Box | Cables
 - Maximum Curvature in Portrait: 1,500R
Radius: 1,500mm
Circumference: 9,420mm
 - Maximum Curvature in Landscape: 2,000R
Radius: 2,000mm
Circumference: 12,560mm

- c** **Wallpaper OLED Display - 55EJ5C**
 - 55" class
 - 1920 x 1080 FHD
 - Brightness 100/400cd/m² {APL100% | 25% average picture level}
 - Bezel Width: 1.2mm {T, B, L, R offset bezel}
 - Available in two types of installation
 - Ceiling Mount
 - Wall Mount
 - Hard Coating {2H}, anti-reflective treatment of the front polarizer {1.0% reflective typ}
 - Portrait and landscape orientation
 - SuperSign OLED | C

- d** **Ultra-Stretch Signage - 86BH5C**
 - 86" class 85.6" diagonal
 - IPS Panel Technology
 - 3840 x 600 Ultra HD Resolution
 - 58:9 Extended Wide Format
 - 4 Divided PBP in Landscape or Portrait
 - Brightness 500cd/m², Min : 400cd/m²
 - Built-in SoC and Synced Playback
 - Portrait and landscape orientation



LOOKBOOK Transportation

a Open-Frame Curved OLED Displays - 55EF5C

- 55" class
- 1920 x 1080 FHD
- Brightness 100/400cd/m² {APL100% | 25%} average picture level
- Bezel Width: 7.2mm {T,B,L,R off-bezel}
- Available in arched, curved, concave and convex by using OLED Module | Signage Box and T-Con Box | Cables
- Maximum Curvature in Portrait: 1,500R
Radius: 1,500mm
Circumference: 9,420mm
- Maximum Curvature in Landscape: 2,000R
Radius: 2,000mm
Circumference: 12,560mm

b Ultra-Stretch Signage - 86BH5C

- 86" class 85.6" diagonal
- IPS Panel Technology
- 3840 x 600 Ultra HD Resolution
- 58:9 Extended Wide Format
- 4 Divided PBP in Landscape or Portrait
- Brightness 500cd/m², Min : 400cd/m²
- Built-in SoC and Synced Playback
- Portrait and landscape orientation



LOOKBOOK *Transportation*


a Dual-View Flat OLED Display - 55EH5C

- 55" class
- 1920 x 1080 FHD
- Brightness 100/400cd/m² {APL100% | 25%} average picture level
- Bezel Width: 2.2mm {T,B,L,R off-bezel}
- Available in three types of installation
 - Ceiling Mount
 - Wall Mount
 - Floor Standing
- Portrait and landscape orientation
- SuperSign W-Lite | C




LOOKBOOK *Transportation*

- a** In-Glass Oled Wallpaper - 55EG5SD
 - 55" class
 - 1920 x 1080 FHD
 - Brightness 100/400cd/m² {APL100% | 25%}
 - Available in two types of installation:
 - Hard Coating {2H}, anti-reflective treatment of the front polarizer {1.0% reflective typ}
 - Portrait orientation
 - SuperSign OLED | C

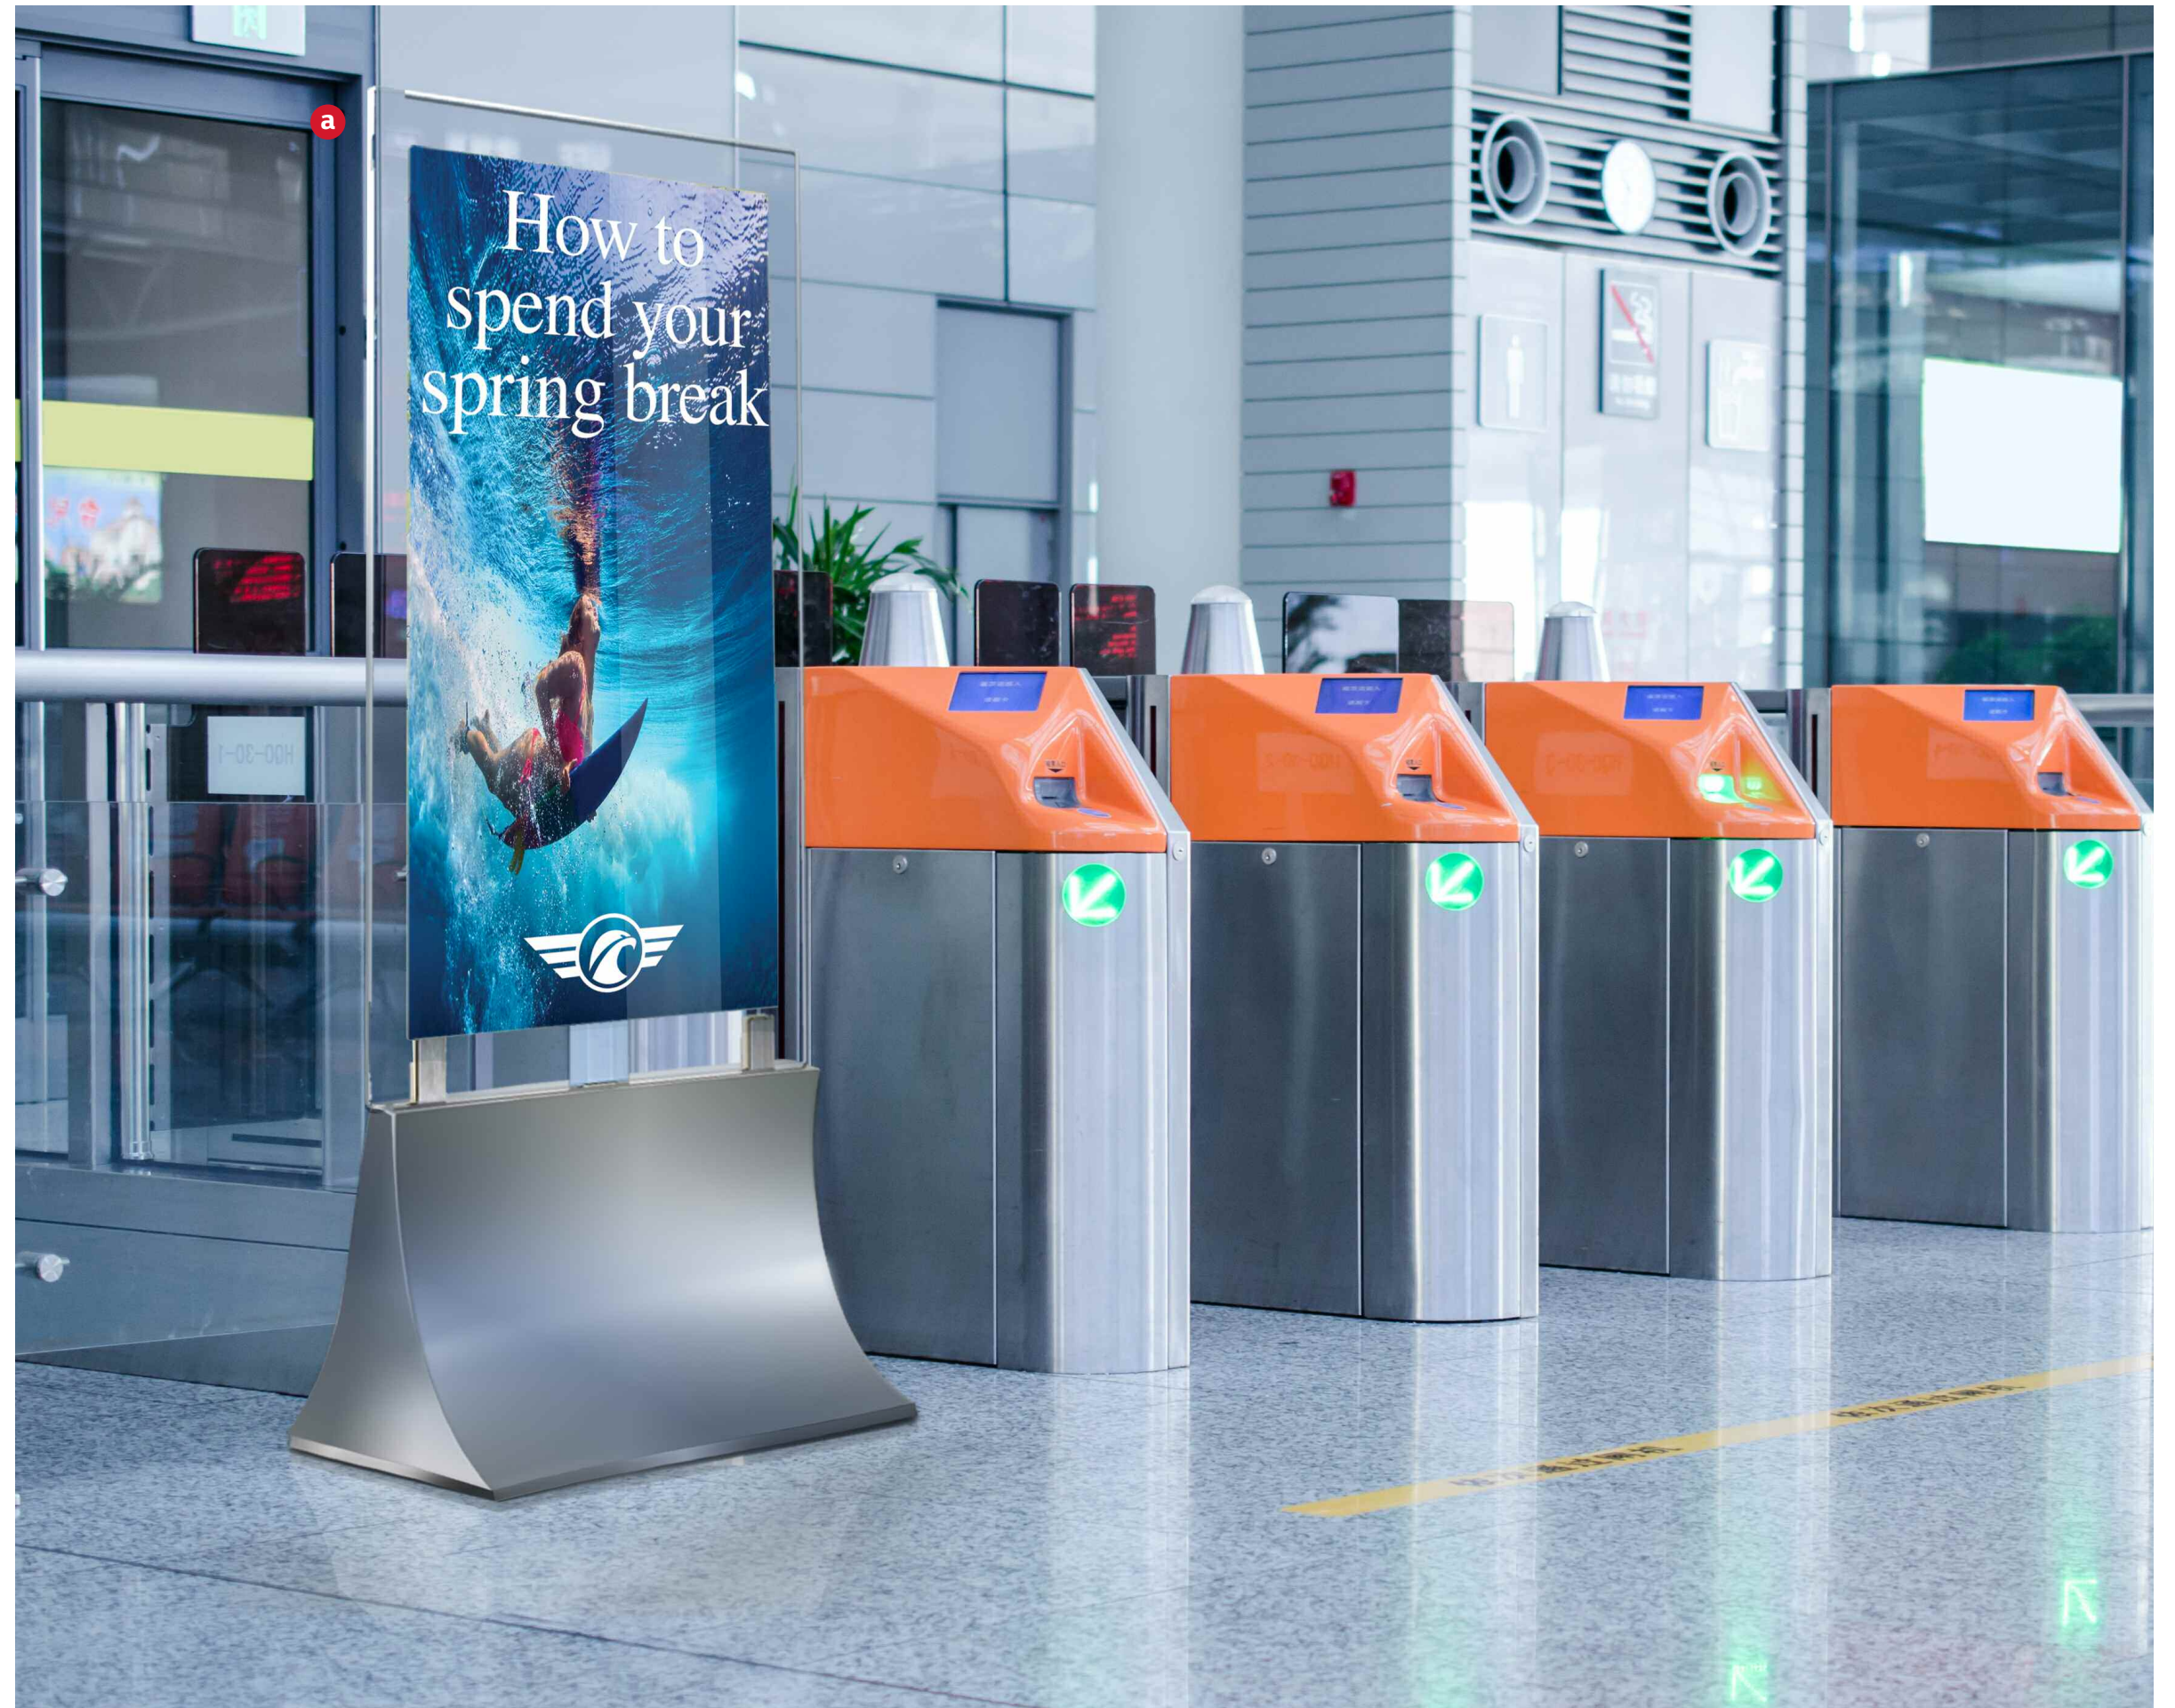

LOOKBOOK *Transportation*

- a** **In-Glass OLED Wallpaper - 55EG5CD**
- 55" class
 - 1920 x 1080 FHD
 - Brightness 100/400cd/m² {APL100% | 25%}
 - Available in two types of installation
 - Ceiling Mount
 - Floor Standing
 - Hard Coating {2H}, anti-reflective treatment of the front polarizer {1.0% reflective typ}
 - Portrait orientation
 - SuperSign OLED | C
- b** **Open-Frame Curved OLED Displays - 55EF5C**
- 55" class
 - 1920 x 1080 FHD
 - Brightness 100/400cd/m² {APL100% | 25%} average picture level
 - Bezel Width: 7.2mm {T,B,L,R off-bezel}
 - Available in arched, curved, concave and convex by using OLED Module | Signage Box and T-Con Box | Cables
 - Maximum Curvature in Portrait: 1,500R
Radius: 1,500mm
Circumference: 9,420mm
 - Maximum Curvature in Landscape: 2,000R
Radius: 2,000mm
Circumference: 12,560mm

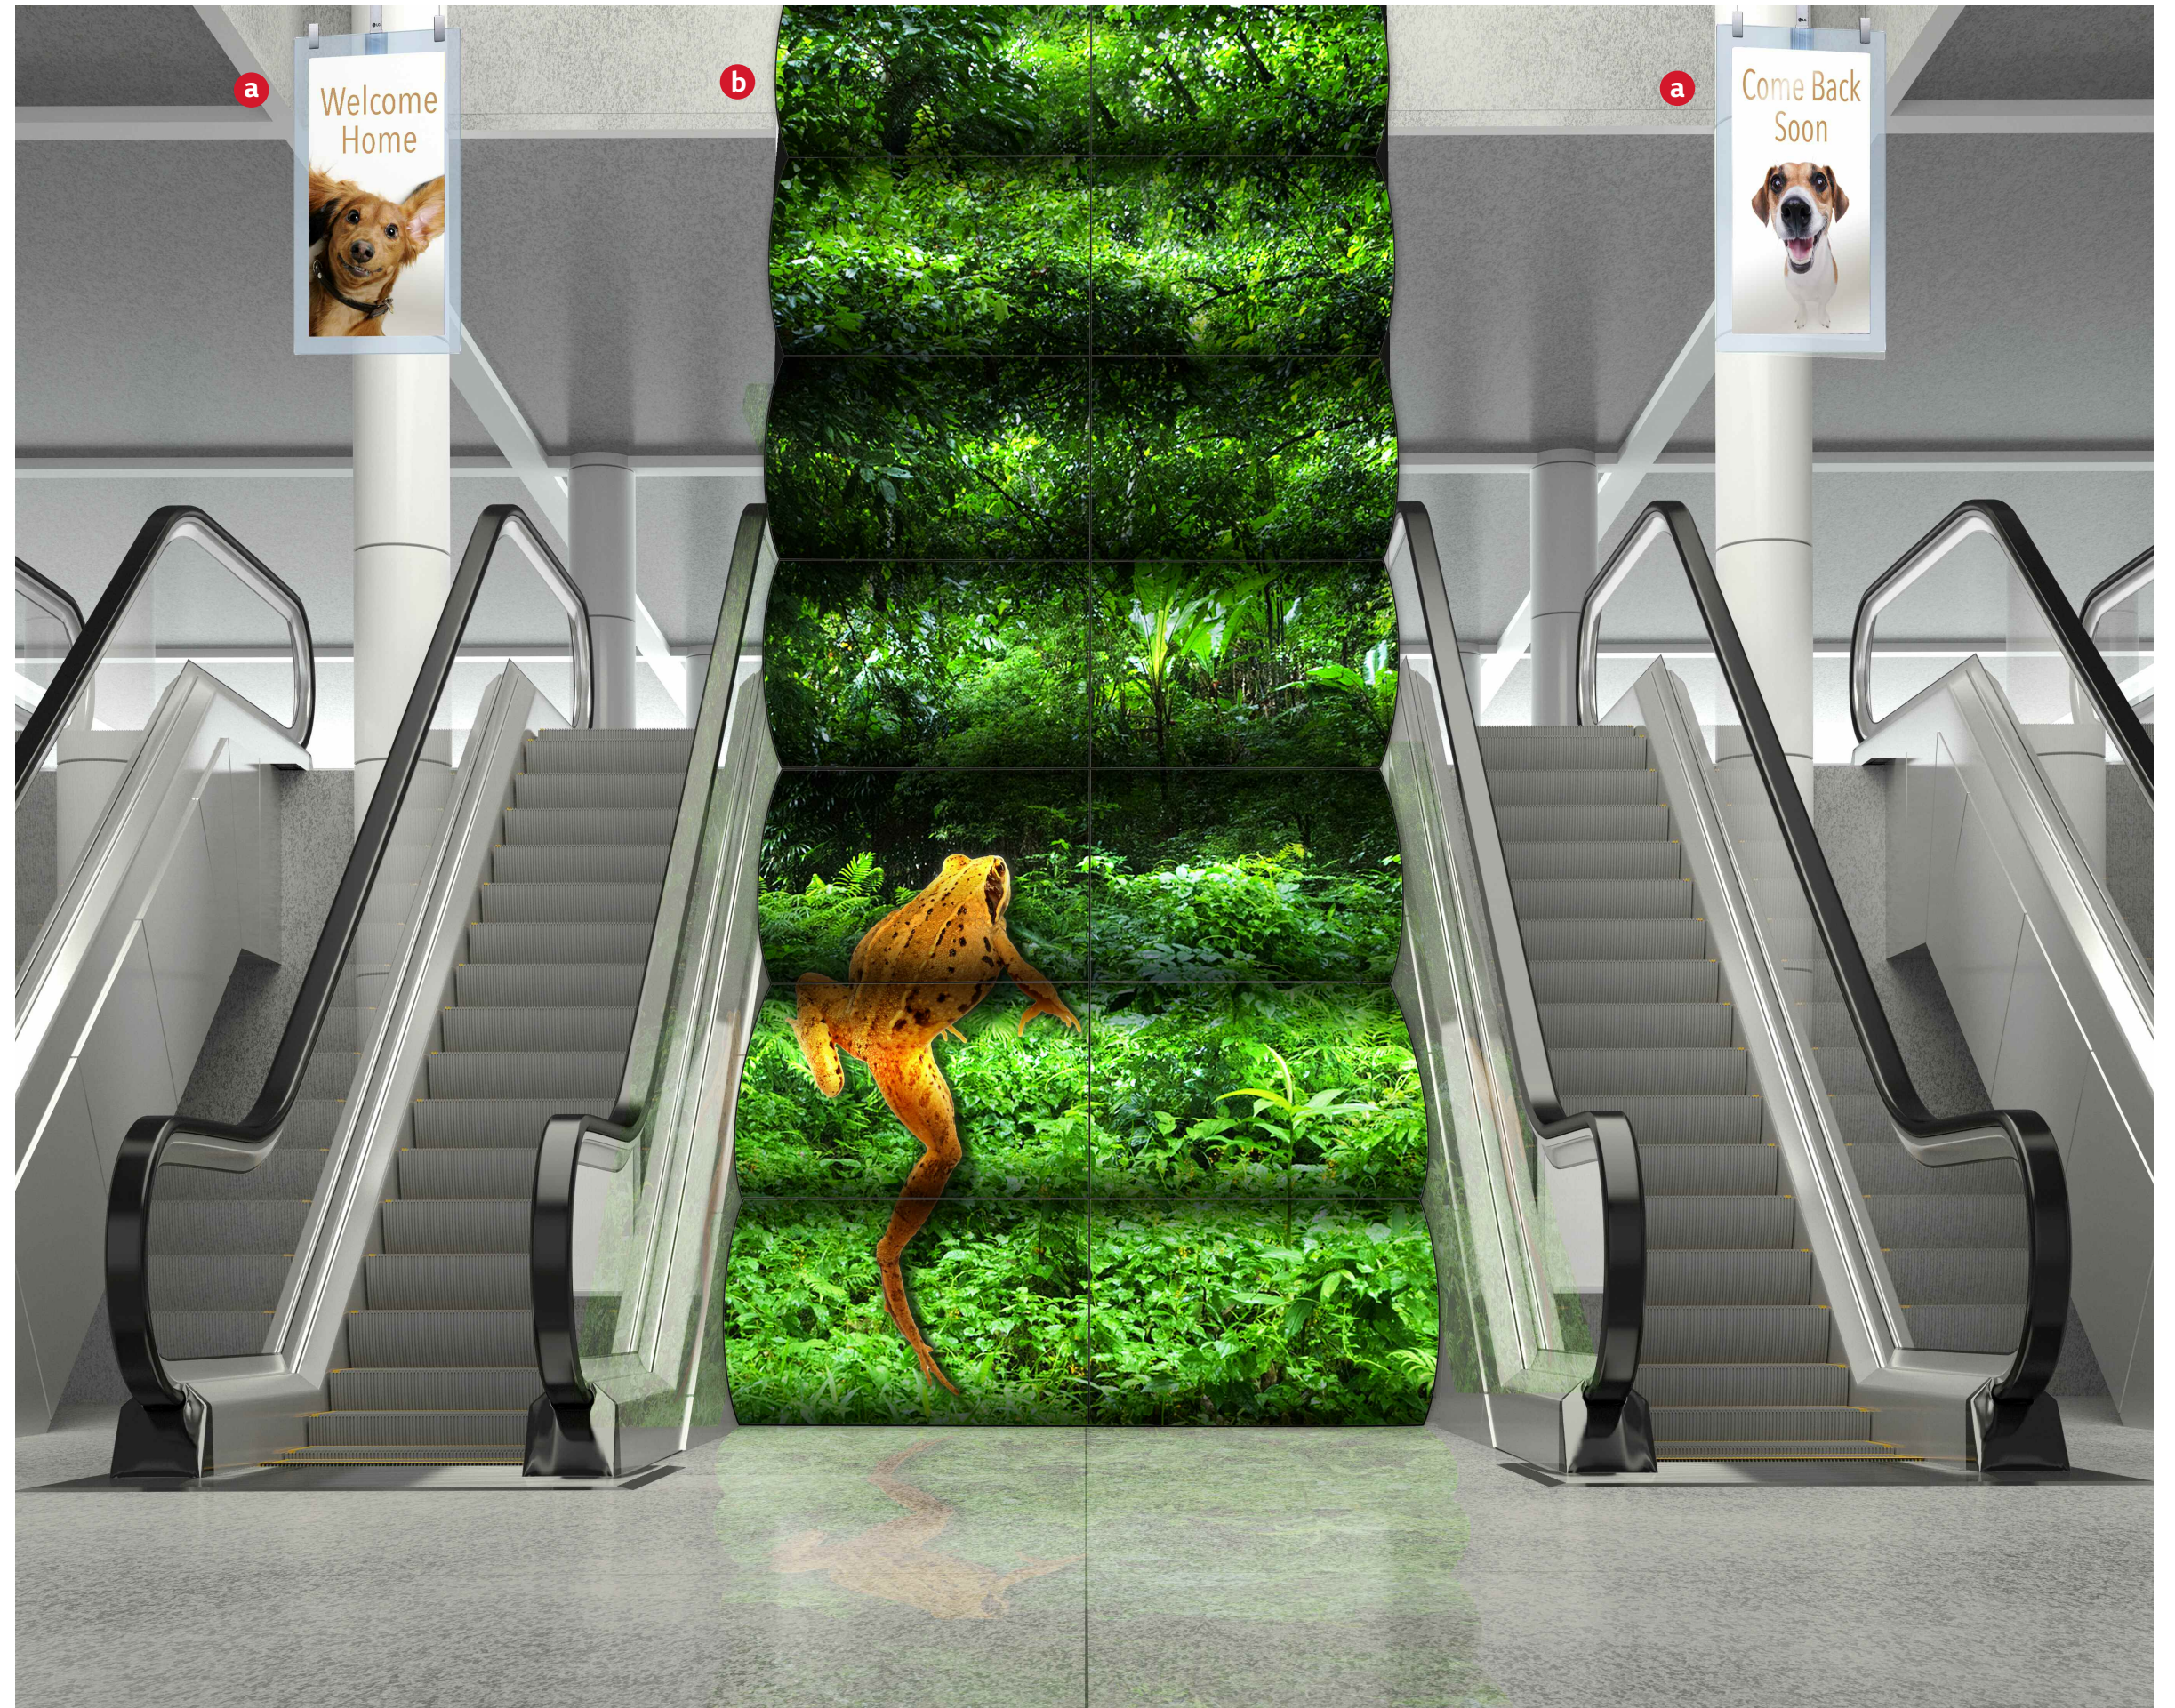

LOOKBOOK *Transportation*

- a LG Styler - S3RERB**
- Refresh Any Garments in Minutes with Steam Clothing Care System
 - Capacity 11.5 lb {5.2kg} / 3 Items + 1 {Pants}
 - Touch Control Hidden Display
 - TrueSteam®
 - Heat-Pump System {Inverter}
 - Gentle Dry
 - Sound On/Off
 - NFC Tag On Cycle Download {Android Mobile OS} {10 minute Default Course}
 - Interior Lights 3 LED {2 White, 1 Blue}
 - Reversible Door

- b UHD Commercial TV - 65UV340C**
- 65" class 64.6" diagonal
 - 3840 x 2160 {4K UHD}
 - Brightness 500cd/m²
 - WOL and SNMP
 - Crestron Connected® Certified Display DPM {Display Power Management}
 - 4K Upscaler
 - Public Display Mode



Layout 8
LOOKBOOK
Transportation

a Direct View Indoor LED - LAP Series

- 55" Class 54.9" diagonal
- High brightness 1,000 / 1,200 nit
- 6,000:1 Super contrast ratio
- LG Dynamic Contrast Algorithm
- SuperSign Lite, SuperSign C, SuperSign Simple Editor
- webOS
- Refresh Rate: 1920 Hz

b WQHD+ IPS Curved Ultrawide Monitor - 38CB99-W

- 37.5" 21:9 Curved UltraWide™
- 3840x1600
- AMD FreeSync™ Technology
- 1ms Motion Blur Reduction
- USB Type C
- USB 3.0 Quick Charge
- Bluetooth Speakers
- sRGB over 99%, Color Calibrated
- Black Stabilizer, Dynamic Action Sync
- OnScreen Control / My Display Presets / Screen Split 2.0 (PIP Mode)
- Tilt / Height Adjustable Stand



Layout 9
LOOKBOOK
Transportation

- a SuperSign™ Smart TV - 55LV640S**
- 55" Class 54.9" diagonal
 - 1920 x 1080 {FHD}
 - Brightness 400cd/m²
 - Bezel Width {L/R, U, B} : on bezel based {mm} 12.9, 12.9, 15.9
 - Bezel Width {L/R, U, B} : off bezel based {mm} 10.4, 10.4, 13.4
 - SuperSign Lite, SuperSign C, SuperSign Simple Editor
 - Triple XD Engine
 - Dynamic Color Enhancer
 - Clear Voice

- b webOS Commercial Signage - 65SM5KD**
- 65" class 64.5" diagonal
 - IPS Panel Technology
 - 1920 x 1080 {FHD}
 - Brightness 450 cd/m²
 - 0.5" mm {T/R/L}, 0.7" mm {B}
 - IP Streaming Protocol
 - Mirroring
 - Soft AP
 - BEACON
 - Dust & Humidity Protection



Layout 10

LOOKBOOK

Transportation

a Direct View Indoor LED - LAP Series

- 55" Class 54.9" diagonal
- High brightness 1,000 / 1,200 nit
- 6,000:1 Super contrast ratio
- LG Dynamic Contrast Algorithm
- SuperSign Lite, SuperSign C, SuperSign Simple Editor
- webOS
- Refresh Rate: 1920 Hz

b Ultra Stretch Display - 88BH7D

- 88" class
- IPS Panel Technology
- 32:9 aspect ratio
- 3840x1080 resolution
- Stand-alone
- Installation types:
 - Stand alone
 - Video wall
 - 360-degree video column
- Touch-Screen
- 4x Picture-in-Picture





LG Electronics USA, Inc. | HE B2B Division | 2000 Millbrook Drive | Lincolnshire, IL 60069

All images on screen are simulated. Design, specifications, and features subject to change without notice.
© Copyright 2017 LG Electronics USA, Inc. All rights Reserved. LG Life's Good, ProCentric and XD Engine are registered trademarks of LG Corp. ProIdiom is a registered trademark of Zenith Electronics Corporation. All other product and brand names are trademarks or registered trademarks of their respective companies

LOOKBOOK_Transportation_121713_PR