

_G UH5B Ultra HD Smart Platform





65" class (64.5" diagonal)

▶ 55UH5B

55" class (54.6" diagonal)

▶ 49UH5B

49" class (48.5" diagonal)















The UH5B Series with webOS signage, allows for customized apps that are easy to create using LG's Software Development Kit. The built-in Wi-Fi and SoC reduces total cost of ownership, simplifies installation, and managing content is easy and convenient.

KEY FEATURES

ULTRA HD RESOLUTION (3840X2160)

Excellent energy-efficiency and cost-savings with the M+ panel*, which decreases power consumption by 31% compared to an RGB panel.



High Efficiency Video Coding

Supports HEVC-based content which has the double data compression ratio than the H.264 so network traffic can be reduced by half.



Up-Scaling and Super Resolution

Up-scaling and Super Resolution technology enhance the quality of FHD content to near-UHD quality.





LOW POWER CONSUMPTION BY M+

Excellent energy-efficiency and cost-savings with the M+ panel*, which decreases power consumption by 31% compared to an RGB panel.







SoftAp

The UH5B with SoftAp software can operate as a wireless access point for mobile devices.



Content sharing is convenient through a Wi-Fi network.





QUAD CORE SOC (SYSTEM-ON-CHIP)

The High Performance SoC can execute several tasks at the same time and provides smooth content playback





EASY MAINTENANCE WITH REAL TIME REMOTE MONITORING


When an alarm occurs, an e-mail notification is sent using SuperSign C or SI SW through the SNMP Protocol. In case of malfunctions or errors, real-time remote care is available





SLIM DESIGN | NARROW BEZEL

LG's monitors featuring a Direct-LED Backlight, have a stylishly slim design that fit perfectly into narrow spaces while ensuring high energy efficiency. The slim bezels are a perfect fit in confined areas and are easy to install.



LG's webOS enabled displays feature an all-in-one hardware and software platform that allows software developers to install and run their software in a more simplified solution. This approach offers architecture that enables easy-to-build web-based apps across multiple platforms, This approach offers software architecture, including iOS®, Android® and Windows®. Using LG's SDK, integrators can construct their own ideal customized signage solution for their clients.





Run messages on up to 50 display screens in the form of a billboard without any additional hardware.

Advertisements, information and broadcast content can be arranged on the same screen to attract attention and deliver specific messaging to your customer base.

LG SuperSign Lite Usage Example

Different layout and designs available.






CONFORMAL COATING

Conformal coating helps protect against water, dust and iron powder deposits which accumulate in harsh environments, saving on expensive installation and added enclosure costs.



With Conformal Coating



Without Conformal Coating

BEACON CONVENIENT SUPPORT


With BEACON and Bluetooth Low Energy (BLE) supported by UH5B, retail stores can provide coupons and information in real-time.





OPS (OPEN PLUGGABLE SPECIFICATION) KIT / HDBASET BOX

The UH5B provides an OPS Kit to connect a third-party OPS player or HDBaseT box. Users have the flexibility to choose any media player as long as it complies with OPS.



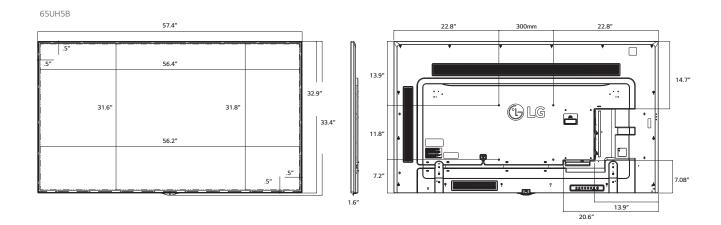

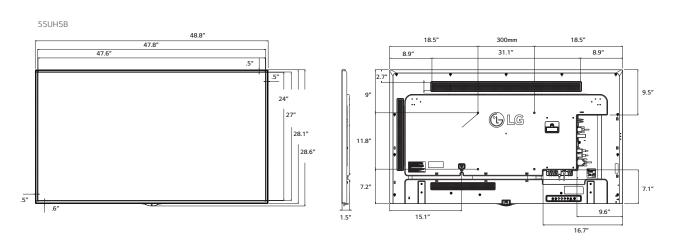

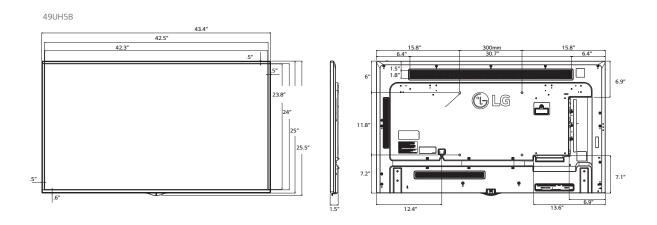

1 SPEAKER OUT

2 IR & LIGHT


5 LAN

6 AUDIO IN

AUDIO OUT

SENSOR

3 PIXEL SENSOR4 HDMI

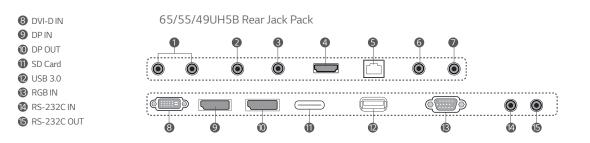

UH5B

Ultra HD Smart Platform

▶ 65UH5B

65" class (64.5" diagonal)

▶ 49UH5B

49" class (48.5" diagonal)



55" class (54.6" diagonal)

PANEL	Model	65UH5B	55UH5B	49UH5B
	Screen Size	65" class (64.5" diagonal)	55" class (54.6" diagonal)	49" class (48.5" diagonal)
	Panel Technology	(04.5 diagonal)	IPS	(40.5 diagonal)
	Aspect Ratio		16:9	
	Native Resolution		3840 x 2160 (UHD)	
	Pixels (H x V x 3)		24,883,200	
	Brightness		500cd/m ²	
	Contrast Ratio Dynamic CR		1,000:1 4,000,000:1	
	Color Gamut		68%	
	Viewing Angle		178° x 178°	
	(H x V)			
	Color Depth Response Time		1.06 Billion 8ms (G to G)	
	Surface Treatment		Low Haze 1%	
	Life Time (Typical) Operation Hours		50,000 Hrs 24 Hr	
	Orientation		Portrait & Landscape	
	HDMI		Yes (1), HDMI /HDCP2.2	
	DP		Yes (1), DP /HDCP1.3	
	DVI-D RGB		Yes (1), HDCP2.2	
	Audio In		Yes (1) Yes (1), RGB/DVI	
	RS232C IN		Yes (1)	
	RJ45		Yes (1)	
	IR Receiver		Yes (1)	
	Pixel Sensor USB (USB3.0)		Yes (1) Yes (1)	
	SD Card		Yes (SDHC/Full Size)	
	HDTV Formats	HE	OMI: 720p, 1080i, 1080p, 216	50p
OUTPUT	DP Out Audio Out		Yes (1), SST/DP1.2a Yes (1)	
	External Speaker Out		Yes (L/R), 6 ohm	
SPECIAL	RS232C OUT		Yes (1)	
FEATURES	Temperature Sensor		Yes	
	Auto Brightness Sensor		Yes	
	Cooling FAN		No	
	Tile Mode		Yes (Up to 15x15)	
	Natural Mode @Tile Mode		Yes	
	Source Selection	RGE	B, HDMI, DVI, DP, OPS, USB, SD	Card
	Brightness/Contrast/ Backlight		Yes	
	Position/Size		Yes	
	Auto Config/Phase		Yes	
		English Franch Gorman Spa		Simplified) Chinese (Original)
	Language (OSD)	Portuguese (Brazil), Si Portuguese (Brazil), Si	nish, Italian, Korean , Chinese (! wedish, Finnish, Norwegian, Da Iguese (Europe), Dutch, Czech,	nish, Russian, Japanese, Greek
	ISM Method	Normal, White Wash, Color * S	Wash, User image, User Video, O cheduling is supported addition	rbiter, Inversion, Washing Bar nally
	Advanced		Color, Color Gamut, Skin Color, S	
	Time	Clock, On	/Off Timer, Auto Off, Automati	c Standby
	Input Label Power On Status		Yes (PC/DTV) Standby, PWR, LST	
	Key Operation		R operation, Local key operation	ın
	DPM Select		Yes	
	DPM Wake Up	Yes (Analog: Sy	nc only, Digital: Clock / Clock+l	Data selectable)
	Energy Saving	Yes (Auto,	Minimum, Medium, Maximum,	Screen off)
	Smart Energy Saving		Yes	
	File Play With USB	0.0	Yes	CD)
	Internal Memory Wi-Fi	80	GB (System 4GB + Available 40 802.11n combo built-in	ob)
	USB Cloning	Logo image	download, Sent to USB, Recei	ve from USB
	Contents Scheduling	Logo il lage	USB, Internal memory, SD Card	
	Calibration Mode		Yes	
	DST		Yes	
	Sync Mode		Time sync, Content sync	
	PM Mode		Yes	
	Frameware Update (LAN)		Yes	
	Local Time Auto Setting		Yes	

LGsolutions.com

SPECIAL FEATURES	Model	65UH5B	55UH5B	49UH5B	
FEATURES	Overlay Touch		Yes ('15.May)		
	Still Image HDMI-CEC	Yes Yes			
	Wake On LAN	Yes			
	Digital Audio Input	Yes			
	Power On Delay Pivot Mode	0 - 250 Yes			
	Content Rotation	0,90, 270			
	OSD Portrait Mode	0,90, 270			
	Intelligent Auto	Yes			
	Password Change	Yes			
	SetID Setup	Manual, Auto			
	Configuration Setup	USB auto Playback			
	Lock Mode	USB			
	Fail Over	USB, SD card, RGB, DP, OPS, DVI, HDMI, Internal Memory			
	SuperSign Server Setup	Signage name, Server IP setting, Server IP Status			
	Media Share	Mirroring, SoftAP			
	Beacon	On/Off			
	Embedded Template	Yes			
	Check Screen	Yes			
	OPS PC Power Control	Sync On, Sync On/Off, Disable			
ENVIRONMENT CONDITIONS	Operation Temperature	32 °F to104 °F			
	Operation Humidity	10 % to 80 %			
POWER	Power Supply	100-240V-, 50/60Hz			
	Power Type Typical	130W	Built-In Power 116W	100W	
	**	90W		70W	
	Smart Energy Saving	9000	80W	7000	
	DPM Power Off		0.5W		
AUDIO	Balance	0.5W Yes			
7.05.0	Audio Power	20W (10W x 2) for External Speaker			
	Speaker On/Off	Yes			
	Clear Voice II	Yes			
	Virtual Surround Plus	Yes			
	Equalizer	Yes			
CERTIFICATION	Sound Mode	Standard, News, Music, Cinema, Sports, Game			
CERTIFICATION	Safety / EMC / ErP / ENERGY STAR ®	UL / cUL / CB / TUV / KC FCC Class "A" / CE / KCC No / No			
MEDIA PLAYER COMPATIBILITY	OPS Type Compatible	Yes			
COMPATIBILITY	External Media Player	Yes (MP500/MP700)			
SOFTWARE COMPATIBILITY	SuperSign-w lite	Yes			
	SuperSign-c	Yes			
	Bezel Color	Black 11 9mm (T) 12 4mm (R/L)			
	Bezel Width		m (R/L), 15.7mm (B)	11.9mm (T), 12.4mm (R/L), 15.5mm (B)	
	WxHxD Weight	57.4" x 33.4" x 1.6" 57.3lbs	48.8" x 28.6" x 1.5" 36.6lbs	43.4" x 25.5" x 1.5" 29.3lbs	
	w/Optional Stand WxHxD	57.4" x 36.0" x 12.4"	48.8" x 31.1" x 11.7"	43.4" × 28.1" × 11.7"	
	w/Optional Stand	60.4lbs	39.9lbs	32.6lbs	
	Weight	00. TID3	55.5103	52.003	
	w/Optional Stand & Speakers (WxHxD)	57.4" x 36.1" x 12.4"	48.8" x 31.1" x 11.7"	43.4" x 28.1" x 11.7"	
	w/Optional Stand & Speakers Weight	61.9lbs	41.4lbs	34.2lbs	
	Carton (WxHxD) Carton Weight	61.5" x 38.2" x 7.5" TBD	52.4" x 31.8" x 6.7" 45.2lbs	47.1" x 29.9" x 6.5" 36.6lbs	
	VESA™ Compatible	300 mm x 300 mm			
ACCESSORIES	Basic	Remote Controller (include battery 2ea), Power Cord, QSG, RGB Cable, Regulation Book, Phone to RS232C Gender, Memory cover			
	Optional	Speaker (SP-5200), Stand (ST-651T), Pixel sensor (KT-SP0), Media player, Wall bracket (LSW350B), VESA Adapter (AM-B330S), OPS Kit (KT-OPSA), HD Base T (EB-B100)			
OTHER	UPC	7 19192 19847 0	7 19192 19846 3	7 19192 19845 6	
WARRANTY	3-Year Limited	Warranty Parts/Labor/Backli	ght Extended warranty optio	ns are also available	



Customer Service: 888.865.3026 www.LGsolutions.com/support

Contact your LG Regional Sales Representative: Channel: 800.897.8871 Hospitality: 800.228.1236 E-mail: info@LGsolutions.com


SPEC_UH5B_061652_PR











@ Copyright 2016 LG Electronics USA, Inc. All Rights Reserved. "LG Life's Good" is a registered trademark of LG Corp.

ENERGY STAR is a registered trademark of the U.S. Environmental Protection Agency. In Plane Switching is a trademark of LG Philips LCD Ltd. VESA is a trademark of Video Electronics Standards Association. HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC.

All other product and brand names are trademarks or registered trademarks of their respective companies.





