

Virtually Seamless Video Wall

The LG 0.44mm Even Bezel Video Wall

55SVH7E


LG has finally introduced the world's first* under 1 mm gap video wall with 0.44 mm even bezel. Instead of contrasting the reduced bezel size with previous bezels, LG's 55SVH7E highlights the similarity of its display with the bezel-less 'original' picture. Providing the perfection of an authentic nearly-seamless view, it targets markets which traditional video walls have not been able to access.

* As of November 2018



Groundbreaking 0.44mm Even Bezel

The unprecedented razor-thin bezel – 0.44 mm even bezel and 0.88 mm bezel to bezel (verified by Nemko*), makes content look like the actual original image by depicting a subject perfectly true to form, without any distortions. Seamlessly assembled to create a large video wall, the 55SVH7E will provide an even more immersive experience to viewers.

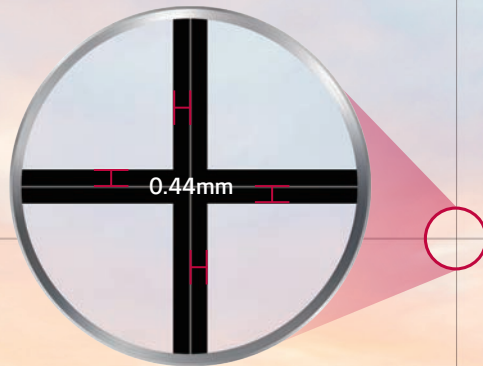

* The 0.44mm even panel bezel and 0.88mm BtB size (borderless type, no metal bezel) have been verified by Nemko, a global institution that tests and certifies electrical equipment.

Nearly Gapless Video Wall

55SVH7E

Vivid and Dynamic Picture Quality

Higher Viewing Angle

Large screens are often positioned higher than eye level, making uniform picture quality essential for video walls. The viewing angle of the 55SVH7E is superior to that of conventional video walls, allowing it to display vivid colors throughout the screen with no distortion – even in areas that are problematic for other large screens.



Conventional non-IPS Viewing Angle



60° Elevated Viewing Angle*
(LG 55SVH7E)

Wider Viewing Angle

It is well known that LG IPS panel technology enables better control of liquid crystals, which in turn allows the screen to be viewed from virtually any angle. Because of this, the 55SVH7E captures the attention of and captivates more viewers with lifelike colors, regardless of their viewing position.



Wider Viewing Angle

* Results based on in-house testing. Test results may vary depending on environment and measuring equipment.

Virtually Gapless Video Wall

55SVH7E

Vivid and Dynamic Picture Quality

Uniform Color Expression

Poor uniformity around bezel boundaries can give the corners a darker appearance, which doesn't look good on a large screen. However, the 55SVH7E has enhanced uniformity, even within the four corners of the display, to deliver vivid and consistent color throughout the screen.



* Uniformity among 13 points on the screen based on in-house testing. Test results may vary depending on environment and measuring equipment.

Image Gap Reduction

The 55SVH7E includes an image improvement algorithm from LG that can reduce image gaps among tiled displays when playing back videos. Objects located on the bezel boundaries are adjusted for a seamless viewing experience.



* "Conventional" refers to displays which do not include an image improvement algorithm.

Virtually Gapless Video Wall

55SVH7E

Powerful Smart Signage Platform

High Performance and Great Scalability

Thanks to its built-in System on Chip and webOS smart signage platform, the 55SVH7E can execute several tasks at once while providing smooth content playback without the need for a media player. Because webOS supports HTML5 as a web-based platform and an SDK*, it is even easier for system integrators to build and optimize their web apps.



* Software Development Kit

Flexible Content Creation

Several different videos* can be played simultaneously via web apps, and various animation effects, such as scaling or rotating, are added to content using ** Cascading Style Sheets transition effects. Real-time streaming*** is also available, providing the flexibility to organize and diversify content free from capacity limits.



* The current 2 video tags may expand to 4 video tags in the 3Q of 2019.

** Cascading Style Sheets

*** Supported protocols : RTSP, RTP, HLS, UDP Multicast


Virtually Gapless Video Wall

55SVH7E

User-Friendly Smart Signage UX


Intuitive Menu Structure

The menu structure has been optimized for commercial use. It simplifies approach flows and groups similar functions together, adopting a more intuitive user interface for ease of use. This way users can avoid trial-and-error when exploring desired functions and managing displays.

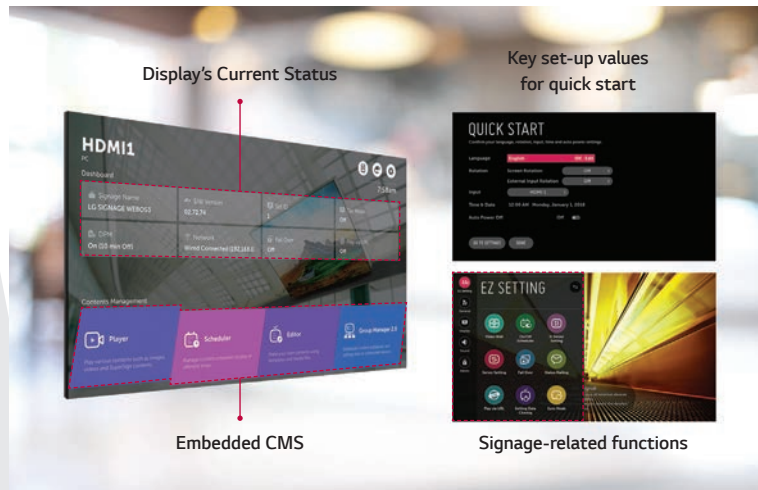

Dedicated GUI for Portrait Orientation

Conventional user interfaces have been designed based on landscape-oriented consumer TV usage, so On Screen Display (OSD) wasn't well-suited for screens in portrait mode. The OSD of the 55SVH7E, however, consists of a dedicated menu format with bigger font sizes and a 9:16 ratio, creating a comfortable and efficient business environment.

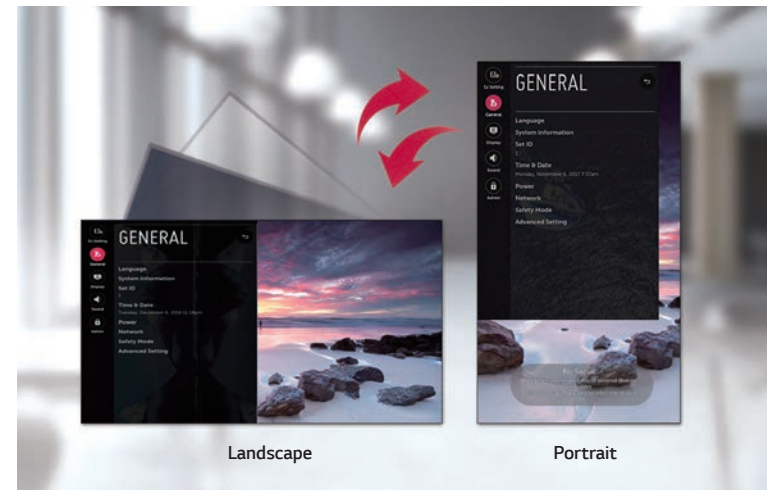


Virtually Gapless Video Wall

55SVH7E

User Convenience

Easy Color Adjustment

Depending on the content, the color temperature of the display can be easily adjusted in increments of 100K using a remote control.

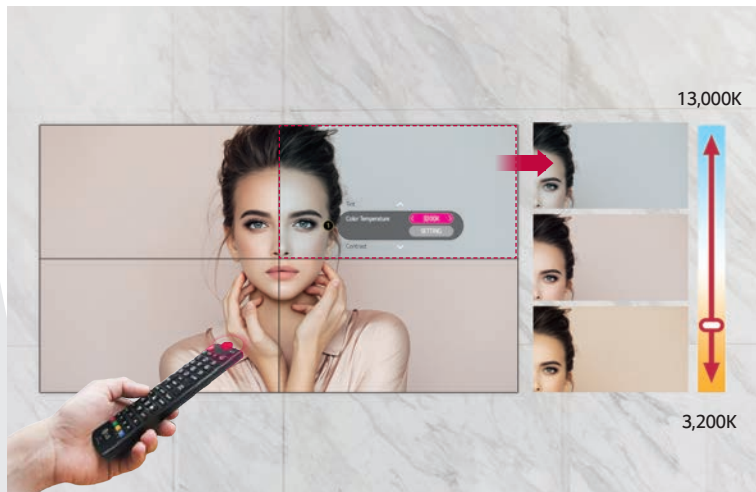

Simple White Balance Adjustment

In conventional video walls, white balance has been adjustable only in "full-white" mode, but the 55SVH7E allows you to modify each value of grayscale to achieve more detailed and precise white balance adjustment.



Virtually Gapless Video Wall

55SVH7E

User Convenience

LAN Daisy Chain Management

A LAN daisy chain allows you to execute commands to control and monitor video walls and even update their firmwares at once.



Real-Time Care Service


The maintenance gets easier and faster with an optional service Signage 365 Care*, a cloud service solution provided by LG. It remotely manages the status of displays in client workplaces for fault diagnosis and remote-control services, ensuring the stable operation of client businesses.




* The availability of Signage 365 Care service can differ by region, so please contact the LG sales representative in your region for further details.

Dimensions

55"

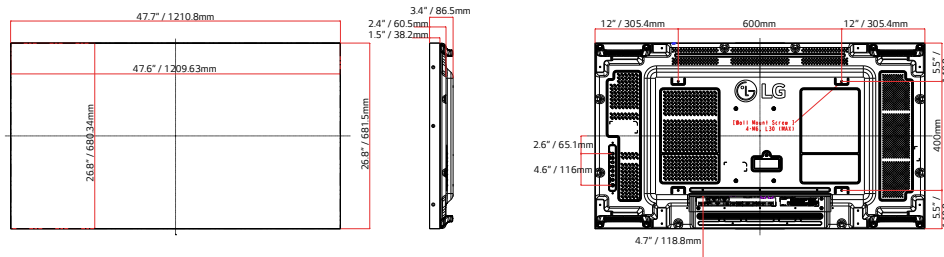

Connectivity

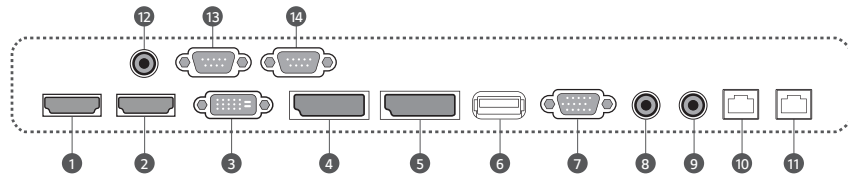

- 1 HDMI IN 1
- 2 HDMI IN 2
- 3 DVI-D IN
- 4 DP IN
- 5 DP OUT
- 6 USB 2.0 IN
- 7 RGB IN
- 8 AUDIO IN
- 9 AUDIO OUT
- 10 LAN IN
- 11 LAN OUT
- 12 IR IN
- 13 RS232C IN
- 14 RS232C OUT



Specifications

55SVH7E

	Screen Size	55"
	Panel Technology	IPS
	Aspect Ratio	16 : 9
	Native Resolution	1,920 x 1,080 (FHD)
	Brightness (Typ.)	700 nits
	Contrast Ratio	1,200:1
PANEL	Viewing Angle (H x V)	178 X 178
	Response Time	8 ms (G to G)
	Surface Treatment	Haze 3%
	Life Time (Typ.)	60,000 Hrs
	Operation Hours	24 Hrs
	Orientation	Landscape & Portrait
	Input	HDMI (2), DP, DVI-D, RGB, Audio, USB 2.0
CONNECTIVITY	Output	DP, Audio
	External Control	RS232C In/out, RJ45 In/out, IR In
	Bezel Color	Black
	Bezel Width	0.44 mm (Even)
MECHANICAL SPECIFICATION	Monitor Dimension (W x H x D)	47.7" x 26.8" x 3.4" / 1,210.51 x 681.22 x 86.5 mm
	Weight (Head)	37 lbs / 16.8 kg
	Carton Dimensions (W x H x D)	53.1" x 33.7" x 10.4" / 1,353.0 x 855.0 x 263.0 mm
	Packed Weight	52 lbs / 23.6 kg
	Handle	Yes
	VESA™ Standard Mount Interface	600 x 400 mm
KEY FEATURE	Internal Memory 8GB (System 4GB, Available 4GB), Temperature Sensor, Tile Mode (Up to 15x15), Natural Mode @Tile Mode, ISM Method, DPM Select, Smart Energy Saving, Contents Scheduling (USB, Internal Memory), USB Cloning, Easy Brightness Control, Calibration Mode, Content Rotation, OSD Portrait Mode, Sync Mode, PM Mode, Still Image Diagnosis, HDMI-CEC ¹ , Wake on LAN, Fail Over, No Signal Image (Up to 5MB), Embedded Template, Check Screen (via Pixel Sensor), OPS Power Control, Scan Inversion (with Pivot Mode)	
ENVIRONMENT CONDITIONS	Operation Temperature	32°F to 104°F / 0°C to 40°C
	Operation Humidity	10% to 80%
POWER	Power Supply	100-240V~, 50/60Hz
	Power Type	Built-In Power
	Power Consumption	Typ. 170 W Max. 220 W
CERTIFICATION	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1
	EMC	FCC Class "A" / CE / KC
	ErP / Energy Star	N/A / Yes (Energy Star 7.0)
MEDIA PLAYER COMPATIBILITY	OPS Type Compatible	Yes (Playback)
	External Media Player Attachable	Yes (MP500/MP700)
SOFTWARE COMPATIBILITY	Content Management Software	SuperSign CMS
	Control and Monitoring Software	SuperSign Control / Control+
ACCESSORIES	Basic	Remote Controller, Power Cord, RS232C Cable, LAN Cable, DP Cable, IR Receiver, Guide Bracket, Screws, Manual
	Optional	Wall Mount (Landscape: WM-L640V, Portrait: WM-P640V), OPS Kit (KT-OPSA)
OTHER	Warranty	3-Year Limited Warranty
	UPC	7 19192 62471 9

- <http://www.lg.com/us/business/commercial-display>
- <http://www.twitter.com/LGCommDisplays>
- <http://www.facebook.com/LGcommercialdisplays>
- <http://www.linkedin.com/company/lg-commercial-displays-usa>
- <http://www.youtube.com/lgcommercialdisplayusa>

LG may make changes to specifications and product descriptions without notice.
 Copyright © 2018 LG Electronics Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp.
 The names of products and brands mentioned here may be the trademarks of their respective owners.
 SPEC_55SVH7E_111837_PR

