


LG PREMIUM FINE-PITCH LED DISPLAY

LAPE Series



※ Actual on-site appearance may differ from the above simulated scene.

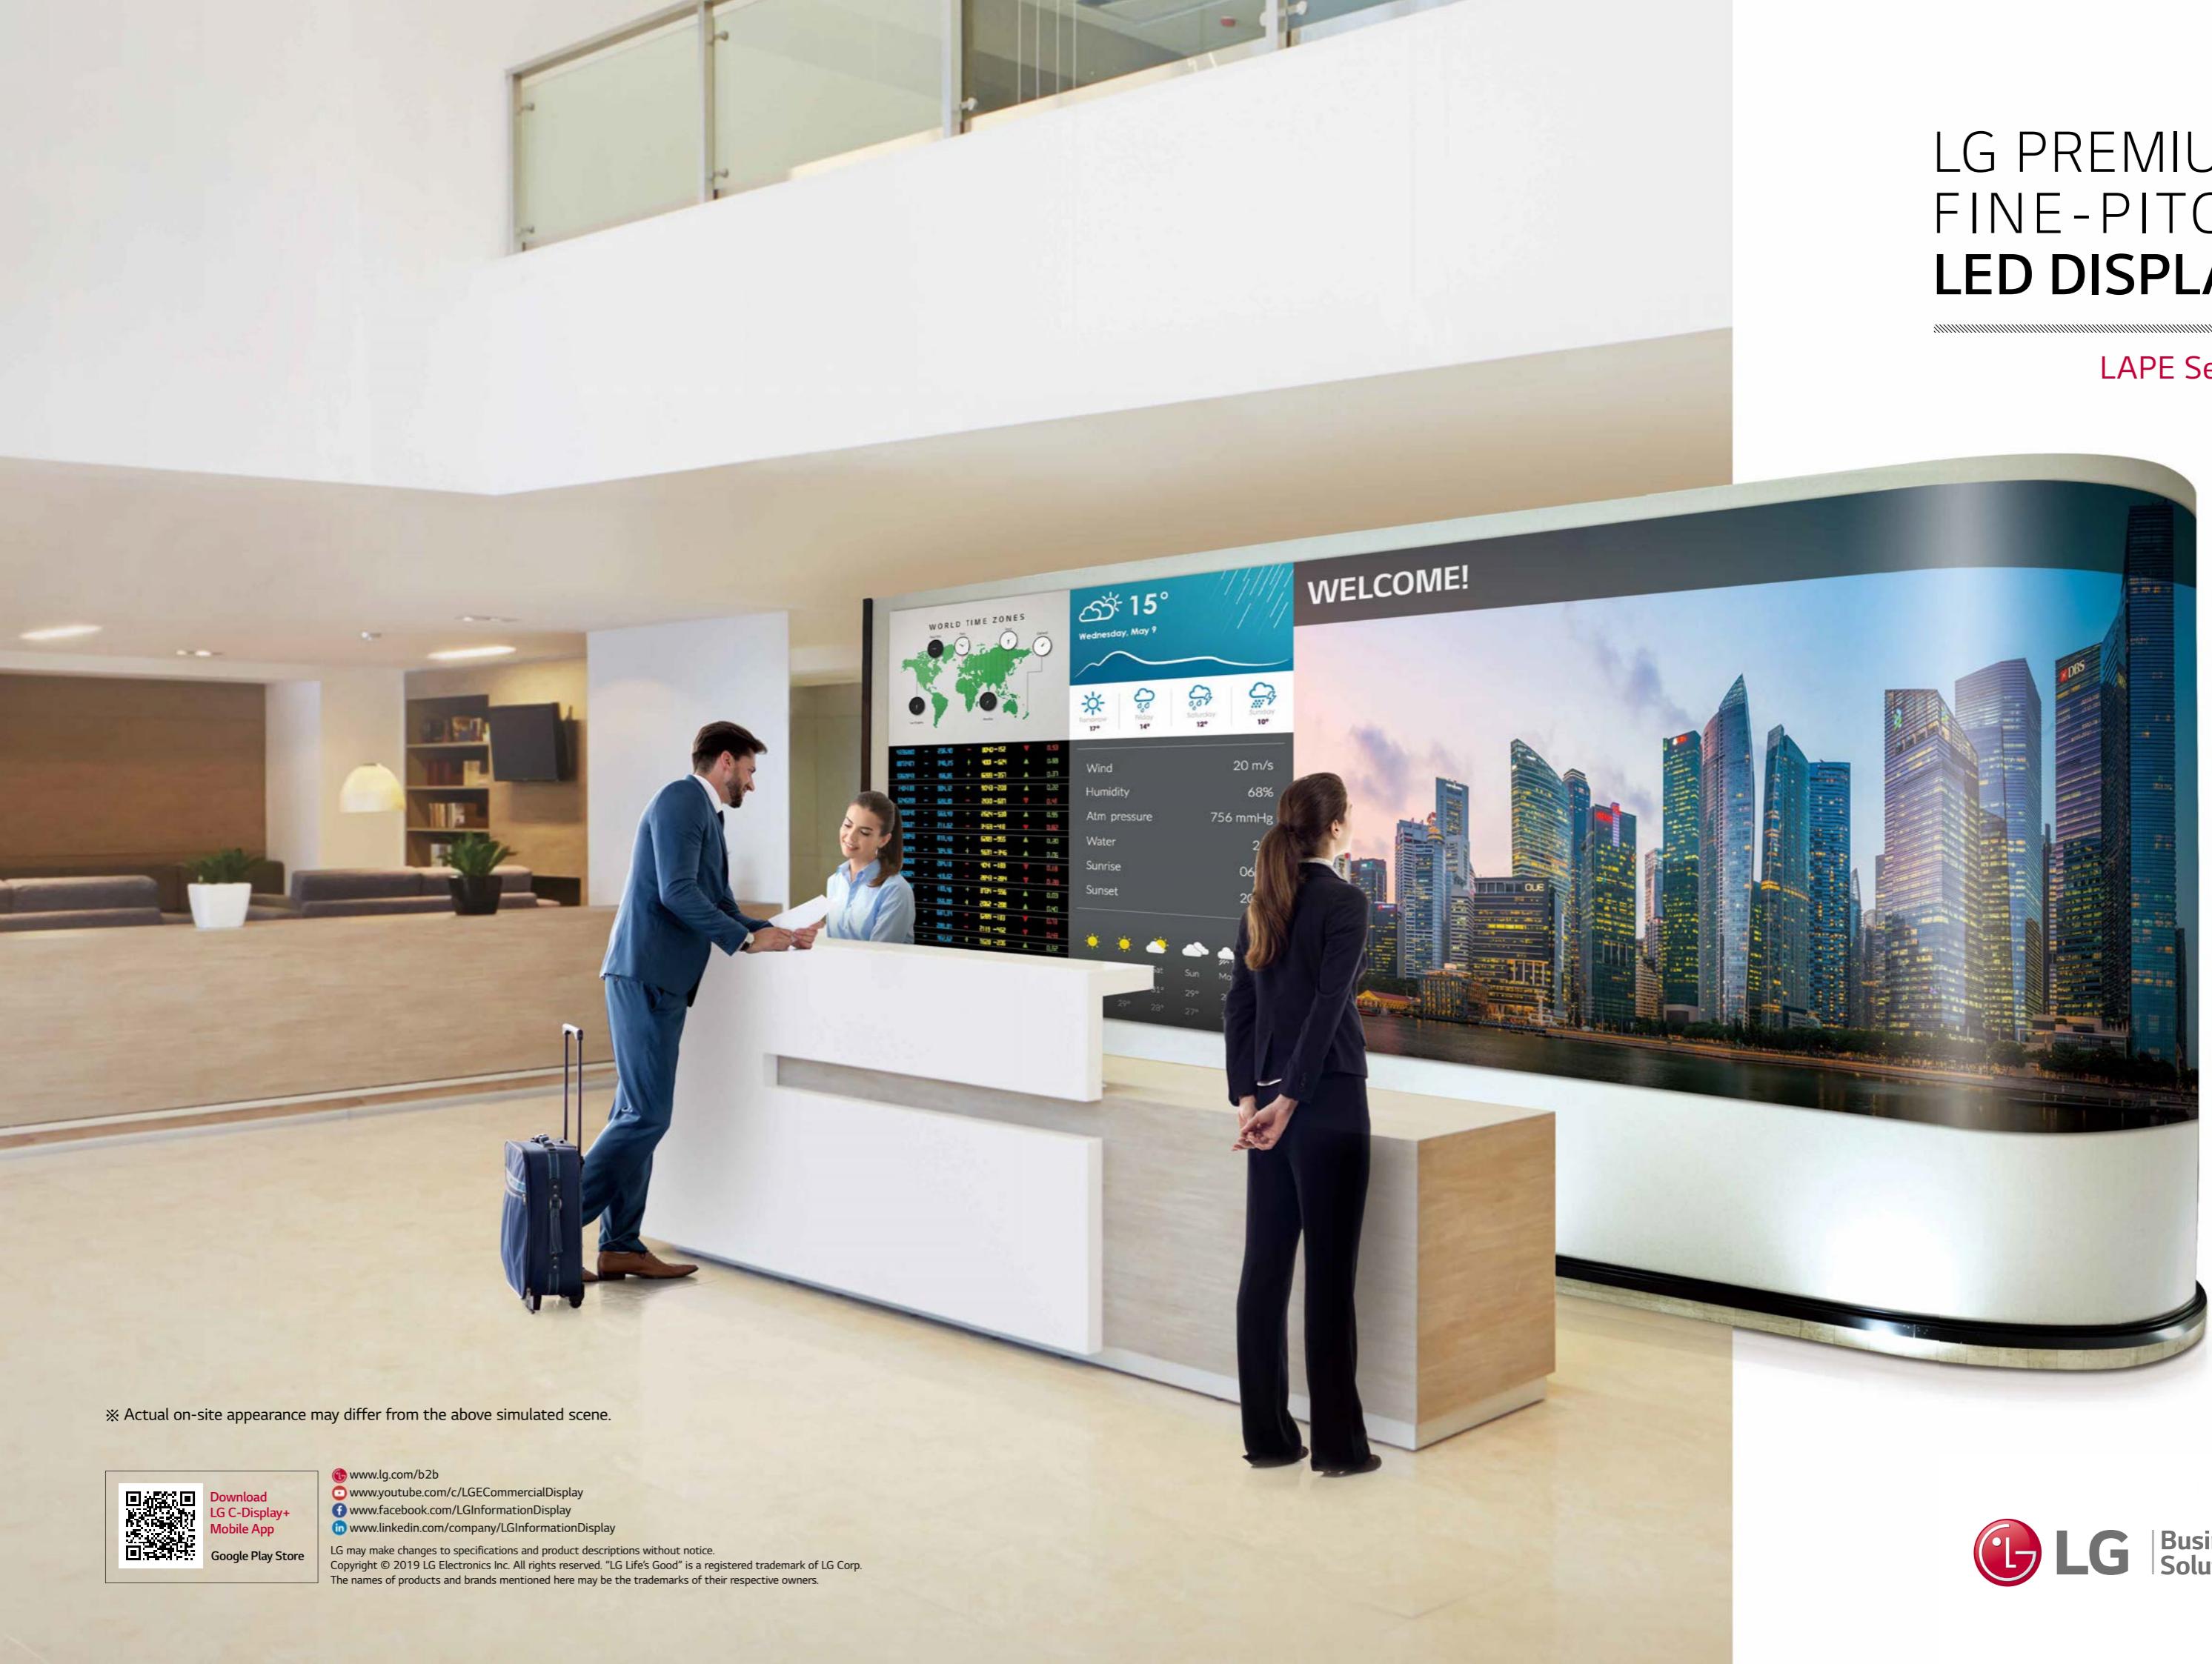


- www.lg.com/b2b
- www.youtube.com/c/LGECommercialDisplay
- www.facebook.com/LGInformationDisplay
- www.linkedin.com/company/LGInformationDisplay

LG may make changes to specifications and product descriptions without notice.
Copyright © 2019 LG Electronics Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp.
The names of products and brands mentioned here may be the trademarks of their respective owners.

An artistic landmark with dynamic content brings new horizons to the LED signage world

Boasting detailed color and super contrast, LG's LAPE series brings content to life through freedom of design, giving it outstanding presence as a work of media art. A world-class slim screen was developed thanks to modular type architectural design concepts and flexible LDM. The LAPE series brings technological innovation and artistic values together.

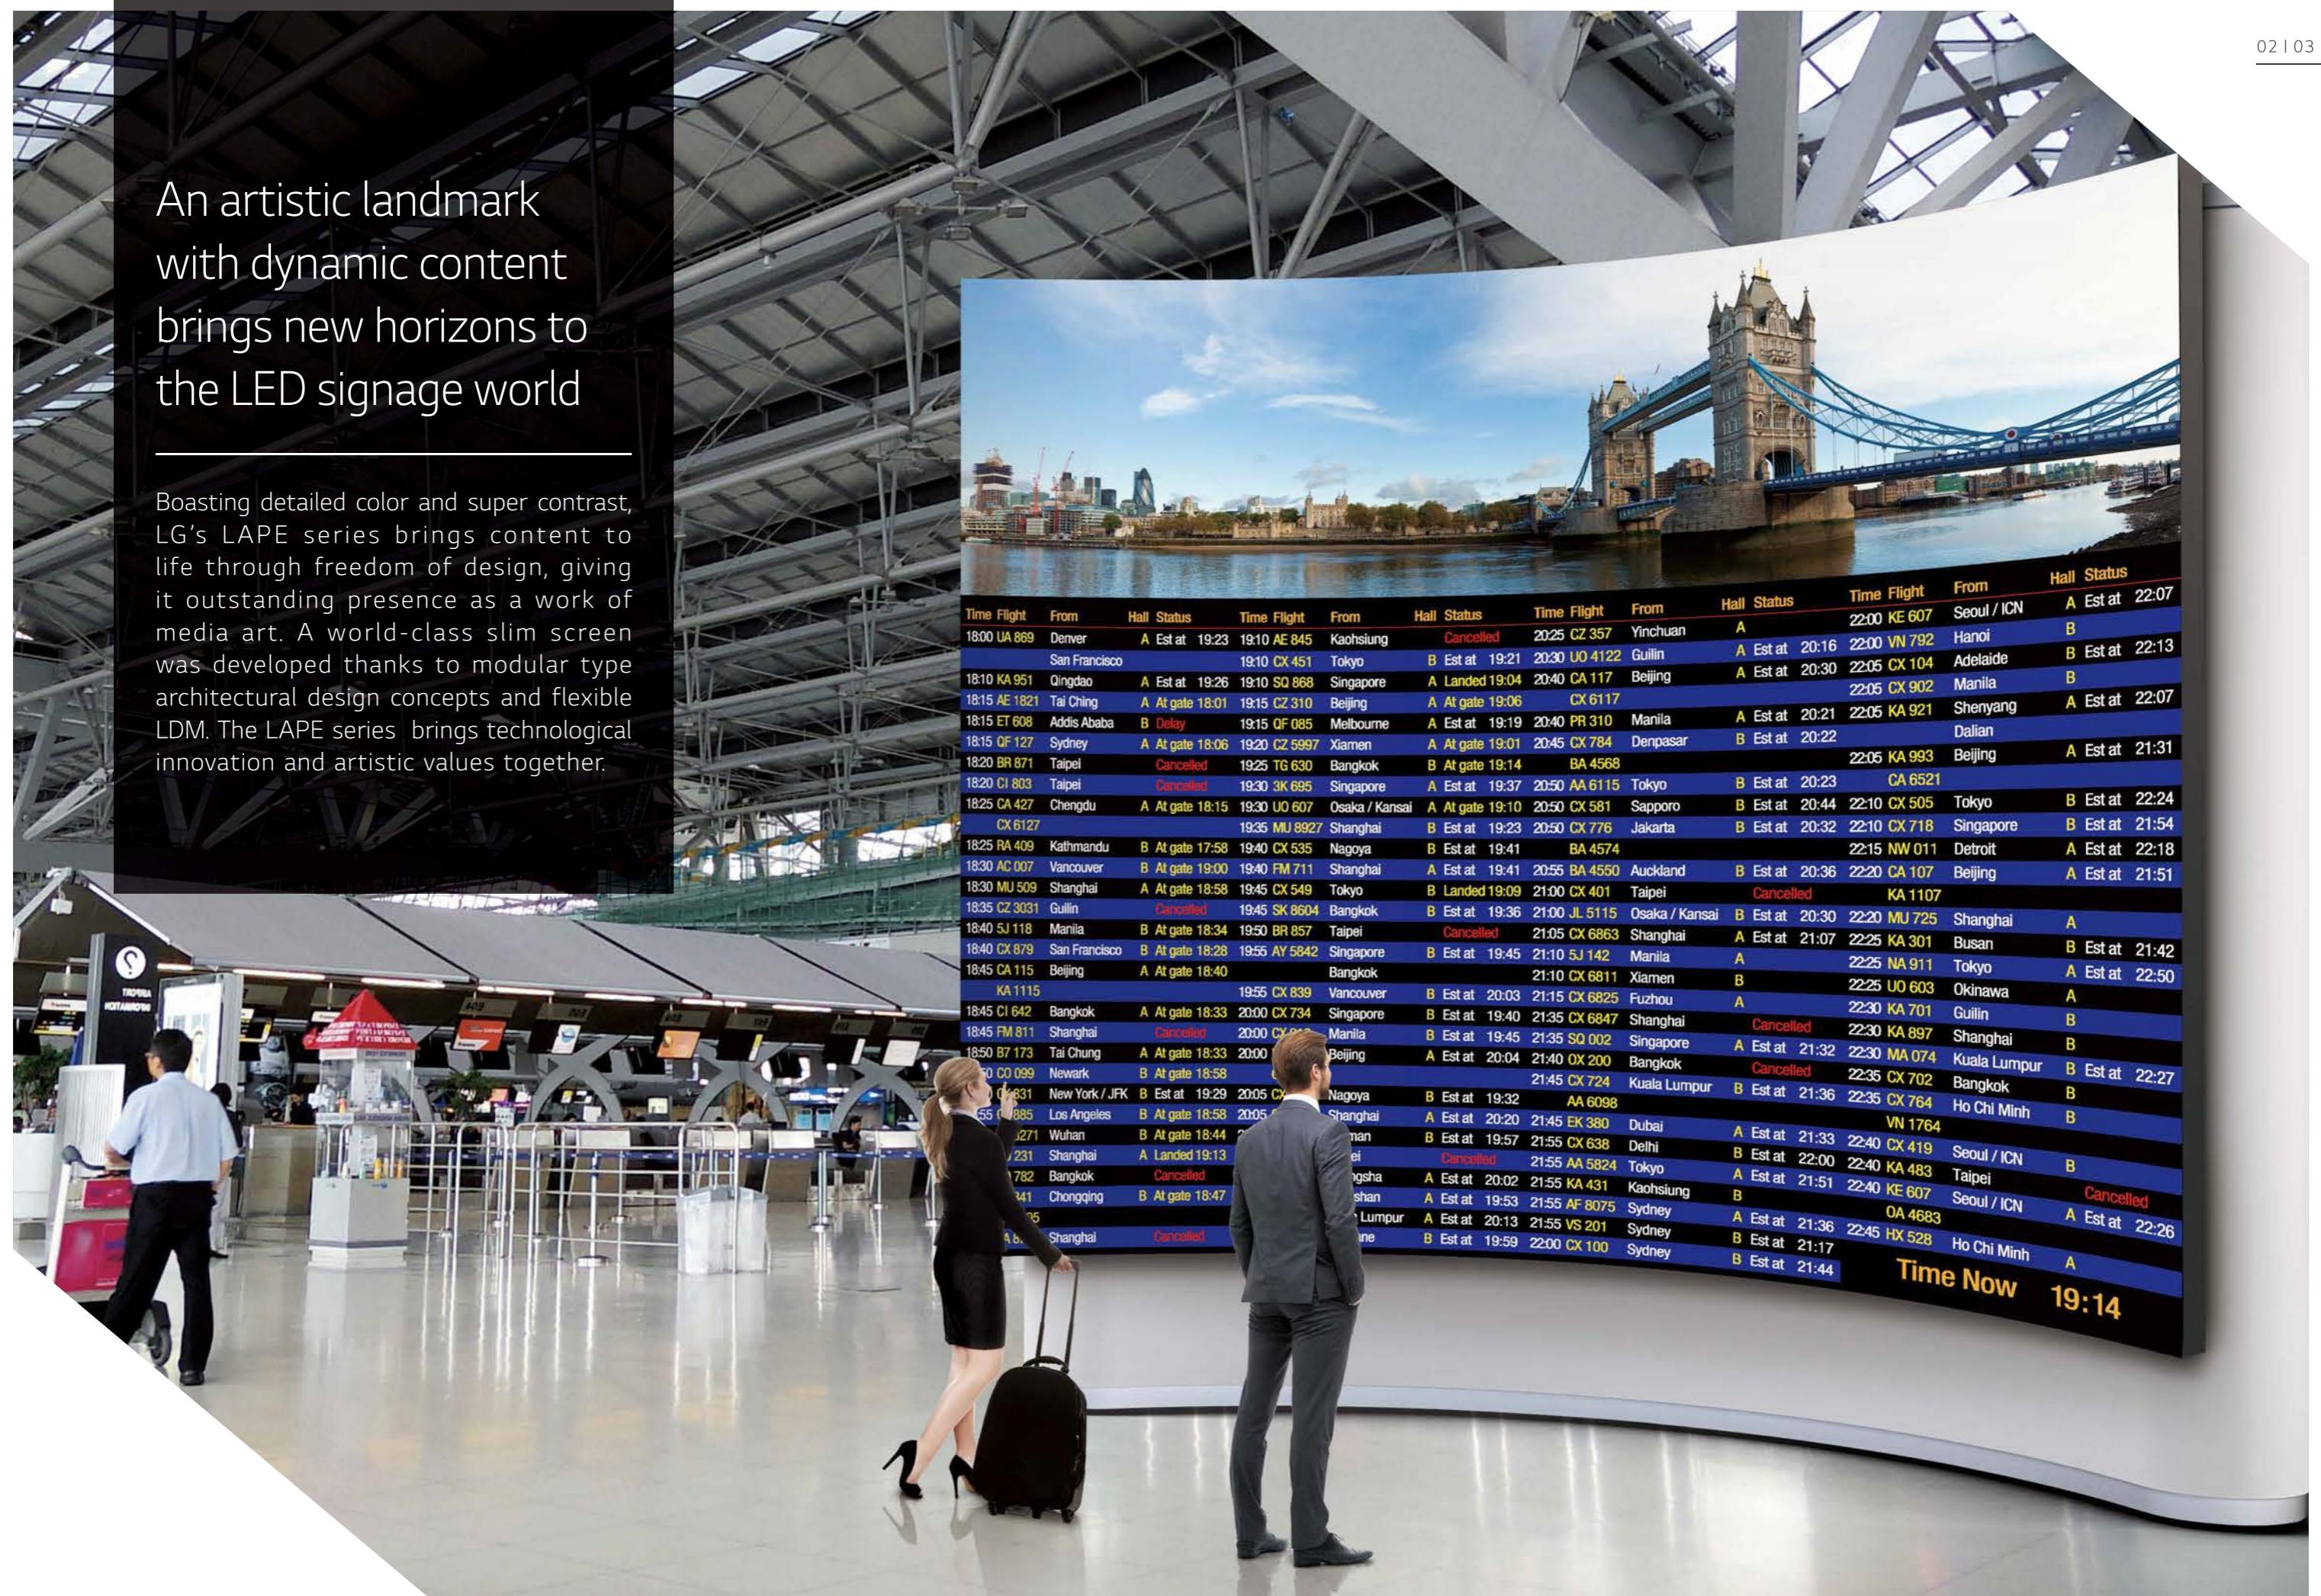

SPACE FITTING DESIGN

Go beyond conventional LED screens when designing your space

SELECTABLE TWO PRODUCT TYPES ACCORDING TO CUSTOMER NEEDS

The LAPE Series comes in 2 product types which differ in the way the power is installed. The one has a power separated from the LED screen while the other one has an embedded power in the screen. Each has their own distinctive benefits, so customers can choose between two types based on installation environment such as space size, outlet layout, service of points, or etc.



FLEXIBLE LDM

With a specially designed flexible LDM^(LED Display Module), the LAPE series supports true concave and convex curvature up to 1,000R. This greatly amplifies design flexibility, providing users with the ability to create true curved screens for use in interior design or as an immersive screen experience.



* The "Conventional" shown above refers to an LED screen composed of flat LED unit cases.

SUPERIOR PICTURE QUALITY

Vivid high visual impact


REALISM THROUGH LIFELIKE COLORS

The LAPE series delivers vivid and distinctive picture quality through a wide range of color details with deep contrast thanks to LG's exclusive 'Dynamic Contrast Algorithm'.



DETAILED EXPRESSION OF COLOR DEPTH

16-bit color processing provides a higher greyscale level, which seamlessly displays different depths and densities of colors without distortion, thereby giving a more realistic and sophisticated content.

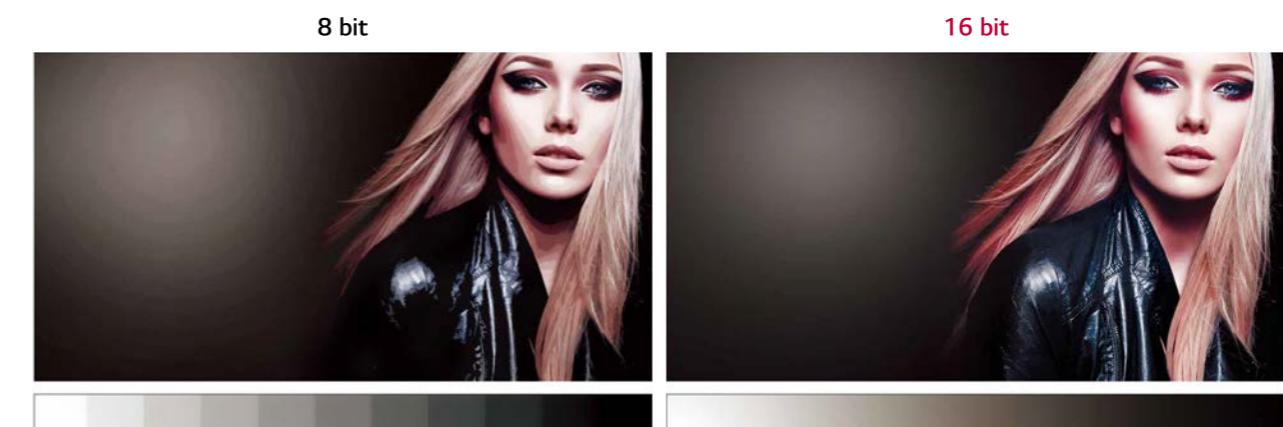

SMOOTH PLAYBACK IN DYNAMIC MOTION

Powered by LG's display technology, a high refresh rate of 3,840Hz assures the smooth playback of content. The flicker-free image prevents the black bars that occur from video shooting, as well as eye strain and blurred vision in viewers.



OPERATIONAL EFFICIENCY

Unique architectural platform maximizes efficiency

FLEXIBLE POWER MANAGEMENT

The power supply units (PSU) are separated from the screen, dramatically improving the latter's internal thermal condition. Thanks to the modular power concept design, users can choose the desired brightness of the screen by customizing* the number of PSUs** based on the electrical capacity of the user environment.




* Exclusive to the Remote Power models.

** The number of power units required may vary depending on the installation environment.

The above description is an example of a UHD screen configuration with a 2.0 mm pitch in 'redundancy off' mode.

POWER/SIGNAL REDUNDANCY SUPPORT

The LAPE series is designed to support power / signal redundancy (optional), providing users with peace of mind. The power supply units (PSU) support power redundancy, assuring the continuous operation of the screen without power failure, while the dual controllers minimize screen failure with a bi-directional signal input.

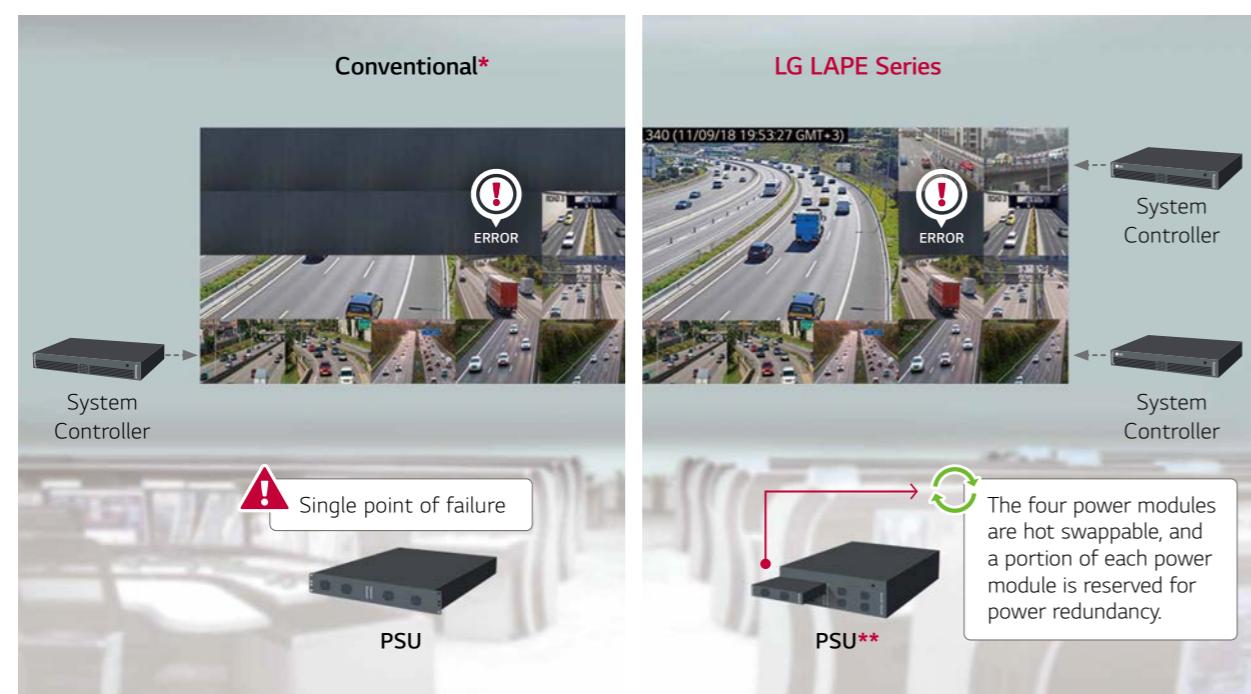

* The "Conventional" shown above refers to LED displays which do not support the power/signal redundancy mode.

** Power redundancy is exclusive to the Remote Power models.

PRECISE FHD/UHD SCREEN CONFIGURATION

It has often been difficult to configure a perfect FHD/UHD resolution screen prohibiting native resolution image display. With the LAPE series, this is possible for all model options.




| Pixel Pitch | 1.5mm | 2.0mm | 2.5mm |
|--------------------------|--------|--------|---------|
| Full HD (1,920 x 1,080) | 6 x 3 | 8 x 4 | 12 x 6 |
| Ultra HD (3,840 x 2,160) | 12 x 6 | 16 x 8 | 24 x 12 |

(Unit Case)

SMART HIGH PERFORMANCE SYSTEM CONTROLLER

The LAPE series comes with a versatile 4K system controller, providing simplified system configuration in a high-resolution canvas platform. The controller also has a built-in high performance media player as well as scaler. Additionally, it has LG's exclusive picture control features such as 'Dynamic Contrast' and Power Saving Mode options.

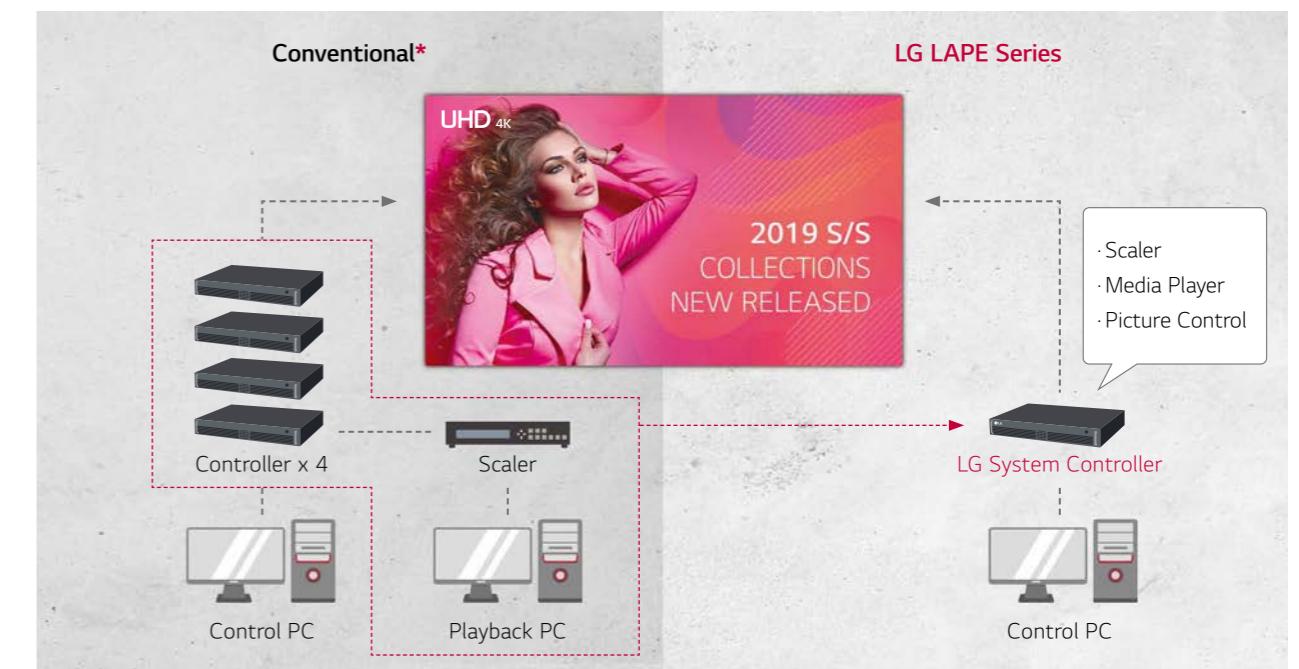

* The "Conventional" shown above refers to LED displays that don't have an all-in-one system controller.

OPERATIONAL EFFICIENCY

Unique architectural platform maximizes efficiency

INTUITIVE MANAGEMENT SOFTWARE

LG's new management control software platform 'LED Assistant' provides easy screen management. Screen setting is made simple with a visual guide and all-in-one dashboard that shows the overall status of screen components at a glance.

The screenshot displays the 'LG LED Assistant' software interface. It includes:

- Daisy Chain Settings:** A visualized layout of a 5x5 grid of LED panels with arrows indicating connection direction. A red box highlights the 'Overall Layout' section.
- System Controller:** Shows 2 units connected, with columns for Status, ID, Unit Name, Error Type, and Value.
- LED Controller:** Shows 2 units connected, with columns for Status, ID, Unit Name, Error Type, and Value.
- LDM PSU:** Shows 1 unit connected, with columns for Status, ID, Unit Name, Error Type, and Value.
- Log Report:** A table showing sensor events with columns for Sensor Name, Event Name, Status, Duration, Start Time, and End Time.

REAL-TIME 365 CARE SERVICE

The maintenance gets easier and faster with an optional service Signage 365 Care*, a cloud service solution provided by LG service. It remotely manages status of LED displays in client workplaces for fault diagnosis and remote-control services, ensuring the stable operation of a client's business.



* The availability of "Signage 365 Care" service can differ by region, so please contact the LG sales representative in your region for further details.

CONVENIENT SCREEN INSTALLATION

Reduce installation complexity


EASY TO HANDLE & INSTALL

Conventional large-sized and heavy cabinet-based installation often results in LED dot defects during installation. The LAPE series breaks free from conventional norms by introducing much smaller and light weight LDM^(LED Display Module)-based installation, providing incomparable ease of handling with far less risk of LED dot damage during installation.




EASY SCREEN ALIGNMENT

The unit case of the LAPE series has been carefully designed for easy screen flatness alignment. Each LDM has 20 Z-axis alignment points for ultra-fine flatness alignment.

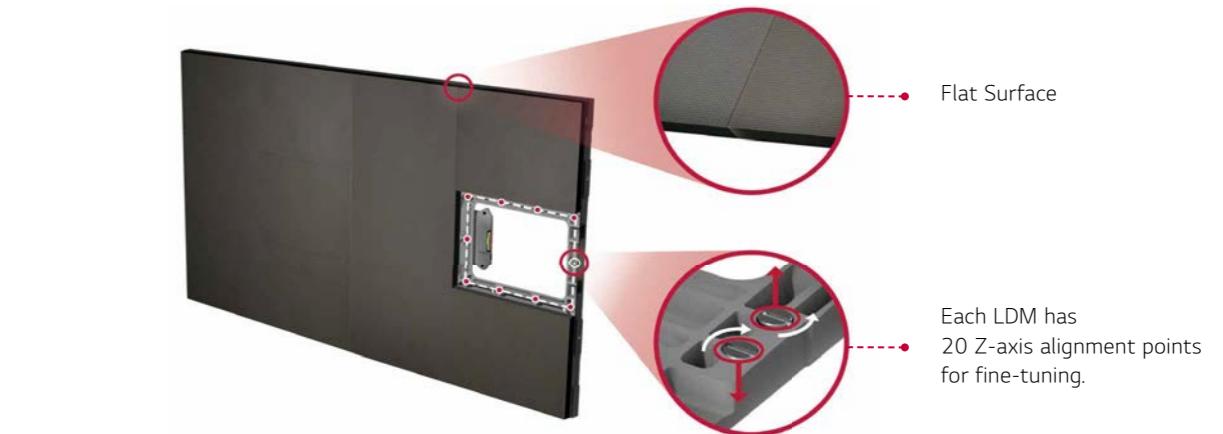


FRONT INSTALLATION & SERVICE

The LAPE series comes with front installation and front service access, freeing users from needing rear access space, as well as a sleek screen design for maximum space optimization.

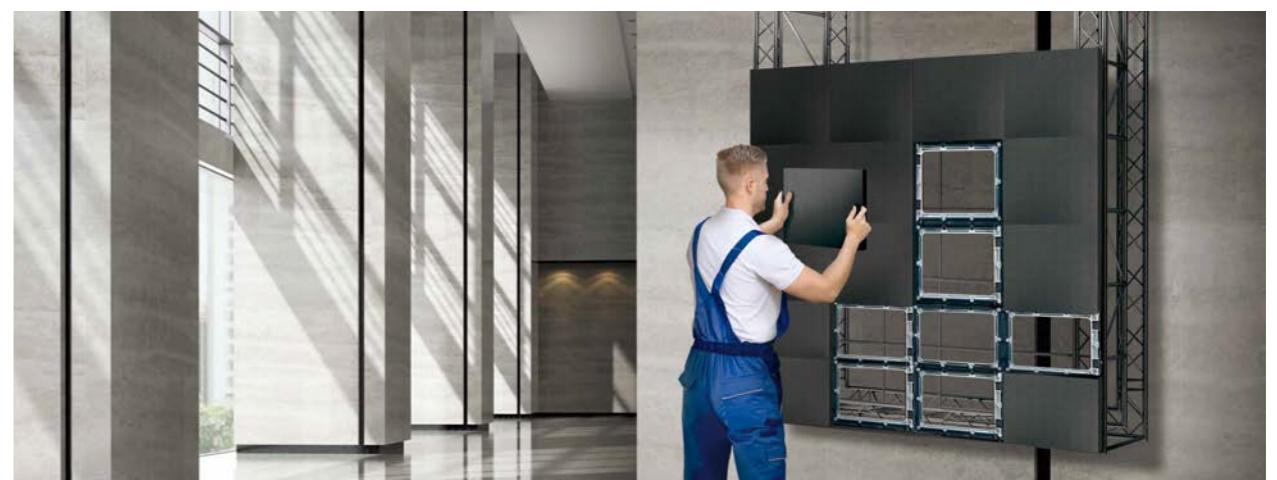

PRODUCT INFORMATION

REMOTE POWER MODELS

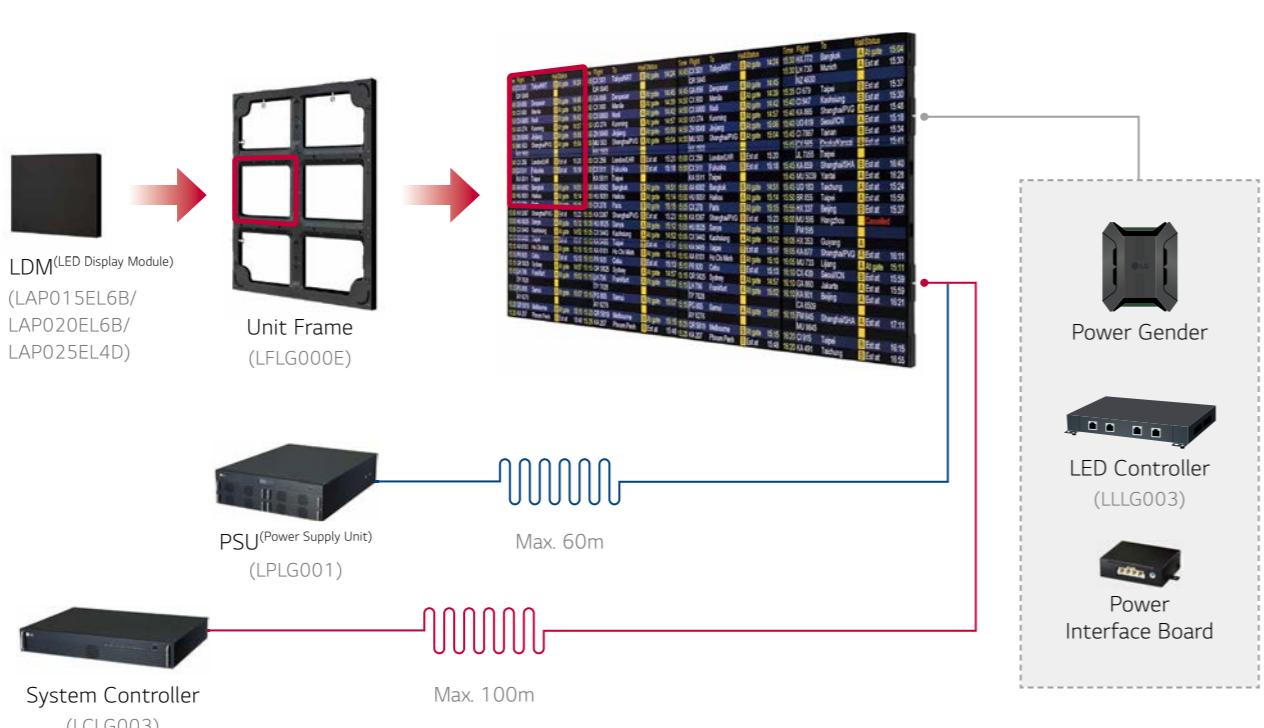

* The number of components required may differ depending on the screen size and other options.

EMBEDDED POWER MODELS



* The number of components required may differ depending on the screen size and other options.

SPECIFICATIONS

| | LAPE Series | | |
|---|--|------------------------|--|
| | Remote Power Model | | Embedded Power Model |
| Model Name | LAP015EL6B | LAP020EL6B | LAP025EL4D |
| Pixel Configuration | 3 in 1 SMD | 3 in 1 SMD | 3 in 1 SMD |
| Pixel Pitch (mm) | 1.50 | 2.00 | 2.50 |
| Module Resolution (W x H) | 160 x 120 | 120 x 90 | 96 x 72 |
| Module Dimensions (W x H, mm) | 240 x 180 | 240 x 180 | 240 x 180 |
| Weight per Module (kg) | 0.36 | 0.36 | 0.36 |
| No. of Modules per Unit Case (W x H) | 2 x 3 | 2 x 3 | 2 x 3 |
| Unit Case Resolution (W x H) | 320 x 360 | 240 x 270 | 192 x 216 |
| Unit Case Dimensions (W x H x D, mm) | 480 x 540 x 53 | | 480 x 540 x 105 |
| Unit Case Surface Area (m ²) | 0.260 | 0.260 | 0.260 |
| Weight per Unit Case (kg/unit) | 6.0 | 6.0 | 6.0 |
| Weight per Square Meter (kg/m ²) | 22.2 | 21.8 | 21.3 |
| Physical Pixel Density (pixels/m ²) | 444,444 | 250,000 | 160,000 |
| Flatness of Unit Case (mm) | ±0.2 | ±0.2 | ±0.2 |
| Unit Case Material | Die Casting Aluminum | | |
| Service Access | Front and Rear | | |
| Min. Brightness (After Calibration) | 1,000 ¹⁾ cd/m ² | | 700 cd/m ² |
| Color Temperature | 3,200 ~ 9,300 | 3,200 ~ 9,300 | 3,200 ~ 9,300 |
| Visual Viewing Angle (Horizontal) | 160 | 160 | 160 |
| Visual Viewing Angle (Vertical) | 140 | 140 | 140 |
| Brightness Uniformity | 95% | 95% | 95% |
| Color Uniformity | ±0.015Cx, Cy | ±0.015Cx, Cy | ±0.015Cx, Cy |
| Contrast Ratio | 6,000 | 6,000 | 6,000 |
| Processing Depth (bit) | 16 (HDR10) | 16 (HDR10) | 16 (HDR10) |
| Power Consumption (W/Unit, Avg.) | 165 | 165 | 120 |
| Power Consumption (W/Unit, Max.) | 330 | 330 | 240 |
| Power Consumption (W/m ² , Max.) | 1,275 | 1,275 | 930 |
| Power Supply (V) | 100 to 240 | 100 to 240 | 100 to 240 |
| Frame Rate (Hz) | 50 / 60 | 50 / 60 | 50 / 60 |
| Refresh Rate (Hz) | 3,840 | 3,840 | 3,840 |
| Lifetime (Half Brightness, hrs) ²⁾ | 100,000 | 100,000 | 50,000 |
| Operating Temperature (°C) | 0°C to + 40°C | 0°C to + 40°C | 0°C to + 40°C |
| Operating Humidity | 10-80% RH | 10-80% RH | 10-80% RH |
| Certification | FCC Class A / CE / KC | | |
| Environment | RoHS | RoHS | RoHS |
| Controller | LCLG003 | LCLG003 | LCLG003 |
| Connectivity | HDMI In, DP In, OPS In, USB | RJ45 In, RS232C In/out | RJ45 In, RS232C In/out |
| Special Features | HDR10, Temperature Sensor, Power Detection ADA Compliant, PSU Hot Swappable | | HDR10, Temperature Sensor, Power Detection |
| Optional Accessory | ACC-LAPP06(DC PSU Cable 6m), ACC-LAPP06(DC PSU Cable 60m) | | N/A |

* Specifications are subject to change without notice.

** LED package with goldwire.

1) Brightness can be reduced (up to 300nit) by the number of PSU modules, thereby decreasing power consumption.

2) The Lifetime(Half brightness) spec is subject to LED package spec.