

0.44mm Even Bezel Video Wall | 55SVM5F-H

0.44mm Even Bezel Video Wall with Clear & Beautiful Vision

The 0.44 mm Even Bezel Video Wall offers virtually seamless view throughout the assembled large screen. Also, it offers clear and vivid picture under bright circumstances by its non-glare screen.



Virtually seamless Viewing Experience



Smart Calibration



Clear View with Non-glare Panel



webOS Smart Signage Platform





*All images are for illustrative purposes only.

VIRTUALLY SEAMLESS VIEWING EXPERIENCE

Groundbreaking 0.44mm Even Bezel


The unprecedented razor-thin bezel – 0.44mm EVEN BEZEL and 0.88mm BEZEL TO BEZEL – which has been verified by Nemko*, makes content look more actual by depicting a subject without any distortions. Virtually seamlessly assembled on a large video wall screen, the 55SVM5F-H will provide an even more immersive experience for viewers.

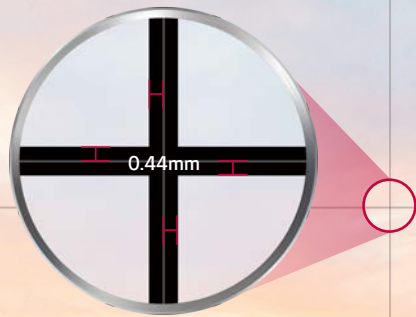

* The 0.44mm even panel bezel and 0.88mm BtB size (borderless type, no metal bezel) have been verified by Nemko, a global institution that tests and certifies electrical equipment.

Smart Calibration

Smart Calibration is a solution that enables error-free calibration by dramatically reducing time and costs compared to existing sensor calibration methods. It analyzes not only the color property differences of each individual display but also those of the connected displays, without the need for any additional manual color adjustments. Because it can be done in a matter of minutes with just the click of a remote control, this process is so simple. In addition, calibration can be set to automatically occur at regular intervals and brightness can be adjusted based on the surrounding environment, always delivering you the optimum image quality.

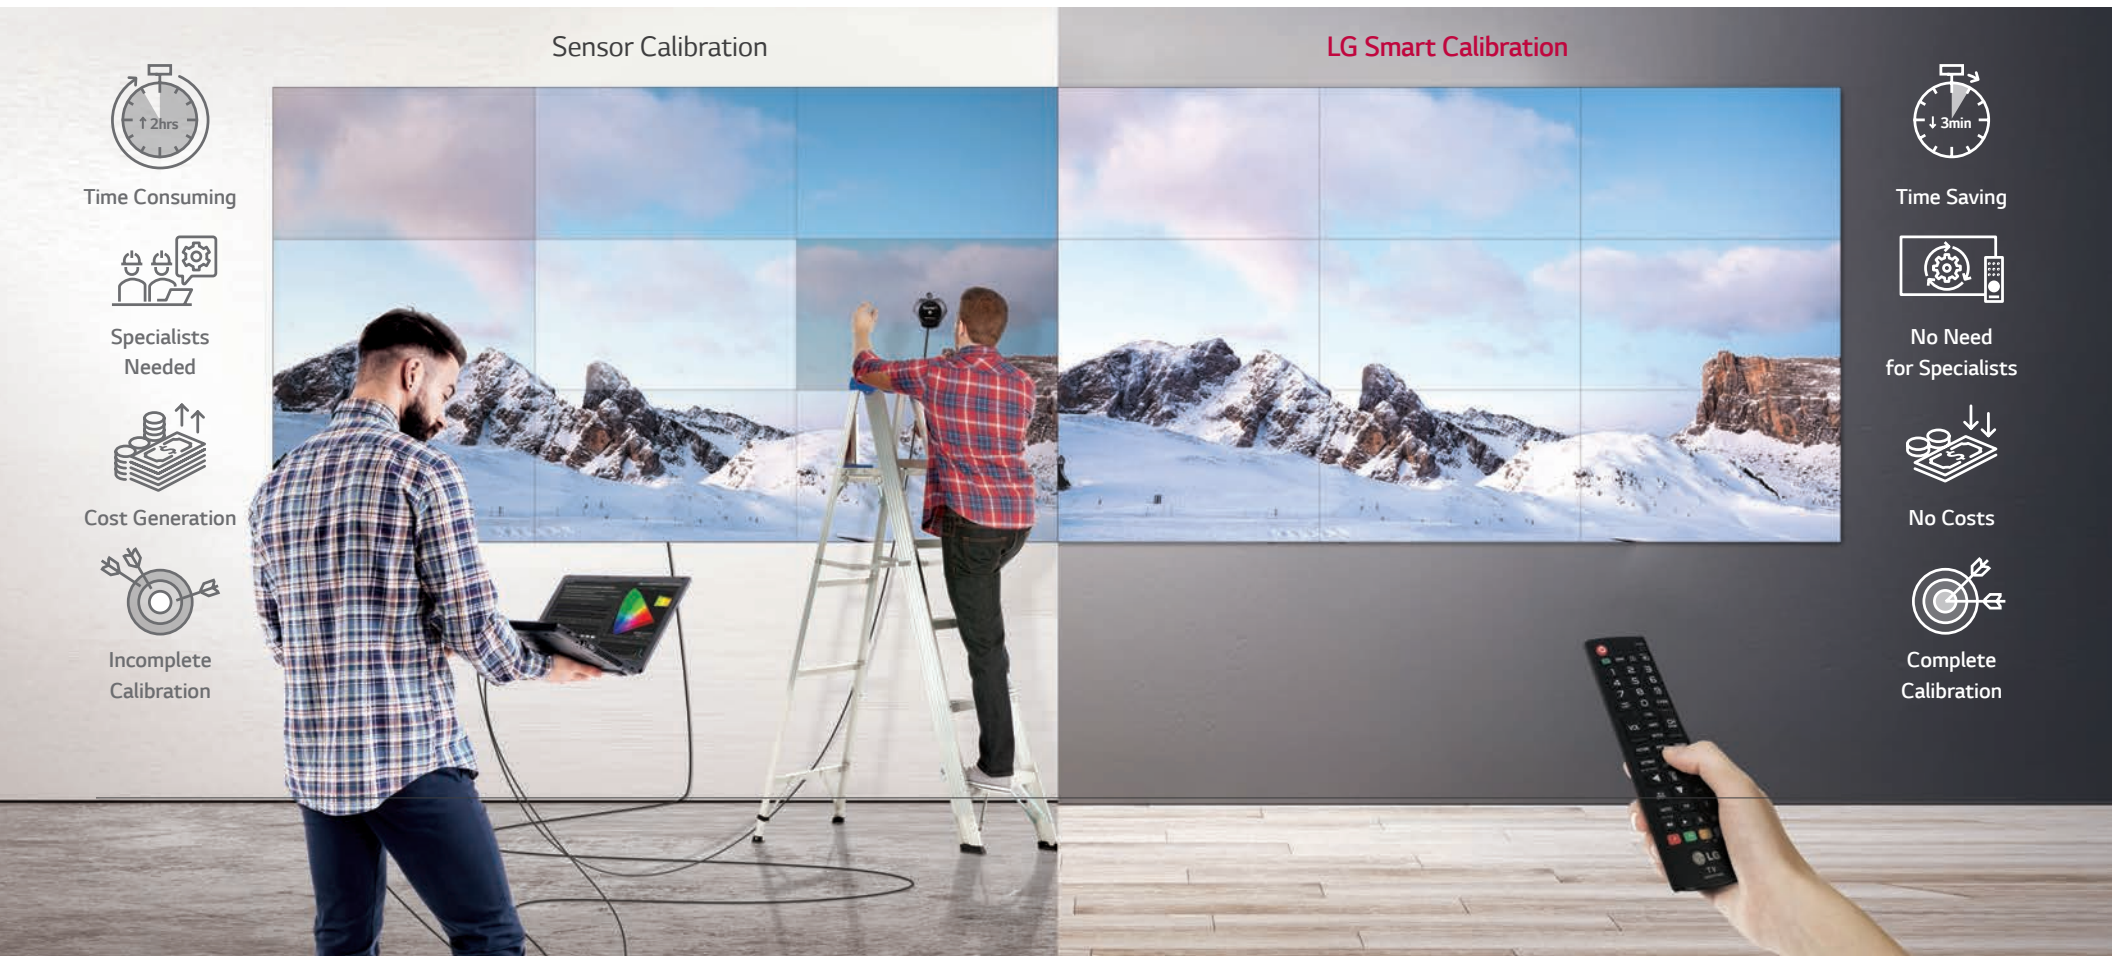

Sensor Calibration

LG Smart Calibration



Time Consuming



Specialists Needed



Cost Generation



Incomplete Calibration



Time Saving



No Need for Specialists



No Costs



Complete Calibration

Clear View with Non-glare Panel

Viewers can be annoyed by unnecessary light reflection when watching a screen under bright conditions. The 55SVM5F-H series has resolved such inconveniences by increasing the level of haze to 28%, which enhanced the visibility and text readability.



Uniform Color Expression

Poor uniformity around bezel boundaries can produce a dark appearance to corners, which doesn't look good on a large screen. However, the 55SVM5F-H has enhanced uniformity, including the four corners of the display, to deliver vivid and consistent color throughout the screen.



* Uniformity among 13 points of the screen. Results based on in-house testing. Actual test results may differ depending on environment and measuring equipment.

Higher Viewing Angle

Large screens are usually positioned higher than human-eye level, making uniform picture quality essential for video walls. The viewing angle of the 55SVM5F-H is superior to that of non-IPS video walls, allowing it to display vivid colors with no distortion – even in areas that are not suitable for large screens.



Low Viewing Angle
(Conventional)



50° High Viewing Angle*
(LG 55SVM5F-H)

* Results based on in-house testing. Actual test results may differ depending on environment and measuring equipment.

Image Gap Reduction

The 55SVM5F-H includes an image improvement algorithm that can reduce image gaps among tiled displays when playing videos. Objects located on the bezel boundaries are adjusted for a virtually seamless viewing experience.



*The "Conventional" refers to displays which do not include an image improvement algorithm.

Real-Time Care Service


Easier and faster maintenance are available with our optional cloud service solution Signage365Care*. It remotely manages status of displays in client workplaces for fault diagnosis and remote-control services, ensuring the stable operation of a client's business.



* The availability of "Signage365Care" service can differ by region, so please contact the LG Sales representative in your region for further details.


Daisy Chain Capability

A LAN daisy chain allows you to control and monitor video walls and even update their firmwares at once. Also, through UHD daisy chain using HDMI and DisplayPort, you can easily set up a UHD video wall without the need of DisplayPort MST or Matrox graphics card.

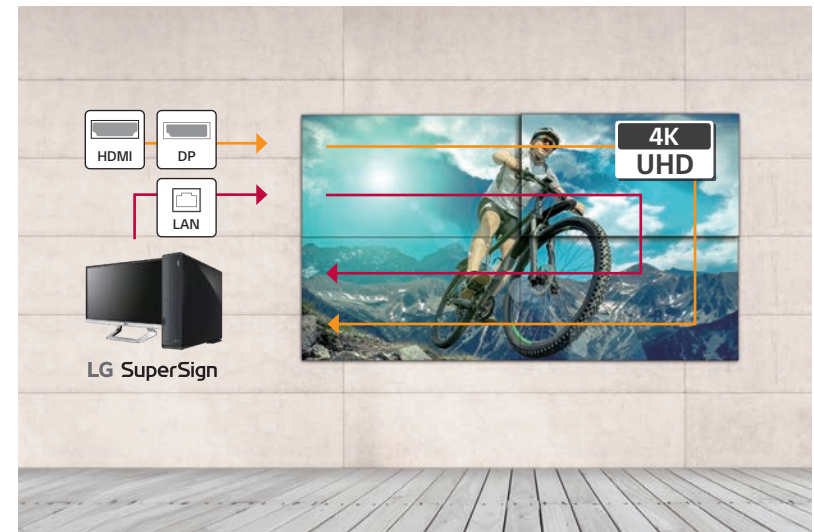


DIMENSION

55"

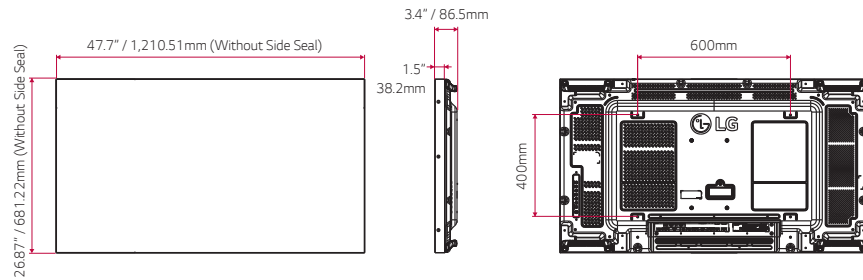

CONNECTIVITY

55"

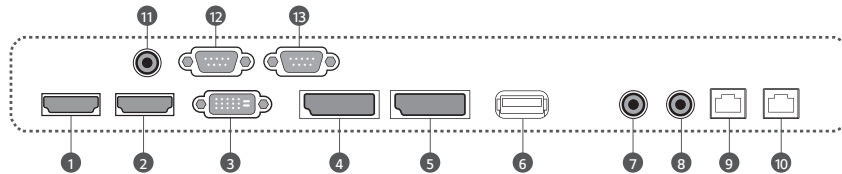

- 1 HDMI IN 1
- 2 HDMI IN 2
- 3 DVI-D IN
- 4 DP IN
- 5 DP OUT
- 6 USB 2.0 IN
- 7 AUDIO IN
- 8 AUDIO OUT
- 9 LAN IN
- 10 LAN OUT
- 11 IR IN
- 12 RS232C IN
- 13 RS232C OUT



* Dimensions & Jack Panels (Read/Side) may differ from the above image, so please contact LG sales team to verify before ordering.

SPECIFICATION

55SVM5F-H

Panel	Screen Size	55"
	Panel Technology	IPS
	Aspect Ratio	16:9
	Native Resolution	1,920 x 1,080 (FHD)
	Brightness (Typ.)	500 nits
	Contrast Ratio	1,100:1
	Dynamic CR ¹⁾	500,000:1
	Viewing Angle (H x V)	178° x 178°
	Color Depth	1.07 Billion (10 bit)
	Response Time	8 ms (G to G)
	Surface Treatment	Haze 28%
	Life Time (Typ.)	60,000 Hrs
	Operation Hours	24 Hrs
Orientation	Portrait & Landscape	
Connectivity	Input	HDMI (2), DP, DVI-D, Audio, USB 2.0
	Output	DP, Audio
	External Control	RS232C In/Out, RJ45 (LAN) In/Out, IR In
Mechanical Specification	Bezel Color	Black
	Bezel Width	0.44 mm (Even)
	Monitor Dimension (W x H x D)	47.7" x 26.8" x 3.4" / 1,210.51 x 681.22 x 86.5 mm
	Weight (Head)	37 lbs / 16.8 kg
	Carton Dimensions (W x H x D)	53.3" x 33.7" x 10.4" / 1,353 x 855 x 263 mm
	Packed Weight	52 lbs / 23.6 kg
	Handle	Yes
VESA™ Standard Mount Interface	600 x 400 mm	
Key Feature	Internal Memory 8GB (System 4GB, Available 4GB), Temperature Sensor, BLU Sensor (for Smart Calibration), Tile Mode (Up to 15x15), UHD Daisy Chain (Up to 10x10), Natural Mode @Tile Mode, Smart Calibration, Power on Status, DPM Wake Up, Smart Energy Saving, File Play with USB, USB Cloning, Contents Scheduling (USB, Internal Memory), Calibration Mode, PM Mode, HDMI-CEC ²⁾ , Wake on LAN, Content Rotation, OSD Portrait Mode, SetID Setup (Manual, Auto), Failover, No Signal Image (Up to 5MB), Embedded Template, OPS Power Control, Scan Inversion (with Pivot Mode)	
Environmental Conditions	Operation Temperature	32°F to 104°F / 0°C to 40°C
	Operation Humidity	10% to 80%
Power	Power Supply	100-240V~, 50/60Hz
	Power Type	Built-In Power
	Power Consumption	Typ. / Max. 200W / 250W Smart Energy Saving 105W
Certification	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1
	EMC	FCC Class "A" / CE / KC
	ErP / Energy Star	Yes (EU Only) / Yes (Energy Star 8.0)
Media player Compatibility	OPS Type Compatible	Yes (Piggyback)
	External Media Player Attachable	Yes (MP500 / MP700)
Software Compatibility	Content Management Software	SuperSign CMS
	Control and Monitoring Software	SuperSign Control / Control+
	Signage365Care	Yes
Accessories	Basic	Remote Controller, Power Cord, RS232C Cable, LAN Cable, DP Cable, IR Receiver, Guide Bracket, Screws, Manual
	Optional	Wall Mount (Landscape : WM-L640V, Portrait : WM-P640V), OPS Kit (KT-OP5F)

¹⁾The luminosity ratio of Full Black/Full White color on video input condition.

²⁾ Availability may differ by equipment.

* Specifications are subject to change without notice, so please contact LG sales team to verify before ordering.