UHD Commercial TV with Essential Smart Function

Commercial TV | UT640S Series

The UT640S Series is specifically designed for diverse business environments. By providing compatibility with AV Control systems and DPM (Display Power Management) as well as its smart connectivity, simple user friendly interface, and UHD picture quality, the UT640S series enhances ease of use while facilitating communications between businesses and their target audiences.



Simple Content Management



High Visibility



Excellent Usability





Embedded Content & Group Management


The embedded Content and Group Management System allows you to edit and play content, schedule playlists and groups, and control Signage via remote control, mouse and mobile phone without the use of separate PC or software. This makes content management much easier and more user-friendly.

SuperSign Control

SuperSign Control is free, basic LG control software that can manage up to 100 displays through a single account and server. Power, volume, and scheduling can be remotely adjusted, and firmware updates supported.

USB Data Cloning

USB data cloning increases efficiency when anaging multiple displays, since installers don't have to set up each display one by one. Once installers copy data to a USB device from one display, it can be easily imported on other displays of the same model through the USB port.







* These images are provided for illustrative purposes, and the actual GUI may differ. * All displays must be connected to the same network.

Real-Time Remote Monitoring

Malfunctions or errors can be easily handled through real-time remote care. When an error occurs, notifications can be sent via SNMP (Simple Network Management Protocol).

Easy Remote Power-On

WOL (Wake-on-LAN) enables users to turn on displays* by sending messages through the network.



AC Power WOL

True Color, Immersive View

The large size and Ultra HD resolution of the UT640S series enhances the visibility of content and captivates viewers. The LG IPS panel provides a wide range of viewing angles so that content can be clearly seen, regardless of the viewer's position. Each pixel in the IPS panel reproduces true-to-life colors without distorting images.

Amazing Picture Quality and Color

Enjoy Full HD content in 4K Ultra HD quality, optimized by the 4K Upscaler. The 4K upscaler automatically upgrades Full HD content to Ultra HD through several upscaling processes so that images look crisp and clear in any viewing situation. This LG TV can also express intense highlights, vivid colors, and deep black hues on the screen through HDR10.





Compatibility with AV Control Systems

The UT640S series has been certified Crestron Connected®, proving that it has a higher level of compatibility with professional AV controls. This results in seamless integration and automated control*, boosting business management efficiency.

DPM (Display Power Management)


Display Power Management (DPM) can be configured to only be On when there is a TV signal present to manage power more efficiently.




* Network-based control system. May differ by region.



DIMENSIONS

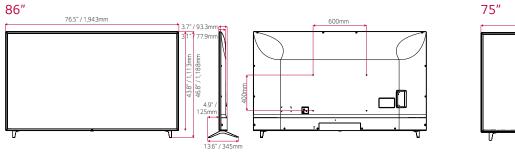

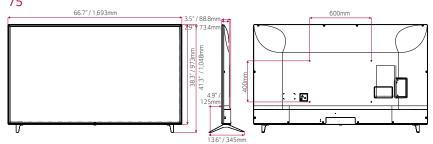



3.4" / 87.1mm


28.4" / 721mm


30.9" / 786mm


" / 77.1mn

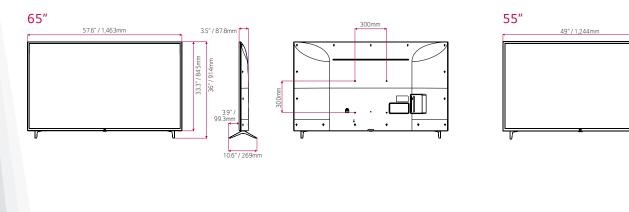



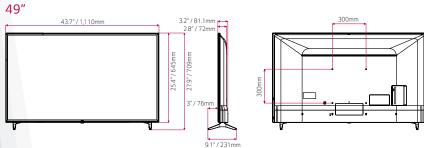






* Dimensions & Jack Panels (Rear/Side) may differ from the above images, so please contact LG sales team to verify before ordering. *UT640S models ship with a 2 Pole stand (attachable feet). See also VESA spec for wall mounting.

CONNECTIVITY


86" | 75"

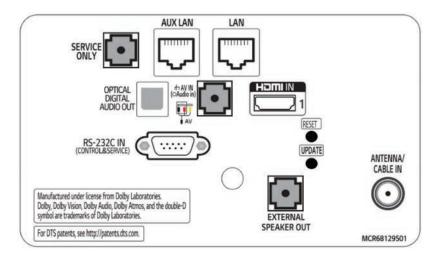






65" | 55" | 49" | 43"

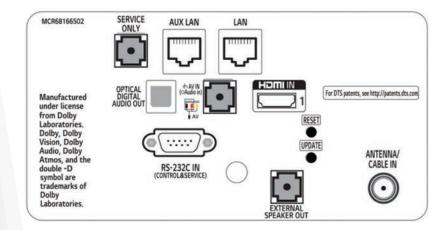



* Dimensions & Jack Panels (Rear/Side) may differ from the above images, so please contact LG sales team to verify before ordering.

SPECIFICATIONS

| UT640S s | series | 86UT640S | 75UT640S | 65UT640S | 55UT640S | 49UT640S | 43UT640S |
|-------------------------|---|--|--|--|--|--|--|
| DESIGN | Stand Type | 2 Pole | 2 Pole | 2 Pole | 2 Pole | 2 Pole | 2 Pole |
| | Front Color | Dark Meteo Titan | Dark Meteo Titan | Ceramic Black | Ceramic Black | Ceramic Black | Ceramic Black |
| DISPLAY | Diagonal Class | 86″ | 75″ | 65″ | 55″ | 49″ | 43" |
| | Resolution | 3840 X 2160 (UHD) | 3840 X 2160 (UHD) | 3840 X 2160 (UHD) | 3840 X 2160 (UHD) | 3840 X 2160 (UHD) | 3840 X 2160 (UHD) |
| | Brightness (nits) | 350 | 350 | 400 | 400 | 400 | 300 |
| ROADCASTING | Digital | NTSC / ATSC / clear QAM | NTSC / ATSC / clear QAM | NTSC / ATSC / clear QAM | NTSC / ATSC / clear QAM | NTSC / ATSC / clear QAM | NTSC / ATSC / clear QAM |
| VIDEO | HDR (10 Pro / HLG) | Yes / Yes | Yes / Yes | Yes / Yes | Yes / Yes | Yes / Yes | Yes / Yes |
| AUDIO | Audio Output | 10W + 10W | 10W + 10W | 10W + 10W | 10W + 10W | 10W + 10W | 10W + 10W |
| | Speaker System | 2.0 ch | 2.0 ch | 2.0 ch | 2.0 ch | 2.0 ch | 2.0 ch |
| | LG Sound Sync | Bluetooth required | Bluetooth required | Bluetooth required | Bluetooth required | Bluetooth required | Bluetooth required |
| SUPERSIGN SW | | | | | | | |
| SIGNAGE | Crestron Connected® (Network Based Control), DPM (Digital Power management), Time scheduler, RTC (Real Time Clock), NTP sync timer, BEACON, Embedded CM (contents manager), Embedded GM (Group manager) | | | | | | |
| MART FEATURES | S webOS 4.5, Smart Home (Launcher Bar), Web Browser, Pre-loaded App (YouTube only), Soft AP, WiFi (bandwidth)(ac), Screen Share (Miracast), LG TV Plus App Compatibility, DIAL, Bluetooth Audio Playback, LG Sound Sync/bluetooth, Mobile Connection Overlay | | | | | | |
| HOSPITALITY FEATURES | Hotel Mode / PDM / Installer Menu, Lock mode (Limited), Welcome Screen (Boot Logo), Insert Image, One Channel Map, IP Channel Manager, External Speaker Out (Variable / Fixed, 3.5mm, Stereo (GND, R, L), Max 1W with 8Ω), VLAN, Teleadapt/Guestlink (HDMI CEC), Moving Picture Playback (SD/HD/Plus HD), Auto Off / Sleep Timer, Smart Energy Saving, Motion Eye Care | | | | | | |
| MAINTENANCE FEATURES | USB Cloning, WOL, SNMP, Diagnostics (Self Diagnostics (USB)), NTSC / ATSC / QAM, Simplink(HDMI-CEC)(1.4), IR Out (RS-232C), Multi-code IR | | | | | | |
| | | USB Clo | ning, WOL, SMWP, Diagnostics (Seir Diagnos | 303 (030)), 1413C / 7413C / Q744, 3411pillik(1 | HDMI-CEC)(1.4), IR Out (RS-232C), Multi- | code IR | |
| | Side | USB Clo | ning, wor, swivi?, Diagnostics (seir Diagnos | HDMI In 2(2. | | code IR | |
| ACK INTERFACE | Side Rear | | | | 0), USB (2.0) cal), RS-232C (D-Sub 9pin, Control & Serv | | |
| ACK INTERFACE | | USB Clo 600 x 400 | | HDMI In 2(2. ner), AV In (3.5mm), Digital Audio Out (Opti | 0), USB (2.0) cal), RS-232C (D-Sub 9pin, Control & Serv | | 200 x 200 |
| ACK INTERFACE | Rear | | HDMI In (HDCP) 2.0, RF In (tu | HDMI In 2(2. ner), AV In (3.5mm), Digital Audio Out (Opti External Speaker Out (3.5mm, Stereo, N | 0), USB (2.0) cal), RS-232C (D-Sub 9pin, Control & Serv lax 1W with 8Ω), Service Only (3.5mm) | ice), RJ45 2 (Ethernet, SNMP), | 200 × 200 38.3° × 24.5° × 8.5° / 17.9 lbs 973 × 623 × 216 / 8.1 kg |
| | Rear VESA (W × H) | 600 × 400 76.5" × 46.8" × 13.6" / 99.2 lbs | HDMI In (HDCP) 2.0, RF In (tu 600 x 400 66.7" x 41.3" x 13.6" / 78 lbs | HDMI In 2(2. ner), AV In (3.5mm), Digital Audio Out (Opti External Speaker Out (3.5mm, Stereo, N 300 × 300 57.6" × 36" × 10.6" / 47.6 lbs | 0), USB (2.0) cal), RS-232C (D-Sub 9pin, Control & Serv lax 1W with 8Ω), Service Only (3.5mm) 300 x 300 49" x 30.9" x 9.1" / 32 lbs | ice), RJ45 2 (Ethernet, SNMP), 300 x 300 43.7" x 27.9" x 9.1" / 24.9 lbs | 38.3" x 24.5" x 8.5" / 17.9 lbs |
| | Rear VESA (W × H) W × H × D / Weight (with stand) | 600 × 400 76.5" × 46.8" × 13.6" / 99.2 lbs 1,943 × 1,188 × 345 / 45.0 kg 76.5" × 43.8" × 3.7" / 97.4 lbs | HDMI In (HDCP) 2.0, RF In (tu 600 x 400 66.7" x 41.3" x 13.6" / 78 lbs 1,693 x 1,048 x 345 / 35.4 kg 66.7" x 38.3" x 3.5" / 76.3 lbs | HDMI In 2(2. ner), AV In (3.5mm), Digital Audio Out (Opti External Speaker Out (3.5mm, Stereo, N 300 × 300 57.6" × 36" × 10.6" / 47.6 lbs 1,463 × 914 × 269 / 21.6 kg 57.6" × 33.3" × 3.5" / 47 lbs | 0), USB (2.0) cal), RS-232C (D-Sub 9pin, Control & Serv lax 1W with 8Ω), Service Only (3.5mm) 300 x 300 49" x 30.9" x 9.1" / 32 lbs 1,244 x 786 x 231 / 14.5 kg 49" x 28.4" x 3.4" / 31.5 lbs | ice), RJ45 2 (Ethernet, SNMP), 300 x 300 43.7" x 27.9" x 9.1" / 24.9 lbs 1,110 x 709 x 231 / 11.3 kg 43.7" x 25.4" x 3.2" / 24.5 lbs | 38.3" x 24.5" x 8.5" / 17.9 lbs 973 x 623 x 216 / 8.1 kg 38.3" x 22.3" x 3.3" / 17.6 lbs |
| | Rear VESA (W × H) W × H × D / Weight (with stand) W × H × D / Weight (without stand) | 600 × 400 76.5" × 46.8" × 13.6" / 99.2 lbs 1,943 × 1,188 × 345 / 45.0 kg 76.5" × 43.8" × 3.7" / 97.4 lbs 1,943 × 1,113 × 93.3 / 44.2 kg 83.3" × 49.6" × 11.2" / 130.1 lbs | HDMI In (HDCP) 2.0, RF In (tu 600 x 400 66.7" x 41.3" x 13.6" / 78 lbs 1,693 x 1,048 x 345 / 35.4 kg 66.7" x 38.3" x 3.5" / 76.3 lbs 1,693 x 973 x 88.8 / 34.6 kg 72.4" x 43.9" x 9.1" / 100.8 lbs | HDMI In 2(2. ner), AV In (3.5mm), Digital Audio Out (Opti External Speaker Out (3.5mm, Stereo, N 300 × 300 57.6" × 36" × 10.6" / 47.6 lbs 1,463 × 914 × 269 / 21.6 kg 57.6" × 33.3" × 3.5" / 47 lbs 1,463 × 845 × 87.8 / 21.3 kg 63" × 38.2" × 7.5" / 62.6 lbs | 0), USB (2.0) cal), RS-232C (D-Sub 9pin, Control & Serv lax 1W with 8Ω), Service Only (3.5mm) 300 × 300 49" × 30.9" × 9.1" / 32 lbs 1,244 × 786 × 231 / 14.5 kg 49" × 28.4" × 3.4" / 31.5 lbs 1,244 × 721 × 87.1 / 14.3 kg 53.5" × 33" × 6.9" / 43 lbs | ice), RJ45 2 (Ethernet, SNMP), 300 x 300 43.7" x 27.9" x 9.1" / 24.9 lbs 1,110 x 709 x 231 / 11.3 kg 43.7" x 25.4" x 3.2" / 24.5 lbs 1,110 x 645 x 81.1 / 11.1 kg 47" x 30.3" x 6.2" / 29.5 lbs | 38.3" x 24.5" x 8.5" / 17.9 lb 973 x 623 x 216 / 8.1 kg 38.3" x 22.3" x 3.3" / 176 lbs 973 x 567 x 85 / 8.0 kg 41.7" x 26" x 6" / 22.5 lbs |
| | Rear VESA (W × H) W × H × D / Weight (with stand) W × H × D / Weight (without stand) W × H × D / Weight (without stand) W × H × D / Weight (Shipping) | 600 × 400 76.5" × 46.8" × 13.6" / 99.2 lbs 1,943 × 1,188 × 345 / 45.0 kg 765" × 438" × 37" / 97.4 lbs 1,943 × 1,113 × 93.3 / 44.2 kg 83.3" × 49.6" × 11.2" / 130.1 lbs 2,116 × 1,261 × 285 / 590 kg | HDMI In (HDCP) 2.0, RF In (tu 600 × 400 66.7" × 41.3" × 13.6" / 78 lbs 1,693 × 1,048 × 345 / 35.4 kg 66.7" × 38.3" × 35" / 76.3 lbs 1,693 × 973 × 88.8 / 34.6 kg 72.4" × 43.9" × 9.1" / 100.8 lbs 1,839 × 1,116 × 231 / 45.7 kg | HDMI In 2(2. ner), AV In (3.5mm), Digital Audio Out (Opti External Speaker Out (3.5mm, Stereo, N 300 × 300 57.6" × 36" × 10.6" / 47.6 lbs 1,463 × 914 × 269 / 21.6 kg 57.6" × 33.3" × 3.5" / 47 lbs 1,463 × 845 × 87.8 / 21.3 kg 6.3" × 38.2" × 7.5" / 62.6 lbs 1,600 × 970 × 190 / 28.4 kg | 0), USB (2.0) cal), RS-232C (D-Sub 9pin, Control & Serv lax 1W with 8Ω). Service Only (3.5mm) 300 x 300 49" x 30.9" x 9.1" / 32 lbs 1,244 x 786 x 231 / 14.5 kg 49" x 28.4" x 3.4" / 31.5 lbs 1,244 x 721 x 87.1 / 14.3 kg 53.5" x 33" x 6.9" / 43 lbs 1,360 x 835 x 175 / 19.5 kg | ce), RJ45 2 (Ethernet, SNMP), 300 × 300 43.7" × 27.9" × 9.1" / 24.9 lbs 1,110 × 709 × 231 / 11.3 kg 43.7" × 25.4" × 3.2" / 24.5 lbs 1,110 × 645 × 81.1 / 11.1 kg 47" × 30.3" × 6.2" / 29.5 lbs 1,193 × 770 × 158 / 13.4 kg | 38.3" x 24.5" x 8.5" / 17.9 lb 973 x 623 x 216 / 8.1 kg 973 x 523 x 3.3" / 17.6 lbs 973 x 567 x 85 / 8.0 kg 41.7" x 26" x 6" / 22.5 lbs 1,060 x 660 x 152 / 10.2 kg |
| MECHANICAL | Rear VESA (W × H) W × H × D / Weight (with stand) W × H × D / Weight (without stand) W × H × D / Weight (without stand) W × H × D / Weight (Shipping) Voltage | 600 × 400 76.5" × 46.8" × 13.6" / 99.2 lbs 1,943 × 1,188 × 345 / 45.0 kg 765" × 43.8" × 3.7" / 97.4 lbs 1,943 × 1,113 × 93.3 / 44.2 kg 83.3" × 49.6" × 11.2" / 130.1 lbs 2,116 × 1,261 × 285 / 59.0 kg AC 120 V - 50 / 60 Hz | HDMI In (HDCP) 2.0, RF In (tu 600 × 400 667.7" × 41.3" × 13.6" / 78 lbs 1,693 × 1,048 × 345 / 35.4 kg 66.7" × 38.3" × 3.5" / 76.3 lbs 1,693 × 973 × 88.8 / 34.6 kg 72.4" × 43.9" × 9.1" / 100.8 lbs 1,839 × 1,116 × 231 / 45.7 kg AC 120 V - 50 / 60 Hz | HDMI In 2(2. ner), AV In (3.5mm), Digital Audio Out (Opti External Speaker Out (3.5mm, Stereo, N 300 × 300 57.6" × 36" × 10.6" / 47.6 lbs 1,463 × 914 × 269 / 21.6 kg 57.6" × 33.3" × 3.5" / 47 lbs 1,463 × 845 × 87.8 / 21.3 kg 6.3" × 38.2" × 7.5" / 62.6 lbs 1,600 × 970 × 190 / 28.4 kg AC 120 V - 50 / 60 Hz | 0), USB (2.0) cal), RS-232C (D-Sub 9pin, Control & Serv lax 1W with 8 Q), Service Only (3.5mm) 300 x 300 49" x 30.9" x 9.1" / 32 lbs 1,244 x 786 x 231 / 14.5 kg 49" x 28.4" x 3.4" / 31.5 lbs 1,244 x 721 x 87.1 / 14.3 kg 53.5" x 33" x 6.9" / 4.3 lbs 1,360 x 835 x 175 / 19.5 kg AC 120 V - 50 / 60 Hz | ce), RI45 2 (Ethernet, SNMP), 300 x 300 43.7" x 27.9" x 9.1" / 24.9 lbs 1,110 x 709 x 231 / 11.3 kg 43.7" x 25.4" x 3.2" / 24.5 lbs 1,110 x 645 x 81.1 / 11.1 kg 47" x 30.3" x 6.2" / 29.5 lbs 1,193 x 770 x 158 / 13.4 kg AC 120 V - 50 / 60 Hz | 38.3" x 24.5" x 8.5" / 17.9 lb 973 x 623 x 216 / 8.1 kg 973 x 623 x 3.3" / 17.6 lb 973 x 567 x 85 / 80 kg 41.7" x 26" x 6" / 22.5 lbs 1,060 x 660 x 152 / 10.2 kg AC 120 V - 50 / 60 Hz |
| MECHANICAL | Rear VESA (W × H) W × H × D / Weight (with stand) W × H × D / Weight (without stand) W × H × D / Weight (Shipping) Voltage Power Consumption (Typical) | 600 × 400 76.5" × 46.8" × 13.6" / 99.2 lbs 1,943 × 1,188 × 345 / 450 lbg 76.5" × 43.8" × 3.7" / 97.4 lbs 1,943 × 1,113 × 93.3 / 442 kg 83.3" × 49.6" × 11.2" / 130.1 lbs 2,116 × 1,261 × 285 / 59.0 kg AC 120 V - 50 / 60 Hz 301W | HDMI In (HDCP) 2.0, RF In (tu 600 × 400 66.7" × 41.3" × 13.6" / 78 lbs 1,693 × 1,048 × 345 / 35.4 kg 66.7" × 38.3" × 3.5" / 76.3 lbs 1,693 × 973 × 88.8 / 34.6 kg 72.4" × 43.9" × 9.1" / 100.8 lbs 1,839 × 1,116 × 231 / 45.7 kg AC 120 V - 50 / 60 Hz 221W | HDMI In 2(2. ner), AV In (3.5mm), Digital Audio Out (Opti External Speaker Out (3.5mm, Stereo, N 300 × 300 57.6" × 36" × 10.6" / 47.6 lbs 1,463 × 914 × 269 / 21.6 kg 57.6" × 33.3" × 3.5" / 47 lbs 1,463 × 845 × 87.8 / 21.3 kg 63" × 38.2" × 7.5" / 62.6 lbs 1,600 × 970 × 190 / 28.4 kg AC 120 V - 50 / 60 Hz 180.3W | 0), USB (2.0) cal), RS-232C (D-Sub 9pin, Control & Serv tax 1W with 8Ω), Service Only (3.5mm) 300 × 300 49" × 30.9" × 9.1" / 32 lbs 1,244 × 786 × 231 / 14.5 kg 49" × 28.4" × 3.4" / 31.5 lbs 1,244 × 721 × 87.1 / 14.3 kg 53.5" × 33" × 6.9" / 43 lbs 1,360 × 835 × 175 / 19.5 kg AC 120 V - 50 / 60 Hz 145W | ce), RJ45 2 (Ethernet, SNMP), 300 × 300 43.7" × 27.9" × 9.1" / 24.9 lbs 1,110 × 709 × 231 / 11.3 kg 43.7" × 25.4" × 3.2" / 24.5 lbs 1,110 × 645 × 81.1 / 11.1 kg 47" × 30.3" × 6.2" / 29.5 lbs 1,193 × 770 × 158 / 13.4 kg AC 120 V - 50 / 60 Hz 104W | 38.3" x 24.5" x 8.5" / 17.9 lb 973 x 623 x 216 / 8.1 kg 38.3" x 223" x 3.3" / 17.6 lbs 973 x 567 x 85 / 80 kg 41.7" x 26" x 6" / 22.5 lbs 1,060 x 660 x 152 / 10.2 kg AC 120 V - 50 / 60 Hz 99.1W |
| MECHANICAL | Rear VESA (W × H) W × H × D / Weight (with stand) W × H × D / Weight (without stand) W × H × D / Weight (Shipping) Voltage Power Consumption (Typical) Standby Power | 600 × 400 76.5" × 46.8" × 13.6" / 99.2 lbs 1,943 × 1,188 × 345 / 45.0 lg 76.5" × 43.8" × 3.7" / 97.4 lbs 1,943 × 1,113 × 93.3 / 44.2 lg 83.3" × 49.6" × 11.2" / 130.1 lbs 2,116 × 1,261 × 285 / 59.0 lg AC 120 V - 50 / 60 Hz 301W Under 0.5W | HDMI In (HDCP) 2.0, RF In (tu 600 × 400 66.7" × 41.3" × 13.6" / 78 lbs 1,693 × 1,048 × 345 / 35.4 kg 66.7" × 38.3" × 3.5" / 76.3 lbs 1,693 × 973 × 88.8 / 34.6 kg 72.4" × 43.9" × 9.1" / 100.8 lbs 1,839 × 1,116 × 231 / 45.7 kg AC 120 V - 50 / 60 Hz 221W Under 0.5W 3 Year Parts and Labor | HDMI In 2(2. ner), AV In (3.5mm), Digital Audio Out (Opti External Speaker Out (3.5mm, Stereo, N 300 × 300 57.6" × 36" × 10.6" / 47.6 lbs 1,463 × 914 × 269 / 21.6 kg 57.6" × 33.3" × 3.5" / 47 lbs 1,463 × 845 × 87.8 / 21.3 kg 63" × 38.2" × 7.5" / 62.6 lbs 1,600 × 970 × 190 / 28.4 kg AC 120 V - 50 / 60 Hz 180.3W Under 0.5W | 0), USB (2.0) cal), RS-232C (D-Sub 9pin, Control & Serv fax 1W with 8Ω), Service Only (3.5mm) 300 × 300 49" × 30.9" × 9.1" / 32 lbs 1,244 × 786 × 231 / 14.5 kg 49" × 28.4" × 3.4" / 31.5 lbs 1,244 × 721 × 87.1 / 14.3 kg 53.5" × 33" × 6.9" / 43 lbs 1,360 × 835 × 175 / 19.5 kg AC 120 V - 50 / 60 Hz 145W Under 0.5W 3 Year Parts and Labor | ice), RI45 2 (Ethernet, SNMP), 300 x 300 43.7" x 27.9" x 9.1" / 24.9 lbs 1,110 x 709 x 231 / 11.3 kg 43.7" x 25.4" x 3.2" / 24.5 lbs 1,110 x 645 x 81.1 / 11.1 kg 47" x 30.3" x 6.2" / 29.5 lbs 1,193 x 770 x 158 / 134 kg AC 120 V - 50 / 60 Hz 104W Under 0.5W | 38.3" x 24.5" x 8.5" / 17.9 lb 973 x 623 x 216 / 8.1 kg 973 x 623 x 216 / 8.1 kg 973 x 567 x 85 / 80 kg 41.7" x 26" x 6" / 22.5 lbs 1,060 x 660 x 152 / 10.2 kg AC 120 V - 50 / 60 Hz 99.1W Under 0.5W |

* Specifications are subject to change without notice, so please contact LG sales team to verify before ordering.

http://www.lg.com/us/business/commercial-display
http://www.twitter.com/LGCommDisplays
http://www.facebook.com/LGCommercialdisplays
http://www.linkedin.com/company/g-commercial-displays-usa
http://www.linkedin.com/company/g-commercialdisplaysa

Copyright 2020 @LG Electronics USA, Inc., 2000 Millbrook Drive Lincolnshire, IL 60069, USA.

All rights reserved. LG and the LG logo are registered trademarks of LG Corp. All other products and brand names are trademarks or registered trademarks of their respective companies. Designs, features, and specifications are subject to change without notice. All screen images are simulated. SPEC_UT640S Series_032070_LR

