

Pro:Centric Hospitality TV with Integrated Pro:Idiom



Pro:Centric Solutions



Optimizer

LN570H / LN560H		32LN570HBUA	32LN560HBUA
Design	Stand Type	1 pole (Swivel)	1 pole (Swivel)
	Size	32"	32"
Display	Resolution	HD (1,366 × 768)	HD (1,366 × 768)
	Туре	LCD	LCD
Broadcasting System	Digital	ATSC / Clear QAM	ATSC / Clear QAM
	Analog	NTSC	NTSC
b-LAN		Yes	No
VESA		200 × 200 mm	200 × 200 mm

Commercial Swivel Stand





Pro:Centric Direct

The hotel content management solution Pro:Centric Direct ("PCD") offers easy and simple editing tools, making it easy to perform service and IP network-based remote management with a single click. The Pro:Centric Direct solution enables users to edit their interface easily by providing customized interface and efficiently manages all TVs in the room. The latest PCD version provides IoT-based in-room control as well as voice control function through LG Natural Language Processing (NLP). These IoT and voice-related functions will be your starting point to prepare for the hotel rooms of next generation through artificial intelligence.

 \star Some features may not be supported based on PCD versions.



Game Optimizer


LG Game Optimizer will get you and keep you in the action through selection of game mode and picture adjustment.



Pro:Idiom

LG's Pro:Idiom Digital Rights Management (DRM) technology provides access to premium content while protecting the content license holders to help assure legitimate, rapid and broad deployment of HDTV and other high-value digital content.

DIMENSIONS

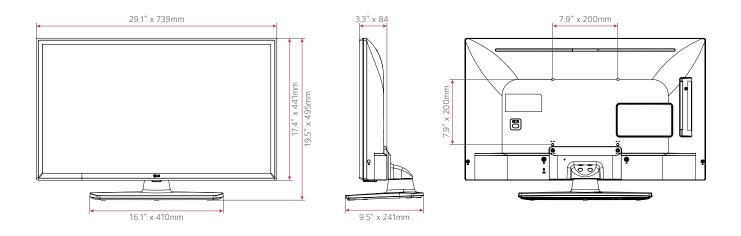


CONNECTIVITY

LN570H Series

32″

Side

IEZ68822

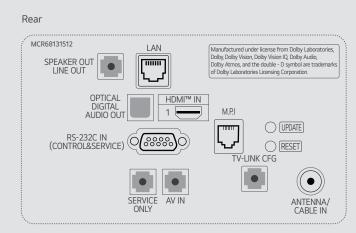

HDMI IN


(eARC/ARC) 3

USB IN

•



Rear



Side

MEZ68822666	HDMI IN	USB IN
(REV00)	2 (eARC/ARC) 3	⊷

SPECIFICATIONS

		32LN570HBUA	32LN560HBUA		
	Size	32			
Display	Resolution	Resolution 1,366 × 768 (HD)			
	Brightness (Typ.)	Up to 240 nits			
Video	HDR 10 Pro	Yes			
	HDR HLG (Hybrid Log Gamma)	Yes			
	Game Optimizer	Yes			
Audio (Sound) Broadcasting System	Speaker (Audio Output)	10 W			
	Al Sound	Yes			
	Digital	ATSC / Clear QAM			
	Analog (NTSC / SECAM / PAL)	NTSC			
Hospitality Solution	Solution Type	Pro:Centric (Smart, Direct, V)			
	Pro:Idiom (DRM / Media)	Yes / Yes			
Smart Feature	webOS22, HDMI-eARC/ARC (HDMI2), Anti-theft System (Kensington Lock, Credenza/Security Aperture (Need Stand), Lock Down Plate (requires stand)				
Hospitality Feature	EzManager, USB Cloning, Wake on RF, Diagnostics (Self Diagnostics (USB)), HTNG-CEC (1.4), Simplink (HDMI-CEC (1.4)), IR Out (RS-232C, MPI), Multi-code IR, Installer Menu, Welcome Screen (Splash Image), Insert Image, One Channel Map (LCM), External Speaker Out / Line Out, Instant ON, Port Block, RJP (Remote Jack Pack) Compatibility, b-LAN (Only 32LN570HBUA), Energy Saving Mode, NTP Sync Timer, Video Tag (2 Videos)				
Connectivity	HDMI In (x3), USB 2.0, RF In, AV In, Digital Audio Out (Optical), Speaker Out / Line Out (3.5 mm Stereo), RJ45 (Usage Purpose (Pro:Centric)), RS-232C In (3.5 mm TRRS), TV Link Configuration (3.5 mm Stereo (Only 32LN570HBUA)), Lt Service Only (3.5 mm Stereo), MPI Port (RJ12 Jack)				
	VESA Compatible	200 × 2	00 mm		
	Stand Type	1 pole (Swivel)			
	Front Color	Ceramic Black			
	Dimensions without Stand (W x H x D)	29.1 x 17.4 x 3.3 in. / 739 × 441 × 84 mm			
		29.1 x 19.5 x 9.5 in. / 739 × 495 × 241 mm			
	Dimensions with Stand (W x H x D)	29.1 x 19.5 x 9.5 in. / 1			
Mechanical		29.1 x 19.5 x 9.5 in. / 35.6 x 20.9 x 6.4 in. /	739 × 495 × 241 mm		
Mechanical	Shipping Dimensions (W x H x D)	35.6 x 20.9 x 6.4 in. /	739 × 495 × 241 mm 905 × 530 × 162 mm		
Mechanical	Shipping Dimensions (W x H x D) Weight without Stand	35.6 x 20.9 x 6.4 in. / 10.7 lbs. /	739 × 495 × 241 mm 905 × 530 × 162 mm / 4.85 kg		
Mechanical	Shipping Dimensions (W x H x D) Weight without Stand Weight with Stand	35.6 x 20.9 x 6.4 in. / 10.7 lbs. / 13.3 lbs. /	739 × 495 × 241 mm 905 × 530 × 162 mm / 4.85 kg / 6.05 kg		
Mechanical	Shipping Dimensions (W x H x D) Weight without Stand Weight with Stand Shipping Weight	35.6 x 20.9 x 6.4 in. / 10.7 lbs. / 13.3 lbs. / 16.2 lbs. /	739 × 495 × 241 mm 905 × 530 × 162 mm / 4.85 kg / 6.05 kg / 7.35 kg		
Mechanical	Shipping Dimensions (W x H x D) Weight without Stand Weight with Stand	35.6 x 20.9 x 6.4 in. / 10.7 lbs. / 13.3 lbs. /	739 × 495 × 241 mm 905 × 530 × 162 mm / 4.85 kg / 6.05 kg / 7.35 kg		
Mechanical	Shipping Dimensions (W x H x D) Weight without Stand Weight with Stand Shipping Weight	35.6 x 20.9 x 6.4 in. / 10.7 lbs. / 13.3 lbs. / 16.2 lbs. /	739 × 495 × 241 mm 905 × 530 × 162 mm ⁷ 4.85 kg ⁷ 6.05 kg ⁷ 7.35 kg 0.6 / 23.4 mm		
Mechanical	Shipping Dimensions (W x H x D) Weight without Stand Weight with Stand Shipping Weight On Bezel Width (L/R/U/B)	35.6 x 20.9 x 6.4 in. / 10.7 lbs. / 13.3 lbs. / 16.2 lbs. / 20.7 / 20.7 / 2	739 × 495 × 241 mm 905 × 530 × 162 mm / 4.85 kg / 6.05 kg / 7.35 kg 0.6 / 23.4 mm 8.8 / 21.6 mm		
Mechanical	Shipping Dimensions (W x H x D) Weight without Stand Weight with Stand Shipping Weight On Bezel Width (L/R/U/B) Off Bezel Width (L/R/U/B)	35.6 x 20.9 x 6.4 in. / 10.7 lbs. / 13.3 lbs. / 16.2 lbs. / 20.7 / 20.7 / 20 18.8 / 18.8 / 18	739 × 495 × 241 mm 905 × 530 × 162 mm / 4.85 kg / 6.05 kg / 7.35 kg 0.6 / 23.4 mm 8.8 / 21.6 mm 50-60 Hz		
	Shipping Dimensions (W x H x D) Weight without Stand Weight with Stand Shipping Weight On Bezel Width (L/R/U/B) Off Bezel Width (L/R/U/B) Power Supply (Voltage, Hz)	35.6 x 20.9 x 6.4 in. / 10.7 lbs. / 13.3 lbs. / 16.2 lbs. / 20.7 / 20.7 / 20 18.8 / 18.8 / 18 120 Vac, 5	739 × 495 × 241 mm 905 × 530 × 162 mm ⁷ 4.85 kg ⁷ 6.05 kg ⁷ 7.35 kg 0.6 / 23.4 mm 8.8 / 21.6 mm 50-60 Hz ⁷ 45 W		
	Shipping Dimensions (W x H x D) Weight without Stand Weight with Stand Shipping Weight On Bezel Width (L/R/U/B) Off Bezel Width (L/R/U/B) Power Supply (Voltage, Hz) Power Consumption (Typ. / Max.)	35.6 x 20.9 x 6.4 in. / 10.7 lbs. / 13.3 lbs. / 16.2 lbs. / 20.7 / 20.7 / 2 18.8 / 18.8 / 18 120 Vac, 5 38 W /	739 × 495 × 241 mm 905 × 530 × 162 mm ⁷ 4.85 kg ⁷ 6.05 kg ⁷ 7.35 kg 0.6 / 23.4 mm 8.8 / 21.6 mm 50-60 Hz ⁷ 45 W 0.5 W		
Electrical	Shipping Dimensions (W x H x D) Weight without Stand Weight with Stand Shipping Weight On Bezel Width (L/R/U/B) Off Bezel Width (L/R/U/B) Power Supply (Voltage, Hz) Power Consumption (Typ. / Max.) Standby Power Consumption	35.6 x 20.9 x 6.4 in. / 10.7 lbs. / 13.3 lbs. / 16.2 lbs. / 20.7 / 20.7 / 20 18.8 / 18.8 / 18 120 Vac, 5 38 W / Under	739 × 495 × 241 mm 905 × 530 × 162 mm ⁷ 4.85 kg ⁷ 6.05 kg ⁷ 7.35 kg 0.6 / 23.4 mm 8.8 / 21.6 mm 50-60 Hz ⁷ 45 W 0.5 W imited		
	Shipping Dimensions (W x H x D) Weight without Stand Weight with Stand Shipping Weight On Bezel Width (L/R/U/B) Off Bezel Width (L/R/U/B) Power Supply (Voltage, Hz) Power Consumption (Typ. / Max.) Standby Power Consumption Warranty	35.6 x 20.9 x 6.4 in / 10.7 lbs. / 13.3 lbs. / 16.2 lbs. / 20.7 / 20.7 / 2 18.8 / 18.8 / 18 120 Vac, 5 38 W / Under 3 Year L	739 × 495 × 241 mm 905 × 530 × 162 mm / 4.85 kg / 6.05 kg / 7.35 kg 0.6 / 23.4 mm 8.8 / 21.6 mm 50-60 Hz / 45 W 0.5 W .imited L		

* Specifications are subject to change without notice. Please make sure to check the product manual for details about product usage.



www.lg.com/us/business/commercial-display
www.youtube.com/lgcommercialdisplayusa
www.facebook.com/LGcommercialdisplays
www.linkedin.com/company/lg-commercial-displays-usa
www.twitter.com/LGCommDisplays

