


LG NeON[®] 2 Black


LG315N1K-A5



60

315W

The LG NeON[®] 2 is LG's best selling solar module. LG NeON[®] 2 received the acclaimed 2015 Intersolar AWARD for featuring LG's Cello Technology which increases power output and reliability and makes the LG NeON[®] 2 one of the most powerful and versatile modules on the market.

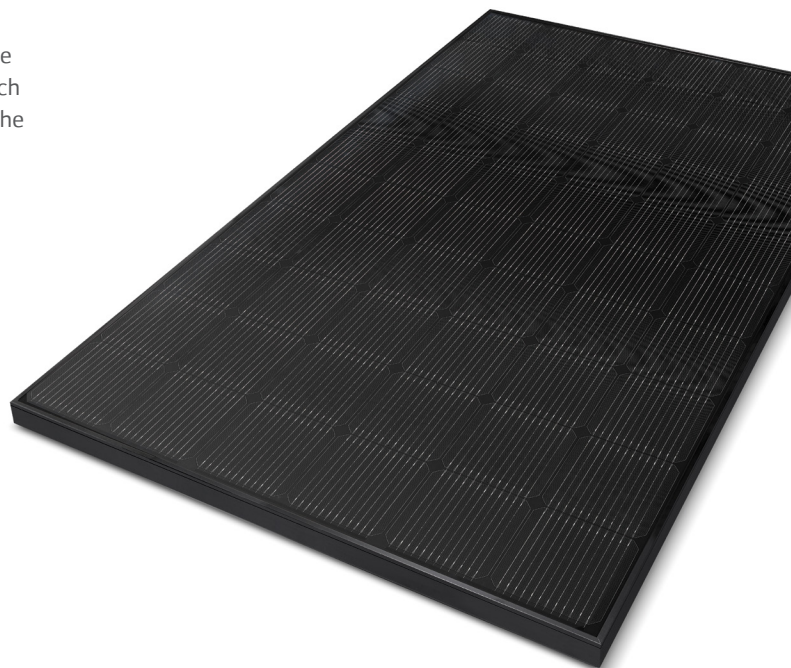

Features



Enhanced Performance Warranty

LG NeON[®] 2 Black has an enhanced performance warranty. After 25 years, LG NeON[®] 2 Black is guaranteed at least 86% of initial performance.



Enhanced Product Warranty

LG has extended the warranty of the NeON[®] 2 Black to 25 years including labor, which is top level in the industry.



Roof Aesthetics

LG NeON[®] 2 Black has been designed with aesthetics in mind using thinner wires that appear all black at a distance. LG NeON[®] 2 Black can increase the value of a property with its modern design.



Outstanding Durability

With its newly reinforced frame design, LG has extended the warranty of the NeON[®] 2 Black from 15 years to 25 years. Additionally, LG NeON[®] 2 Black can endure a front load up to 6000 Pa, and a rear load up to 5400 Pa.



Better Performance on a Sunny Day

LG NeON[®] 2 Black now performs better on sunny days, thanks to its improved temperature coefficient.



Near Zero LID (Light Induced Degradation)

The n-type cells used in LG NeON[®] 2 Black have almost no boron. This leads to less LID (Light Induced Degradation) right after installation.

When you go solar, ask for the brand you can trust: LG Solar

About LG Electronics

LG Electronics is a global leader in electronic products in the clean energy markets by offering solar PV panels and energy storage systems. The company first embarked on a solar energy source research program in 1985, supported by LG Group's vast experience in the semi-conductor, LCD, chemistry and materials industries. In 2010, LG Solar successfully released its first MonoX[®] series to the market, which is now available in 32 countries. The NeON[®] (previous MonoX[®] NeON), NeON[®]2, NeON[®]2 BiFacial won the "Intersolar AWARD" in 2013, 2015 and 2016, which demonstrates LG's leadership and innovation in the solar industry.

LG Solar

LG315N1K-A5

Mechanical Properties

Cells	6 x 10
Cell Vendor	LG
Cell Type	Monocrystalline / N-type
Cell Dimensions	161.7 x 161.7 mm / 6 inches
# of Busbar	12 (Multi Wire Busbar)
Dimensions (L x W x H)	1,686 x 1,016 x 40 mm 66.38 x 40 x 1.57 in
Front Load	6,000Pa / 125 psf*
Rear Load	5,400Pa / 113 psf*
Weight	18 kg / 39.68 lb
Connector Type	MC4 (MC)
Junction Box	IP68 with 3 Bypass Diodes
Cables	1,000 mm x 2 ea / 39.37 in x 2 ea
Glass	Tempered Glass with AR Coating
Frame	Anodized Aluminium

* Please refer to the installation manual for the details.

Certifications and Warranty


Certifications	IEC 61215, IEC 61730-1/-2 UL 1703 IEC 61701 (Salt mist corrosion test) IEC 62716 (Ammonia corrosion test) ISO 9001
Module Fire Performance	Type 2 (UL 1703)
Fire Rating	Class C (ULC/ORD C 1703, IEC 61730)
Product Warranty	25 Years
Output Warranty of Pmax	Linear Warranty*

* 1) 1st year: 98%, 2) After 1st year: 0.5% annual degradation, 3) 86% after 25 years

Temperature Characteristics

NOCT	[°C]	45 ± 3
Pmax	[%/°C]	-0.37
Voc	[%/°C]	-0.27
Isc	[%/°C]	0.03

Characteristic Curves

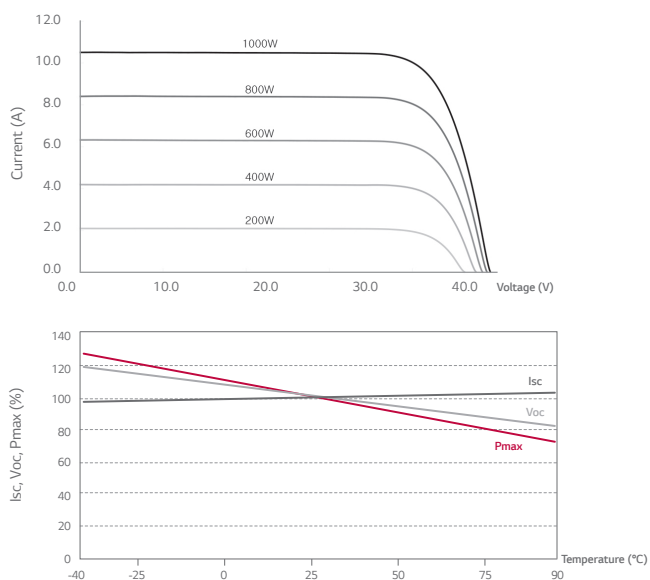

Electrical Properties (STC*)

Model	LG315N1K-A5	
Maximum Power (Pmax)	[W]	315
MPP Voltage (Vmpp)	[V]	32.9
MPP Current (Impp)	[A]	9.58
Open Circuit Voltage (Voc)	[V]	40.7
Short Circuit Current (Isc)	[A]	10.15
Module Efficiency	[%]	18.4
Operating Temperature	[°C]	-40 ~ +90
Maximum System Voltage	[V]	1000 (UL / IEC)
Maximum Series Fuse Rating	[A]	20
Power Tolerance	[%]	0 ~ +3


* STC (Standard Test Condition): Irradiance 1000 W/m², cell temperature 25 °C, AM 1.5
The nameplate power output is measured and determined by LG Electronics at its sole and absolute discretion.

Electrical Properties (NOCT*)

Model	LG315N1K-A5	
Maximum Power (Pmax)	[W]	232
MPP Voltage (Vmpp)	[V]	30.4
MPP Current (Impp)	[A]	7.63
Open Circuit Voltage (Voc)	[V]	37.9
Short Circuit Current (Isc)	[A]	8.17

* NOCT (Nominal Operating Cell Temperature): Irradiance 800 W/m², ambient temperature 20 °C, wind speed 1 m/s

Dimensions (mm / inch)

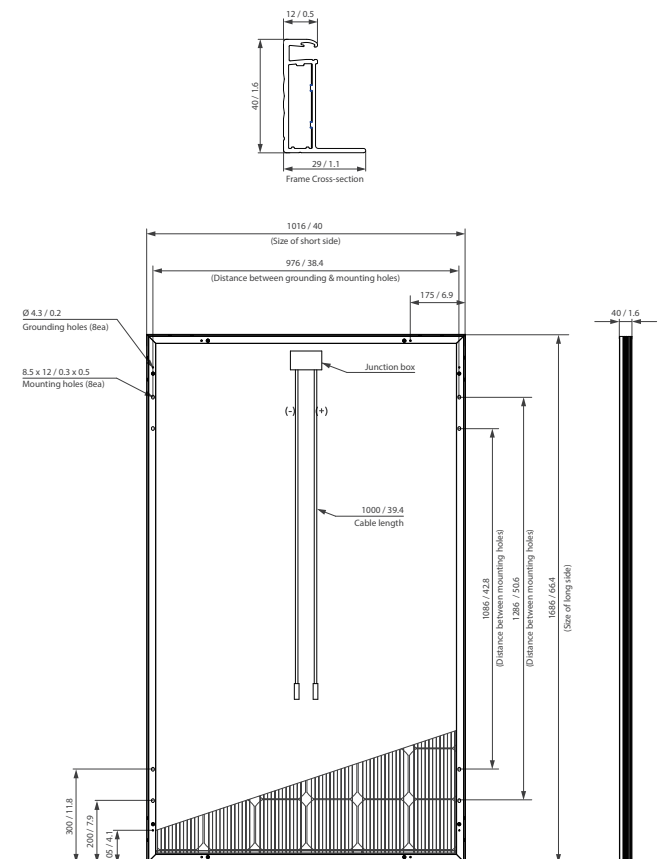

* The distance between the center of the mounting/grounding holes.

