


# LG NeON<sup>®</sup> 2 ACe

LG360M1C-N5-PRELIMINARY

60

## 360W

LG NeON<sup>®</sup> ACe is a high-power AC module based on our NeON<sup>®</sup> 2 series. The NeON<sup>®</sup> ACe is a smart AC module that is easy to install and monitor, provides increased flexibility for array design and is an excellent solution for home installation.

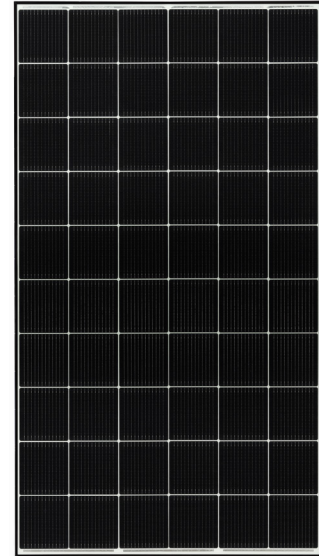

## Features



### High Output and Efficiency

The LG NeON<sup>®</sup> 2 series has been designed for high-power output making it efficient even in limited space.



### 25-Year Warranty

The NeON<sup>®</sup> 2 series offers a 25-year limited warranty for performance, product and labor. At 25 years, the modules are guaranteed to produce at least 90.08% of their labeled power output.



### Roof Aesthetics

LG NeON<sup>®</sup> 2 has been designed with aesthetics in mind using thinner wires that appear all black at a distance.



### Flexible Array Design

The LG NeON<sup>®</sup> 2 ACe provides flexibility in array design, with simple accessories and cable connections.



### Solid Performance on Hot Days

The LG NeON<sup>®</sup> 2 series performs well on hot days due to its low temperature coefficient.



### Easy Monitoring

LG NeON<sup>®</sup> 2 Ace connects quickly and easily to the Internet. Registering the modules onto the system is a simple process.

When you go solar, ask for the brand you can trust: LG Solar

## About LG Electronics USA, Inc.

LG Electronics is a global leader in electronic products in the clean energy markets by offering solar PV panels and energy storage systems. The company first embarked on a solar energy source research program in 1985, supported by LG Group's vast experience in the semi-conductor, LCD, chemistry and materials industries. In 2010, LG Solar successfully released its first MonoX<sup>®</sup> series to the market, which is now available in 32 countries. The NeON<sup>®</sup> (previous MonoX<sup>®</sup> NeON), NeON<sup>®</sup>2, NeON<sup>®</sup>2 BiFacial won the "Intersolar AWARD" in 2013, 2015 and 2016, which demonstrates LG's leadership and innovation in the solar industry.



# LG NeON<sup>®</sup>2 ACe

## LG360M1C-N5-PRELIMINARY

### General Data

Cells	6 x10
Cell Vendor	LG
Cell Type	Monocrystalline/N-type
Number of Busbars	12 EA (Multi Wire Busbar)
Dimensions (L x W x H)	1,700 x 1,016 x 40 mm
Weight	19.5 kg/43 lbs
Mechanical Test Load*	5,400Pa (Front)/4,000Pa (Rear)
Cooling	Natural Convection - No Fans
Enclosure Environmental Rating	Outdoor - NEMA 250 type 6 (Micro Inverter)
Operating Ambient Temperature	-40 ~ +65°C (-40 ~ +149°F)
Storage Temperature	-40 ~ +90°C (-40 ~ +194°F)
Glass	2.8mm/Tempered Glass with High Transmission Anti-Reflective Coating
Frame	Anodized Aluminium
Inverter Model (Grid Support Utility Interactive)	LM320UE-A2

\*Mechanical Test Load 5,400pa/4,000pa based on IEC 61215 - 2:2016 (Test Load = Design Load x Safety Factor (x1.5))

### Certifications and Warranty

Certifications	UL1703/61730*, UL1741*, UL1741 SA*, IEEE1547* FCC Part 15 Class B
Module Fire Performance	Type 1 (UL 1703)
Solar Module Product Warranty	25 Year Limited
Micro Inverter Warranty	25 Year Limited
Output Warranty of Pmax (DC) (Measurement Tolerance ± 3%)	Linear Warranty**

\*Certification in progress


\*\*Improved: 1st year 98%, from 2-24th year: 0.33%/year down, 90.08% at year 25

### DC Temperature Characteristics

NOCT*	[°C]	42 ± 3
Pmax	[%/°C]	-0.34
Voc	[%/°C]	-0.26
Isc	[%/°C]	0.03

\*NOCT (Nominal Operating Cell Temperature): Irradiance 800W/m<sup>2</sup>, ambient temperature 20°C, wind speed 1m/s

### Characteristic Curves

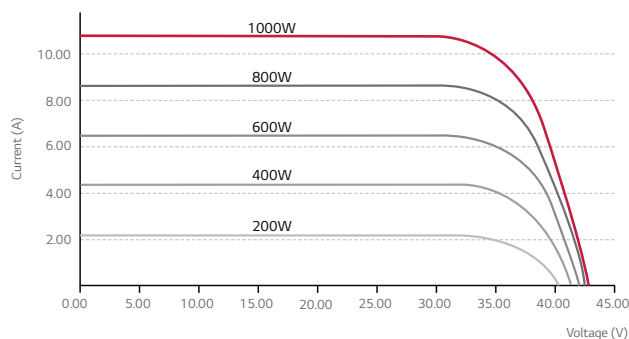

### DC Electrical Properties (STC\*)

Model	LG360M1C-N5	
Maximum Power (Pmax)**	[W]	360
Module Efficiency	[%]	20.8
Power Tolerance	[%]	0 ~ +3


\*STC (Standard Test Condition): Irradiance 1000 W/m<sup>2</sup>, Cell temperature 25°C, AM 1.5

\*\*Measurement Tolerance of Pmax: ±3%

### AC Electrical Properties

		@240VAC	@208VAC
Max. Continuous Output Power	[VA]	320	
Nominal Voltage/Range	[V]	240/211~264	208/183~229
Nominal Output Current	[A]	1.33	1.54
CEC Weighted Efficiency	[%]	97.0	96.5
Cable Length (only cable length)	[mm]	Cable 1 : 1,200	Cable 2 : 1,100
Number of Max. AC Modules	[EA]	12	10
Nominal Frequency/Range	[Hz]	60.0 / 59.3-60.5	
Power Factor/Adjustable		1/0.8leading...0.8lagging	
Max. Branch Circuit Over Current Protection	[A]	20	

### Dimensions (mm/inch)

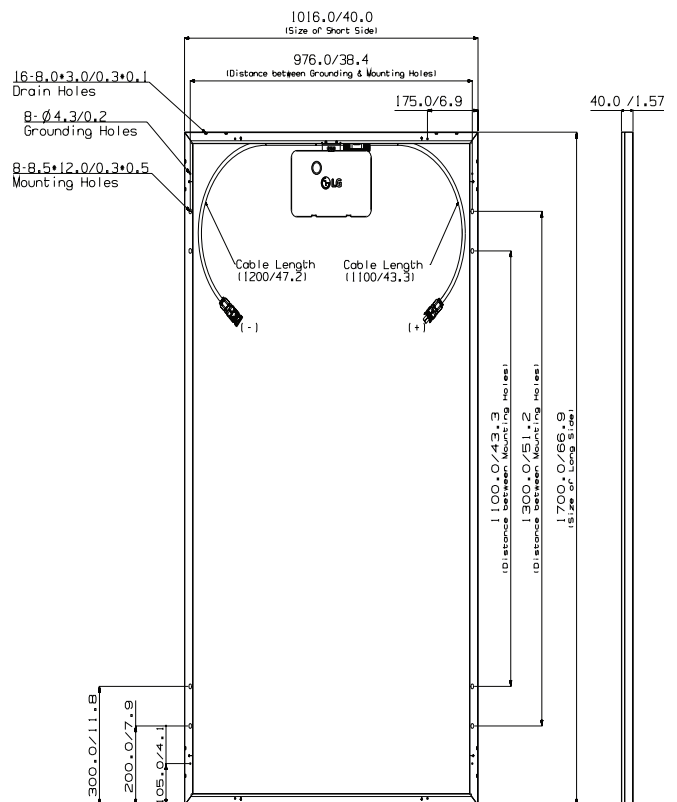

\*The distance between the center of the mounting/grounding holes.



LG Electronics USA, Inc.  
Solar Business Division  
2000 Millbrook Drive  
Lincolnshire, IL 60069  
www.lg-solar.com

Product specifications are subject to change without notice.  
LG360M1C-N5.pdf  
071020

© 2020 LG Electronics USA, Inc. All rights reserved.