

28.7 cu. ft. 4-Door French Door Refrigerator



- 28.7 cu. ft. Capacity
- Double Freezer Drawers
- Water Dispenser
- Door Cooling +
- LED Lighting
- LoDecibel™ Quiet Operation
- SmartDiagnosis™



COLOR AVAILABILITY

- LRMWS2906S – PrintProof™ Stainless Steel
- LRMWS2906D – PrintProof™ Black Stainless Steel

CAPACITY

Refrigerator (cu. ft.)	19.5
Freezer (cu. ft.)	9.2
Total Capacity (cu. ft.)	28.7

ENERGY

Energy Consumption (kWh / Year)	652
ENERGY STAR® Qualified	Yes

WATER & ICE SYSTEM

Ice & Water Dispenser	Yes
Dispenser Type	Integrated Tall Water Dispenser
Internal Water Dispenser	No
Measured Fill	No
Dual Ice Maker	No
Ice System	Factory Installed Ice Maker
Daily Ice Production (lbs.)	2.5 lbs.
IcePlus™ Production (lbs.)	2.7 lbs.
Ice Storage Capacity (lbs.)	4.0 lbs.
Water Filter	LT1000P (NSF-Certified*)

COOLING

Compressor Type	Smart Inverter Compressor
Dual Evaporators	No
Cooling System	No
Multi-Air Flow™ System	Yes
Door Cooling+	Yes
Temperature Sensors	6
Fresh Air Filter	No

CONVENIENCE

Display Type	Membrane / White LED
Temperature Controls	Electronic / Digital
Door Alarm	Yes
Child Lock	Yes
Auto Closing Door Hinge	Yes
ADA Compliant	No
Sabbath Mode	Yes (Star-K-Certified)
LoDecibel™ Quiet Operation	Yes

REFRIGERATOR

No. of Shelves	4 Split (3 Fixed+1Folding)
Cantilevered Shelves	Hybrid Cantilevered
Shelf Construction	Spill Protector™ Tempered Glass
Crisper Bins	2 Humidity Crispers
Glide N' Serve™ Pantry Drawer	Yes
Cool Guard	No
Refrigerator Light	Ceiling LED
Full-Convert™ Drawer	No

REFRIGERATOR DOOR

InstaView® Door-in-Door®	No
Door-in-Door® with ColdSaver™ Panel	No
No. of Door Bins	6 Total (2 Adjustable Gallon Sized)
Door Bin Construction	1 Piece (Clear)

FREEZER

Freezer Type	Pull Drawer
Freezer Drawers	2-Tier Organization
DuraBase™ Solid Drawer Base	Yes
Drawer Divider	Yes
Ice Storage	Ice Maker & Ice Bin in Freezer
Freezer Light	LED (Upper Drawer Only)
Freezer Handle	Matching Handle

SMART FEATURES

Wi-Fi Enabled	No
ThinQ®	No
SmartDiagnosis™	Yes

MATERIALS AND FINISHES

Hidden Hinges	Yes
Surface	Smooth
Fingerprint & Smudge Resistant Exterior	Yes
Handles	Matching Handles

ACCESSORIES

Replacement Water Filter	LT1000P
--------------------------	---------

TECHNICAL SPECS

Required Power Supply	115 V, 60 Hz, 15 Amp
Plug Type	3-Prong
Power Cord Location	Back
Min. / Max. Water Pressure	20 - 120 psi

DIMENSIONS / CLEARANCES / WEIGHTS

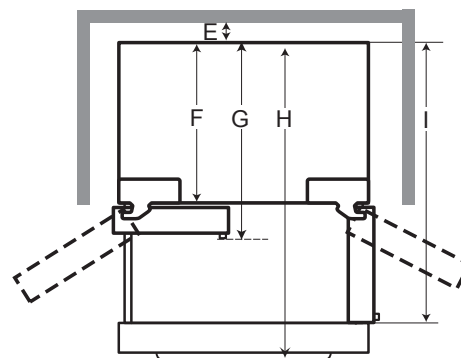
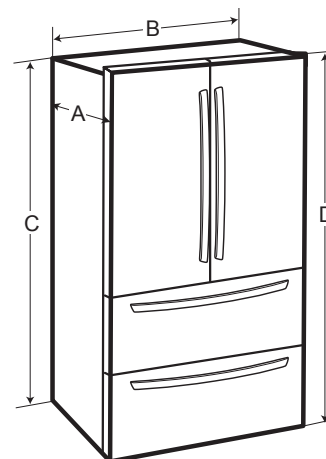
Depth with Handles	36 1/4"
Depth without Handles	33 3/4"
Depth without Door	29 7/8"
Depth (Total with Door Open)	48 5/8"
Height to Top of Case	68 1/2"
Height to Top of Door Hinge	TBD
Width	35 3/4"
Width (Door Open 90° with Handle)	44 1/4"
Width (Door Open 90° without Handle)	39 1/4"
Door Edge Clearance with Handle	4 1/2"
Door Edge Clearance without Handle	1 3/8"
Installation Clearance	Sides 1/8", Top 1", Back 2"
Approx. Weight (Product / Carton)	227 lbs. / 302 lbs.
Carton Dimensions (WxHxD)	38" x 73" x 39"

LIMITED WARRANTY

Parts & Labor	1 Year
Sealed System (Parts & Labor)	5 Years
Compressor (Parts & Labor)	5 Years
Smart Inverter Compressor (Parts Only)	6-10 Years



*System tested and certified by NSF® International against NSF / ANSI Standard 42, Standard 53 and Standard 401.

DIMENSIONS / CLEARANCES**DIMENSIONS / CLEARANCES**

A	Depth without Handles	33 3/4" (857 mm)
B	Width	35 3/4" (908 mm)
C	Height to Top of Case	68 3/8" (1737 mm)
D	Height to Top of Hinge	68 1/2" (1740 mm)
E	Back Clearance	2" (50 mm)
F	Depth without Door	29 7/8" (759 mm)
G	Depth With Handle	36 1/4" (921 mm)
H	Depth (Total with Freezer Drawer Open)	55 1/4" (1403 mm)
I	Depth (Total with Door Open 90°)	48 5/8" (1235 mm)

INSTALLATION NOTES

- The installation location chosen for the refrigerator should allow space behind the unit for connections and airflow and space in front to open the doors and drawers.
- Too small of a distance from adjacent items may result in lowered freezing capability and increased electricity consumption charges. Allow at least 24 inches (610 mm) in front of the refrigerator to open the doors, and at least 2 inches (50.8 mm) between the back of the refrigerator and the wall.