



## 26.1 cu. ft. InstaView™ Door-in-Door® Side-By-Side Refrigerator

- 26.1 cu. ft. Capacity
- InstaView™ Door-in-Door®
- Multi-Air Flow™ Cooling
- Premium LED Lighting
- Fresh Air Filter
- Integrated Ice & Water Dispenser
- SpacePlus® Ice System
- LoDecibel™ Quiet Operation
- LG ThinQ® Technology (Wi-Fi)



### COLOR AVAILABILITY

● LSXS26396S – Stainless Steel

### CAPACITY

Refrigerator (cu. ft.)	16.9
Freezer (cu. ft.)	9.2
Total Capacity (cu. ft.)	26.1

### ENERGY

Energy Consumption (kWh/Year)	684
ENERGY STAR® Qualified	Yes

### WATER & ICE SYSTEM

Ice & Water Dispenser	Yes
Dispenser Type	Integrated Ice & Water Dispenser
Dual Ice Maker	No
Ice System	SpacePlus®
Daily Ice Production	3.5 lbs.
IcePlus™ Production	4.1 lbs.
Ice Storage Capacity	4.5 lbs.
Dispenser Light	Yes
Water Filter	LT1000P

### COOLING

Compressor Type	Linear Compressor
Dual Evaporators	No
Cooling System	Multi-Air Flow™
Multi-Air Flow™ System	Yes
Temperature Sensors	5
Fresh Air Filter	Yes

### CONVENIENCE

Display Type	Smooth Touch Control / White LED
Temperature Controls	Electronic / Digital
Door Alarm	Yes
Child Lock	Yes
Auto Closing Door Hinge	Yes
ADA Compliant	Yes
Sabbath Mode	No
LoDecibel™ Quiet Operation	Yes

### REFRIGERATOR

No. of Shelves	4
Shelf Construction	Tempered Glass
Crisper Bins	2
Refrigerator Light	Premium LED

### REFRIGERATOR DOOR

InstaView™ Door-in-Door®	Yes
Door-In-Door® with ColdSaver™ Panel	Yes
No. of Door Bins	6
Door Bin Construction	1 Piece (Clear)

### FREEZER

Freezer Drawers	2
No. of Shelves	3
No. of Door Bins	3
Freezer Light	Premium LED
Freezer Handle	Matching Handle

### SMART FEATURES

Wi-Fi Enabled	Yes
ThinQ®	Yes
Proactive Customer Care	Yes
Voice Control	Google Assistant, Amazon Alexa
SmartDiagnosis™	Yes
Remote Monitoring	Yes

### MATERIALS AND FINISHES

Hidden Hinges	Yes
Surface	Smooth
Fingerprint & Smudge Resistant Exterior	No
Handles	Matching Handles

### ACCESSORIES

Replacement Water Filter	LT1000P
Replacement Fresh Air Filter	LT120F

### TECHNICAL SPECS

Required Power Supply	115 V, 60 Hz, 15 Amp
Plug Type	3-Prong
Power Cord Location	Top
Min. / Max. Water Pressure	40 - 120 psi

### DIMENSIONS / CLEARANCES / WEIGHTS

Depth with Handles	35 15/16"
Depth without Handles	33 3/8"
Depth without Door	28 3/4"
Depth (Total with Door Open)	50 9/16"
Height to Top of Case	68 7/8"
Height to Top of Door Hinge	70 1/4"
Width	35 15/16"
Width (Door Open 90° with Handle)	44 1/4"
Width (Door Open 90° without Handle)	39 1/4"
Door Edge Clearance with Handle	1 3/8"
Door Edge Clearance without Handle	3/8"
Installation Clearance	Sides 1/8", Top 1", Back 2"
Approx. Weight (Product / Carton)	310 lbs / 334 lbs
Carton Dimensions (WxHxD)	38 1/2" x 72 1/4" x 37 1/2"



### LIMITED WARRANTY

Parts & Labor	1 Year
Sealed System (Parts & Labor)	5 Years
Compressor (Parts & Labor)	5 Years
Linear/Inverter Compressor (Parts Only)	10 Years



\*System tested and certified by NSF® International against NSF/ANSI Standard 42, Standard 53 and Standard 401.

### DIMENSIONS / CLEARANCES

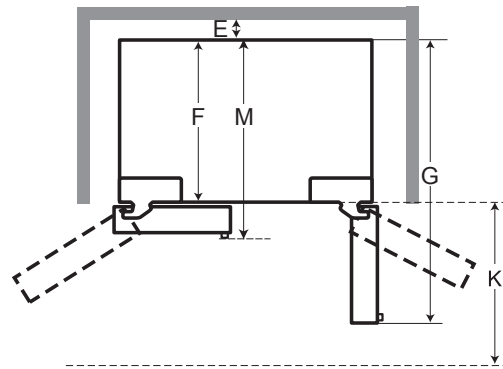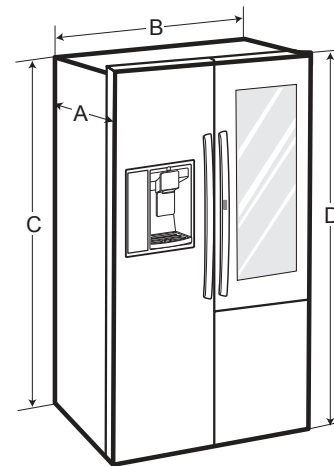

### DIMENSIONS / CLEARANCES

A	Depth without Handles	33 3/8" (848 mm)
B	Width	35 15/16" (912 mm)
C	Height to Top of Case	68 7/8" (1750 mm)
D	Height to Top of Hinge	70 1/4" (1785 mm)
E	Back Clearance	2" (50 mm)
F	Depth without Door	28 3/4" (730 mm)
G	Depth (Total with Door Open 90°)	50 9/16" (1285 mm)
K	Front Clearance	24" (610 mm)
M	Depth with Handles	35 15/16" (912 mm)

### INSTALLATION NOTES

- The installation location chosen for the refrigerator should allow space behind the unit for connections and airflow and space in front to open the doors and drawers.
- Too small of a distance from adjacent items may result in lowered freezing capability and increased electricity consumption charges. Allow at least 24 inches (610 mm) in front of the refrigerator to open the doors, and at least 2 inches (50.8 mm) between the back of the refrigerator and the wall.