



# 7.3 cu. ft. Electric Double Oven Slide-in Range

- ProBake Convection®
- EasyClean® + Self Clean
- Triple Element & Dual Element
- Glass Touch Controls
- Slide-in Design with Double Oven
- 7.3 cu. ft. Largest Capacity
- LG ThinQ® Technology (Wi-Fi)



### COLOR AVAILABILITY

- LTE4815ST – Stainless Steel
- LTE4815BD – PrintProof™ Black Stainless Steel

### CAPACITY

Oven Capacity	7.3 cu. ft.
Upper Oven Capacity	3.0 cu. ft.
Lower Oven Capacity	4.3 cu. ft.

### OVEN FEATURES

Convection System	ProBake Convection® (Lower Oven Only)
Oven Cooking Modes	
Upper: Bake, Broil, Delay Bake, Delay Clean	
Lower: Bake, Broil, Convection Bake, Convection Roast, Delay Bake, Delay Clean, Proof, Warm	
Infrared Heating™ System	Yes
Air Sous Vide	No
Built-in Air Fry	No
Temperature Probe	Yes
Oven Racks	1 Standard, 1 Gliding, 1 Offset
Number of Rack Positions	Upper: 2; Lower: 4
Broil Element	Upper: 3,000W (Infrared Grill) Lower: 3,800W / 6 Pass
Bake Element	Upper & Lower: 2,400W / 4 Pass (Exposed Bake)
Convection Element	Lower: 2,500W
Convection Conversion	Yes (Lower Oven Only)
EasyClean®	Yes
Self Clean	Yes
GoCook Smart Oven Light	Yes (1)
Door Lock	Yes
Automatic Safety Shut-Off	After 12 Hours (Lower Only)

### COOKTOP FEATURES

Cooktop Type	Radiant
Number of Elements	5
Element Size / Wattage	
Left Front	Dual 9" / 6" – 3,200W / 1,400W (UltraHeat™)
Left Rear	6" – 1,200W
Center	7" – 100W
Right Front	Triple 12" / 9" / 6" – 3,000W / 2,200W / 1,100W
Right Rear	6" – 1,200W
Hot Surface LED Indicator	Yes

### CONTROLS

Cooktop Control Type	Front Tilt-Control Knobs
Oven Control Type	SmoothTouch™ Glass
Display	VFD (White)
Language	English
Kitchen Timer	Yes
Timed Cook	Yes
Clock	Yes
Temperature Unit of Measure	°F or °C
Cooking Complete Reminder Volume	High, Low, Off
Oven Control Lock	Yes

### CONVENIENCE

ADA Compliant	No
Sabbath Mode	No

### SMART FEATURES

Wi-Fi Enabled	Yes
ThinQ®	Yes
Proactive Customer Care	Yes
Voice Control	Amazon Alexa, Google Assistant
SmartDiagnosis™	Yes

### FINISHES AND APPEARANCE

Fingerprint & Smudge Resistant Exterior	Yes (Black Stainless Only)
Cooktop Finish	Black Ceramic Glass w/Gray Pattern
Handle / Knobs	ST - Stainless Steel Appearance BD - Black Stainless Steel Appearance
Oven Door Feature	WideView™ Window

### TECHNICAL SPECS

Required Power Supply	120 / 208-240 V, 60 Hz, 3-Wire or 4-Wire
Minimum Circuit Rating	40 Amp
kW Rating at 208V	11.6
kW Rating at 240V	15.5
Power Cord	Not Included
Electrical Receptacle	4-Wire (14-50R) / 3-Wire (10-50R)
Power Outlet Location	See Installation Diagram

### INCLUDED ACCESSORIES

1 Standard Rack, 1 Gliding Rack, 1 Offset Rack, Temperature Probe, Rear Filler Kit, EasyClean® Kit (Spray Bottle & Scouring Pad), Cooktop Cleaner

### OPTIONAL ACCESSORIES

Slide-in Range Filler Kit (Side Gaps) LSFL301S


### DIMENSIONS / CLEARANCES / WEIGHTS

Product Dimensions (W x H x D w/Handle)	29 7/8" x 36" x 28 15/16"
Product Height to Cooking Surface	36"
Cutout Dimensions (W x H x D)	30" x 36" x 25"
Carton Dimensions (W x H x D)	31 31/32" x 51" x 30 17/32"
Approx. Weight (Product / Carton)	189 lbs. / 231 lbs.

### LIMITED WARRANTY

Parts and Labor 1 Year

### DIMENSIONS / CLEARANCES

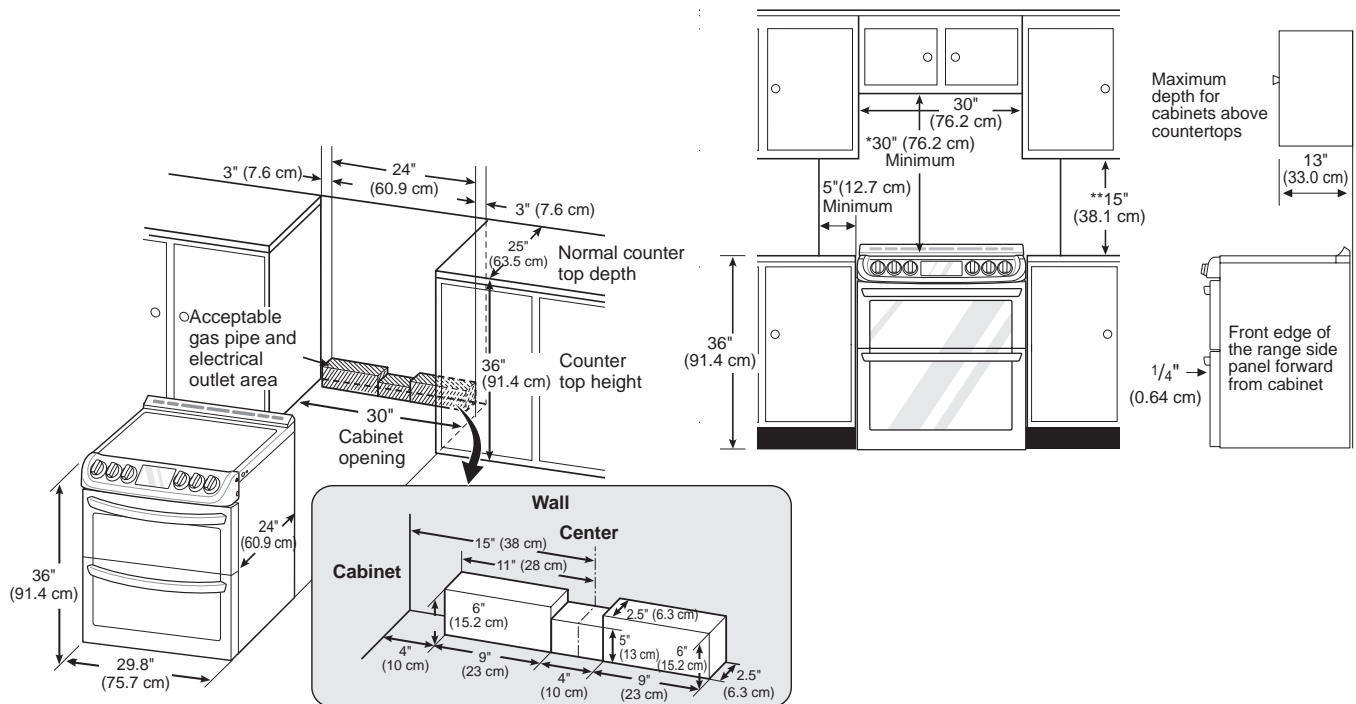

### MINIMUM DIMENSIONS

\*30" (76.2 cm) minimum clearance between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet; or 24" (60.9 cm) minimum when bottom of wood or metal cabinet is protected by not less than 1/4" (6.4 cm) flame retardant millboard covered with not less than no. 28 MSG sheet steel, 0.015" (0.381 mm) stainless steel, 0.024" (0.610 mm) aluminum or 0.020" (0.508 mm) copper.

\*\*15" (38.1 cm) minimum between countertop and adjacent cabinet bottom.