



## 6.9 cu. ft. Gas Double Oven Slide-in Range

- ProBake Convection®
- EasyClean® + Self Clean
- 18.5k BTU Power Burner
- Glass Touch Controls
- Slide-in Design with Double Oven
- 6.9 cu. ft. Large Capacity
- LG ThinQ® Technology (Wi-Fi)



### COLOR AVAILABILITY

- LTG4715ST – Stainless Steel
- LTG4715BD – PrintProof™ Black Stainless Steel

### CAPACITY

Oven Capacity	6.9 cu. ft.
Upper Oven Capacity	2.6 cu. ft.
Lower Oven Capacity	4.3 cu. ft.

### OVEN FEATURES

Convection System	ProBake Convection® (Lower Oven Only)
Oven Cooking Modes	Upper: Bake, Broil, Delay Bake, Delay Clean, Pizza Lower: Bake, Convection Bake, Convection Roast, Favorites, Delay Bake, Delay Clean, Proof, Warm
Air Sous Vide	No
Built-in Air Fry	No
Temperature Probe	Yes
Oven Racks	2 Standard, 1 Gliding
Number of Rack Positions	Upper: 2; Lower: 4
Broil Element (BTU, NG / LP)	Upper: 14,500 / 12,500
Convection (BTU, NG / LP)	Lower: 14,000 / 12,000
Bake Element (BTU, NG / LP)	Upper: 14,500 / 12,500
Convection Conversion	Yes (Lower Oven Only)
EasyClean®	Yes
Self Clean	Yes
GoCook Smart Oven Light	Yes (1)
Door Lock	Yes
Automatic Safety Shut-Off	After 12 Hours

### COOKTOP FEATURES

Cooktop Type	Sealed
Number of Burners	5

Burner BTU (NG / LP)	
Left Front	12,000 / 10,000
Left Rear	9,100 / 9,100
Center	10,000 / 10,000 (Oval)
Right Front	18,500 / 12,500 (UltraHeat™)
Right Rear	5,000 / 5,000
Cooktop Burner Grate Material	Cast Iron
Continuous Grates	Yes

### CONTROLS

Cooktop Control Type	Front Tilt-Control Knobs (Weighted)
Oven Control Type	Glass Touch
Display	VFD (White)
Language	English
Kitchen Timer	Yes
Timed Cook	Yes
Clock	12 Hr or 24 Hr (Option)
Temperature Unit of Measure	°F or °C
Cooking Complete Reminder Volume	High, Low, Off
Oven Control Lock	Yes

### CONVENIENCE

ADA Compliant	Yes
Sabbath Mode	No

### SMART FEATURES

Wi-Fi Enabled	Yes
ThinQ®	Yes
Proactive Customer Care	Yes
Voice Control	Amazon Alexa, Google Assistant
SmartDiagnosis™	Yes
Smart Recipe (3rd Party Recipe App)	Yes (Tovala, Innit, SideChef and Drop)
NFC Tag On	No

### FINISHES AND APPEARANCE

Fingerprint & Smudge Resistant Exterior	Yes (Black Stainless Only)
Cooktop Finish	Stainless Steel
Handle / Knobs	ST - Stainless Steel Appearance BD - Black Stainless Steel Appearance
Oven Door Feature	WideView™ Window

### TECHNICAL SPECS

Fuel Type	NG / LP
Required Power Supply	120V, 60Hz
Minimum Circuit Rating	15 Amp
Power Cord Type	3-Prong, Attached to Unit
Power Outlet Location	See Installation Diagram
Gas Supply Location	See Installation Diagram

### INCLUDED ACCESSORIES

2 Standard Racks, 1 Gliding Rack, Griddle, Wok Grate, Temperature Probe, Rear Filler Kit, EasyClean® Kit (Spray Bottle & Scouring Pad), LP Conversion Kit

### OPTIONAL ACCESSORIES

Slide-in Range Filler Kit (Side Gaps) LSFL301S

### DIMENSIONS / CLEARANCES / WEIGHTS



Product Dimensions (W x H x D w/Handle)	29 7/8" x 37 7/8" x 28 15/16"
Product Height to Cooking Surface	36"
Cutout Dimensions (W x H x D)	30" x 36" x 25"
Carton Dimensions (W x H x D)	31 31/32" x 51" x 30 17/32"
Approx. Weight (Product / Carton)	225 lbs. / 280 lbs.

### LIMITED WARRANTY

Parts and Labor 1 Year

### DIMENSIONS / CLEARANCES

Provide proper clearance between the range and adjacent combustible surfaces. These dimensions must be met for safe use of your range. The location of the electrical outlet and pipe opening may be adjusted to meet specific requirements. The range may be placed with 0" clearance (flush) at the back wall.

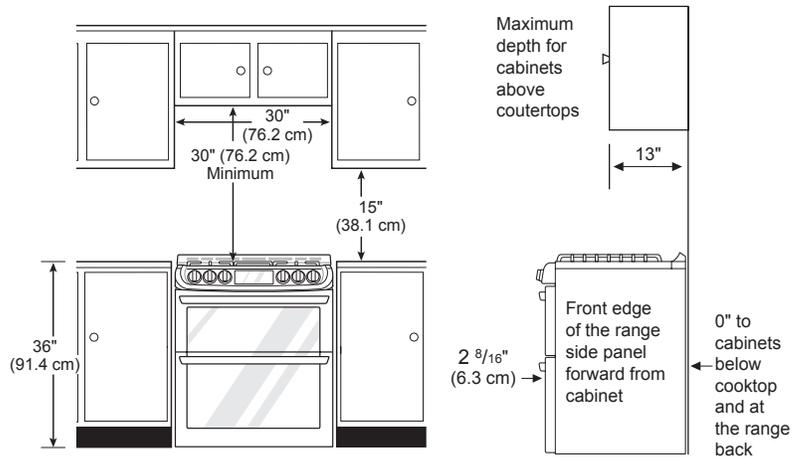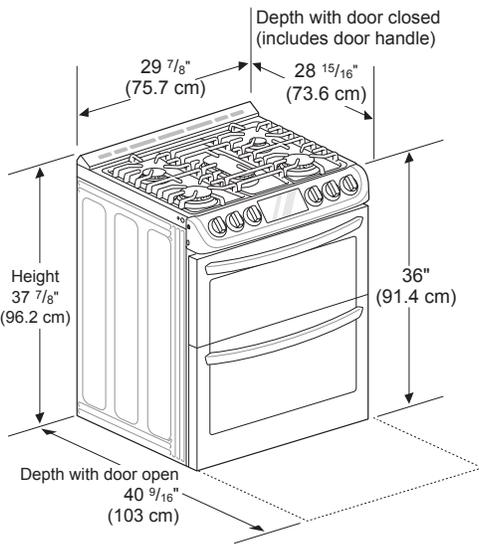

### GAS PIPE AND ELECTRICAL OUTLET LOCATIONS

