

Built-In Speed Oven

- 1.7 cu. ft TurboCook™ Speed Oven
- Air Fry
- Convection Technology
- Scan-to-Cook
- Sensor Cooking
- LG ThinQ® Technology (Wi-Fi)



COLOR AVAILABILITY

- MZBZ1715S – Stainless Steel
- MZBZ1715D – Black Stainless Steel

CAPACITY

Oven Capacity	1.7
---------------	-----

CONTROLS

Oven Control Type	Touch Controls
Language	English
Clock	12 hr or 24 hr (option)
Kitchen Timer	Yes
Temperature Unit of Measure	°F or °C
Cooking Complete Reminder Volume	High, Low, Off

OVEN FEATURES

Microwave	Yes
Convection Bake	Yes
Broil	Yes
Built-in Air Fry	Yes
Dehydrate	Yes
Speed Cook	Yes
Speed Broil	Yes
Warm	Yes
Proof	Yes
Defrost	Yes (4 options)
Sensor Cook	Yes (8 options)
Auto Cook	Yes (22 options)
Soften	Yes (4 options)
Melt	Yes (5 options)
Microwave Power Output	975 W
Microwave Mode Power Consumption	Max. 1,900 W, Saturation 1,650 W
Convection Bake Mode Power Consumption	1,600 W
Broil Mode Power Consumption	1,300 W
Convection Element	1,500 W (Hidden)
Broil Element (Upper)	1,200 W (500 W + 700 W)
Broil Element (Lower)	375 W

OVEN FEATURES (CONTINUED)

Glass Tray	Yes
Metal Tray	Yes
Metal Rack	Yes

CONVENIENCE

ADA Compliant	No
Sabbath Mode	No

SMART FEATURES

Wi-Fi Enabled	Yes
ThinQ®	Yes
Proactive Customer Care	Yes
Voice Control	No
SmartDiagnosis™	Yes
Smart Recipe (3rd Party Recipe App)	No
Scan to Cook (LG ThinQ®)	Yes

FINISHES AND APPEARANCE

Fingerprint & Smudge Resistant Exterior	No
Handle Finish	S - Stainless Steel Appearance D - Black Stainless Steel Appearance
Oven Door Feature	WideView™ Window

TECHNICAL SPECS

Required Power Supply	120V, 60 Hz
Minimum Circuit Breaker	20 Amp
Power Outlet Location	See Installation Diagram

INCLUDED ACCESSORIES

Rack, Metal Tray, Air Fry Pan, Glass Tray and Rotating Ring


DIMENSIONS

Product Dimensions (W x H x D)	29 3/4" x 20 1/8" x 23 3/16" without handle (depth without handle 25 9/16")
Minimum Cutout Dimensions (W x H x D)	28 1/2" x 19 11/16" x 23 1/2"
Carton Dimensions (W x H x D)	31 7/8" x 23 5/8" x 27 1/4"
Approx. Weight (Product / Carton)	78.14 lbs / 101.7 lbs.

LIMITED WARRANTY

Parts and Labor	1 Year
-----------------	--------

DIMENSIONS / CLEARANCES

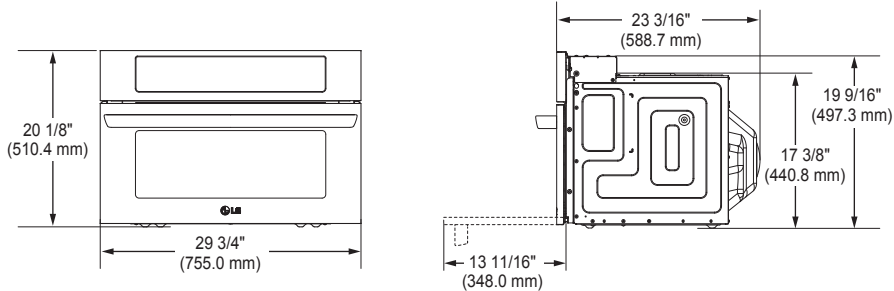


Measure the current cutout dimensions and compare them to the cutout dimensions shown below. Little or no cabinet work may be necessary.

INSTALLATION NOTES

- The cabinet base platform must be able to support 90 lbs (40.82 kg). If the cabinet does not have a solid bottom, two braces or runners must be installed level with the bottom of the cutout to support the weight of the oven. Make sure the base is level and the front of the cabinet is square. If the cabinet base is not level, the oven glides will tend to slide out when opening the door.
- If the cabinet does not have a front frame and the sides are less than 3/4" (1.9 cm) thick, shim both sides equally to establish the cutout width.
- Allow at least a 23" clearance for the door depth when it is open.
- Kitchen cabinets in contact with the oven must be heat resistant up to 194°F (90°C), and fronts of nearby units up to at least 158°F (70°C).


SINGLE SPEED OVEN INSTALLATION

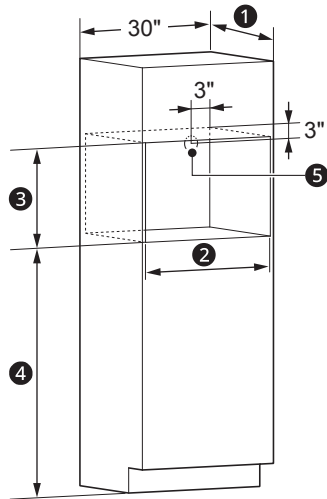

Order a 30" wide single oven cabinet or cut the opening in a wall to the dimensions shown.

DIMENSIONS / CLEARANCES		
1	Cutout Depth	23 1/2" Min.
2	Cutout Width	28 1/2" Min.–28 5/8" Max.
3	Cutout Height	19 11/16" Min.– 19 3/4" Max.
4	Recommended Minimum Cutout Location from Floor	36 3/4"
5	Power cord hole	

INSTALLATION OVER A WARMING DRAWER:

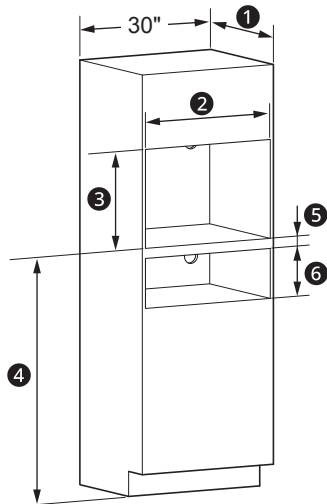


DIMENSIONS / CLEARANCES		
1	Cutout Depth	23 1/2" Min.
2	Cutout Width	28 1/2" Min.–28 5/8" Max.
3	Cutout Height	19 11/16" Min.– 19 3/4" Max.
4	Recommended Minimum Cutout Location from Floor	36 3/4"
5	2" Min. (3" Recommended)	
6	Per warming drawer requirement	

NOTE

- Additional clearances between the cutouts may be required. Check to be sure the oven supports above the warming drawer location do not obstruct the required interior depth and height. See warming drawer's installation instructions for details.


INSTALLATION OVER A WALL OVEN:

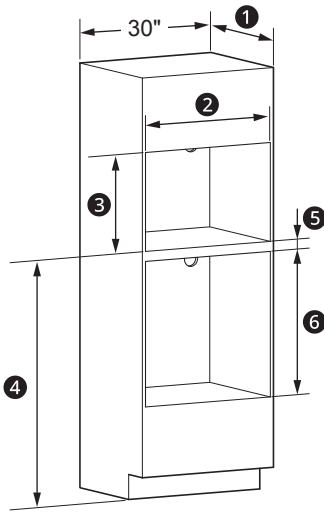

If you are replacing an electric double oven with the combined installation of a wall oven and a speed oven, use the dimensions shown. The middle rail separating the two openings may need to be larger than the 2" minimum shown.

DIMENSIONS / CLEARANCES		
1	Cutout Depth	23 1/2" Min.
2	Cutout Width	28 1/2" Min.–28 5/8" Max.
3	Cutout Height	19 11/16" Min.– 19 3/4" Max.
4	Recommended Minimum Cutout Location from Floor	45 1/4"
5	2" Min. (3" Recommended)	
6	Per oven requirement	

INSTALLATION OVER A WALL OVEN AND WARMING DRAWER:

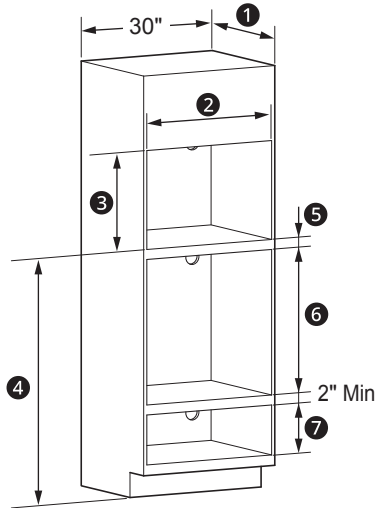


DIMENSIONS / CLEARANCES		
1	Cutout Depth	23 1/2" Min.
2	Cutout Width	28 1/2" Min.–28 5/8" Max.
3	Cutout Height	19 11/16" Min.– 19 3/4" Max.
4	Recommended Minimum Cutout Location from Floor	45 1/4"
5	2" Min. (3" Recommended)	
6	Per oven requirement	
7	Per warming drawer requirement	

NOTE

- Additional clearances between the cutouts may be required. Check to be sure the oven supports above the warming drawer location do not obstruct the required interior depth and height. See warming drawer's installation instructions for details.

INSTALLATION UNDER A 30" OR 36" COOKTOP OR COUNTERTOP:

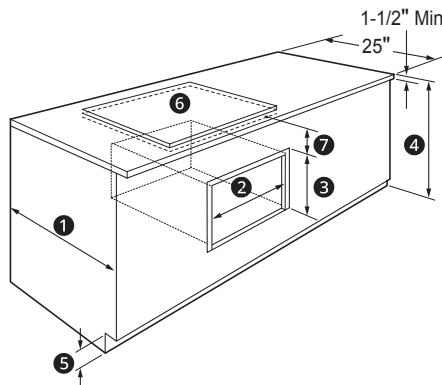

Gas or electric cooktops may be installed over this oven. See cooktop installation instructions for the cutout size. This oven requires a separate, properly grounded 16-Amp, 120-Volt, 60Hz power supply. The cooktop requires a separate power supply. Use a 36" or wider base cabinet.

DIMENSIONS / CLEARANCES		
1	Cutout Depth	23 1/2" Min.
2	Cutout Width	28 1/2" Min.–28 5/8" Max.
3	Cutout Height	19 11/16" Min.– 19 3/4" Max.
4	Recommended Minimum Cutout Location from Floor	36"
5	High Toekick	4"
6	Cooktop	
7	Cooktop height including depth of electrical box on some models. Refer to cooktop installation instructions. No minimum clearance required between cooktop and oven.	