## 5.2 cu. ft. Front Load Washer

- 5.2 cu.ft. Mega Capacity
- TurboWash® Technology
- 14 Cycles / 11 Options
- Allergiene™ Cycle
- ColdWash™ Option
- Direct Drive Motor (10-Year Limited Warranty)
- NeveRust<sup>™</sup> Stainless Steel Tub
- Drum Light
- SmartDiagnosis™










COLOR AVAILABILITY		
WM8100HVA – Graphite Steel		
CAPACITY & MATCHING DRYERS		
Capacity (cu. ft.)	5.2	
Matching Electric Dryer	DLEX8100V	
Matching Gas Dryer	DLGX8101V	
APPEARANCE		
Electronic Controls with LED Display	Yes	
Hard Buttons	Yes	
Touch Buttons	Yes	
Dial-A-Cycle™	Yes	
ENERGY & WATER		
ENERGY STAR® Qualified	Yes	
CEE Qualified	Tier 2	
Integrated Modified Energy Factor (IMEF)	2.92	
Integrated Water Factor (IWF)	3.2	
WASH CYCLES		
Number of Cycles	14	
Wash Cycles	Normal, Perm. Press, Heavy Duty, Delicates, Towels, Speed Wash, Hand Wash / Wool, Bulky / Large, Tub Clean, Bright White, Sanitary, Allergiene™, Jumbowash, Small Load	
WASH OPTIONS		
Number of Options	11	
Options	TurboWash®, Steam, Fresh Care, Prewash, Delay Wash, Extra Rinse, ColdWash™, Child Lock*, Rinse+Spin, Drum Light, Add Garments	

WASH DETAILS	
Internal Heater	Yes
Number of Wash/Rinse Temps	5
Wash/Rinse Temps	Extra Hot, Hot, Warm, Cold, Tap Cold
Number of Spin Speeds	5
Spin Speeds	Extra High, High, Medium, Low, No Spin
Max RPM	1,300
Water Levels	Load Sensing
Number of Soil Levels	5
AAFA Certified	Yes
FABRIC CARE	
AI DD™	No
Wash Technology	TurboWash® 2.0
Steam Technology	Yes
Allergiene™ Cycle	Yes
Sanitary Cycle	Yes
ColdWash™ Option	Yes
SenseClean™ System	Yes
CONVENIENCE	
TrueBalance™ Anti-Vibration System	Yes
Dispenser Type	4-Tray (Prewash, Main Wash with Liquid Detergent Cup, Bleach, Fabric Softener)
LoDecibel™ Quiet Operation	Yes
End of Cycle Signal	Yes
LoadSense	Yes
Child Lock	Yes
Auto Suds Removal	Yes
4 Adjustable Leveling Legs	Yes
Easy Loading TilTub™	Yes
ADA Compliant	No

SMART FEATURES		
Wi-Fi Enabled	No	
ThinQ <sup>®</sup>	No	
SmartDiagnosis™	Yes	
MOTOR AND AGITATOR		
Motor Type	Inverter Direct Drive Motor	
Axis	Horizontal	
MATERIALS AND FINISHES		
NeveRust™ Stainless Steel Drum	Yes	
Door / Rim	Glass / Chrome	
Door Cover	Dark Black Tinted Square Cover	
TECHNICAL SPECS		
Electrical Requirements	120V, 60 Hz, 10 Amps	
Туре	Electric	
Power Outlet Location	Within 60" of Either Side	
Plug Type	3-Prong (Cord Attached to Unit)	
Min. / Max. Water Pressure	20 - 120 psi	
INCLUDED ACCESSORIES		

Drain Hose, Hot/Cold Water Hoses, Non-Skid Pads, Hole Caps, Wrench, Tie Strap, Elbow Bracket (for Securing Drain Hose)

17	,	
OPTIONAL ACCESSORIES		
Pedestal	WDP5V	
Pedestal (W x H x D)	29" x 13 5/8" x 29 1/2"	
LG Sidekick™ Pedestal Washer	WD200CV	
LG Sidekick™ Pedestal Washer (W x H x D)	29" x 14 1/8" x 30 7/8"	
Stacking Kit	KSTK2	
DIMENSIONS		
Product (W x H x D)	29" x 40 <b>3</b> / <b>4</b> " x 33"	
Depth with Door Open	57 <sup>1</sup> /2"	
Carton Dimensions (W x H x D)	31 <b>3</b> / <b>8</b> " × 44 <b>3</b> / <b>4</b> " × 33 <b>3</b> / <b>4</b> "	
Approx. Weight (Product / Carton)	225 lbs. / 251.5 lbs.	
LIMITED WARRANTY		
Parts and Labor	1 Year	
Direct Drive Motor	10 Years (Parts Only)	
Drum	Lifetime (Parts Only)	

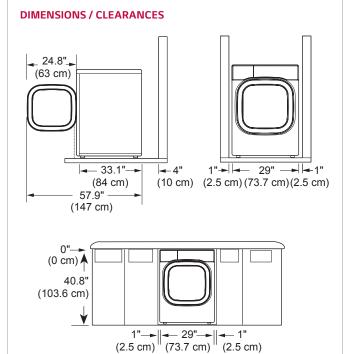

## **INSTALLATION NOTES**

- · Allow sufficient space for water lines, the drain line, and airflow.
- Install the washing machine on a solid floor that is strong and rigid enough to support the weight of the washing machine, even when fully loaded, without flexing or bouncing. If the floor has too much flex, you may need to reinforce it to make it more rigid. If the floor is not solid, it may cause severe vibration and noise.
- If installing with an optional pedestal or SideKick™, refer to the instructions packaged with pedestals for dimensions and clearances.

ASTHMA & ALLERGY FRIENDLY Mark is a Registered Trade Mark of the ASTHMA AND ALLERGY FOUNDATION OF AMERICA and ALLERGY STANDARDS LTD.

