

5.5 cu. ft. Top Load Washer

- 5.5 cu. ft. Mega Capacity
- EasyUnload™
- Built-In Intelligence: Smart Pairing™
- ezDispense® Automatic Dispenser
- Water Faucet
- TurboWash3D® Technology
- 28 Cycles / 27 Options
- 6Motion™ Technology
- SlamProof™ Glass Lid
- Direct Drive Motor 10-Year Limited Warranty
- LG ThinQ® Technology (Wi-Fi)



COLOR AVAILABILITY

● WT8600CB – Matte Black

○ WT8600CW – Alpine White

CAPACITY & MATCHING DRYERS

Capacity (cu. ft.)	5.5
Matching Electric Dryer	DLEX8600BE
Matching Gas Dryer	DLGX8601BE

APPEARANCE

LCD Digital Dial Control with LED Display	Yes
Touch Buttons	Yes
Dial-A-Cycle™	Yes

ENERGY & WATER

ENERGY STAR® Certified	Yes
CEE Qualified	Tier 1
Integrated Modified Energy Factor (IMEF)	2.76
Integrated Water Factor (IWF)	3.2

WASH CYCLES

Number of Cycles	28
Wash Cycles	Normal, AI Wash, Bedding, Delicates, Towels, Quick Wash, Heavy Duty, Deep Wash, Waterproof, PreWash+Normal, Rinse + Spin, Spin Only, Perm. Press, Tub Clean, Baby Bibs, Baby Wear, Bright Whites™, Dresses, Econowash, Juice&Food Stains, Kids Wear, Large Load, Overnight Wash, Single item, Small load, Sweat Stains, Swimwear, X Large Load

WASH OPTIONS

Number of Options	27
Options	Temp., Spin, Soil, Delay Start, Deep Fill, Faucet, Settings, TurboWash™, ColdWash, Soak, Extra Rinse, Detergent Dispense, Softener Dispense, Remote Start, Control Lock, Cycle List Edit, Additional-Settings, Wi-Fi Connection, Cycle Optimization, Use of Dispenser 2, Default Soft. Dispense, Default Soft. Dispense, ezDispense™ Nozzel Clean, Signal, Language, Smart Diagnosis, Factory Reset

WASH DETAILS

Internal Heater	No
Number of Wash / Rinse Temps	5
Wash / Rinse Temps	Cold / Cool / Semi Warm / Warm / Hot
Number of Spin Speeds	5
Spin Speeds	No Spin / Low / Medium / Med. High / High
Max RPM	950
Water Levels	Load Sensing
Number of Soil Levels	5
AAFA Certified	No

FABRIC CARE

Wash Technology	TurboWash3D®, TurboWash®
Steam Technology	No
Allergiene® Cycle	No
Sanitary Cycle	No
SmartRinse™ Jet Spray System	Yes
ColdWash™ Option	Yes
4-Way Agitator	No

CONVENIENCE

SlamProof™ Lid	Yes
TrueBalance™ Anti-Vibration System	Yes
Dispenser Type	3-Tray (Softener, Detergent, Bleach)
End of Cycle Signal	Yes
LoadSense	Yes
Control Lock	Yes
Auto Suds Removal	No
4 Adjustable Leveling Legs	Yes
Status Indicator(s)	Yes
Add Garment Indicator	No
Forced Drain System	Yes
ADA Compliant	No
EasyUnload™	Yes

SMART FEATURES

Wi-Fi Enabled	Yes
ThinQ® Technology	Yes
ThinQ Care™™	Yes
ThinQ UP™	Yes
Voice Control	Google Assistant, Amazon Alexa
SmartDiagnosis™	Yes
Remote Start (On / Off)	Yes
Remote Monitoring & Notifications	Yes
Energy Monitoring	Yes
Tub Clean Coach	Yes
Smart Pairing	Yes

MOTOR AND AGITATOR

Motor Type	Inverter Direct Drive Motor
Axis	Vertical
Wash Type	Wash Plate

MATERIALS AND FINISHES

Drum Material / Finish	NeveRust™ Stainless Steel
Washplate	Yes, NeveRust™ Stainless Steel
Lid	Tempered Glass

TECHNICAL SPECS

Electrical Requirements	120V @ 60Hz
Type	Electric
Power Outlet Location	Within 60" of Either Side
Plug Type	3-Prong (Cord Attached to Unit)
Min. / Max. Water Pressure	20 – 120 psi

INCLUDED ACCESSORIES

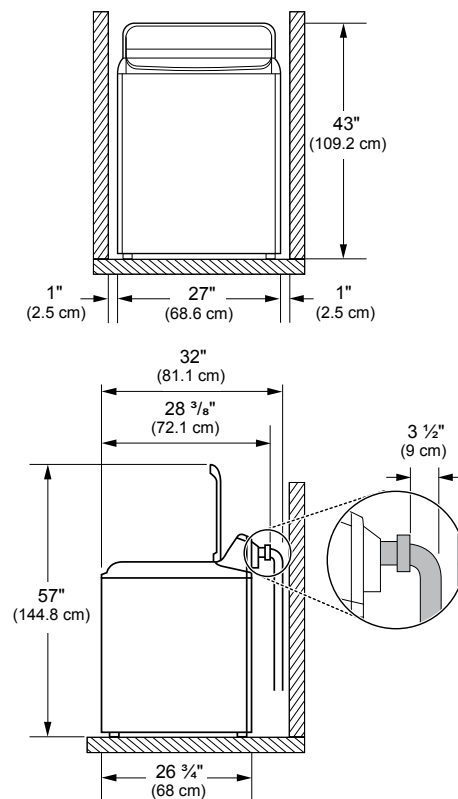
Tie Strap, Leg Holders	
------------------------	--

DIMENSIONS

Product (W x H x D)	27" x 43" x 28 3/8"
Height with Lid Open	57"
Cutout Dimensions (W x H x D)	29" x 58" x 32"
Carton Dimensions (W x H x D)	29 3/8" x 43 1/2" x 31 1/2"
Weight (Product / Carton)	130 lbs. / 143.3 lbs.

LIMITED WARRANTY

Parts and Labor	1 Year
Direct Drive Motor	10 Years (Parts Only)
Drum	3 Years (Parts Only)

DIMENSIONS / CLEARANCES**Floor Installation**

Minimum vertical space from floor to overhead shelves, cabinets, ceilings, etc., is 58 inches (147 cm).

INSTALLATION NOTES

- To ensure sufficient clearance for water lines, the drain line and airflow, allow minimum clearances of at least 1 inch (2.5 cm) at the sides and 4 inches (10 cm) behind the unit. Be sure to allow for wall, door, or floor moldings that may increase the required clearances.
- Install the washer on a solid floor that is strong and rigid enough to support the weight of the washer, even when fully loaded, without flexing or bouncing. If the floor has too much flex, you may need to reinforce it to make it more rigid. If the floor is not solid, it may cause severe vibration and noise.