


# Development diagram



# How to disassemble the product


1. Use the disassembly tool to place it between products and turn it one turn to disassemble it.

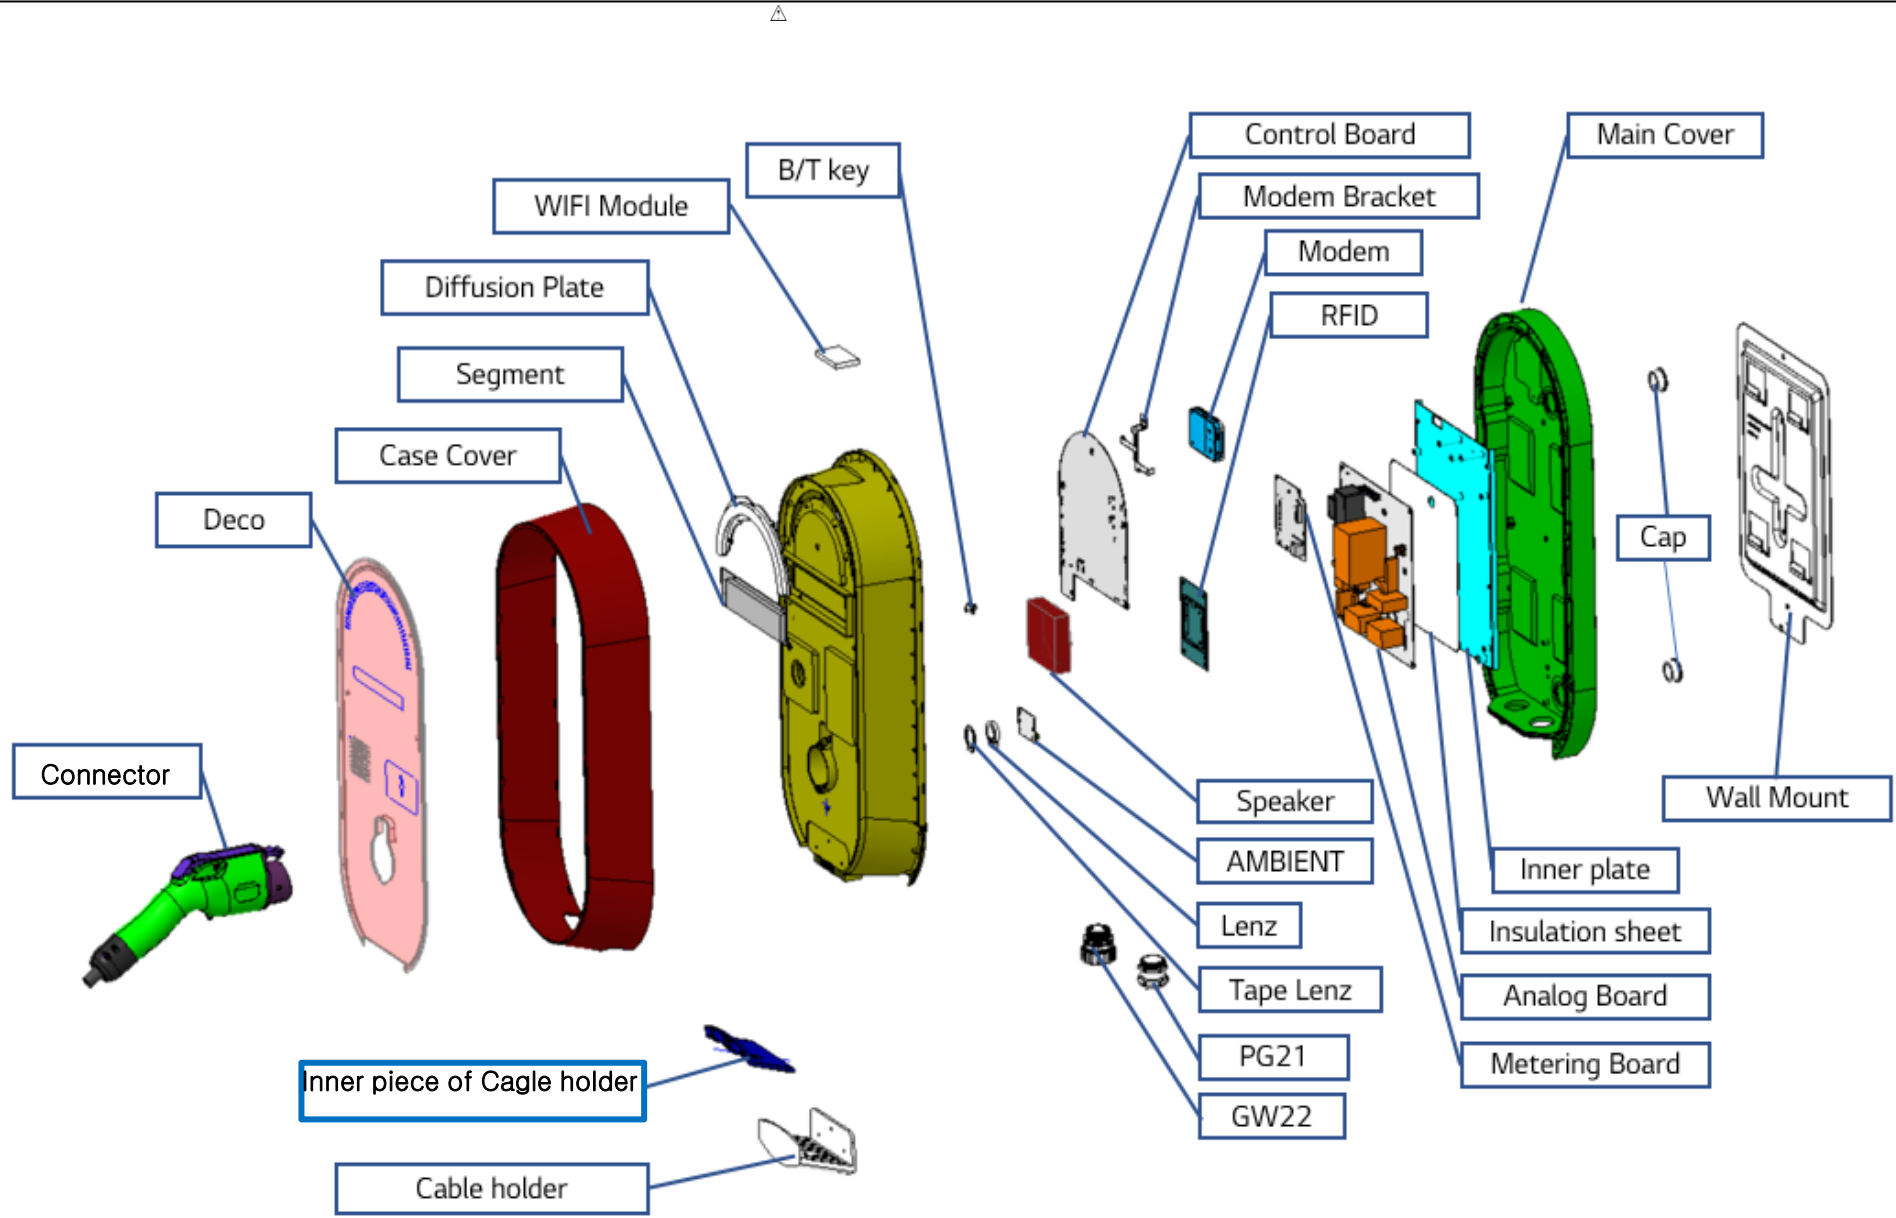

Tools for product disassembly  
\*It can be any plastic card.




2. Use a (+)screwdriver to remove 11 screws.



# How to connect an LTE modem

External connection possible by removing the cap

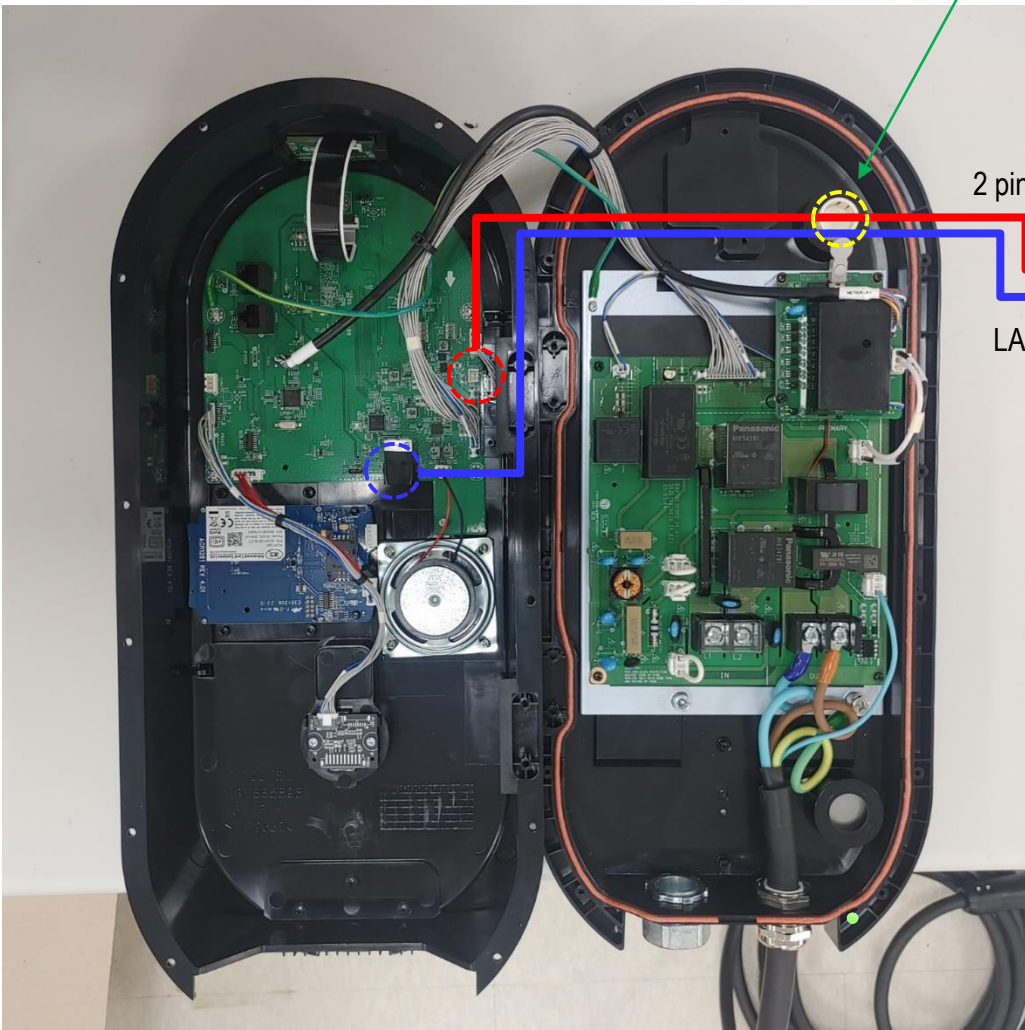

2 pin Power Cable (5V)


LAN cable (RJ45)



LTE Modem



2 pin Power Cable Connector (5V)

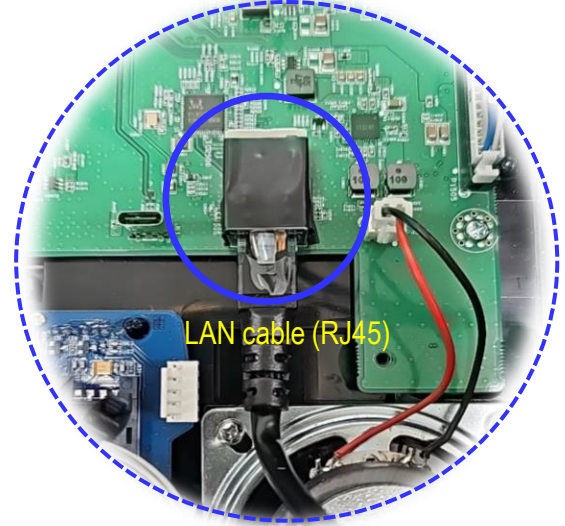

LAN cable (RJ45)