

# Digital Signage Player for UHD Display

▶ MP700-DHCJ



## The Powerful Answer

to feed video and audio contents to LG Digital Signage

### COMPATIBLE


MP700 is hybrid type signage player which can use as a stand alone or built-in type, either way suits to a certain usage scene.

### COST EFFECTIVE

Thanks to 4 DP out (2 with HBR2), it can support multiple displays with high resolution(maximum 3,840 x 2,160) with one media player.

### COMPATIBLE MODEL:

84WS70MS-B, 84WS70BS-B

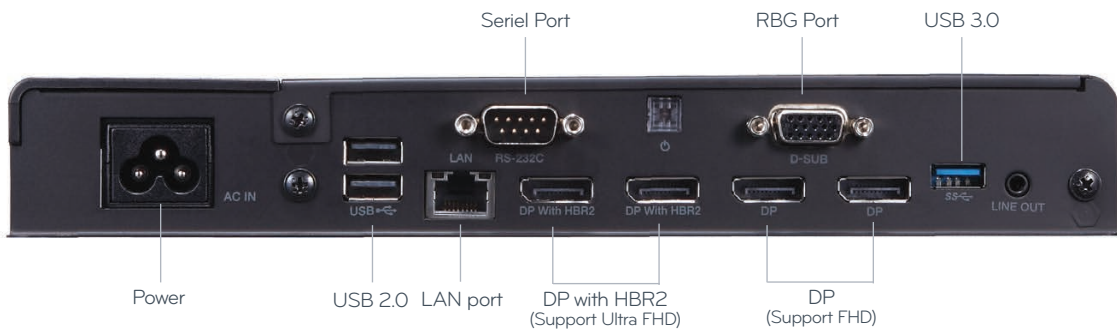

# Digital Signage Player

## ▶ MP700-DHCJ

### BEST SOLUTION TO DISPLAY ULTRA HD CONTENTS


Display with \*HBR (High bit-rate) Bandwidth  
3,840 x 2,160 pixels with excellent performance

#### Ultra HD Dual Cloning Feature


2 DP ports with \*HBR dedicated for Ultra HD display  
→ Offers 2 same contents at Ultra HD resolution



**2X2 VIDEOWALL AT FULL HD RESOLUTION PER DISPLAY**  
Ensure a graphic performance to playback up to 4 Full HD contents for videowall

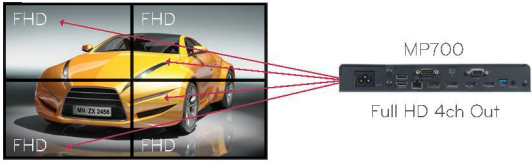

### DIMENSION

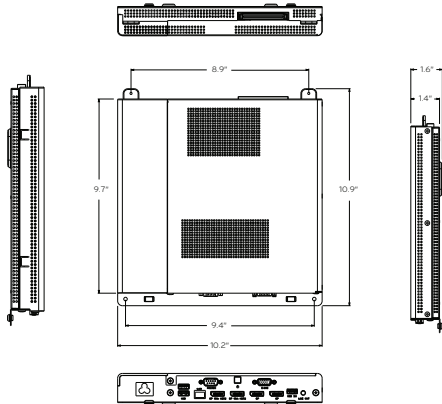

GENERAL SPECIFICATION	Model	MP700-DHCJ			
	Dimensions	10.2" (W) x 1.6" (H) x 10.9"(D)			
	Carton Dimension	13.1" (W) x 3.9" (H) x 13.6" (D) (Set Box)			
	Weight	5.3 lbs.			
	CPU	Intel® Core™ i7-3610QE 2.3 GHz (Qual Core)			
	Storage	2.5" 1TB HDD			
	Chip Set	Mobile Intel® QM77			
	Graphic	AMD Radeon™ E6760 with 1GB VRAM			
	System Memory	DDR3 1333 4GB (2 SODIMM)			
	O/S	Windows Embedded Standard 7 Professional (64bit)			
	Graphic Performance	Full HD x 4, Ultra HD x 1 Decoding			
	Multi I/O Port	LAN Port	Intel 82577LM Gigabit(10/100/1,000 Mbps) Ethernet PHY		
		Input			
		USB Port	Hi-Speed USB 2.0 x 2 , USB 3.0 Port x 1		
		4-in-1 Card	N/A		
PCI Express Card Slot		N/A			
Mini PCI Express Socket		Supported			
Output					
Serial Port		Supported			
Display Out		DP x 4 / RGB			
Line Out		Supported			
SPDIF (Digital Audio Out)	N/A				
OPERATIONAL SPECIFICATION	Resolution	Maximum Resolution 3,840 x 2,160 @ 30 Hz (DP with HBR2)			
		Maximum Resolution 2,048 x 1,536 @ 75 Hz (DP)			
		Maximum Resolution 1,920 x 1,080 @ 75 Hz (RGB)			
	Power	Rated Voltage AC 100-240V~, 50/60 Hz, 1.8A			
Operating Conditions	Operating Temperature 5°C to 40°C				
	Operating Humidity 10% to 80%				
	Storage Temperature -20°C to 60°C				
	Storage Humidity 5% to 95%				
UPC	7 19192 19242 3				
COMPATIBLE MODEL	84WS70MS-B, 84WS70BS-B				
WARRANTY	3-Year Limited Warranty				



LG Electronics U.S.A., Inc.  
HE B2B Division  
2000 Millbrook Drive  
Lincolnshire, IL 60069

Customer Service: 888.865.3026  
www.LGolutions.com/support

Contact your LG Regional Sales Representative:  
Channel: 800.897.8871  
Hospitality: 800.228.1236  
E-mail: info@LGolutions.com

SPEC\_MP700-DHCJ\_071320\_PR

All screen images are simulated. Dimensions and weights are approximate. Design, specifications, and features subject to change without notice.

© Copyright 2013 LG Electronics USA, Inc. All Rights Reserved. "LG Life's Good" is a registered trademark of LG Corp.

ENERGY STAR is a registered trademark of the U.S. Environmental Protection Agency. In Plane Switching is a trademark of LG Display Co., LTD. VESA is a trademark of Video Electronics Standards Association. HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC.

All other product and brand names are trademarks or registered trademarks of their respective companies.

Printed in the USA. July 2013