

# LG NeON<sup>®</sup>H

LG450N2W-E6

144

## 450W

For those who demand super-high efficiency, strong warranties and time-tested technology from a trusted brand, the NeON H Monofacial module is good value and offers improved temperature coefficient and near-zero Light Induced Degradation (LID).



## Features



### Enhanced Performance Warranty

LG NeON<sup>®</sup> H has an enhanced performance warranty. After 25 years, LG NeON<sup>®</sup> H is guaranteed at least 90.6% of initial performance.



### 25-Year Limited Product Warranty

The NeON<sup>®</sup> H is covered by a 25-year limited product warranty.



### BOS (Balance Of System) Saving

LG NeON<sup>®</sup> H can reduce the total number of strings due to its high module efficiency resulting in a more cost effective and efficient solar power system.



### Solid Performance on Hot Days

LG NeON<sup>®</sup> H performs well on hot days due to its low temperature coefficient.

When you go solar, ask for the brand you can trust: LG Solar

### About LG Electronics USA, Inc.

LG Electronics is a global leader in electronic products in the clean energy markets by offering solar PV panels and energy storage systems. The company first embarked on a solar energy source research program in 1985, supported by LG Group's vast experience in the semi-conductor, LCD, chemistry and materials industries. In 2010, LG Solar successfully released its first MonoX<sup>®</sup> series to the market, which is now available in 32 countries. The NeON<sup>®</sup> (previous MonoX<sup>®</sup> NeON), NeON<sup>®</sup>2, NeON<sup>®</sup>2 BiFacial won the "Intersolar AWARD" in 2013, 2015 and 2016, which demonstrates LG's leadership and innovation in the solar industry.



## LG450N2W-E6

### General Data

Cell Properties (Material/Type)	Monocrystalline / N-type
Cell Maker	LG
Cell Configuration	144 Cells (6 x 24)
Number of Busbars	9EA
Module Dimensions (L x W x H)	2,110mm x 1,042mm x 40mm
Weight	22kg
Glass (Material)	Tempered Glass with AR Coating
Backsheet (Color)	White
Frame (Material)	Anodized Aluminium
Junction Box (Protection Degree)	IP 68 with 3 Bypass Diodes
Cables (Length)*	1,400mm x 2EA
Connector (Type/Maker)	MC 4 / MC

\*Including connector

### Certifications and Warranty

Certifications	IEC 61215-1/-1-1/2 : 2016, IEC 61730-1/2:2016, UL 61730
	ISO 9001, ISO 14001, ISO 50001
	OHSAS 18001
Salt Mist Corrosion Test	IEC 61701 : 2012 Severity 6
Ammonia Corrosion Test	IEC 62716 : 2013
Module Fire Performance	Type 1 (UL 61730)
Fire Rating	Class C (UL 790, ULC / ORD C 1703)
Solar Module Product Warranty	25 Year Limited
Solar Module Output Warranty	Linear Warranty*

\*Improved: 1<sup>st</sup> year 98.5%, from 2-24th year: -0.33%/year down, 90.6% at year 25

### Temperature Characteristics


NMOT <sup>†</sup>	[°C]	44 ± 3
P <sub>max</sub>	[%/°C]	-0.33
V <sub>oc</sub>	[%/°C]	-0.26
I <sub>sc</sub>	[%/°C]	0.04

<sup>†</sup>NMOT (Nominal Module Operating Temperature): Irradiance 800 W/m<sup>2</sup>, Ambient temperature 20°C, Wind speed 1 m/s, Spectrum AM 1.5

### Electrical Properties (NMOT)

Model	LG450N2W-E6	
Maximum Power (P <sub>max</sub> )	[W]	338
MPP Voltage (V <sub>mpp</sub> )	[V]	38.6
MPP Current (I <sub>mpp</sub> )	[A]	8.77
Open Circuit Voltage (V <sub>oc</sub> )	[V]	46.2
Short Circuit Current (I <sub>sc</sub> )	[A]	9.24

### I-V Curves

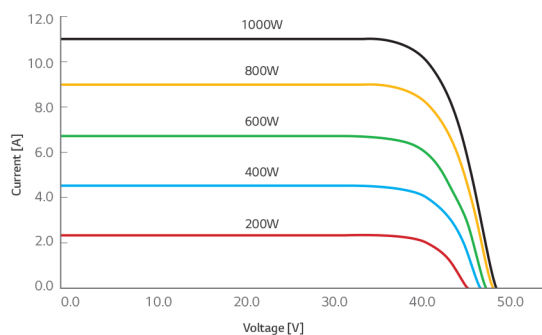

### Electrical Properties (STC\*)

Model	LG450N2W-E6	
Maximum Power (P <sub>max</sub> )	[W]	450
MPP Voltage (V <sub>mpp</sub> )	[V]	41.1
MPP Current (I <sub>mpp</sub> )	[A]	10.96
Open Circuit Voltage (V <sub>oc</sub> , ± 5%)	[V]	49.0
Short Circuit Current (I <sub>sc</sub> , ± 5%)	[A]	11.47
Module Efficiency	[%]	20.5
Power Tolerance	[%]	0 ~ +3

\*STC (Standard Test Condition): Irradiance 1000 W/m<sup>2</sup>, Cell temperature 25°C, AM 1.5  
Measure Tolerance: ± 3%

### Operating Conditions

Operating Temperature	[°C]	-40 ~ +85
Maximum System Voltage	[V]	1,000 (IEC)
Maximum Series Fuse Rating	[A]	20
Mechanical Test Load <sup>†</sup> (Front)	[Pa/psf]	5,400/113
Mechanical Test Load <sup>†</sup> (Rear)	[Pa/psf]	3,000/63

<sup>†</sup>Based on IEC 61215-2 : 2016 (Test Load = Design Load x Safety Factor (1.5))

### Packaging Configuration

Number of Modules per Pallet	[EA]	25
Number of Modules per 40' HQ Container	[EA]	550
Number of Modules per 53' HQ Container	[EA]	750
Packaging Box Dimensions (L x W x H)	[mm]	2,160 x 1,120 x 1,213
Packaging Box Dimensions (L x W x H)	[in]	85 x 44.1 x 47.8
Packaging Box Gross Weight	[kg]	610
Packaging Box Gross Weight	[lb]	1,345

### Dimensions (mm/inch)

