


## Transferring a Phone Number from a Prior Provider?

Transferring a phone number can take about four days, so you should keep a phone plugged into your wall jack to **receive** calls on your old service (including 911) until your transfer completes. However, you can **make** calls immediately on your Wireless Home Phone device. Check transfer status at [att.com/port](http://att.com/port).

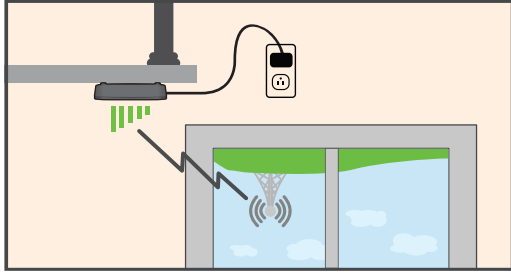



- Where you have a strong signal from a cell tower, typically near a window or outside wall. Signal strength may vary in different parts of your home.
  - Near an electrical wall outlet.
- Your device should be located:
- use your home phone wall jacks.
- The Wireless Home Phone device uses the AT&T cellular network and DOES NOT
- ## Before You Begin

## For More Information

- For help on setting up your AT&T voicemail, go to [att.com/voicemailsetup](http://att.com/voicemailsetup).
- Visit [att.com/whptutorial](http://att.com/whptutorial) to view videos and interactive tutorials on how to set up, use and troubleshoot your Wireless Home Phone device.
- Refer to your User Guide for detailed information about using your Wireless Home Phone device, including advanced troubleshooting and frequently asked questions.
- Call AT&T Customer Care at 800.331.0500 for assistance with your AT&T service.

Wireless Home Phone ("WHP") device is a mobile device that may be used with home phone equipment in different locations in the U.S. WHP device has a backup battery in the event of a power outage. However, a landline phone requiring separate electric power to operate (e.g., cordless phones) connected to a WHP device will not place or receive calls (including 911 calls) during a power outage. For emergency calls, you may have to provide your location address to the 911 operator. Landline home phone equipment is not included. Provides voice service only. Not compatible with data or messaging services, home security systems, fax service, medical alert systems, medical monitoring systems, credit card machines, IP/PBX Phone systems, or dial-up Internet service. May not be compatible with your DVR/Satellite systems, please check with your provider. DSL customers should contact their provider before transferring a phone number to ensure uninterrupted DSL Internet service. WHP device is sold for use on the AT&T wireless network and cannot be activated on other carriers' wireless networks. If your WHP device is roaming, AT&T's off-net usage restrictions apply. Service provided by AT&T Mobility. © 2014 AT&T Intellectual Property. All rights reserved. AT&T is a registered trademark of AT&T Intellectual Property.

For more detailed information on Light Indicators, please refer to the User Guide.

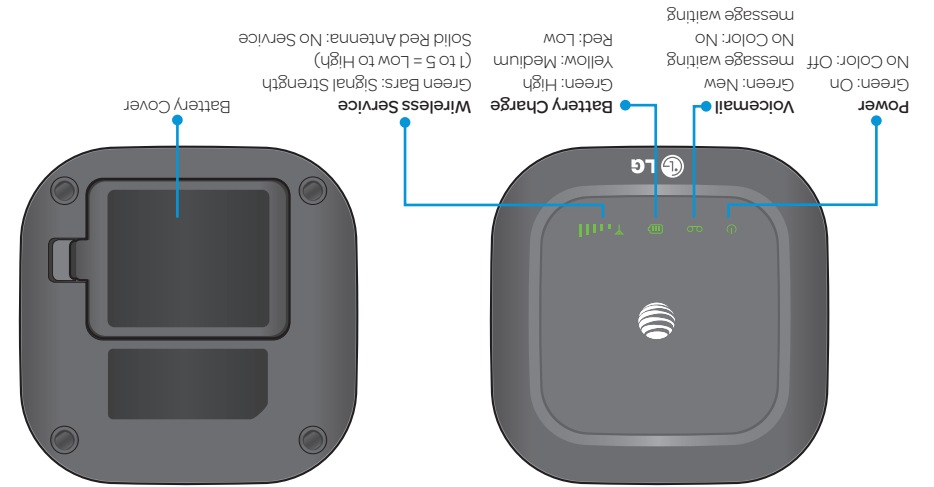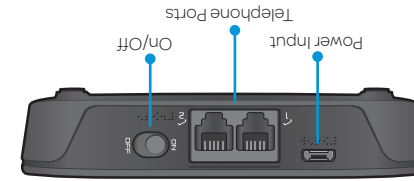

## Getting To Know Your Device

## Quick Start

### AT&T Wireless Home Phone




## 1 Install the Back-up Battery

Remove the cover from the battery compartment.




Insert the back-up battery and replace the cover.

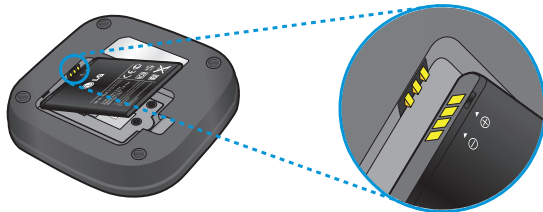


## 2 Turn on Your Device

- 1) Connect the large end of the power cord into the power plug. Insert the power plug into an electrical outlet.
- 2) Insert the small end of the power cord into the Power Input port on the back of your Wireless Home Phone device.
- 3) Slide the **On/Off** switch to the **On** position.

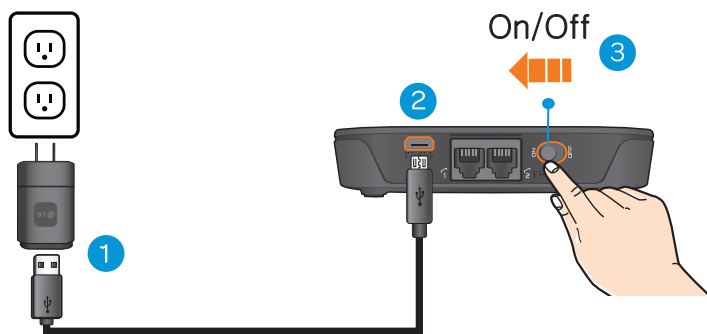

## 3 Check the Wireless Signal

More green bars indicate a stronger signal. Your device can be relocated in your home for best performance.

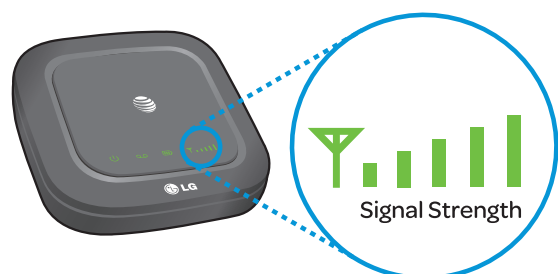

## 4 Connect the Device to a Phone

1) Unplug your phone from your home phone wall jack.

2) Plug your phone into the "Phone 1" port on the Wireless Home Phone device, using your existing phone cable.




**IMPORTANT: DO NOT** plug the Wireless Home Phone device or your phones into your wall jacks.

## 5 Place a Test Call

Place a test call from your connected home phone. Make sure to dial the 10-digit phone number, including area code. For best results, place the cordless phone base at least 12 inches from the Wireless Home Phone device.

**NOTE:** Keep your cordless phone plugged into a power outlet.

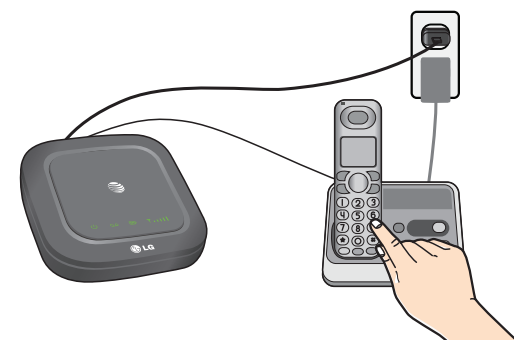

## 6 Set up Voicemail and Additional Phones

Voicemail is included with your service. **Dial "1" to set up and access.** If you choose to use an answering machine instead, set it to fewer than 4 rings.

To place phones throughout your home, use a cordless phone system with multiple handsets. Wall jacks are not used with Wireless Home Phone.

