

COMMERCIAL

SINGLE SPLIT



LINE - UP

H-INVERTER (R32)

		H-INVERTER (R32)				STANDARD INVERTER (R32)									
kBtu/h	kW	Type	Ceiling Mounted Cassette	Ceiling Concealed Duct	Ceiling Suspended	ODU	1Ø	3Ø	Ceiling Mounted Cassette	Ceiling Concealed Duct	Ceiling Suspended	Console / Wall Mounted	ODU	1Ø	3Ø
9	2.5						1Ø	3Ø						1Ø	3Ø
		UT09FH NQ0				UUA1 ULO	CT09F NRO	CL09F N50	UQ09 NAO				UUA1 ULO		
12	3.4						1Ø	3Ø						1Ø	3Ø
		UT12FH NQ0	UM12FH N10	UL12FH N50		UUB1 U20	CT12F NRO	CL12F N50	UQ12 NAO				UUA1 ULO		
18	5.0						1Ø	3Ø						1Ø	3Ø
		UT18FH N80	UM18FH N10	UL18FH N30	UV18FH N10	UUB1 U20	CT18F NQ0	CM18F N10	CL18F N60	UV18F N10	UQ18 NAO	UUB1 U20			
24	6.8						1Ø	3Ø						1Ø	3Ø
		UT24FH NAO	UM24FH N20		UV24FH N20	UUC1 U40	CT24F N80	CM24F N10	CL24F N30	UV24F N10	UUC1 U40		UUA1 ULO		
30	8.0						1Ø	3Ø						1Ø	3Ø
		UT30FH NAO	UM30FH N20		UV30FH N20	UUB1 U20	UT30F N80	UM30F N10	UV30F N10	US30F NRO					
36	9.5						1Ø	3Ø						1Ø	3Ø
		UT36FH NAO	UM36FH N30		UV36FH N20	UUD1 U30	UT36F NAO	UM36F N20	UV36F N20	US36F NRO					
42	12.0						1Ø	3Ø						1Ø	3Ø
		UT42FH NAO	UM42FH N30		UV42FH N20	UUD3 U30	UT42F NAO	UM42F N20	UV42F N20	UUD1 U30	UUD3 U30				
48	13.4						1Ø	3Ø						1Ø	3Ø
		UT48FH NAO	UM48FH N30		UV48FH N20	UU48W U32	UT48F NAO	UM48F N30	UV48F N20	UU48W U32					
60	14.6						1Ø	3Ø						1Ø	3Ø
		UT60FH NAO			UV60F N20	UU49W U32	UT60F NAO	UM60F N30	UV60F N20	UU49W U32					
70	20.0												UB70 N94		
85	25.0												UU85W U74		

LINE - UP

COMPACT INVERTER (R32)

		COMPACT INVERTER (R32)				STANDARD INVERTER (R410A)							
kBtu/h	kW	Type	Ceiling Mounted Cassette	Ceiling Concealed Duct	Ceiling Suspended	Wall Mounted	ODU	1Ø	Ceiling Concealed Duct (High Static)	Floor Standing	ODU	1Ø	3Ø
9	2.5												
12	3.4												
18	5.0												
24	6.8												
30	8.0												
36	9.5												
42	12.0												
48	13.4												
60	14.6												
70	20.0												
85	25.0												

SINGLE SPLIT



FEATURE OVERVIEW

Category	H-Inverter (R32)									
	kBtu/h	9	12	18	24	30	36	42	48	60
kW	2.5	3.4	5.0	6.8	8.0	9.5	12.0	13.4	14.6	
Supreme Energy Efficiency	BLDC Comp & Fan Motor	●	●	●	●	●	●	●	●	●
	Eurovent Certi.	●	●	●	●	●	●	●	●	●
	High Level SEER / SCOP	●	●	●	●	●	●	●	●	●
	Variable Voltage Control	●	●	●	●	●	●	●	●	●
	Wide Louver Fin	●	●	●	●	●	●	●	●	●
	Optimised Heat Exchanger Path		●	●	●	●	●	●	●	●
	Power Saving Start up	●	●	●	●	●	●	●	●	●
	Peak Current Control		●	●	●	●	●	●	●	●
	Mode Lock	●*	●*	●	●	●	●	●	●	●
	Standby Mode	●	●	●	●	●	●	●	●	●
Comfort Environment	Comfort Cooling with Humidity sensor**		●	●	●	●	●	●	●	●
	Night Silent Operation		●	●	●	●	●	●	●	●
	Continuous Cooling Operation	●	●	●	●	●	●	●	●	●
High Performance & Reliability	Quick & Reliable Operation	●	●	●	●	●	●	●	●	●
	R1 Compressor				●	●	●	●	●	●
	Corrision resistance Black Fin	●	●	●	●	●	●	●	●	●
Convenient Control System	Long Pipe Installation	●	●	●	●	●	●	●	●	●
	LG ThinQ***	●	●	●	●	●	●	●	●	●
	Easy Control (PI-485 Connection)	●	●	●	●	●	●	●	●	●
Enhanced Application	1 Point External Input****	●	●	●	●	●	●	●	●	●
	Forced Cooling Operation		●	●	●	●	●	●	●	●
	Mobile LG MV	●	●	●	●	●	●	●	●	●
Enhanced Application	Weekly Program*****	●	●	●	●	●	●	●	●	●
	Synchro function									
	Connection with AHU		●	●	●	●	●	●	●	●

* With controller PREMTB001 / PREMTBB01 / PREMTB100 / PREMTBB100

** Available only for Ceiling Mounted cassette (840 x 840), Ceiling Suspended, Console models.

*** Available with LG Wi-Fi modem(PWFMD200) and it should be connected to the indoor unit.

**** Available except for Wall Mounted Unit.

***** Weekly program is available with wired remote controller.

Category	Standard Inverter (R32)								Compact Inverter (R32)				
	kBtu/h	9	12	18	24	30	36	42	48	60	18	24	30
kW	2.5	3.4	5.0	6.8	8.0	9.5	12.0	13.4	14.6	5.0	6.8	8.0	9.5
Supreme Energy Efficiency	BLDC Comp & Fan Motor	●	●	●	●	●	●	●	●	●	●	●	●
	Eurovent Certi.	●	●	●	●	●	●	●	●	●	●	●	●
	High Level SEER / SCOP	●	●	●	●	●	●	●	●	●	●	●	●
	Variable Voltage Control	●	●	●	●	●	●	●	●	●	●	●	●
	Wide Louver Fin	●	●	●	●	●	●	●	●	●	●	●	●
	Optimised Heat Exchanger Path		●	●	●	●	●	●	●	●	●	●	●
	Power Saving Start up	●	●	●	●	●	●	●	●	●	●	●	●
	Peak Current Control		●	●	●	●	●	●	●	●	●	●	●
	Mode Lock	●*	●*	●	●	●	●	●	●	●	●*	●	●
	Standby Mode	●	●	●	●	●	●	●	●	●	●	●	●
Comfort Environment	Comfort Cooling with Humidity sensor**	●	●	●	●	●	●	●	●	●	●	●	●
	Night Silent Operation		●	●	●	●	●	●	●	●	●	●	●
	Continuous Cooling Operation	●	●	●	●	●	●	●	●	●	●	●	●
High Performance & Reliability	Quick & Reliable Operation	●	●	●	●	●	●	●	●	●	●	●	●
	R1 Compressor				●	●	●	●	●	●	●	●	●
	Corrision Resistance Black Fin	●	●	●	●	●	●	●	●	●	●	●	●
Convenient Control System	Long Pipe Installation	●	●	●	●	●	●	●	●	●	●	●	●
	LG ThinQ***	●	●	●	●	●	●	●	●	●	●	●	●
	Easy Control (PI-485 Connection)	●	●	●	●	●	●	●	●	●	●	●	●
Enhanced Application	1 Point External Input****	●	●	●	●	●	●	●	●	●	●	●	●
	Forced Cooling Operation		●	●	●	●	●	●	●	●	●	●	●
	Mobile LG MV	●	●	●	●	●	●	●	●	●	●	●	●
Enhanced Application	Weekly Program*****	●	●	●	●	●	●	●	●	●	●	●	●
	Synchro function												
	Connection with AHU		●	●	●	●	●	●	●	●	●	●	●

* With controller PREMTB001 / PREMTBB01 / PREMTB100 / PREMTBB100

** Available only for Ceiling Mounted cassette (840 x 840), Ceiling Suspended, Console models.

*** Available with LG Wi-Fi modem(PWFMD200) and it should be connected to the indoor unit.

**** Available except for Wall Mounted Unit.

***** Weekly program is available with wired remote controller.

WHY LG SINGLE SPLIT?

Triple Line-up for On-site Customization

LG's commercial triple line-up provides more customizable options for unique customer needs and installation requirements.

H-INVERTER (R32)	STANDARD INVERTER (R32)	COMPACT INVERTER (R32)
 32 Sets	 45 Sets	 16 Sets

LINE-UP	DESCRIPTION	9K (2.5kW)	12K (3.4kW)	18K (5.0kW)	24K (6.8kW)	30K (8.0kW)	36K (9.5kW)	42K (12.0kW)	48K (13.4kW)	60K (14.6kW)
H-INVERTER (R32)	High Performance - Suitable for high quality functions - Maximum pipe length up to 85m * - Floor Detection Sensor (Default) - Wide Cooling operation range (-20°C ~ 52°C) & 100% Capacity at 48°C * - Wide Heating operation range (-25°C ~ 18°C) & 100% Capacity at -15°C *									
STANDARD INVERTER (R32)	Wide Commercial Applications - Suitable for wide commercial applications - Maximum pipe length up to 85m* - Synchro Function over 36k Model (Max 4 IDUs) - Wi-Fi Modem and Floor Detection Sensor (Option) - Wide Cooling operation range (-20°C ~ 52°C)* - Wide Heating operation range (-25°C ~ 18°C)*									
COMPACT INVERTER (R32)	Compact & Cost Effective - Suitable for busy environments and small shops - Very compact and easy to install - Maximum pipe length up to 50m* - Wi-Fi Modem and Floor Detection Sensor (Option) - Cooling operation range (-20°C ~ 50°C)* - Heating operation range (-15°C ~ 18°C)*									

* This specification can be different as per each model or combination.

Application : Premium residences & office spaces

Solution : H-Inverter



※ Based on maximum operation.

High Performance


-  High energy savings
Seasonal efficiency class : A+++ ~ A+
-  Powerful cooling & heating under harsh conditions*
-  Maximum pipe length up to 85m
-  Comfort heating with floor sensor (with premium panel)
-  Embedded Drain Pump
-  Connection with AHU

※ The indoor unit functions is an example of cassette model.

※ The specification can be different as per each model or combination.

Application : Large restaurant & cafes

Solution : Standard Inverter

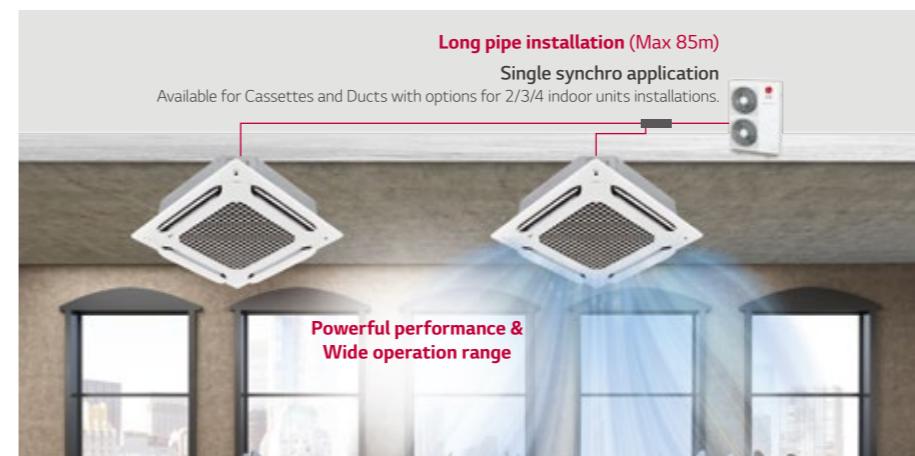

※ Accessories are ordered and purchased separately and Installed at field.


Wide commercial applications

-  Wide operation range
Cooling (DB) : -20 ~ 52 °C
Heating (WB) : -25 ~ 18 °C
-  Maximum pipe length up to 85m
-  Syncro Function over 36k Model (Max 4 IDUs)
-  Connection with AHU
-  On-demand accessories*
Wi-Fi, Drain pump, Human detection

※ The specification can be different as per each model or combination.

Application : Small shops

Solution : Compact Inverter

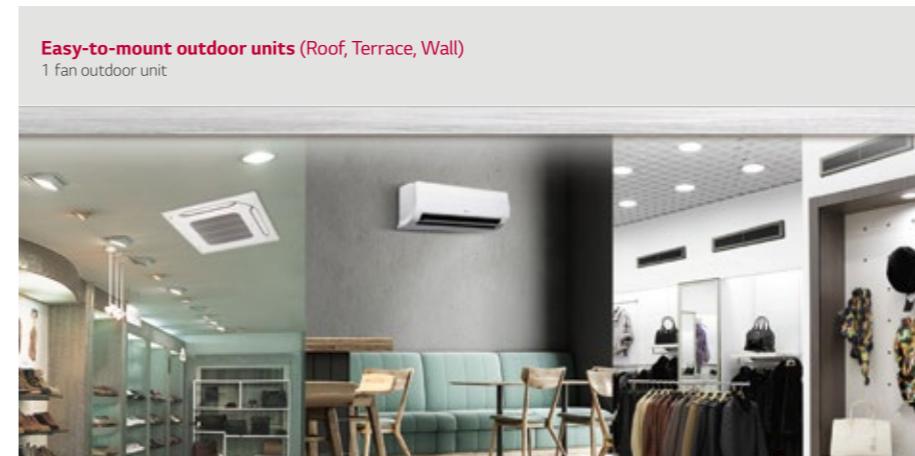

※ Accessories are ordered and purchased separately and Installed at field.

Compact & Cost Effective


-  Very compact and easy to install
-  Maximum pipe length up to 50m
-  Connection with AHU
-  On-demand accessories*
Wi-Fi, Drain pump, Human detection

※ The specification can be different as per each model or combination.

WHY LG SINGLE SPLIT?

Free Combination

By applying concept of free combination, the total line-up increases from 45 to 93 sets while number of outdoor unit is decreased from 17 EA to 5 EA.

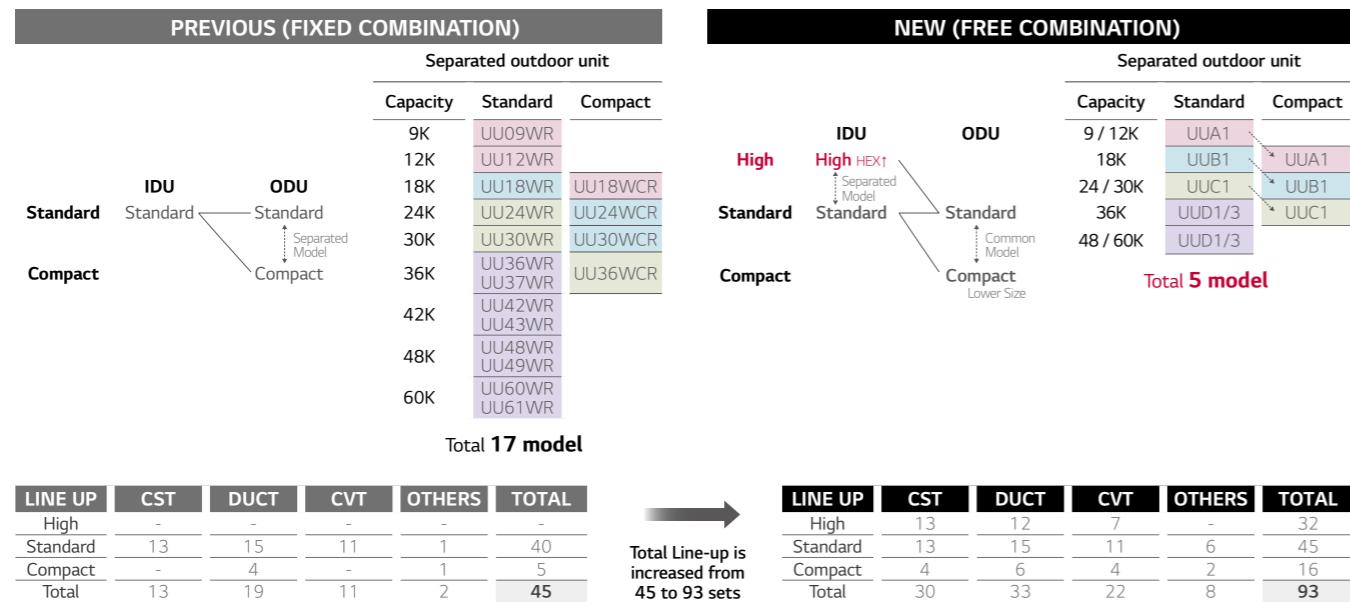

Expanded Product Type

LG Single split expands from double to triple line-up including various types of indoor units.

CAPACITY	H-INVERTER (R32)			STANDARD INVERTER (R32)			COMPACT INVERTER (R32)		
	Duct		Ceiling	Duct		Ceiling	Duct		Ceiling
	Cassette	Mid Static	Suspended	Cassette	Mid Static	Low Static	Cassette	Mid Static	Low Static
Btu/h	kW								
9k	2.5	UT09FH			CT09F	CL09F	UQ09F		
12k	3.4	UT12FH	UM12FH	UL12FH	CT12F	CL12F	UQ12F		
18k	5.0	UT18FH	UM18FH	UL18FH	UV18FH	CT18F	CM18F	CL18F	UV18F
24k	6.8	UT24FH	UM24FH		UV24FH	CT24F	CM24F	CL24F	UV24F
30k	8.0	UT30FH	UM30FH		UV30FH	UT30F	UM30F		UV30F
36k	9.5	UT36FH	UM36FH		UV36FH	UT36F	UM36F		UV36F
42k	12.0	UT42FH	UM42FH		UV42FH	UT42F	UM42F		UV42F
48k	13.4	UT48FH	UM48FH		UV48FH	UT48F	UM48F		UV48F
60k	14.6	UT60FH			UT60F	UM60F			UV60F

Common ODU UUA1 UUB1 UUC1 UUD1 (10) UUD3 (30)

770 x 545 x 288 870 x 650 x 330 950 x 834 x 330 950 x 1380 x 330

Differentiated Specification

LG Single Split provides differentiated features (Performance / Installation / Convenience) with each product line.

Items	H-INVERTER	STANDARD	COMPACT	19Y Standard (R32)
	High Performance	Wide Commercial Applications	Compact & Cost Effective	
SEER Class	A+++ ~ A+	A++ ~ A+	A+ ~ A	A++ ~ A+
Cooling Capacity* @48°C	112%	105%	88%	100%
Heating Capacity* @-15°C	124%	107%	98%	100%
Operation Range (Cooling, DB)	-20 ~ 50 °C	-10 ~ 48 °C	-15 ~ 48 °C	-15 ~ 48 °C
Operation Range (Heating, WB)	-20 ~ 18 °C	-15 ~ 18 °C	-18 ~ 18 °C	-18 ~ 18 °C
Max Pipe Length	50 m	35 m	50 m	50 m
Cooling Capacity @50m	113%	109%	-	100%
Drain Pump (Cassette)	●	●	●	●
Drain Pump (Duct, Suspended)	●	Accessory	Accessory	Accessory
Humidity Sensing (Cassette, suspended, console)	●	●	●	●
Wi-Fi (Cassette)	Accessory	Accessory	Accessory	Accessory
Floor Detection (Cassette)	●	N/A	N/A	N/A
Air purifying (Cassette)	Accessory	N/A	N/A	N/A
Human detection (Cassette)	Accessory	Accessory	Accessory	Accessory
Synchro Application	36k↑	36k↑	N/A	36k↑
AHU Comm. Kit Application	18k↑	18k↑	24k↑	18k↑

* Based on internal test data for 9.5kW model. (Capacity is calculated compared to 19Y standard model)

** This specification can be different as per each model or combination.

*** In the case of cassette model, note that the function depends on the application of recommended decoration panel.

SUPREME ENERGY EFFICIENCY

SEER / SCOP

LG's advanced technologies achieve world-class energy efficiency.



SEER / SCOP class

kW	2.5	3.4	5.0	6.8	8.0	9.5	Average
SEER	7.0	6.8	7.6	8.5	7.8	7.6	7.6
A++	A++	A++	A++	A+++	A++	A++	A++
SCOP	4.0	4.0	4.4	4.8	4.8	4.5	4.4
A+	A+	A+	A+	A++	A++	A+	A+

* These values are based in the H-Inverter Ceiling Cassette model and can change based on the applied combination.

European Energy Labeling


	SEER	SCOP
A+++	SEER \geq 8.5	SCOP 5.1
A++	6.1 \leq SEER $<$ 8.5	4.6 \leq SCOP $<$ 5.1
A+	5.6 \leq SEER $<$ 6.1	4.0 \leq SCOP $<$ 4.6
A	5.1 \leq SEER $<$ 5.6	3.4 \leq SCOP $<$ 4.0
B	4.6 \leq SEER $<$ 5.1	3.1 \leq SCOP $<$ 3.4
C	4.1 \leq SEER $<$ 4.6	2.8 \leq SCOP $<$ 3.1
D	3.6 \leq SEER $<$ 4.1	2.5 \leq SCOP $<$ 2.8

* Based on Ceiling Cassette (6.8 kW)

SUPREME ENERGY EFFICIENCY


Energy Savings

LG commercial air conditioners will automatically alter the temperature of discharge air by controlling their refrigerant temperature based on the difference between the indoor temperature and the target indoor temperature. During cooling operation, evaporating temperature will increase if the temperature difference reduces. This allows for enhanced comfort and reduced energy consumption.

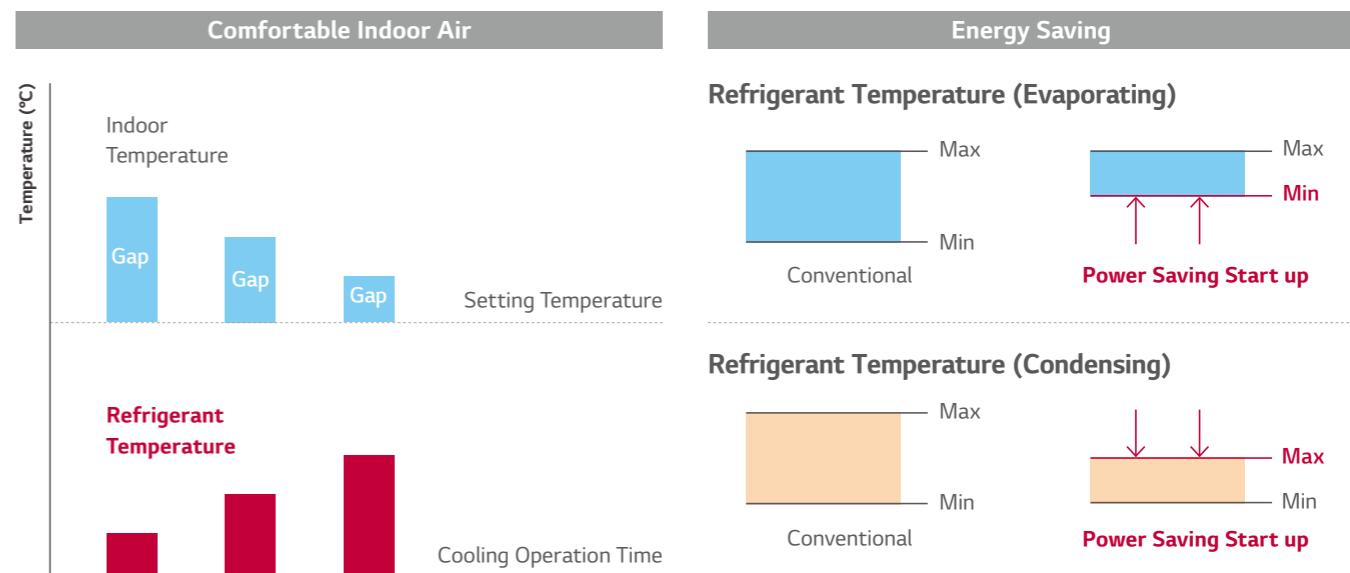


Peak Current Control

The peak current control function prevents the air conditioner from running at the maximum level while maintaining current system settings, in order to reduce energy consumption. This function helps minimize energy costs during the peak periods of energy use when the energy billing is much higher.

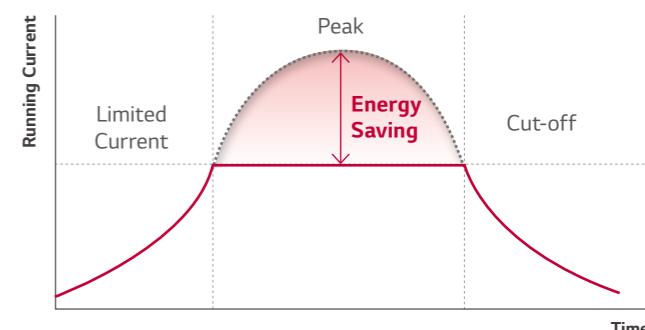

Mode Lock

Set the operation mode to either cooling-only or heating-only; either by adjusting the wired remote controller or setting the DIP switch to avoid combined use of cooling and heating. (Some models need wired remote controller for mode lock function according to feature overview table)

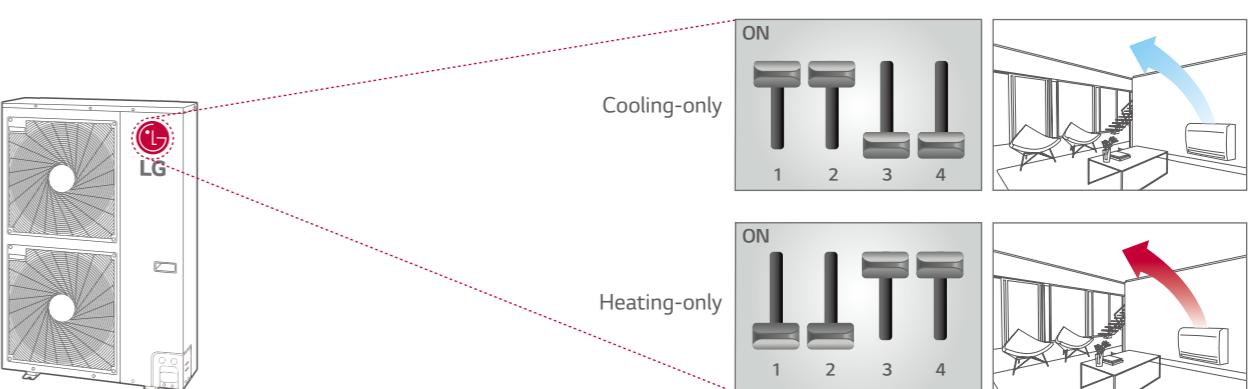

COMFORTABLE ENVIRONMENT

Comfort with Temperature & Humidity Sensors

With Dual Sensing Control, air conditioners can rapidly achieve a comfortable indoor environment for customers.




By sensing both temperature and humidity, this feature helps avoid over-cooling and dehumidification, maximizing comfort



※ Comfort cooling apply to Ceiling Cassette, Ceiling Suspended, Console
- It does not apply to small capacity cassette models.
(UT09FH, UT12FH, CT09F, CT12F, CT18F)

Dry Summer

During a dry summer season, the system senses the low humidity levels and decreases the operating ratio to increase humidity for a more comfortable environment and energy efficient operation.

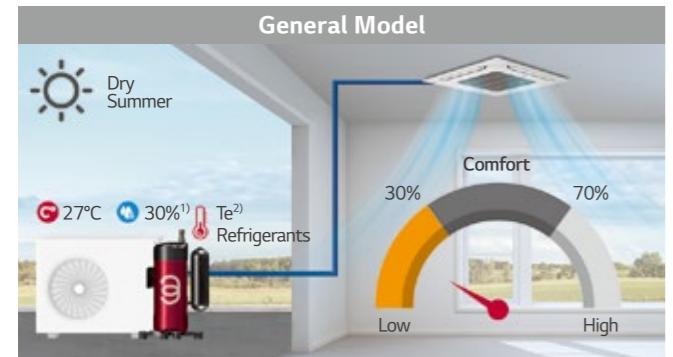


- Uncomfortable Environment

Excessive latent heat elimination regardless of humidity

- Waste Energy

Eliminate latent heat unnecessarily

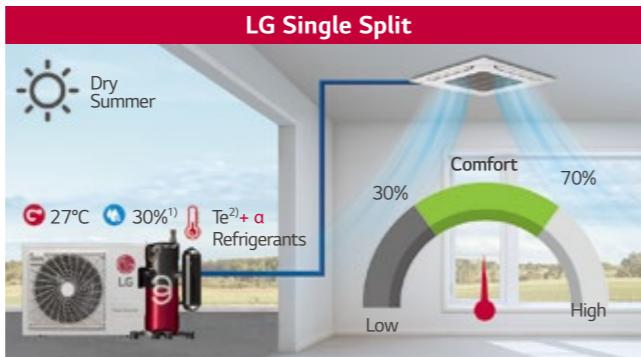

- Comfortable Environment

By making the room less dry

- Increased Energy Efficiency


Provide optimized cooling and save energy considering humidity

Humidity Condition : Low (< 30%), Standard (30~70%)

1) Indoor Condition 2) Evaporation Temperature


Wet Summer

During a wet summer season, the system senses the high humidity levels and increases the operating ratio to rapidly decrease humidity for a more comfortable indoor environment.

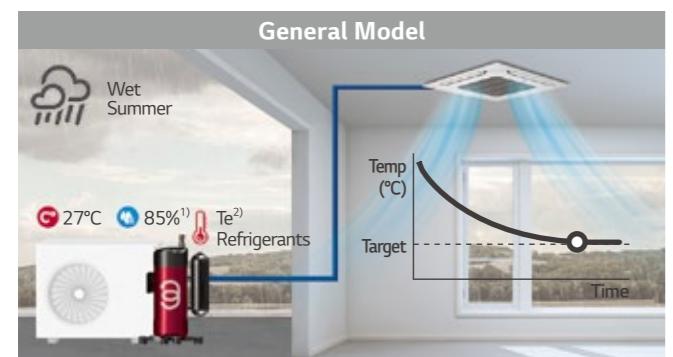

- Uncomfortable Environment

General latent heat elimination regardless of humidity

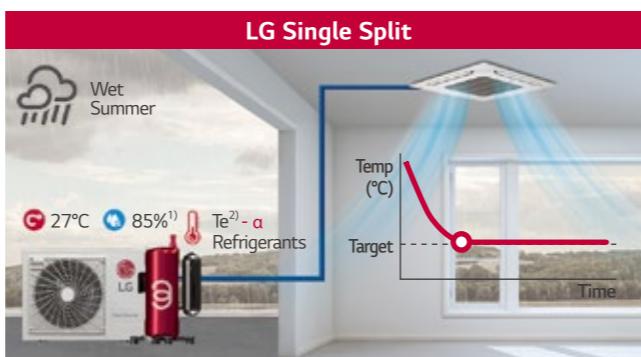

- Comfortable Environment


Quick latent heat elimination with humidity sensors

1) Indoor Condition 2) Evaporation Temperature

COMFORTABLE ENVIRONMENT


Night Silent Operation

Night Silent Operation can reduce noise levels at night time by simply setting the dip switch on the PCB of the outdoor unit.

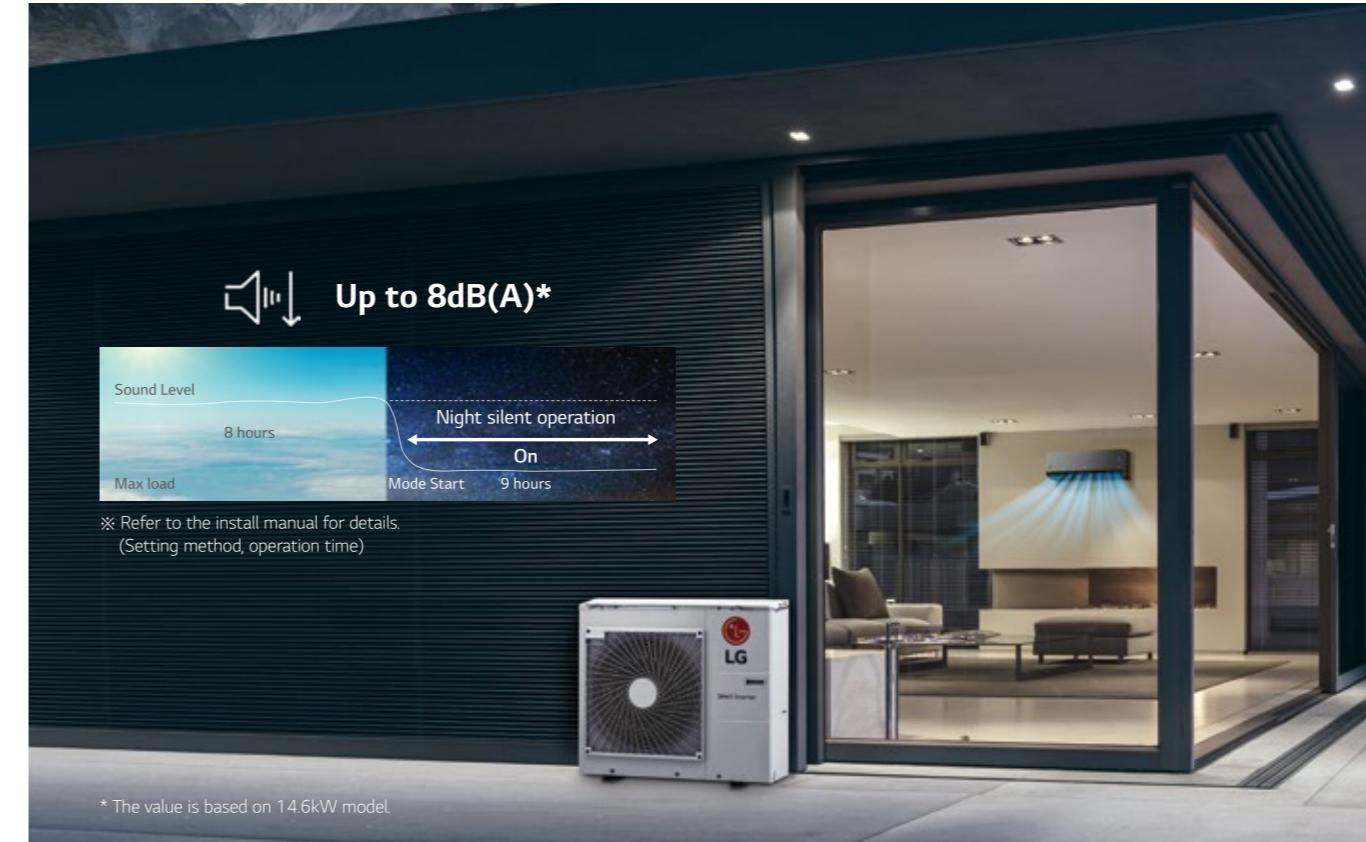

Continuous Cooling Operation

LG Single Split is able to perform continuous cooling at low ambient temperature. (as low as -15°C)

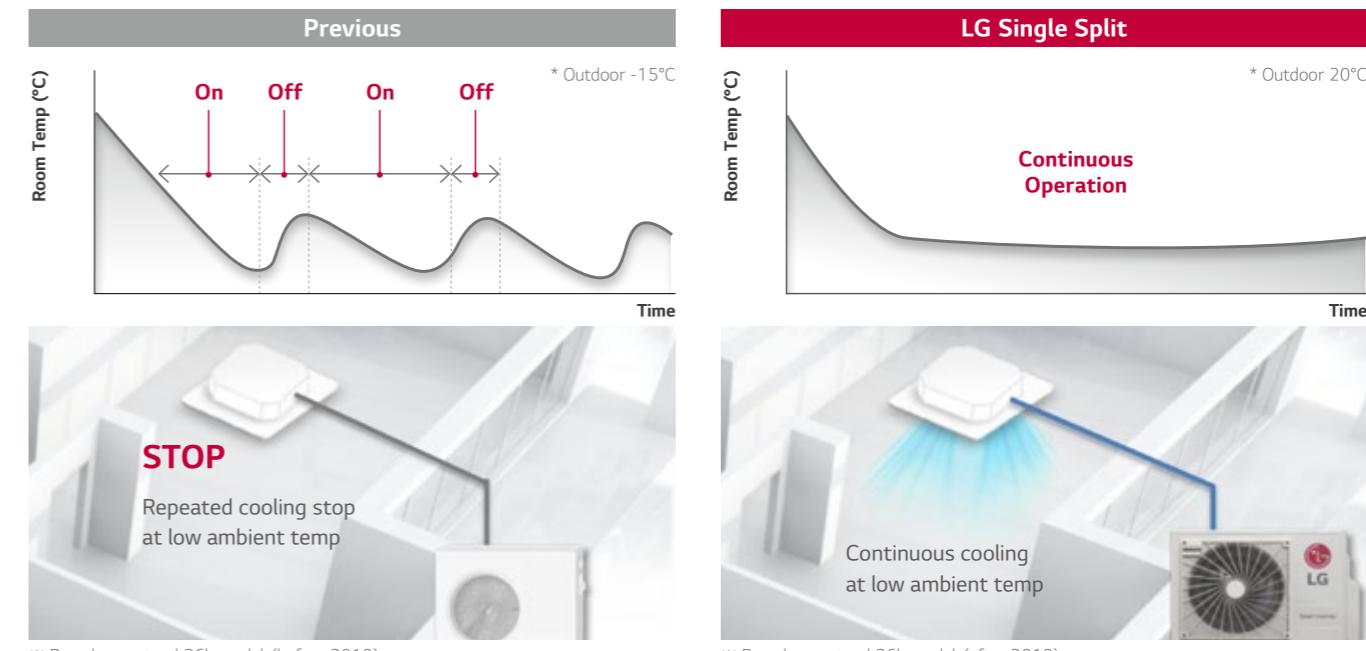

※ Based on a stand 36k model. (before 2019)

※ Based on a stand 36k model. (after 2019)


HIGH PERFORMANCE & RELIABILITY

Quick & Reliable Operation


Through pressure and temperature sensing, the desired indoor temperature can be reached more rapidly.

- Quick response due to sensing with ready for operation.
- Target performance point is reached while avoiding compressor damage from liquid compression or oil shortage.


Temperature Sensor Only

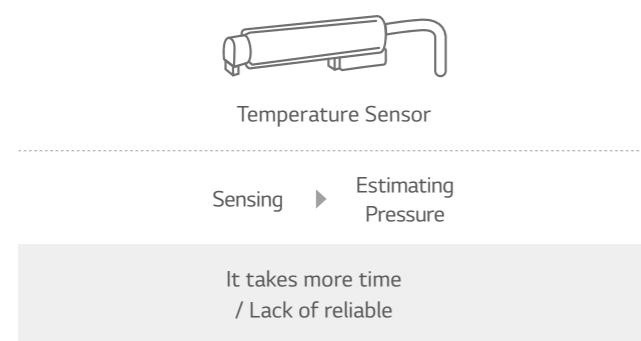



• Cooling

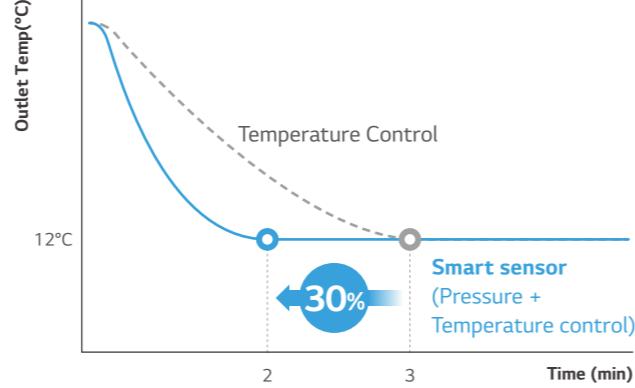

Smart Sensor

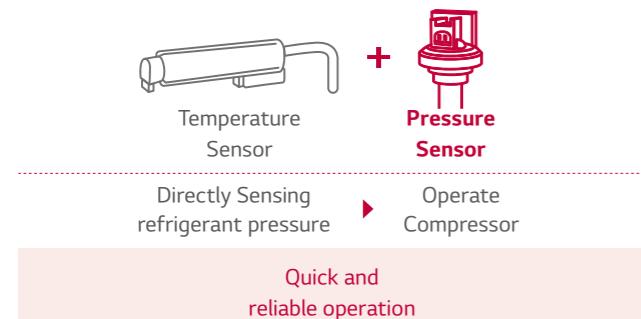


• Heating

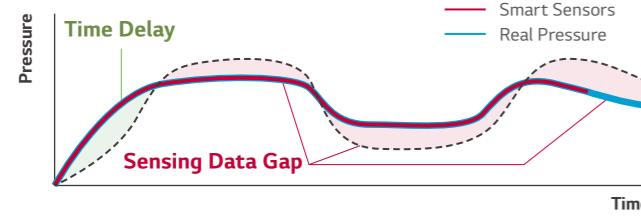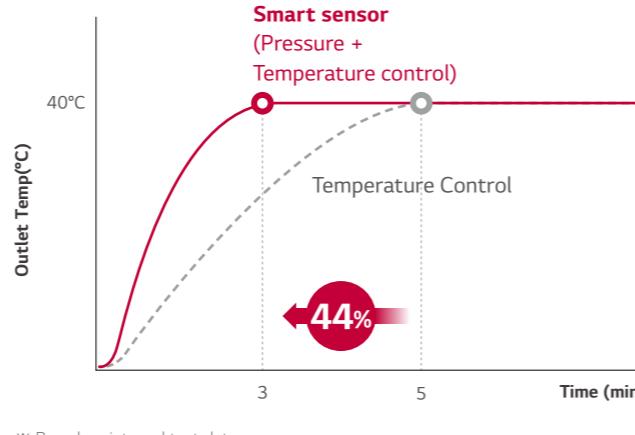

HIGH PERFORMANCE & RELIABILITY


R1 Compressor™

R1 Compressor is one that combines high-efficiency, low sound characteristics of the scroll and the simple compressing structure of the rotary compressor. This technology enables a highly efficient compact model.

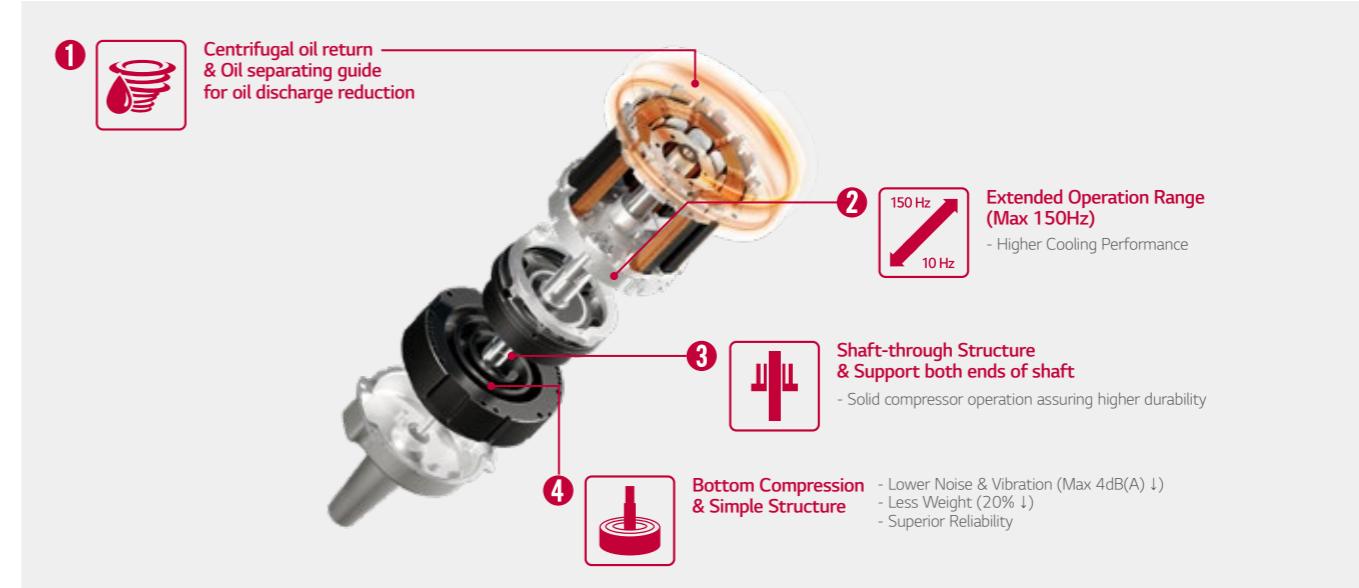


Conventional Compressor

Scroll : High efficiency / Low sound
(Continuous compression, but complex structure)

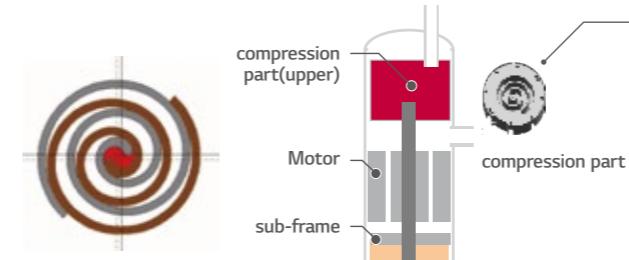


R1 Compressor™

Revolutionary Scroll : High efficiency / Stable & Simple Structure

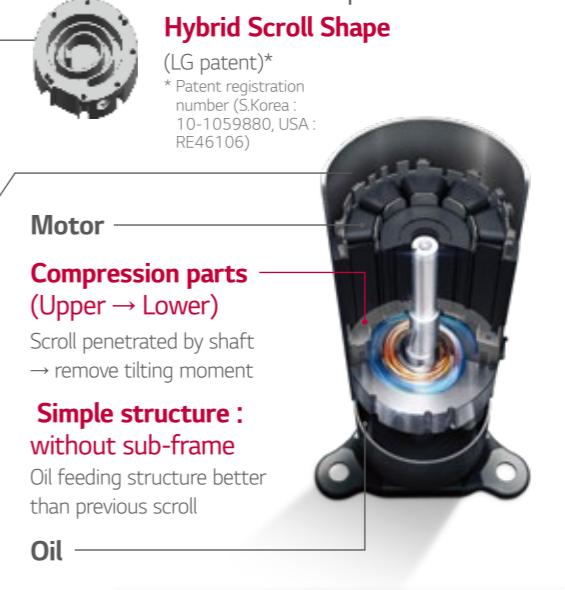

Rotary : Simple structure

(Compression per 1 rotation)

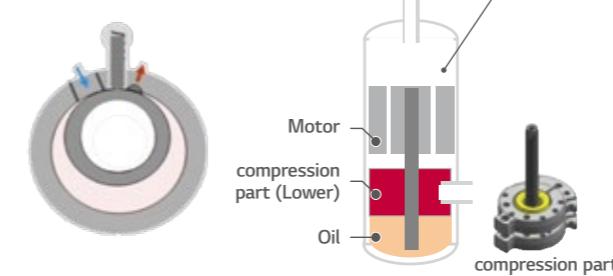


Extended operation (Max 150Hz)
Low noise & Vibration (Max 4dB(A)↓)
Less weight (20%↓)

HIGH PERFORMANCE & RELIABILITY

Corrosion Resistance Black Fin

The black coating with enhanced epoxy resin is applied for strong protection from various corrosive external conditions such as salt contamination and air pollution including fumes from factories.

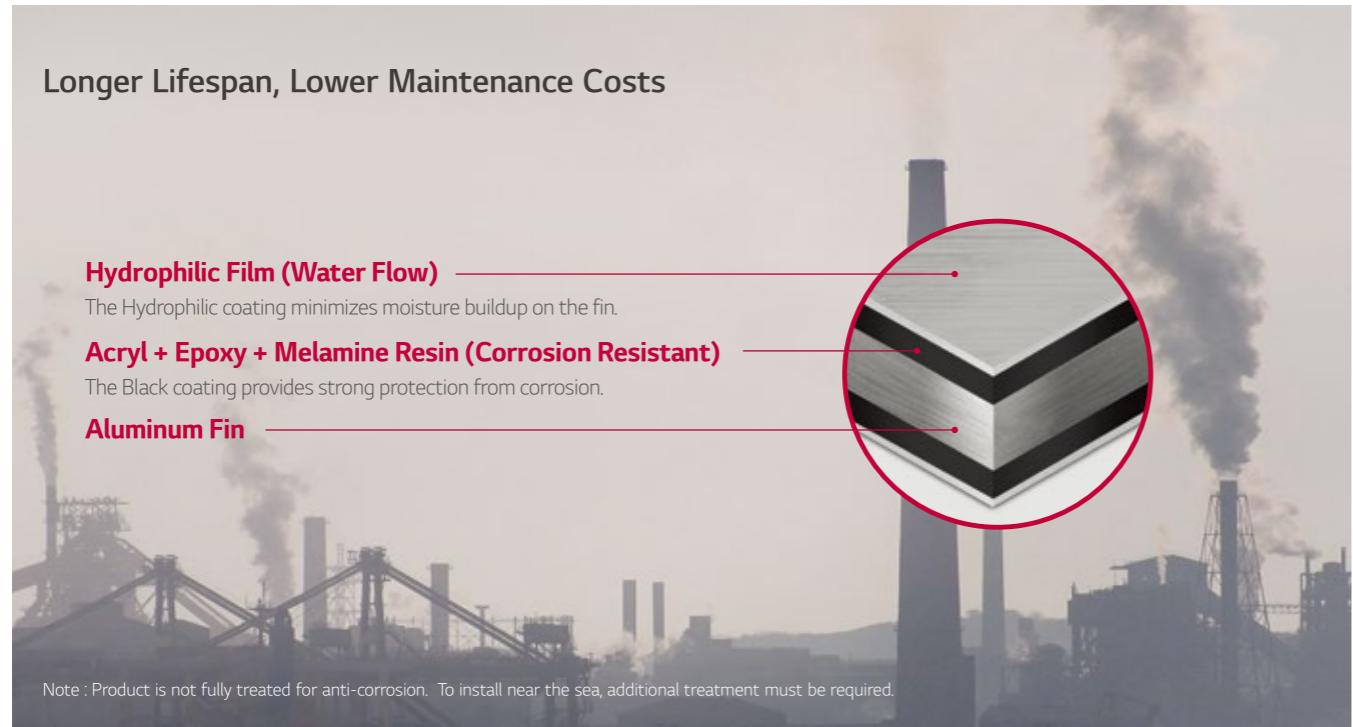

SST (Salt Spray Test)

Test Process




Process repeated

Test process is conducted according to ISO 9227.

1) Salty water concentration : NaCl aqueous solution (5%)

CCT (Cyclic Corrosion Test)

Test Process

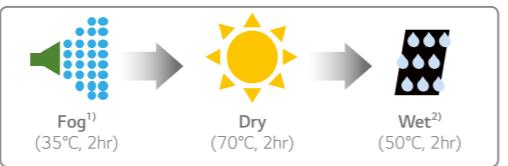

Process Repeated


Test process is conducted according to ISO 14933.

1) Salty water concentration : NaCl aqueous solution (5%)

※ Dry condition changed : 60°C, 4hr → 70°C, 2hr


2) Deionized water

Test Result (5% Area of defects compared to initial)

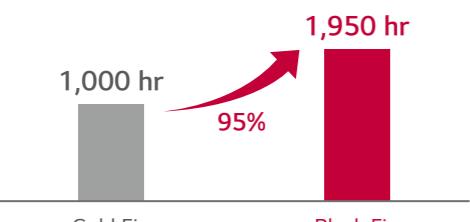

100% copper material to prevent corrosion & refrigerant leakage

Test Result (5% Area of defects compared to initial)

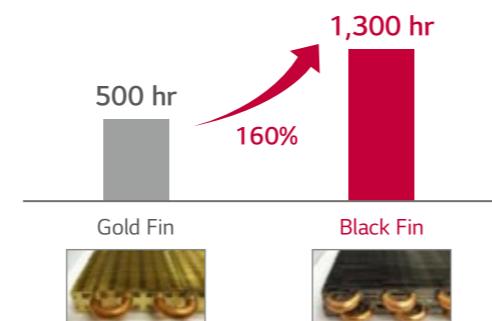


100% copper material to prevent corrosion & refrigerant leakage

HIGH PERFORMANCE & RELIABILITY

Long Pipe Installation

Maximum pipe length up to 85m and elevation length up to 30m provides flexibility for various conditions and easy installation.

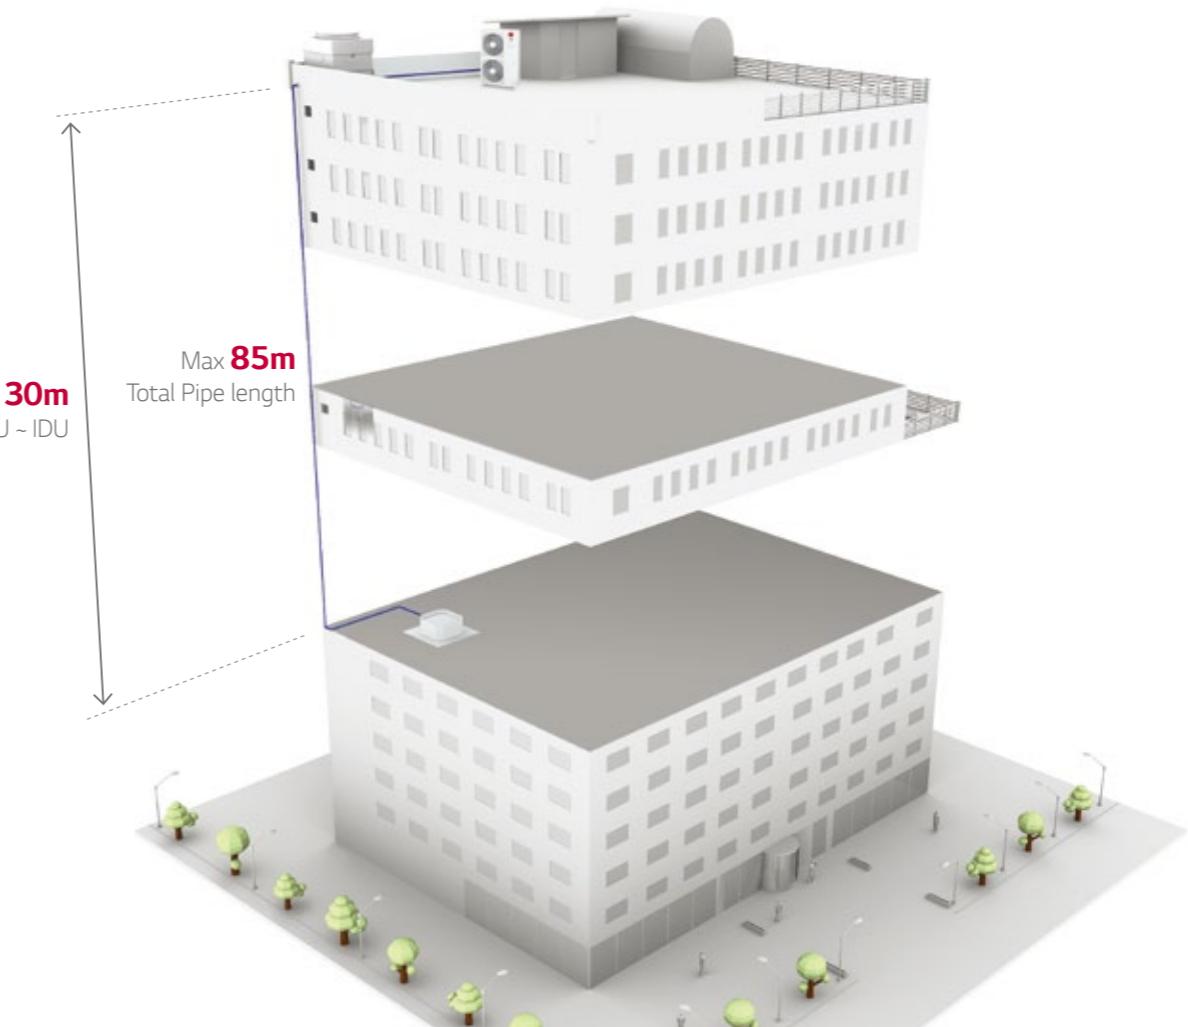

[Test condition]

- Location : LG HQ
- Installation : Apply the maximum pipe length by model.
- Period : 3 month (Checking oil level in real time)
- No use U-Trap

Model name	UUA1	UUB1	UUC1	UUD1 / UUD3
Total pipe length (m)	30	30 / 35*	50	85
Pipe Elevation Level ODU-IDU (m)	30	30	30	30

* 24k, 30k

CONVENIENT CONTROL SYSTEM

LG ThinQ™

Users can control air conditioners using Android or iOS-enabled smartphones and voice commands via Google assistant and Amazon's Alexa.



Access your air conditioner anytime and from anywhere



Simple operation for various functions


- On / Off*
- Mode Selection*
- Current temperature*
- Set temperature*
- Set fan speed*
- Vane Control

* This functions are used by google assistant & amazon alexa
※ In some countries, the use of the google assistant & amazon alexa system may be restricted.
- Launched country : Germany, UK, Ireland, Austria, Switzerland, France, Spain, Italy, Russia, Norway, Netherland, Portugal, Turkey, Sweden, Denmark

※ Search "LG ThinQ" on Google or Apple store then download the app.
※ Wi-Fi modem (PWFMD200) is required by option.

Easy Control (Central Controller)

PI-485 is a gateway device that provides communication between LG Outdoor Units and LG central controllers such as ACP, AC Smart.

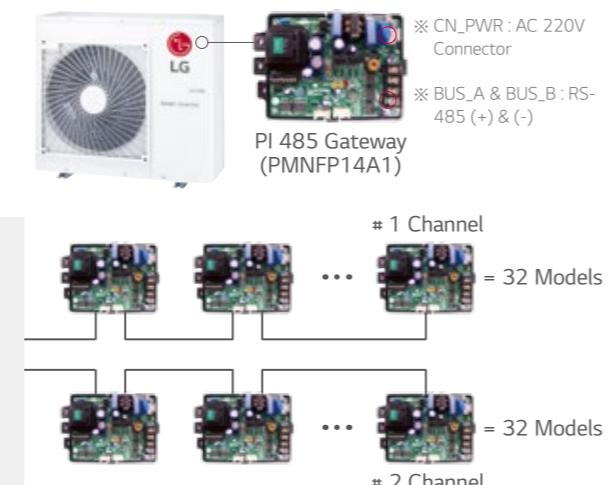


CONVENIENT CONTROL SYSTEM

1 Point External Input (On / Off Control)

Indoor unit can be controlled by external devices without dry contact, so customer can save cost of installation.

Connection between an indoor unit and external devices directly

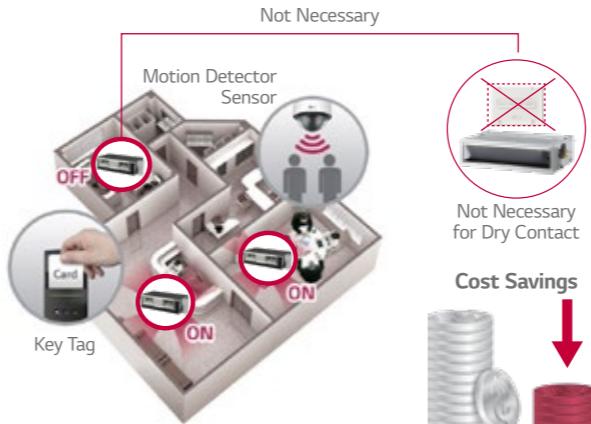

※ In case of needing more functions beside on / off control, a dry contact is required to be installed.

Mobile LGMV


LGMV (Monitoring View) helps engineers to inspect and monitor air conditioning unit easily.



Error Indicator

	Contents
01	Air temperature sensor of indoor unit
02	Inlet pipe temperature sensor of indoor unit
03	Communication error : Wired Remote Controller ↔ Indoor Unit

⋮

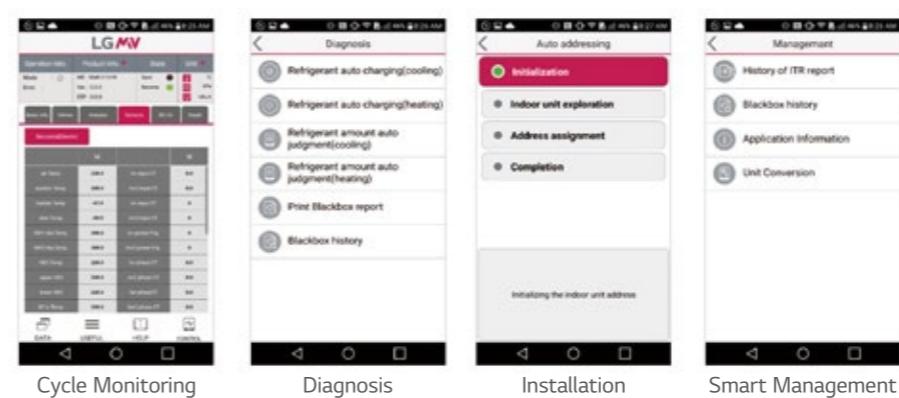


※ Search "Mobile LGMV" on Google or Apple store then download the app.
※ Wi-Fi modem (PWFMD200) is required by option.

A technician not only can check the cycle information with diagrams & graph, but also check easily the error status (Troubleshooting guide) and take action immediately.

ENHANCED APPLICATION

Synchro function

Maximum 4 indoor units can be combined by using a branch kit and setting dip switch for one outdoor unit. It can be easily applied to various sites.

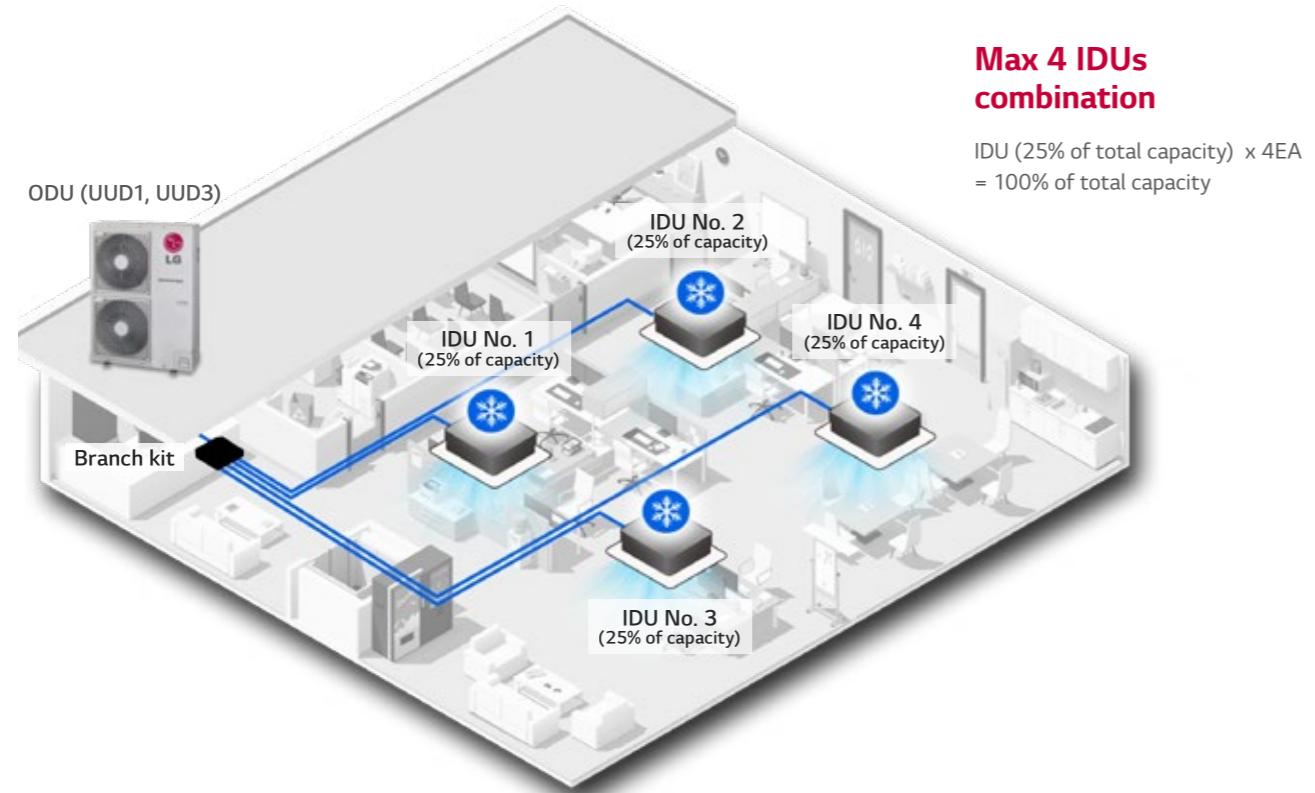

※ Combination table

Model	Duo		Trio		Quartet	
	Cassette	Duct	Cassette	Duct	Cassette	duct
UU1, UUD3	CT18F x 2EA	CM18F x 2EA	CT12F x 3EA	CL12F x 3EA	CT12F x 4EA	CL12F x 4EA
	CT24F x 2EA	CM24F x 2EA	CT18F x 3EA	CM18F x 3EA	-	-
	UT30F x 2EA	UM30F x 2EA	-	-	-	-
Branch kit	PMUB11A		PMUB111A		PMUB1111A	
Dip switch						

Note

- 1. Possible indoor units : Single CAC indoor unit series
- Dry contact & Zone control & Auto changeover is not available which is connected with synchro.
- When using synchro operation
- Do not use wireless remote controller.
- Use only one wired remote controller in the indoor units.
- Some Central controllers and some functions of central controller can not be available with synchro operation.
- 2. Branch kits are required for operating Synchro models.


ENHANCED APPLICATION

Connection with AHU

Single split can be connected to AHU using communication kit.

SIMPLE **COMPLICATED**


Simple and space saving
Easy installation
Low maintenance cost

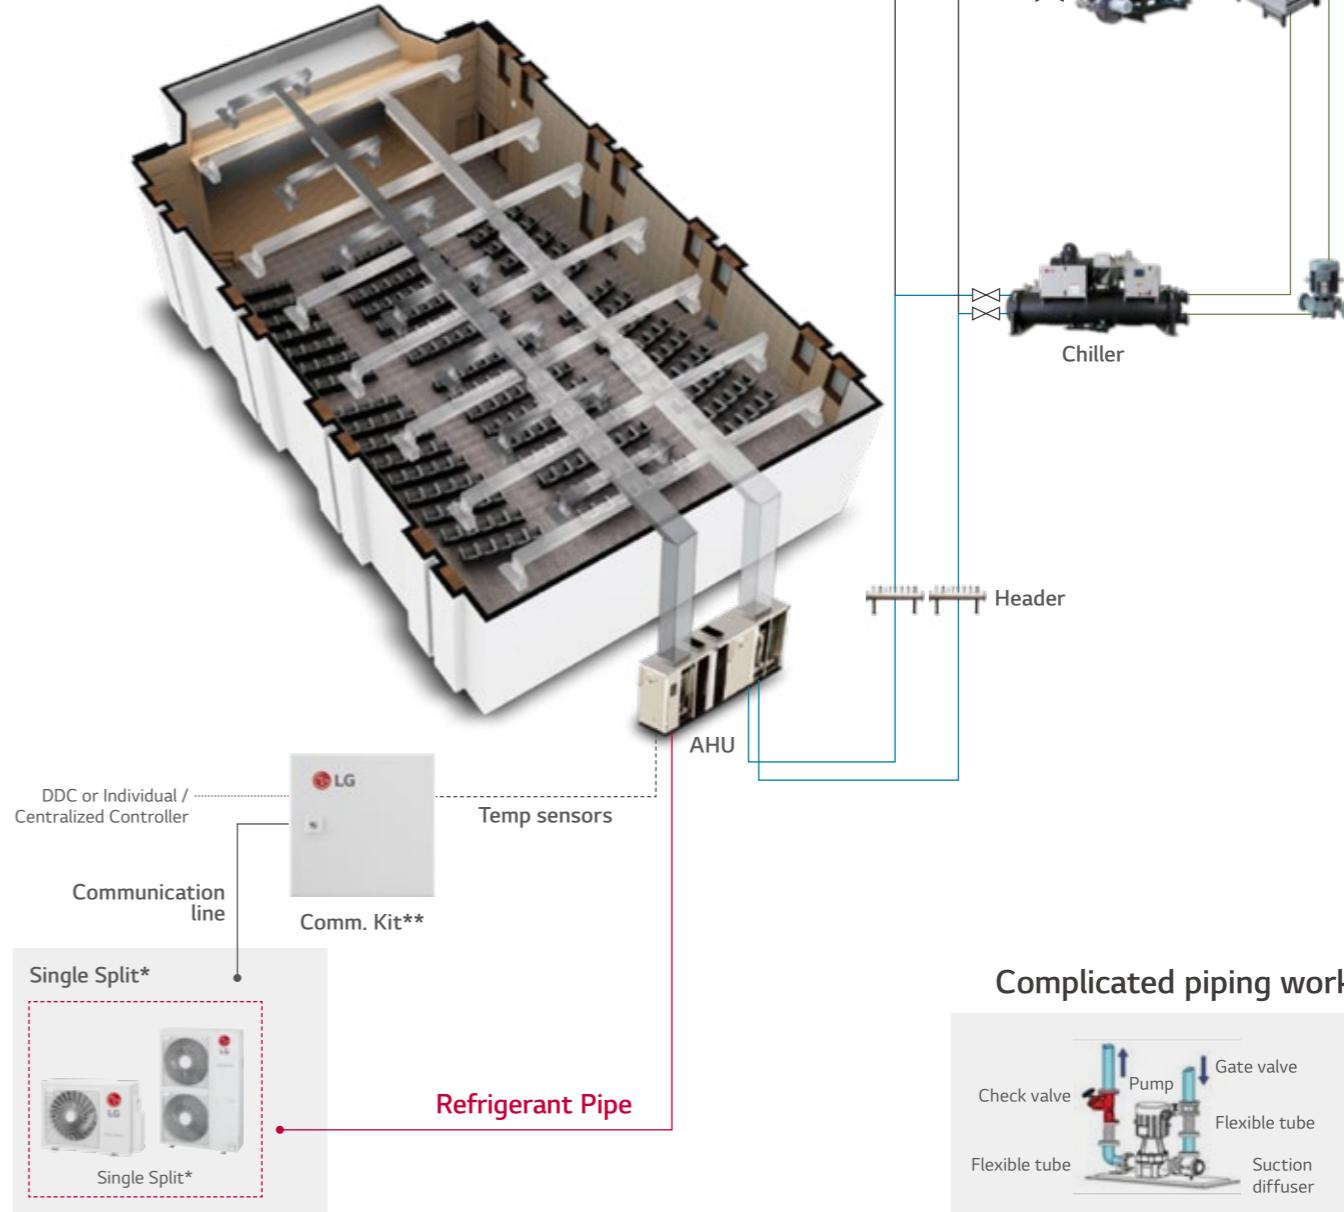

* The single model can be applied only to UUB1, UUC1, UUD1, UUD3

** Model name of communication kit
- RA air temperature control : PAHCMR000
- SA air temperature control : PAHCMS000

Complicated piping work

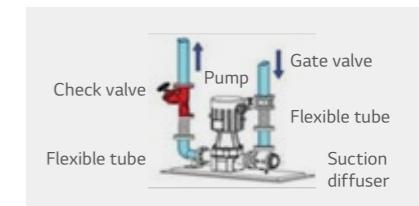

CEILING MOUNTED CASSETTE



SINGLE SPLIT KEY FEATURES

NEW DESIGN

4 Way air flow with new dual vane design

Innovative dual vane designs each of the best airflow over various spaces.



4 Way
Dual Vane

New types wind

Normal Dual Vane

Indirect Wind



Dual Vane



Direct Wind



Indirect Wind



6 Air flow modes



Fast and Quick
Power Mode



Fresh and Natural
Up / Down Swing



Auto Vane Control
Smart Mode



Indirect cooling & Heating
Indirect Wind



Suitable for High Ceiling
Direct Wind



Provide high concentration
Refresh Mode


Brighter Color

Color enhancement allows cassette to blend in to most interior ceiling spaces.



Wide Design

Bigger inlet and outlet make faster cooling / heating airflow.

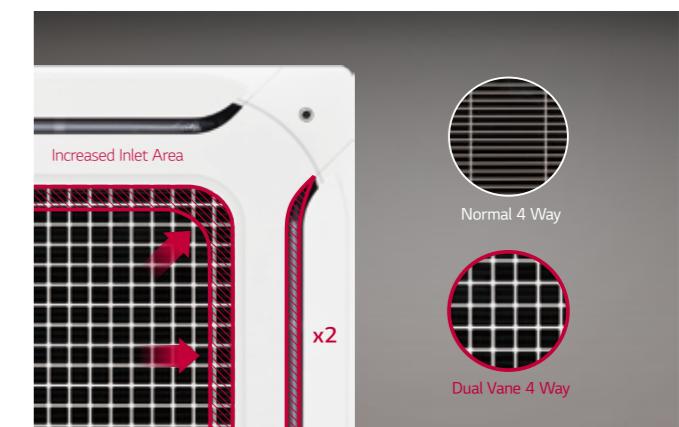


Increased Inlet Area
Normal 4 Way
x2
Dual Vane 4 Way

NEW DESIGN


Full 3D Turbo Fan

Full 3D Turbo fan decreases air resistance, so it makes High Efficient and reduces noise level.

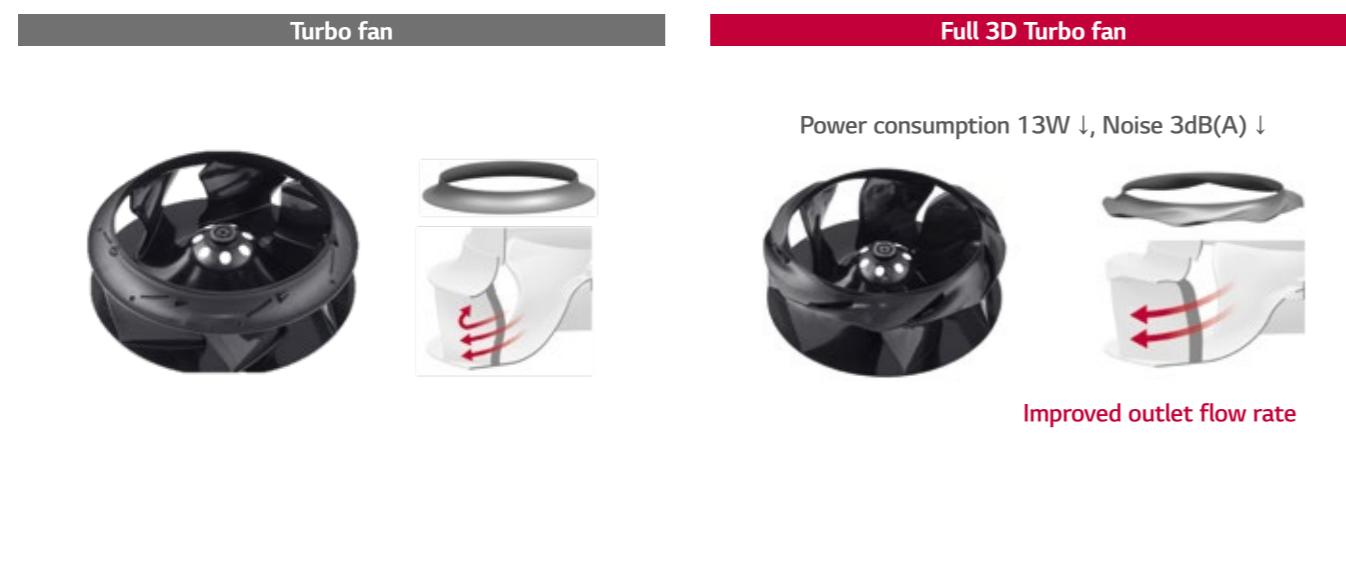

High Efficiency Heat Exchanger (HEX)

Highly integrated heat exchanger is applied to increase cooling and heating efficiency.

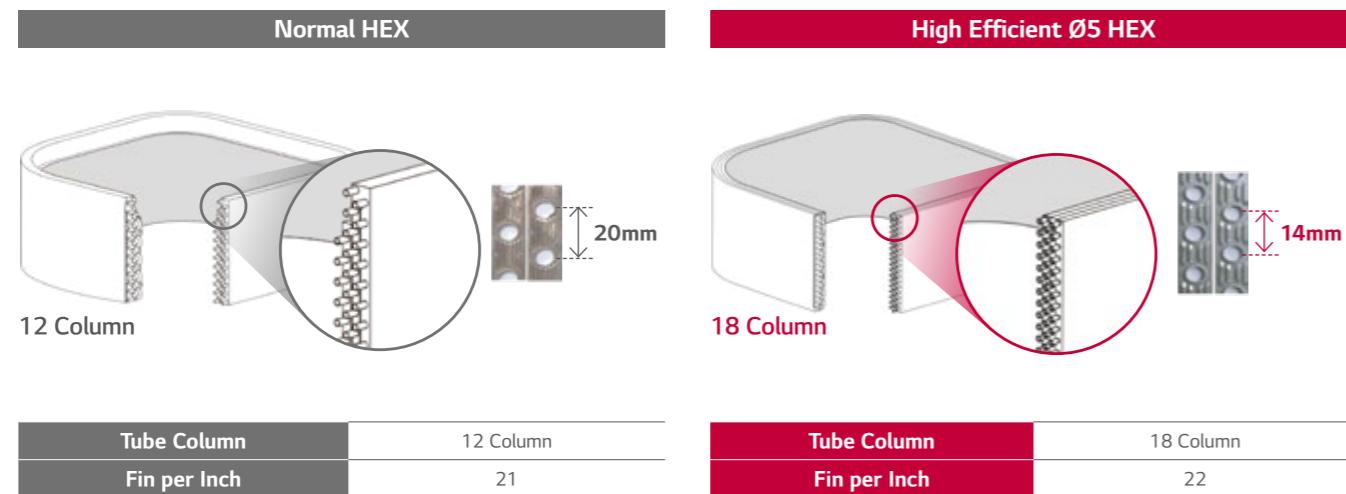

SMART

Sensor reads temperature from ceiling to floor for heating

IDU provides the human oriented room temperature with sensing floor And calculating by floor and ceiling temperature by thermopile sensor.



※ Available only for products with floor temperature sensor.

Human detecting Direct / Indirect airflow

Human sensing function finds users to provide their favorite airflow.

Comfort Indirect
Prevent airflow to heading to user by sensing.




Follow user Direct
Prefer air flow to heading to user by sensing.



SMART


Human detecting On / Off Learning operation system

IDU senses people to switch On / Off for Max 54% power saving.

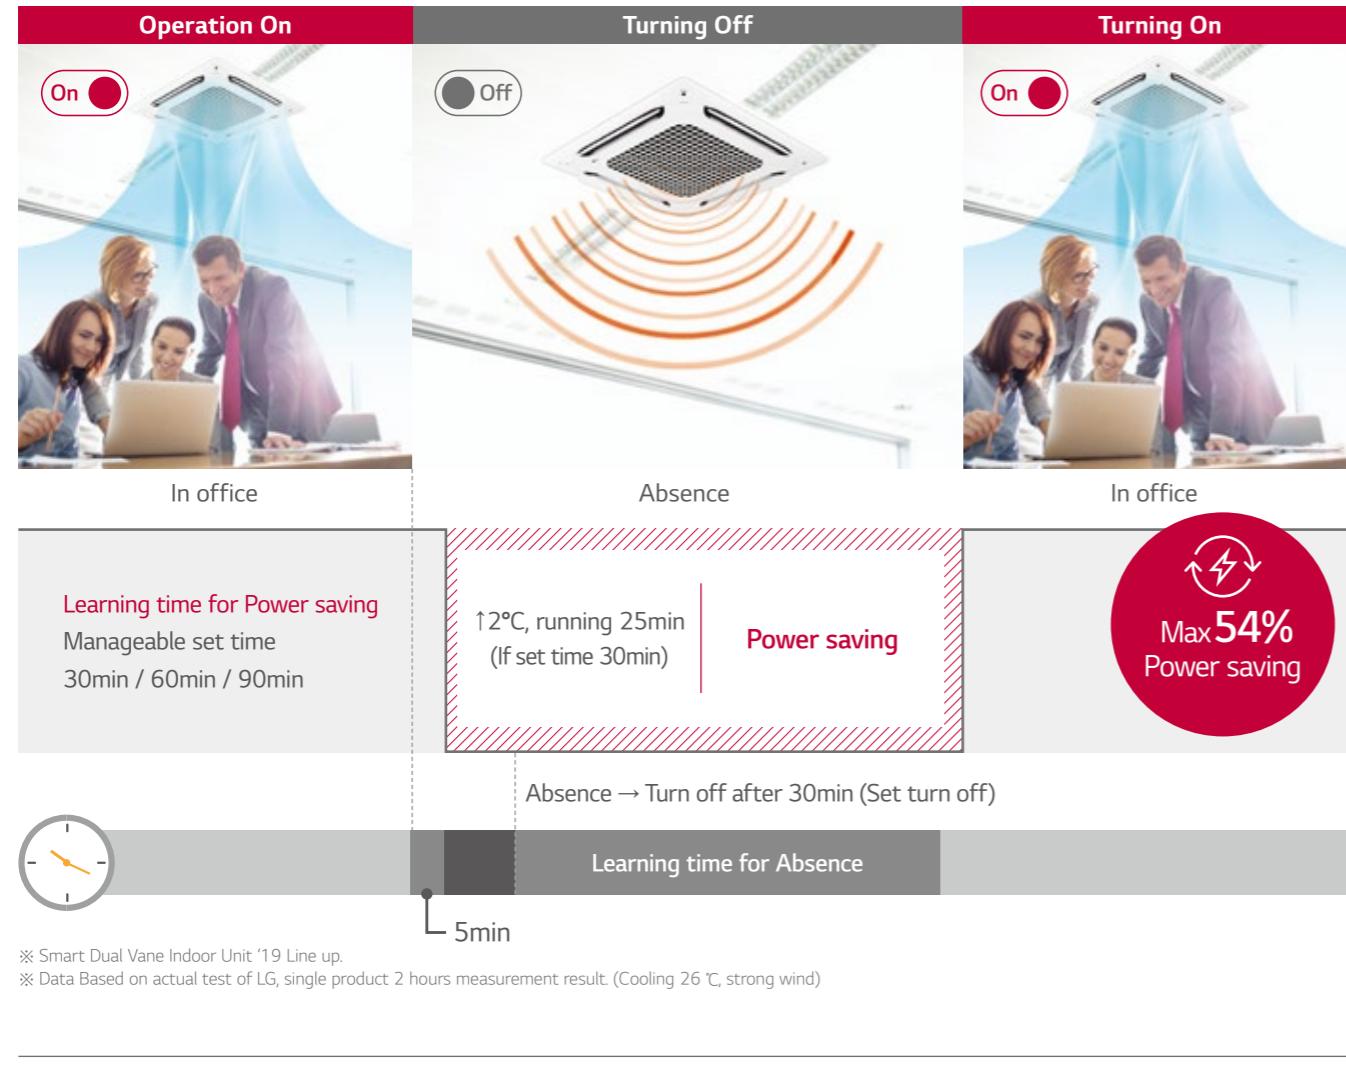

Elevation Grill

4 lines of elevation grille contributes stable movement and convenient filter management.

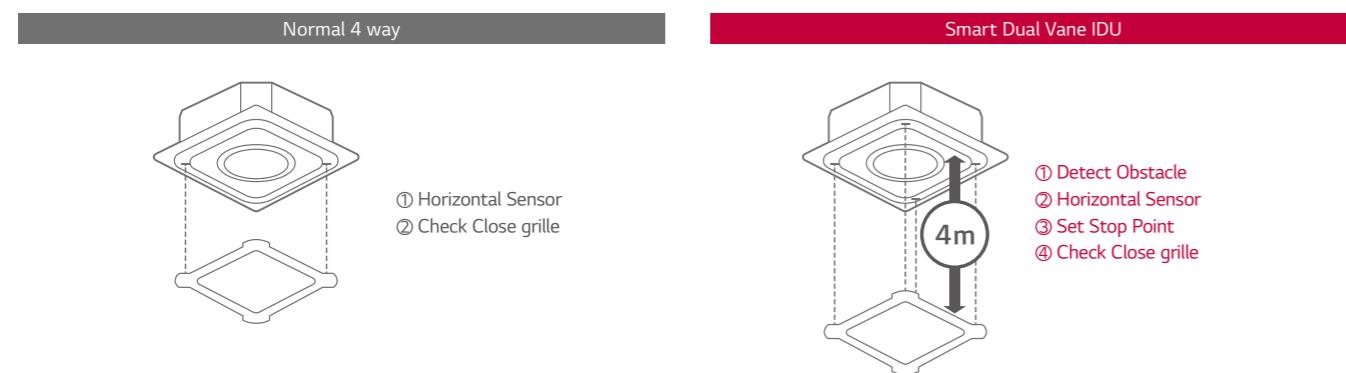

SMART


Everyday High performance of Air purifying

Air purifying function makes clean spaces for everyday.



Convenient and Powerful 4 Steps Air purifying

Easy to manage air purifying system with one-touch air cleaning filter.



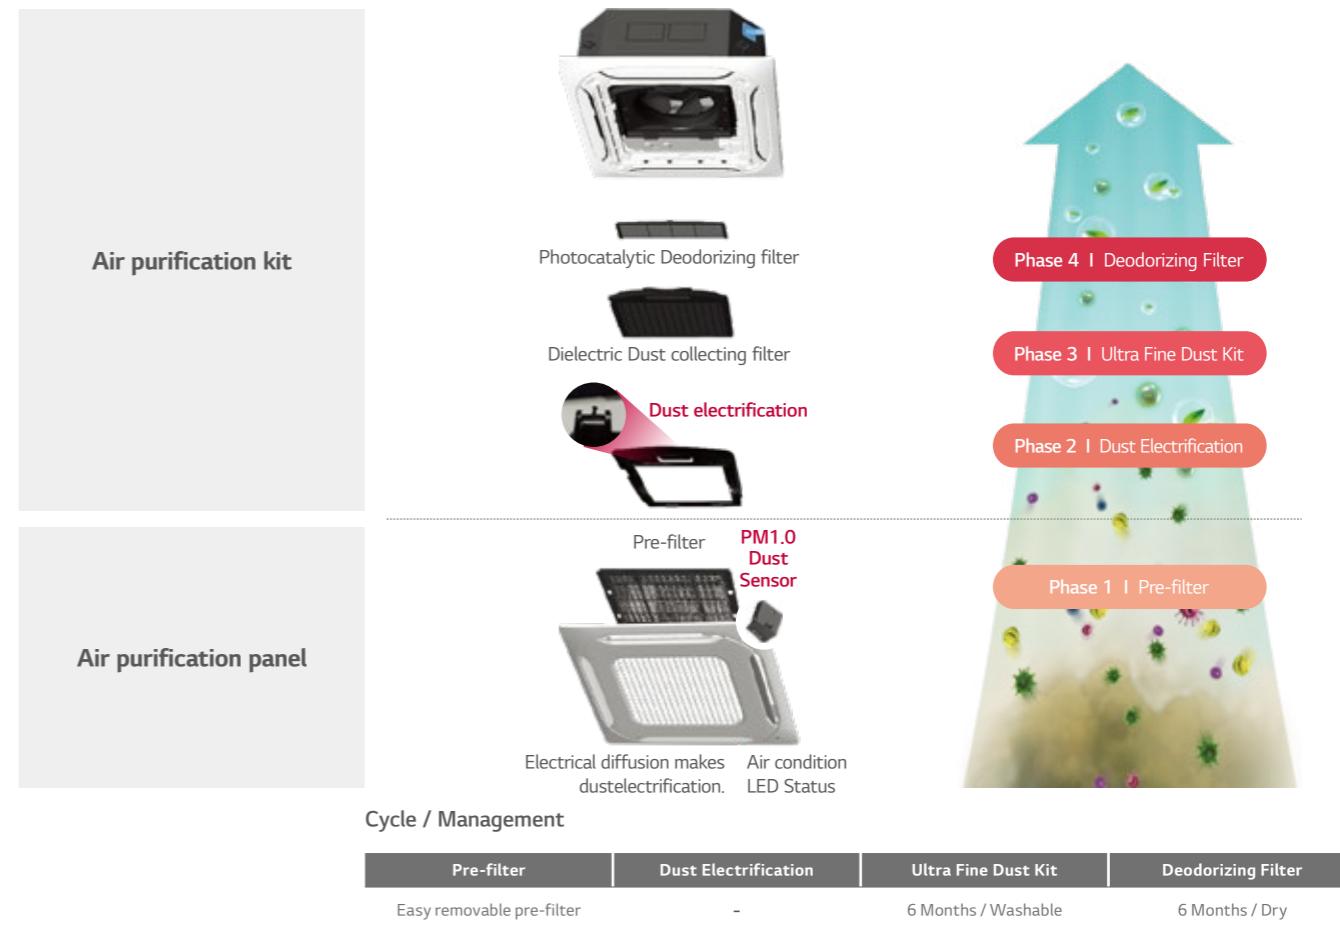


※ Available in case both Air Purification Kit (PTAFMPO) and Air purification panel (PT-AFGWO) are installed.

SMART

Various Display of Air purifying

Installed Wi-Fi leads unlimited boundary to control IDU and display air purifying status.

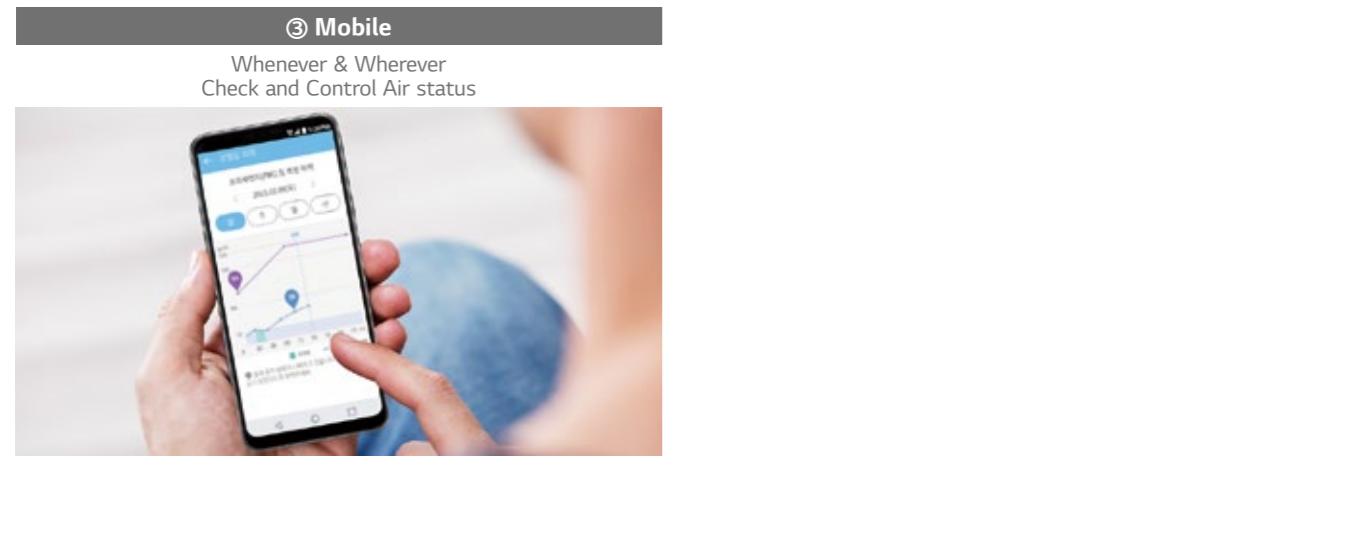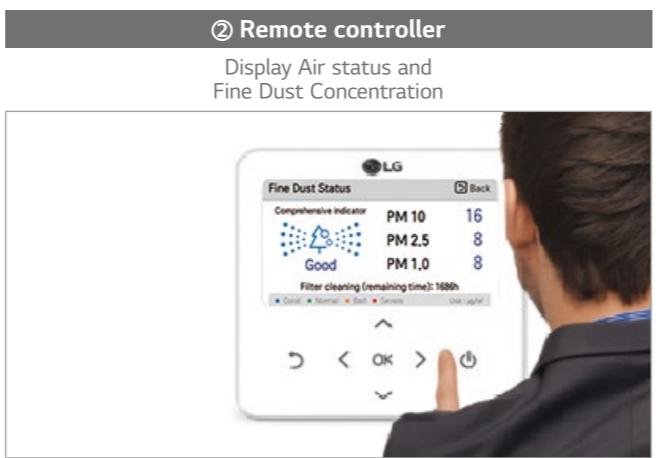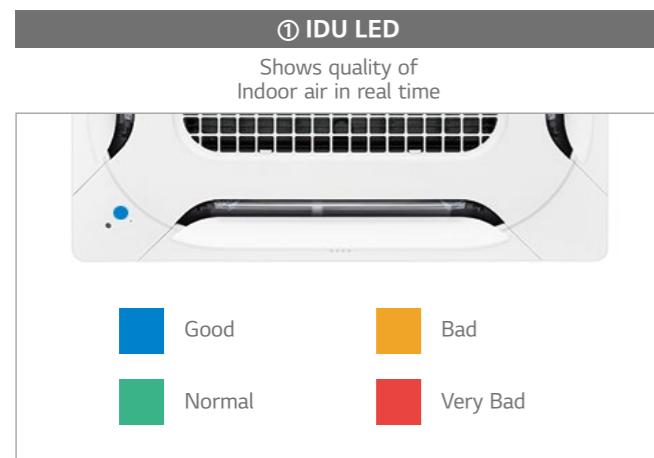


Pairing LG ThinQ

Anywhere! Anytime! Can connect to IDU with LG ThinQ

① Monitoring Air status Easy to check indoor air status
• Ultra Fine / Extra Fine / Fine Dust
• Day / Week / Month / Yearly

② Mobile Remote Control Remote control by using mobile phone
• Control Mode / Temperature / Air flow etc.

③ Display Power Consumption Check power consumption of A/C
• Check energy display
• Set target energy consumption level

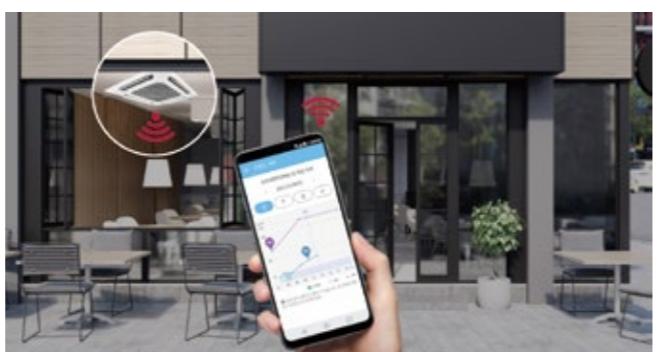

CEILING MOUNTED CASSETTE



H-INVERTER (R32)

UT09FH
UT12FH
UT18FH
UT24FH
UT30FH



UUA1 ULO UUB1 U20 UUC1 U40



LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification : www.eurovent-certification.com

COMBINATION	9	12	18	24	30
Capacity	Cooling Min ~ Rated ~ Max kW 1.6 / 2.5 / 4.0 Heating Min ~ Rated ~ Max kW 1.7 / 3.2 / 4.5	Cooling Min ~ Rated ~ Max kW 1.6 / 3.4 / 4.8 Heating Min ~ Rated ~ Max kW 1.7 / 4.1 / 5.8	Cooling Min ~ Rated ~ Max kW 2.0 / 5.0 / 6.0 Heating Min ~ Rated ~ Max kW 2.3 / 5.8 / 7.0	Cooling Min ~ Rated ~ Max kW 2.7 / 6.8 / 8.3 Heating Min ~ Rated ~ Max kW 3.2 / 7.9 / 9.9	Cooling Min ~ Rated ~ Max kW 3.2 / 8.0 / 9.5 Heating Min ~ Rated ~ Max kW 3.6 / 9.0 / 10.7
Power Input (Set)	Cooling Min ~ Rated ~ Max kW 0.32 / 0.61 / 0.98 Heating Min ~ Rated ~ Max kW 0.32 / 0.75 / 1.06	Cooling Min ~ Rated ~ Max kW 0.32 / 0.97 / 1.78 Heating Min ~ Rated ~ Max kW 0.32 / 1.03 / 1.87	Cooling Min ~ Rated ~ Max kW 0.30 / 1.25 / 1.69 Heating Min ~ Rated ~ Max kW 0.30 / 1.47 / 1.98	Cooling Min ~ Rated ~ Max kW 0.40 / 1.66 / 2.31 Heating Min ~ Rated ~ Max kW 0.40 / 2.12 / 2.82	Cooling Min ~ Rated ~ Max kW 0.40 / 1.76 / 2.53 Heating Min ~ Rated ~ Max kW 0.40 / 2.14 / 2.93
Running Current	Cooling Rated A 2.7 Heating Rated A 3.3	Cooling Rated A 4.3 Heating Rated A 4.6	Cooling Rated A 7.2 Heating Rated A 7.7	Cooling Rated A 7.4 Heating Rated A 7.8	Cooling Rated A 9.4 Heating Rated A 9.5
EER / COP	Cooling @ 35°C kWh/kWh 4.10 / 4.30 Heating @ -10°C kWh/kWh 7.0 / 4.0	Cooling @ 35°C kWh/kWh 3.50 / 4.00 Heating @ -10°C kWh/kWh 6.8 / 4.0	Cooling @ 35°C kWh/kWh 4.00 / 3.95 Heating @ -10°C kWh/kWh 7.6 / 4.4	Cooling @ 35°C kWh/kWh 4.10 / 4.48 Heating @ -10°C kWh/kWh 8.5 / 4.8	Cooling @ 35°C kWh/kWh 3.77 / 4.20 Heating @ -10°C kWh/kWh 7.8 / 4.8
SEER / SCOP	Cooling / Heating kWh/kWh 7.0 / 4.0	Cooling / Heating kWh/kWh 6.8 / 4.0	Cooling / Heating kWh/kWh 7.6 / 4.4	Cooling / Heating kWh/kWh 8.5 / 4.8	Cooling / Heating kWh/kWh 7.8 / 4.8
Pdesign	Cooling @ 35°C kW 2.5 Heating @ -10°C kW 2.8	Cooling @ 35°C kW 3.4 Heating @ -10°C kW 2.8	Cooling @ 35°C kW 5.0 Heating @ -10°C kW 4.1	Cooling @ 35°C kW 6.8 Heating @ -10°C kW 5.5	Cooling @ 35°C kW 8 Heating @ -10°C kW 5.5
Seasonal Energy Label	Cooling / Heating - A++ / A+	Cooling / Heating - A++ / A+	Cooling / Heating - A++ / A+	Cooling / Heating - A++ / A++	Cooling / Heating - A++ / A++
Annual Energy Consumption	Cooling / Heating kWh 125 / 980	Cooling / Heating kWh 175 / 980	Cooling / Heating kWh 230 / 1,305	Cooling / Heating kWh 280 / 1,604	Cooling / Heating kWh 359 / 1,604
Dehumidification Rate	I/h 0.1	I/h 0.8	I/h 1.9	I/h 2.7	I/h 5.5
ODU Sound Pressure Level	Cooling / Heating Rated dB(A) 49 / 52	Cooling / Heating Rated dB(A) 49 / 52	Cooling / Heating Rated dB(A) 47 / 52	Cooling / Heating dB(A) 48 / 52	Cooling / Heating dB(A) 50 / 52
ODU Sound Power Level	Cooling Rated dB(A) 65	Cooling Rated dB(A) 65	Cooling Rated dB(A) 63	Cooling dB(A) 65	Cooling dB(A) 68
Piping Connections	Liquid mm (inch) 06.35 (1/4) Gas mm (inch) 09.52 (3/8)	Liquid mm (inch) 06.35 (1/4) Gas mm (inch) 09.52 (3/8)	Liquid mm (inch) 06.35 (1/4) Gas mm (inch) 09.52 (3/8)	Liquid mm (inch) 09.52 (3/8) Gas mm (inch) 015.88 (5/8)	Liquid mm (inch) 09.52 (3/8) Gas mm (inch) 015.88 (5/8)
Connections Method	- Flared	- Flared	- Flared	Flared	Flared
Operation Range (Outdoor)	Cooling Min ~ Max °C -15 ~ 50 Heating Min ~ Max °C -20 ~ 18	Cooling Min ~ Max °C -15 ~ 50 Heating Min ~ Max °C -20 ~ 18	Cooling Min ~ Max °C -15 ~ 50 Heating Min ~ Max °C -20 ~ 18	Cooling Min ~ Max °C -20 ~ 50 Heating Min ~ Max °C -20 ~ 18	Cooling Min ~ Max °C -20 ~ 50 Heating Min ~ Max °C -20 ~ 18

INDOOR	UT09FH NQ0	UT12FH NQ0	UT18FH NBO	UT24FH NAO	UT30FH NAO
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)	H / M / L W	30 / 26 / 22	30 / 26 / 22	33 / 26 / 22	43 / 35 / 28
Air Flow Rate	H / M / L m³/min	11.0 / 10.0 / 9.3	11.0 / 10.0 / 9.3	17.0 / 15.5 / 14.0	23.8 / 21.4 / 19.0
Dimensions	Body W x H x D mm	570 x 256 x 570	570 x 256 x 570	840 x 204 x 840	840 x 288 x 840
Weight	Body kg	139	139	21.1	25.3
Sound Pressure Level	Cooling H / M / L dB(A) 41 / 39 / 37	Cooling H / M / L dB(A) 41 / 39 / 37	Cooling H / M / L dB(A) 37 / 36 / 34	Cooling H / M / L dB(A) 42 / 41 / 40	Cooling H / M / L dB(A) 42 / 41 / 40
Sound Power Level	Cooling Max dB(A) 54	Cooling Max dB(A) 54	Cooling Max dB(A) 52	Cooling Max dB(A) 56	Cooling Max dB(A) 56
Piping Connections	Drain O.D. / I.D. mm	Ø32.0 / 25.0	Ø32.0 / 25.0	Ø32.0 / 25.0	Ø32.0 / 25.0
Recommended Decoration Panel*	Model Name -	PT-QAGW0	PT-QAGW0	PT-AFGW0	PT-AFGW0
	Color -	White	White	White	White
Dimensions	Body mm	620 x 34 x 620	620 x 34 x 620	950 x 35 x 950	950 x 35 x 950
Weight	Body kg	3.0	3.0	7.5	7.5

OUTDOOR	UUA1 ULO	UUB1 U20	UUC1 U40
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Circuit Breaker	Min A	15	20
Power Supply Cable (Included Earth)	No x mm³	3C x 1.5	3C x 2.5
Dimensions	Net W x H x D mm	770 x 545 x 288	870 x 650 x 330
Weight	Net kg	33.3	44.5
Compressor	Type -	Twin Rotary	Twin Rotary
	Type -	R32	R32
Refrigerant	GWP (Global Warming Potential) -	675	675
	Precharged Amount kg	1.0	1.2
	t-CO₂eq -	0.675	0.81
	Additional Charge (After 7.5m) g/m	20	20
Fan	Air Flow Rate Rated m³/min x No.	28 x 1	50 x 1
Total Piping Length	Min / Max m	5 / 30	5 / 50
Piping Elevation	IDU - ODU Max m	30	30

* Decoration panel can be selected as an optional accessory.

Note :

1. Due to our policy of innovation some specifications may be changed without notification.

2. Performances are based on the following conditions (It is accordance with EN14511)

- Cooling : Indoor Ambient Temp 27°CDB / 19°CWB, Outdoor Ambient Temp 35°CDB / 24°CWB

- Heating : Indoor Ambient Temp 20°CDB / 15°CWB, Outdoor Ambient Temp 7°CDB / 6°CWB

- Interconnected Pipe is standard length and difference of Elevation (Outdoor ~ Indoor Unit) is 0m.

3. Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation.

4. This product contains fluorinated greenhouse gases. (R32)

COMMERCIAL
SINGLE SPLIT

CEILING MOUNTED CASSETTE



H-INVERTER (R32)

UT36FH
UT42FH
UT48FH
UT60FH



UUID1 U30



LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification : www.eurovent-certification.com

COMBINATION		36	42	48	60
Capacity	Cooling	Min - Rated - Max kW	3.8 / 9.5 / 12.8	4.8 / 12.1 / 14.5	5.4 / 13.4 / 16.1
	Heating	Min - Rated - Max kW	4.3 / 10.8 / 13.7	5.4 / 13.5 / 16.2	6.2 / 15.5 / 17.8
Power Input (Set)	Cooling	Min - Rated - Max kW	0.40 / 2.15 / 3.23	0.60 / 3.14 / 4.24	0.80 / 3.83 / 5.17
	Heating	Min - Rated - Max kW	0.50 / 2.40 / 3.36	0.70 / 3.29 / 4.28	0.90 / 4.69 / 5.25
Running Current	Cooling	Rated A	9.6	13.8	16.9
	Heating	Rated A	10.4	14.4	18.3
EER / COP		kWh/kWh	4.42 / 4.50	3.85 / 4.10	3.50 / 3.71
SEER / SCOP		kWh/kWh	7.6 / 4.5	7.4 / 4.5	6.8 / 4.5
Pdesign	Cooling @ 35°C	kW	9.5	12.1	13.4
	Heating @ -10°C	kW	9.5	9.5	9.5
Seasonal Energy Label	Cooling / Heating	-	A++ / A+	- / -	- / -
Annual Energy Consumption	Cooling / Heating	kWh	437 / 2,956	981 / 2,956	1,182 / 2,956
Dehumidification Rate		l/h	2.6	4.8	5.3
ODU Sound Pressure Level	Cooling / Heating	dB(A)	50 / 50	51 / 52	52 / 53
ODU Sound Power Level	Cooling	Rated dB(A)	66	69	71
Piping Connections	Liquid	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
Connections Method	-		Flaredd	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max °C	-20 - 52	-20 - 52	-20 - 52
	Heating	Min - Max °C	-25 - 18	-25 - 18	-25 - 18
INDOOR		UT36FH NAO	UT42FH NAO	UT48FH NAO	UT60FH NAO
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)	H / M / L	W	70 / 59 / 50	81 / 60 / 50	81 / 60 / 50
Air Flow Rate	H / M / L	m³/min	28 / 25 / 23	30 / 27 / 24	30 / 27 / 24
Dimensions	Body	W x H x D mm	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840
Weight	Body	kg	27.2	27.2	27.2
Sound Pressure Level	Cooling	H / M / L	dB(A) 44 / 42 / 41	44 / 42 / 41	45 / 43 / 41
Sound Power Level	Cooling	Max	dB(A) 59	59	61
Piping Connections	Drain	O.D. / I.D. mm	Ø32.0 / 25.0	Ø32.0 / 25.0	Ø32.0 / 25.0
	Model Name	-	PT-AFGW0	PT-AFGW0	PT-AFGW0
Recommended Decoration Panel*	Color	-	White	White	White
	Dimensions	Body mm	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950
	Weight	Body kg	7.5	7.5	7.5
OUTDOOR		UUID1 U30			
Power Supply	Ø, V, Hz	1, 220-240, 50			
Circuit Breaker	Min	A	40		
Power Supply Cable (Included Earth)	No x mm³		3C x 6.0		
Dimensions	Net	W x H x D mm		950 x 1,380 x 330	
Weight	Net	kg		85.0	
Compressor	Type	-	Inverter Scroll		
	Type	-	R32		
Refrigerant	GWP (Global Warming Potential)	-	675		
	Precharged Amount	kg	3.0		
	t-CO ₂ eq	-	2.025		
	Additional Charge (After 7.5m)	g/m	40		
Fan	Air Flow Rate	Rated	m³/min x No.	55 x 2	
Total Piping Length	Min / Max	m		5 / 85	
Piping Elevation	IDU - ODU	Max	m		30

* Decoration panel can be selected as an optional accessory.

Note :

1. Due to our policy of innovation some specifications may be changed without notification.

2. Performances are based on the following conditions (It is accordance with EN14511)

- Cooling : Indoor Ambient Temp 27°CDB / 19°CWB, Outdoor Ambient Temp 35°CDB / 24°CWB

- Heating : Indoor Ambient Temp 20°CDB / 15°CWB, Outdoor Ambient Temp 7°CDB / 6°CWB

- Interconnected Pipe is standard length and difference of Elevation (Outdoor ~ Indoor Unit) is 0m.

3. Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation.

4. This product contains fluorinated greenhouse gases. (R32)

CEILING MOUNTED CASSETTE



H-INVERTER (R32)

UT36FH
UT42FH
UT48FH
UT60FH



UUID3 U30

LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification : www.eurovent-certification.com

COMBINATION		36	42	48	60
Capacity	Cooling	Min - Rated - Max kW	3.8 / 9.5 / 12.8	4.8 / 12.1 / 14.5	5.4 / 13.4 / 16.1
	Heating	Min - Rated - Max kW	4.3 / 10.8 / 13.7	5.4 / 13.5 / 16.2	6.2 / 15.5 / 17.8
Power Input (Set)	Cooling	Min - Rated - Max kW	0.40 / 2.15 / 3.23	0.60 / 3.14 / 4.24	0.80 / 3.83 / 5.17
	Heating	Min - Rated - Max kW	0.50 / 2.40 / 3.36	0.70 / 3.29 / 4.28	0.90 / 4.69 / 5.25
Running Current	Cooling	Rated A	3.6	4.9	6.0
	Heating	Rated A	3.8	5.1	6.5
EER / COP		kWh/kWh	4.42 / 4.50	3.85 / 4.10	3.50 / 3.71
SEER / SCOP		kWh/kWh	7.6 / 4.5	7.4 / 4.5	6.8 / 4.5
Pdesign	Cooling @ 35°C	kW	9.5	12.1	13.4
	Heating @ -10°C	kW	9.5	9.5	9.5
Seasonal Energy Label	Cooling / Heating	-	A++ / A+	- / -	- / -
Annual Energy Consumption	Cooling / Heating	kWh	437 / 2,956	981 / 2,956	1,182 / 2,956
Dehumidification Rate		l/h	2.6	4.8	5.3
ODU Sound Pressure Level	Cooling / Heating	dB(A)	50 / 50	51 / 52	52 / 53
ODU Sound Power Level	Cooling	Rated dB(A)	66	69	71
Piping Connections	Liquid	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
Connections Method	-		Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max °C	-20 - 52	-20 - 52	-20 - 52
	Heating	Min - Max °C	-25 - 18	-25 - 18	-25 - 18
INDOOR		UT36FH NAO	UT42FH NAO	UT48FH NAO	UT60FH NAO
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)	H / M / L	W	70 / 59 / 50	81 / 60 / 50	81 / 60 / 50
Air Flow Rate	H / M / L	m³/min	28 / 25 / 23	30 / 27 / 24	30 / 27 / 24
Dimensions	Body	W x H x D mm	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840
Weight	Body	kg	27.2	27.2	27.2
Sound Pressure Level	Cooling	H / M / L	dB(A) 44 / 42 / 41	44 / 42 / 41	45 / 43 / 41
Sound Power Level	Cooling	Max	dB(A) 59	59	61
Piping Connections	Drain	O.D. / I.D. mm	Ø32.0 / 25.0	Ø32.0 / 25.0	Ø32.0 / 25.0
	Model Name	-	PT-AFGW0	PT-AFGW0	PT-AFGW0
Recommended Decoration Panel*	Color	-	White	White	White
	Dimensions	Body mm	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950
	Weight	Body kg	7.5	7.5	7.5
OUTDOOR		UUID3 U30			
Power Supply	Ø, V, Hz	1, 220-240, 50			
Circuit Breaker	Min	A		20	
Power Supply Cable (Included Earth)	No x mm³			5C x 2.5	
Dimensions	Net	W x H x D mm			950 x 1,380 x 330
Weight	Net	kg		85	
Compressor	Type	-			Inverter Scroll
	Type	-			R32
Refrigerant	GWP (Global Warming Potential)	-			675
	Precharged Amount	kg			3.0
	t-CO ₂ eq	-			2.025
	Additional Charge (After 7.5m)	g/m			40
Fan	Air Flow Rate	Rated	m³/min x No.		55 x 2

CEILING MOUNTED CASSETTE



STANDARD INVERTER (R32)

CT09F
CT12F
CT18F
CT24F
UT30F



UUA1 ULO UUB1 U20 UUC1 U40

LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification : www.eurovent-certification.com

COMBINATION		9	12	18	24	30	
Capacity	Cooling	Min - Rated - Max kW	1.5 / 2.5 / 3.2	1.5 / 3.4 / 4.5	2.0 / 5.0 / 5.8	2.7 / 6.8 / 8.0	3.2 / 8.0 / 9.2
	Heating	Min - Rated - Max kW	1.8 / 3.2 / 3.7	1.8 / 4.1 / 5.0	2.3 / 5.7 / 6.6	3.0 / 7.5 / 9.0	3.6 / 8.9 / 10.1
Power Input (Set)	Cooling	Min - Rated - Max kW	0.30 / 0.61 / 0.87	0.30 / 0.98 / 1.62	0.30 / 1.57 / 2.20	0.40 / 1.93 / 2.66	0.50 / 2.45 / 3.14
	Heating	Min - Rated - Max kW	0.30 / 0.75 / 0.89	0.30 / 1.11 / 1.57	0.30 / 1.52 / 2.13	0.40 / 1.96 / 2.84	0.50 / 2.62 / 3.25
Running Current	Cooling	Rated A	2.7	4.4	8.0	8.6	10.9
	Heating	Rated A	3.3	4.9	7.8	8.7	11.6
EER / COP		kWh/kWh	4.10 / 4.30	3.50 / 3.71	3.19 / 3.74	3.52 / 3.83	3.27 / 3.40
SEER / SCOP		kWh/kWh	6.7 / 4.0	6.7 / 4.0	6.4 / 4.3	7.4 / 4.3	7.1 / 4.3
Pdesign	Cooling @ 35°C	kW	2.5	3.4	5	6.8	8
	Heating @ -10°C	kW	2.8	2.8	4.1	5.6	5.6
Seasonal Energy Label	Cooling / Heating	-	A++ / A+				
Annual Energy Consumption	Cooling / Heating	kWh	131 / 980	178 / 980	273 / 1,335	322 / 1,823	394 / 1,823
Dehumidification Rate		l/h	0.63	1.26	1.89	2.8	2.8
ODU Sound Pressure Level	Cooling / Heating	Rated dB(A)	49 / 52	49 / 52	48 / 52	50 / 52	50 / 52
ODU Sound Power Level	Cooling	Rated dB(A)	65	65	63	65	68
	Liquid	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
Piping Connections	Gas	mm (inch)	Ø9.52 (3/8)	Ø12.7 (1/2)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
Connections Method	-	Flared	Flared	Flared	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max °C	-15 - 50	-15 - 50	-20 - 50	-20 - 50	-20 - 50
	Heating	Min - Max °C	-20 - 18	-20 - 18	-20 - 18	-20 - 18	-20 - 18

INDOOR		CT09F NRO	CT12F NRO	CT18F NQO	CT24F NBO	UT30F NBO
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)	H / M / L	W	26 / 22 / 19	28 / 24 / 20	30 / 26 / 22	36 / 26 / 21
Air Flow Rate	H / M / L	m³ / min	85 / 70 / 60	95 / 80 / 70	13 / 12 / 11	18 / 155 / 14
Dimensions	Body	W x H x D mm	570 x 214 x 570	570 x 214 x 570	570 x 256 x 570	840 x 204 x 840
Weight	Body	kg	12.4	12.4	13.9	21.1
Sound Pressure Level	Cooling	H / M / L	dB(A) 36 / 33 / 30	38 / 35 / 32	41 / 39 / 37	38 / 36 / 34
Sound Power Level	Cooling	Max	dB(A) 52	52	57	53
Piping Connections	Drain	O.D. / I.D. mm	Ø32.0 / 25.0	Ø32.0 / 25.0	Ø32.0 / 25.0	Ø32.0 / 25.0
	Model Name	-	PT-QAGW0	PT-QAGW0	PT-AAGW0	PT-AAGW0
Recommended Decoration Panel*	Color	-	White	White	White	White
Dimensions	Body	mm	620 x 34 x 620	620 x 34 x 620	950 x 35 x 950	950 x 35 x 950
Weight	Body	kg	3.0	3.0	7.1	7.1

OUTDOOR		UUA1 ULO	UUB1 U20	UUC1 U40
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Circuit Breaker	Min A	15	20	25
Power Supply Cable (Included Earth)	No x mm³	3C x 1.5	3C x 2.5	3C x 2.5
Dimensions	Net W x H x D mm	770 x 545 x 288	870 x 650 x 330	950 x 834 x 330
Weight	Net kg	33.3	44.5	57.7
Compressor	Type	- Twin Rotary	Twin Rotary	Twin Rotary
	Type	- R32	R32	R32
Refrigerant	GWP (Global Warming Potential)	-	675	675
	Precharged Amount	kg	1.0	1.2
	t-CO₂eq	-	0.675	0.81
	Additional Charge (After 7.5m)	g/m	20	20
Fan	Air Flow Rate	Rated m³/min x No.	28 x 1	50 x 1
Total Piping Length	Min / Max m	5 / 30	5 / 30	5 / 50
Piping Elevation	IDU - ODU Max m	30	30	30

* Decoration panel can be selected as an optional accessory.

Note :

1. Due to our policy of innovation some specifications may be changed without notification.

2. Performances are based on the following conditions (It is accordance with EN14511)

- Cooling : Indoor Ambient Temp 27°CDB / 19°CWB, Outdoor Ambient Temp 35°CDB / 24°CWB

- Heating : Indoor Ambient Temp 20°CDB / 15°CWB, Outdoor Ambient Temp 7°CDB / 6°CWB

- Interconnected Pipe is standard length and difference of Elevation (Outdoor ~ Indoor Unit) is 0m.

3. Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation.

4. This product contains fluorinated greenhouse gases. (R32)

CEILING MOUNTED CASSETTE



STANDARD INVERTER (R32)

UT36F
UT42F
UT48F
UT60F



LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification : www.eurovent-certification.com

COMBINATION		36	42	48	60	
Capacity	Cooling	Min - Rated - Max kW	3.8 / 9.5 / 12.5	4.8 / 12.1 / 14.2	5.4 / 13.4 / 15.7	5.8 / 14.6 / 15.8
	Heating	Min - Rated - Max kW	4.3 / 10.8 / 13.4	5.4 / 13.5 / 15.8	6.2 / 15.5 / 17.5	6.8 / 16.9 / 18.3
Power Input (Set)	Cooling	Min - Rated - Max kW	0.50 / 2.26 / 3.44	0.70 / 3.31 / 4.30	0.90 / 4.25 / 5.53	1.00 / 5.21 / 5.84
	Heating	Min - Rated - Max kW	0.50 / 2.43 / 3.30	0.70 / 3.51 / 4.56	0.90 / 4.37 / 5.33	1.00 / 5.12 / 5.89
Running Current	Cooling	Rated A	10.1	14.6	18.7	23.1
	Heating	Rated A	10.7	15.0	19.0	22.7
EER / COP		kWh/kWh	4.20 / 4.45	3.66 / 3.85	3.15 / 3.55	2.80 / 3.30
SEER / SCOP		kWh/kWh	7.0 / 4.3	7.0 / 4.3	6.5 / 4.2	6.2 / 4.2
Pdesign	Cooling @ 35°C	kW	9.5	12.1	13.4	14.6
	Heating @ -10°C	kW	9.5	9.5	9.5	9.5
Seasonal Energy Label	Cooling / Heating	-	A++ / A+	- / -	- / -	- / -
Annual Energy Consumption	Cooling / Heating	kWh	475 / 3,093	1,037 / 3,093	1,237 / 3,167	1,413 / 3,167
Dehumidification Rate		l/h	2.4	4.5	5.7	6.6
ODU Sound Pressure Level	Cooling / Heating	Rated dB(A)	50 / 50	51 / 52	52 / 53	54 / 54
ODU Sound Power Level	Cooling	Rated dB(A)	66	69	69	71
	Liquid	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
Piping Connections	Gas	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
Connections Method	-	Flared	Flared	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max °C	-20 - 52	-20 - 52	-20 - 52	-20 - 52
	Heating	Min - Max °C	-25 - 18	-25 - 18	-25 - 18	-25 - 18

CEILING MOUNTED CASSETTE



STANDARD INVERTER (R32)

UT36F
UT42F
UT48F
UT60F



LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification : www.eurovent-certification.com

UUUD3 U30



COMBINATION		36	42	48	60
Capacity	Cooling	Min - Rated - Max kW	3.8 / 9.5 / 12.5	4.8 / 12.1 / 14.2	5.4 / 13.4 / 15.7
	Heating	Min - Rated - Max kW	4.3 / 10.8 / 13.4	5.4 / 13.5 / 15.8	6.2 / 15.5 / 17.5
Power Input (Set)	Cooling	Min - Rated - Max kW	0.50 / 2.26 / 3.44	0.70 / 3.31 / 4.30	0.90 / 4.25 / 5.53
	Heating	Min - Rated - Max kW	0.50 / 2.43 / 3.30	0.70 / 3.51 / 4.56	0.90 / 4.37 / 5.33
Running Current	Cooling	Rated A	3.8	5.2	6.6
	Heating	Rated A	3.9	5.4	6.7
EER / COP		kWh/kWh	4.20 / 4.45	3.66 / 3.85	3.15 / 3.55
SEER / SCOP		kWh/kWh	7.0 / 4.3	7.0 / 4.3	6.5 / 4.2
Pdesign	Cooling @ 35°C	kW	9.5	12.1	13.4
	Heating @ -10°C	kW	9.5	9.5	9.5
Seasonal Energy Label	Cooling / Heating	-	A++ / A+	- / -	- / -
Annual Energy Consumption	Cooling / Heating	kWh	475 / 3,093	1,037 / 3,093	1,237 / 3,167
Dehumidification Rate		l/h	2.4	4.5	5.7
ODU Sound Pressure Level	Cooling / Heating	dB(A)	50 / 50	51 / 52	52 / 53
ODU Sound Power Level	Cooling	dB(A)	66	69	69
	Liquid	mm (inch)	09.52 (3/8)	09.52 (3/8)	09.52 (3/8)
Piping Connections	Gas	mm (inch)	015.88 (5/8)	015.88 (5/8)	015.88 (5/8)
Connections Method	-		Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max °C	-20 - 52	-20 - 52	-20 - 52
	Heating	Min - Max °C	-25 - 18	-25 - 18	-25 - 18

INDOOR

	UT36F NAO	UT42F NAO	UT48F NAO	UT60F NAO
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)	H / M / L	W	60 / 50 / 45	60 / 50 / 45
Air Flow Rate	H / M / L	m³/min	275 / 25 / 22.5	275 / 25 / 22.5
Dimensions	Body	W x H x D	840 x 288 x 840	840 x 288 x 840
Weight	Body	kg	25.3	25.3
Sound Pressure Level	Cooling	H / M / L	dB(A)	44 / 42 / 41
Sound Power Level	Cooling	Max	dB(A)	61
Piping Connections	Drain	O.D. / I.D.	mm	032.0 / 25.0
	Model Name	-		PT-AAGWO
Recommended Decoration Panel*	Color	-	White	White
Dimensions	Body	mm	950 x 35 x 950	950 x 35 x 950
Weight	Body	kg	7.1	7.1

OUTDOOR

	UUUD3 U30
Power Supply	Ø, V, Hz
Circuit Breaker	Min A
Power Supply Cable (Included Earth)	No x mm³
Dimensions	Net W x H x D
Weight	Net kg
Compressor	Type
	Type
	GWP (Global Warming Potential)
Refrigerant	Precharged Amount kg
	t-CO ₂ eq
	Additional Charging Volume g/m
Fan	Air Flow Rate Rated m³/min x No.
Total Piping Length	Min / Max m
Piping Elevation	IDU - ODU Max m

* Decoration panel can be selected as an optional accessory.

Note :

1. Due to our policy of innovation some specifications may be changed without notification.

2. Performances are based on the following conditions (It is accordance with EN14511)

- Cooling : Indoor Ambient Temp 27°CDB / 19°CWB, Outdoor Ambient Temp 35°CDB / 24°CWB

- Heating : Indoor Ambient Temp 20°CDB / 15°CWB, Outdoor Ambient Temp 7°CDB / 6°CWB

- Interconnected Pipe is standard length and difference of Elevation (Outdoor ~ Indoor Unit) is 0m.

3. Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation.

4. This product contains fluorinated greenhouse gases. (R32)

CEILING MOUNTED CASSETTE



COMPACT INVERTER (R32)

CT18F
CT24F
UT30F
UT36F



UUA1 UL0 UUB1 U20 UUC1 U40

LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification : www.eurovent-certification.com

COMBINATION		18	24	30	36
Capacity	Cooling	Min - Rated - Max kW	1.8 / 5.0 / 5.5	2.7 / 6.8 / 7.5	3.0 / 7.5 / 8.3
	Heating	Min - Rated - Max kW	2.1 / 5.2 / 5.7	3.0 / 7.9 / 8.6	3.2 / 7.9 / 8.7
Power Input (Set)	Cooling	Min - Rated - Max kW	0.34 / 1.76 / 2.11	0.40 / 2.00 / 2.40	0.50 / 2.31 / 2.77
	Heating	Min - Rated - Max kW	0.30 / 1.45 / 1.87	0.40 / 2.21 / 2.87	0.50 / 2.37 / 3.08
Running Current	Cooling	Rated A	7.8	8.8	10.1
	Heating	Rated A	6.4	9.6	10.4
EER / COP		kWh/kWh	2.85 / 3.60	3.40 / 3.39	3.25 / 3.34
SEER / SCOP		kWh/kWh	6.3 / 3.9	7.0 / 4.2	6.8 / 4.2
Pdesign	Cooling @ 35°C	kW	5	6.8	7.5
	Heating @ -10°C	kW	2.8	4.1	5.6
Seasonal Energy Label	Cooling / Heating	-	A++ / A	A++ / A+	A++ / A+
Annual Energy Consumption	Cooling / Heating	kWh	278 / 1,005	340 / 1,367	386 / 1,367
Dehumidification Rate		l/h	1.8	2.6	3.1
ODU Sound Pressure Level	Cooling / Heating	Rated dB(A)	49 / 52	48 / 53	50 / 54
ODU Sound Power Level	Cooling	dB(A)	65	65	67
	Liquid	mm (inch)	06.35 (1/4)	09.52 (3/8)	09.52 (3/8)
Piping Connections	Gas	mm (inch)	09.52 (3/8)	015.88 (5/8)	015.88 (5/8)
Connections Method	-		Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max °C	-10 - 50	-10 - 48	-10 - 48
	Heating	Min - Max °C	-10 - 18	-15 - 18	-15 - 18

INDOOR

	CT18F NQ0	CT24F NBO	UT30F NBO	UT36F NAO
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)	H / M / L	W	30 / 26 / 21	40 / 33 / 26
Air Flow Rate	H / M / L	m³/min	13 / 12 / 11	18 / 15.5 / 14
Dimensions	Body	W x H x D	570 x 256 x 570	840 x 204 x 840
Weight	Body	kg	13.9	21.1
Sound Pressure Level	Cooling	H / M / L	dB(A)	41 / 39 / 37
Sound Power Level	Cooling	Max	dB(A)	57
Piping Connections	Drain	O.D. / I.D.	mm	032.0 / 25.0
	Model Name	-		PT-QAGWO
Recommended Decoration Panel*	Color	-	White	White
Dimensions	Body	mm	620 x 34 x 620	950 x 35 x 950
Weight	Body	kg	3.0	7.1

	OUTDOOR	UUA1 UL0	UUB1 U20	UUC1 U40
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Circuit Breaker	Min A	15	20	25
Power Supply Cable (Included Earth)	No x mm³	3C x 1.5	3C x 2.5	3C x 2.5
Dimensions	Net W x H x D	770 x 545 x 288	870 x 650 x 330	950 x 834 x 330
Weight	Net kg	33.3	44.5	57.7
Compressor	Type	-	Twin Rotary	Twin Rotary
	Type	-	R32	R32
	GWP (Global Warming Potential)	-	675	675

CASSETTE PANEL



Model Name

PT-AAGW0
PT-AEGW0
PT-AFGW0
PT-QAGW0

Key Features

Model	Function					
	Dual Vane	Wi-Fi	Floor Temperature Sensor	Air Purification	Elevating Grille	Occupancy Sensor
PT-AAGW0	O	Optional	X	X	X	Optional
PT-AEGW0	O	Optional	X	X	O	Optional
PT-AFGW0	O	Optional	O	Optional	X	Optional

Specification


Model	Suction Type	Color (RAL)	Gloss	Weight (kg)	Dimension (mm)		
					W	H	D
PT-AAGW0	Grid	White (RAL 9003)	-	7.1	950	35	950
PT-AEGW0	Grid	White (RAL 9003)	-	8.5	950	35	950
PT-AFGW0	Grid	White (RAL 9003)	-	7.5	950	35	950
PT-QAGW0	Grid	White (RAL 9003)	-	3.0	620	34	620

Air Purification Kit

Model	Image	Model name	Dielectric Dust collecting filter	Photocatalytic Deodorizing filter	HVPS	Ionizer
Air cleaning kit		PTAFMPO	0	0	0	0

CASSETTE COVER

Cover in case of exposed cassette installation.

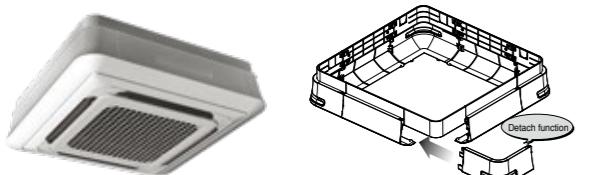

Key Features

- Specially designed for indoor unit
- Covers the side area of cassette
- Gives elegant looks
- Light weight

Specification

Model	Front Panel	Weight (kg)		Dimensions (mm)		
		NET	Gross	W	H	D
PTDCQ	PT-UQC	TR	5.0	7.2	907	907 268
		TQ	5.0	7.2	907	907 310

* PTDCA suitable for Dual Vane 4 Way CST (840 x 840) will be available later.

CEILING CONCEALED DUCT



Model Name

PTDCQ / PTDCA*

Applied Products

4 Way Cassette (for chassis TQ, TR)


Included Parts

• Cover A, Cover B	• Screws
• Cover C, Cover D	• Installation Manual
	Installation Manual

CEILING CONCEALED DUCT

External Static Pressure (ESP) Control


User has easy access to air volume selection via remote controller using the ESP control function. The BLDC motor can control fan speed and air volume. No additional accessories are necessary to control air flow.

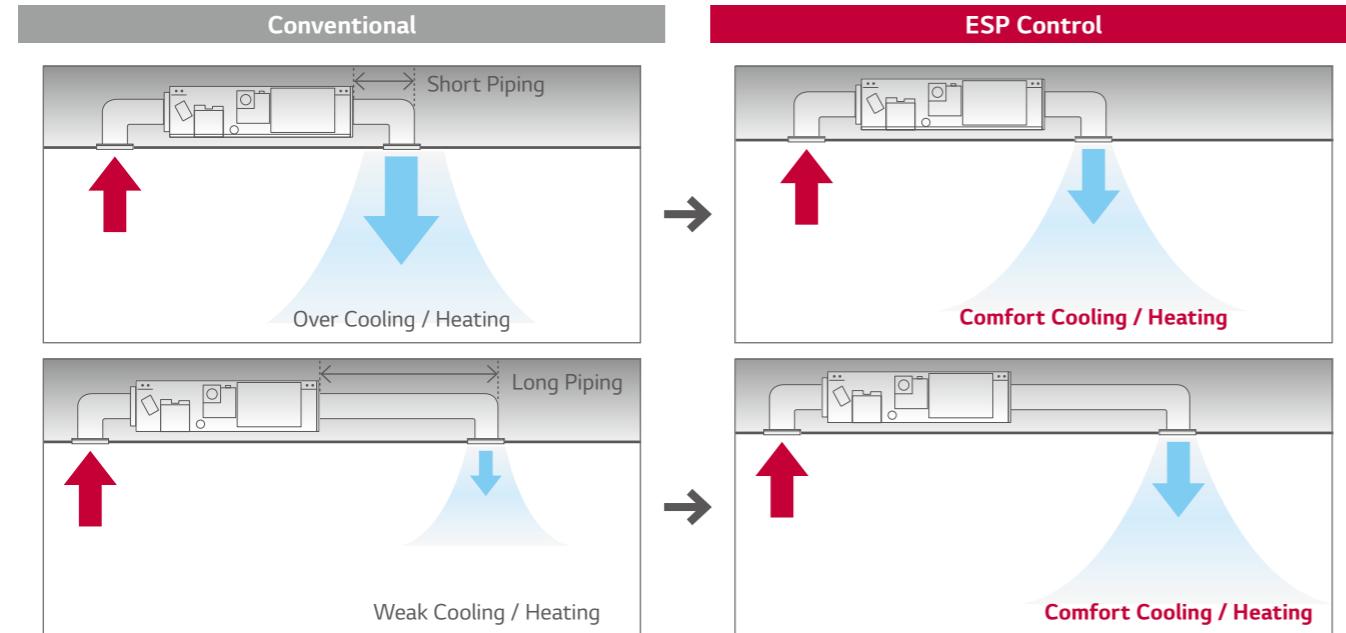

CEILING CONCEALED DUCT

Two Thermistors Control


The indoor temperature can be checked using the thermistors in the remote controller as well as from the indoor unit. There may be a significant difference between ceiling and floor air temperature. Two thermistors can optimize indoor air temperature for a more comfortable environment.

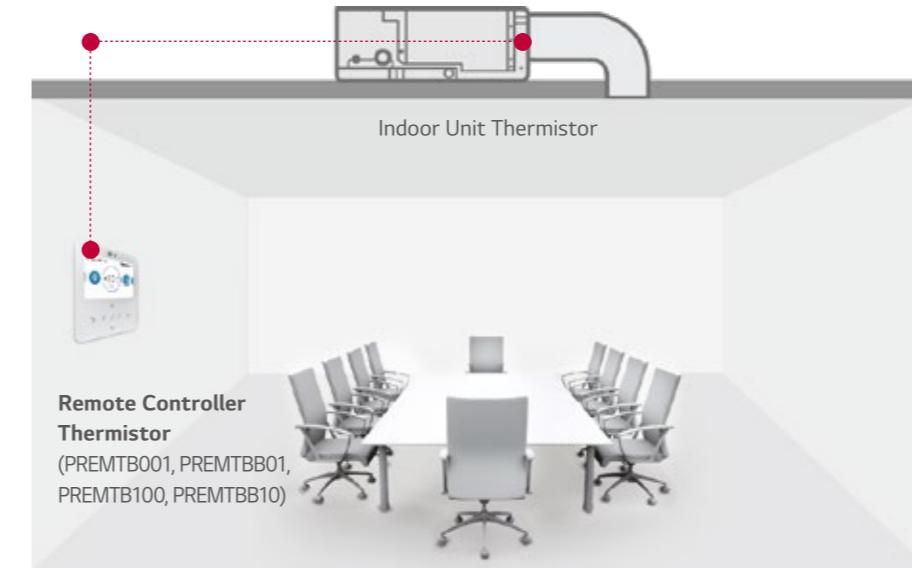

Compares temperatures sensed from different positions, and automatically selects the optimum temperature for users.

High Head Drain Pump

High head drain pump automatically drains water up to a height of 700mm of drain-head height. It provides the perfect solution for draining of water.

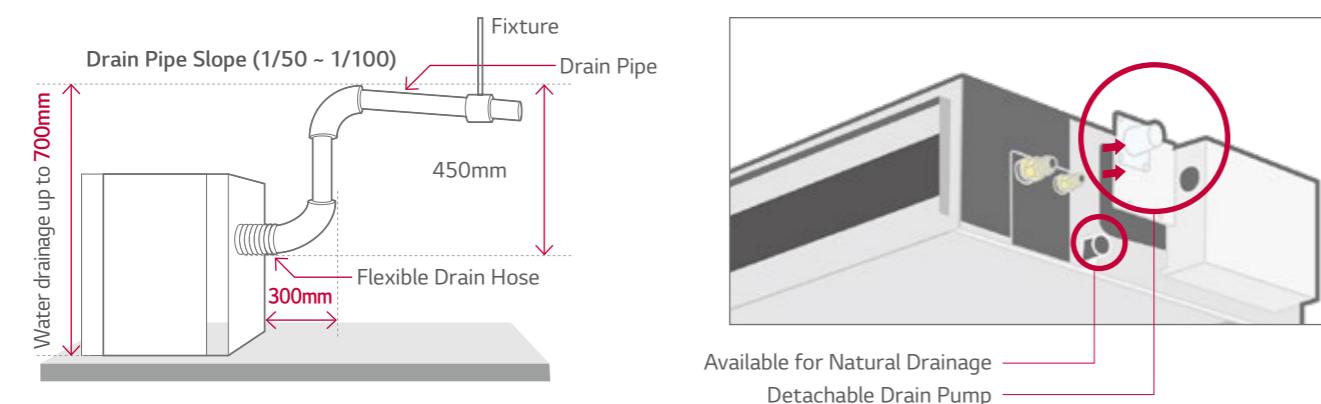



※ Standard Inverter : Accessory (ABDPG) / Low-Static Duct : Included
※ Required by option for Standard / Compact Inverter high static pressure models.

Operation for Multiple Rooms

Using a spiral duct (Embedded or flexible type) and stream chamber, it is possible to operate cooling / heating for several rooms simultaneously. Also, zone control is available with zone controller accessory. (ABZCA)

Zone control features

- Controls different zones (Up to 4 zones) by external thermostat (AC 24V)
- Maintain proper air volume of each zone
- Auto variation of dampers
- Auto control of fan speed and On / Off operation

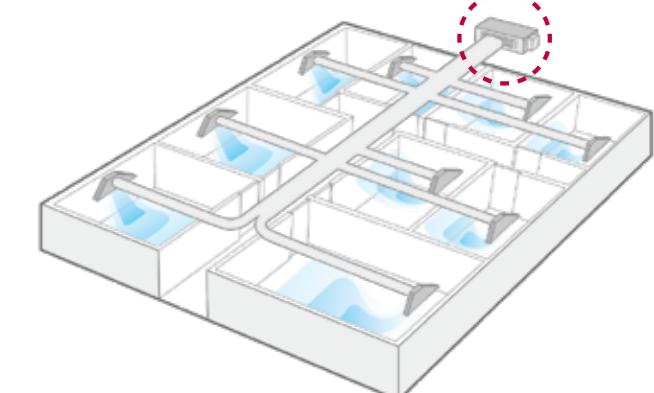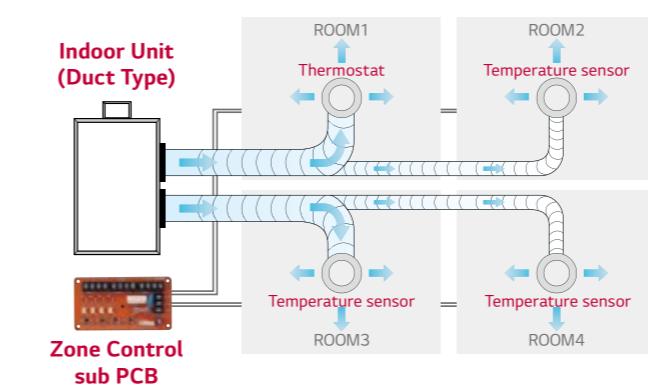


CEILING CONCEALED DUCT

Minimized Height and Depth


New Low Static ducts provide ideal solution for installation in limited space.

Low Static Duct

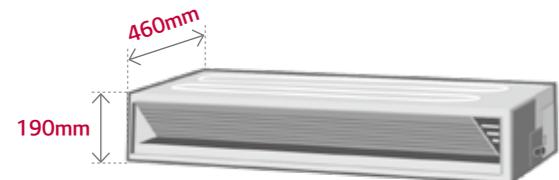


※ CL09F N50, CL12F N50, CL18F N60, UL12FH N50 only

Depth


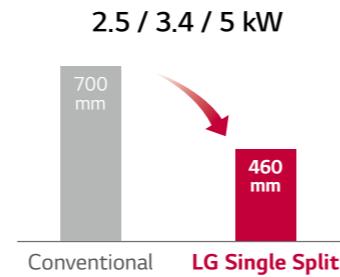


Wide Operation Range

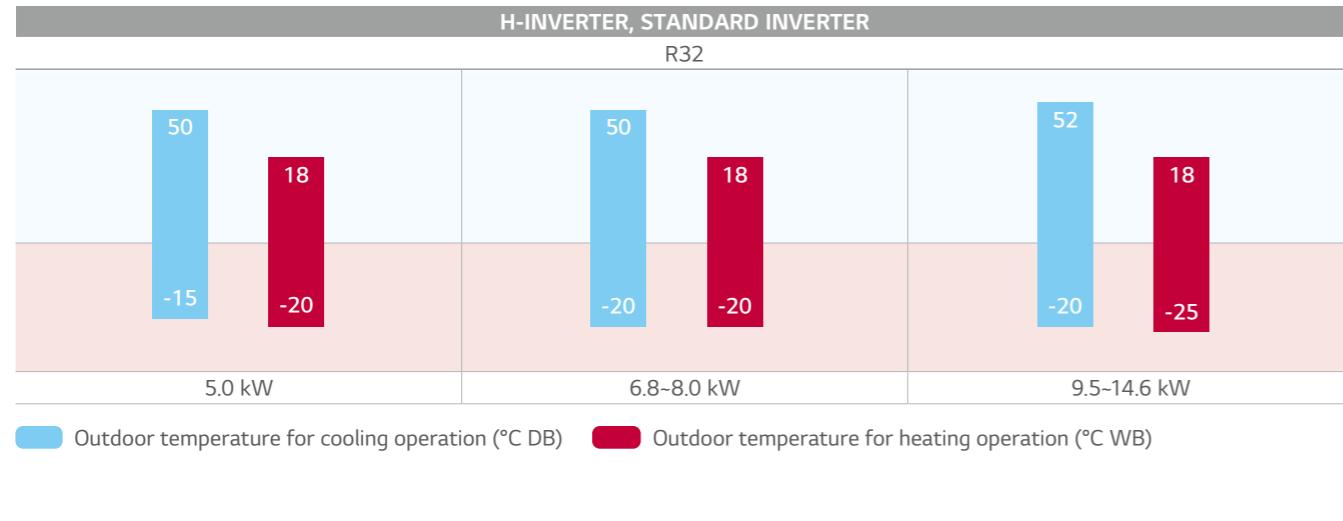

Easy Service & Maintenance

Users are not required to disassemble the whole panel for maintenance; since panel is divided into 2 components; one for heat exchanger and the other for fan / motor. The user can easily detach and re-attach the filter in the available limited space.

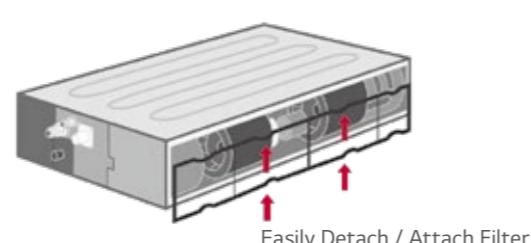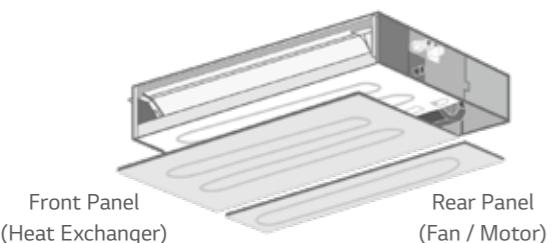


CEILING CONCEALED DUCT (LOW STATIC PRESSURE)

Quiet Operation

The noise level of low static ducts have been reduced, even though ESP has been increased.

	CL09F N50	CL12F N50	CL18F N60	CL24F N30
Sound Pressure (High / Medium / Low) dB(A)	35 / 30 / 27	35 / 30 / 27	34 / 31 / 29	39 / 35 / 32

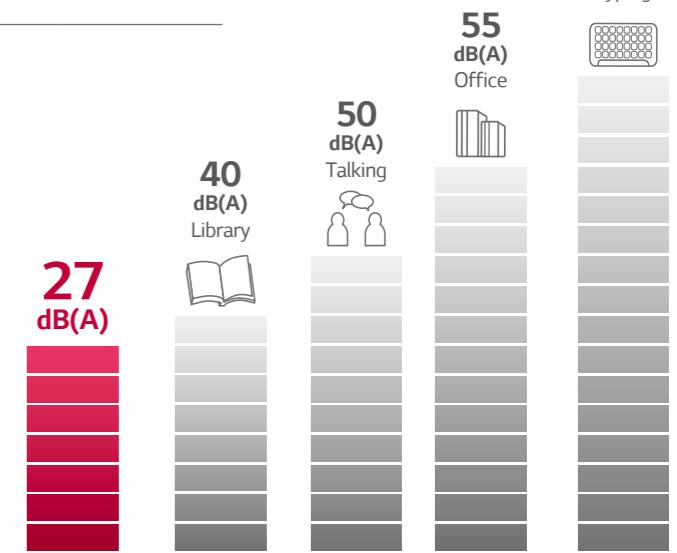


Flexible Installation

Standard Inverter low static duct allows the air intake at the rear or bottom under installation condition.


Conventional

Air intake at the only rear



Low Static Duct

Air intake at the rear or bottom

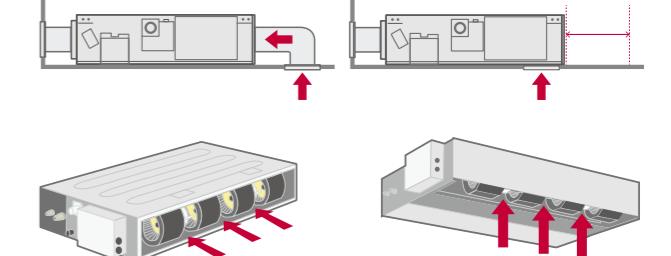

CEILING CONCEALED DUCT

**H-INVERTER (R32)****LOW STATIC PRESSURE****- UL12FH / UL18FH**

LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification : www.eurovent-certification.com

UUA1 ULO UUB1 U20

COMBINATION			12	18
Capacity	Cooling	Min ~ Rated ~ Max kW	1.5 / 3.4 / 4.7	2.0 / 5.0 / 6.0
	Heating	Min ~ Rated ~ Max kW	1.8 / 4.0 / 4.9	2.3 / 5.8 / 7.0
Power Input (Set)	Cooling	Min ~ Rated ~ Max kW	0.33 / 1.05 / 1.84	0.30 / 1.39 / 1.88
	Heating	Min ~ Rated ~ Max kW	0.33 / 1.08 / 1.63	0.30 / 1.56 / 2.12
Running Current	Cooling	Rated A	4.7	7.6
	Heating	Rated A	4.8	8.1
EER / COP		kWh/kWh	3.23 / 3.71	3.60 / 3.71
SEER / SCOP		kWh/kWh	6.1 / 4.0	6.5 / 4.1
Pdesign	Cooling @ 35°C	kW	3.4	5
	Heating @ -10°C	kW	2.9	4.1
Seasonal Energy Label	Cooling / Heating	-	A++ / A+	A++ / A+
Annual Energy Consumption	Cooling / Heating	kWh	195 / 1,015	269 / 1,400
Dehumidification Rate		l/h	0.8	2.6
ODU Sound Pressure Level	Cooling / Heating	Rated dB(A)	49 / 52	47 / 52
ODU Sound Power Level	Cooling	Rated dB(A)	65	63
	Liquid	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)
Piping Connections	Gas	mm (inch)	Ø9.52 (3/8)	Ø12.7 (1/2)
	Connections Method	-	FLARED	Flared
Operation Range (Outdoor)	Cooling	Min ~ Max °C	-15 ~ 50	-15 ~ 50
	Heating	Min ~ Max °C	-20 ~ 18	-20 ~ 18

INDOOR **UL12FH N50** **UL18FH N30**

Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)	H / M / L	W	21 / 15 / 13
Air Flow Rate	H / M / L	m³/min	11.5 / 9.5 / 8
Dimensions	Body	W x H x D mm	900 x 190 x 460
Weight	Body	kg	18
Sound Pressure Level	Cooling	H / M / L	dB(A) 35 / 30 / 27
Sound Power Level	Cooling	Max	dB(A) 55
Piping Connections	Drain	O.D. / I.D.	mm Ø32.0 / 26.0

OUTDOOR **UUA1 ULO** **UUB1 U20**

Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Circuit Breaker	Min	A	15
Power Supply Cable (Included Earth)	No x mm²	3C x 1.5	3C x 2.5
Dimensions	Net	W x H x D mm	770 x 545 x 288
Weight	Net	kg	33.3
Compressor	Type	-	Twin Rotary
	Type	-	R32
Refrigerant	GWP (Global Warming Potential)	-	675
	Precharged Amount	kg	1.0
t-CO₂eq	-	0.675	0.81
	Additional Charge (After 7.5m)	g/m	20
Fan	Air Flow Rate	Rated	m³/min x No.
			28 x 1
Total Piping Length	Min / Max	m	5 / 30
Piping Elevation	IDU - ODU	Max	m 30

CEILING CONCEALED DUCT

**H-INVERTER (R32)****MID STATIC PRESSURE****- UM12FH / UM18FH / UM24FH / UM30FH**

LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification : www.eurovent-certification.com

UUA1 ULO UUB1 U20 UUC1 U40

COMBINATION			12	18	24	30
Capacity	Cooling	Min ~ Rated ~ Max kW	1.6 / 3.5 / 5.1	2.0 / 5.0 / 6.0	2.7 / 6.8 / 8.3	3.1 / 7.8 / 9.3
	Heating	Min ~ Rated ~ Max kW	1.6 / 4.0 / 5.8	2.3 / 5.8 / 7.0	3.0 / 7.5 / 9.4	3.6 / 9.0 / 10.7
Power Input (Set)	Cooling	Min ~ Rated ~ Max kW	0.32 / 1.03 / 1.93	0.30 / 1.26 / 1.70	0.40 / 1.84 / 2.56	0.50 / 2.25 / 2.99
	Heating	Min ~ Rated ~ Max kW	0.32 / 0.98 / 1.85	0.30 / 1.49 / 2.01	0.40 / 1.75 / 2.52	0.50 / 2.27 / 3.11
Running Current	Cooling	Rated A	4.6	7.3	8.2	10.0
	Heating	Rated A	4.3	7.8	7.8	10.1
EER / COP		kWh/kWh	3.40 / 4.10	3.96 / 3.89	3.70 / 4.28	3.51 / 3.97
SEER / SCOP		kWh/kWh	6.1 / 3.9	6.6 / 4.2	6.8 / 4.3	6.6 / 4.3
Pdesign	Cooling @ 35°C	kW	3.5	5	6.8	7.8
	Heating @ -10°C	kW	2.8	4.4	5.4	5.4
Seasonal Energy Label	Cooling / Heating	-	A++ / A	A++ / A+	A++ / A+	A++ / A+
Annual Energy Consumption	Cooling / Heating	kWh	201 / 1,005	265 / 1,467	350 / 1,758	419 / 1,758
Dehumidification Rate		l/h	0.4	1.3	1.2	2.2
ODU Sound Pressure Level	Cooling / Heating	Rated dB(A)	49 / 52	47 / 52	48 / 52	50 / 52
ODU Sound Power Level	Cooling	Rated dB(A)	65	63	65	68
	Liquid	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø9.52 (3/8)	Ø9.52 (3/8)
Piping Connections	Gas	mm (inch)	Ø9.52 (3/8)	Ø12.7 (1/2)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Connections Method	-	Flared	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min ~ Max °C	-15 ~ 50	-15 ~ 50	-20 ~ 50	-20 ~ 50
	Heating	Min ~ Max °C	-20 ~ 18	-20 ~ 18	-20 ~ 18	-20 ~ 18

INDOOR **UM12FH N10** **UM18FH N10** **UM24FH N20** **UM30FH N20**

Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)	H / M / L	W	150 / 130 / 110	180 / 150 / 130	134 / 101 / 80
Air Flow Rate	H / M / L	m³/min	16.5 / 14.5 / 13	17.5 / 16 / 14	28 / 24 / 21
Dimensions	Body	W x H x D mm	900 x 270 x 700	900 x 270 x 700	1,250 x 270 x 700
Weight	Body	kg	25.4	27.0	39.3
Sound Pressure Level	Cooling	H / M / L	dB(A) 34 / 32 / 30	35 / 34 / 32	34 / 33 / 32
Sound Power Level	Cooling	Max	dB(A) 56	60	59
Piping Connections	Drain (Natural Drainage)	O.D. / I.D.	mm Ø25.4 / 19.4	Ø25.4 / 19.4	Ø25.4 / 19.4
	Drain (Using Drain Pump)	O.D. / I.D.	mm Ø32.0 / 26.0	Ø32.0 / 26.0	Ø32.0 / 26.0

OUTDOOR **UUA1 ULO** **UUB1 U20** **UUC1 U40**

Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Circuit Breaker	Min	A	15	20
Power Supply Cable (Included Earth)	No x mm²	3C x 1.5	3C x 2.5	3C x 2.5
Dimensions	Net	W x H x D mm	770 x 545 x 288	870 x 650 x 330
Weight	Net	kg	33.3	44.5
Compressor	Type	-	Twin Rotary	Twin Rotary
	Type	-	R32	R32
Refrigerant	GWP (Global Warming Potential)	-	675	675
	Precharged Amount	kg	1.0	1.2
t-CO₂eq	-	0.675	0.81	1.283
	Additional Charge (After 7.5m)	g/m	20	20
Fan	Air Flow Rate	Rated	m³/min x No.	28 x 1
				50 x 1
Total Piping Length	Min / Max	m	5 / 30	

CEILING CONCEALED DUCT



H-INVERTER (R32)

MID STATIC PRESSURE

- UM36FH / UM42FH / UM48FH



LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification : www.eurovent-certification.com

UUID1 U30



COMBINATION			36	42	48
Capacity	Cooling	Min ~ Rated ~ Max kW	3.8 / 9.5 / 12.8	4.8 / 12.0 / 14.4	5.4 / 13.4 / 16.1
	Heating	Min ~ Rated ~ Max kW	4.3 / 10.8 / 13.7	5.4 / 13.5 / 16.2	6.2 / 15.5 / 17.8
Power Input (Set)	Cooling	Min ~ Rated ~ Max kW	0.50 / 2.26 / 3.39	0.70 / 3.38 / 4.56	0.80 / 4.12 / 5.56
	Heating	Min ~ Rated ~ Max kW	0.50 / 2.57 / 3.60	0.70 / 3.51 / 4.56	0.80 / 4.18 / 5.24
Running Current	Cooling	Rated A	10.0	14.9	18.1
	Heating	Rated A	11.3	15.3	18.4
EER / COP		kWh/kWh	4.20 / 4.20	3.55 / 3.85	3.25 / 3.71
SEER / SCOP		kWh/kWh	6.4 / 4.2	6.2 / 4.1	6.1 / 4.1
Pdesign	Cooling @ 35°C	kW	9.5	12	13.4
	Heating @ -10°C	kW	9.5	9.5	9.5
Seasonal Energy Label	Cooling / Heating	-	A++ / A+	A++ / A+	-
Annual Energy Consumption	Cooling / Heating	kWh	520 / 3,167	677 / 3,244	1,318 / 3,244
Dehumidification Rate		l/h	20	4.2	4.8
ODU Sound Pressure Level	Cooling / Heating	Rated dB(A)	50 / 50	51 / 52	52 / 53
ODU Sound Power Level	Cooling	Rated dB(A)	66	69	69
	Liquid	mm (inch)	09.52 (3/8)	09.52 (3/8)	09.52 (3/8)
Piping Connections	Gas	mm (inch)	015.88 (5/8)	015.88 (5/8)	015.88 (5/8)
	Connections Method	-	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min ~ Max °C	-20 ~ 52	-20 ~ 52	-20 ~ 52
	Heating	Min ~ Max °C	-25 ~ 18	-25 ~ 18	-25 ~ 18

INDOOR **UM36FH N30** **UM42FH N30** **UM48FH N30**

Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)	H / M / L	W	242 / 159 / 124	242 / 159 / 124
Air Flow Rate	H / M / L	m³/min	40 / 34 / 28	40 / 34 / 28
Dimensions	Body	W x H x D	1,250 x 360 x 700	1,250 x 360 x 700
Weight	Body	kg	44.3	44.3
Sound Pressure Level	Cooling	H / M / L	39 / 38 / 36	39 / 38 / 36
Sound Power Level	Cooling	Max	dB(A)	65
Piping Connections	Drain (Natural Drainage) O.D. / I.D.	mm	Ø25.4 / 19.4	Ø25.4 / 19.4
	Drain (Using Drain Pump) O.D. / I.D.	mm	Ø32.0 / 26.0	Ø32.0 / 26.0

OUTDOOR **UUID1 U30**

Power Supply	Ø, V, Hz	1, 220-240, 50		
Circuit Breaker	Min	A	40	
Power Supply Cable (Included Earth)	No x mm²		3C x 6.0	
Dimensions	Net	W x H x D	mm	950 x 1,380 x 330
Weight	Net	kg		85.0
Compressor	Type	-	Inverter Scroll	
	Type	-	R32	
Refrigerant	GWP (Global Warming Potential)	-	675	
	Precharged Amount	kg		3.0
	t-CO₂eq	-		2.025
	Additional Charge (After 7.5m)	g/m		40
Fan	Air Flow Rate	Rated	m³/min x No.	55 x 2
Total Piping Length		Min / Max	m	5 / 85
Piping Elevation	IDU - ODU	Max	m	30

CEILING CONCEALED DUCT



H-INVERTER (R32)

MID STATIC PRESSURE

- UM36FH / UM42FH / UM48FH



LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification : www.eurovent-certification.com

UUID3 U30



COMBINATION			36	42	48
Capacity	Cooling	Min ~ Rated ~ Max kW	3.8 ~ 9.5 ~ 12.8	4.8 ~ 12.0 ~ 14.4	5.4 ~ 13.4 ~ 16.1
	Heating	Min ~ Rated ~ Max kW	4.3 ~ 10.8 ~ 13.7	5.4 ~ 13.5 ~ 16.2	6.2 ~ 15.5 ~ 17.8
Power Input (Set)	Cooling	Min ~ Rated ~ Max kW	0.50 ~ 2.26 ~ 3.39	0.70 ~ 3.38 ~ 4.56	0.80 ~ 4.12 ~ 5.56
	Heating	Min ~ Rated ~ Max kW	0.50 ~ 2.57 ~ 3.60	0.70 ~ 3.51 ~ 4.56	0.80 ~ 4.18 ~ 5.24
Running Current	Cooling	Rated A	3.8	5.3	6.5
	Heating	Rated A	4.1	5.5	6.5
EER / COP		kWh/kWh	4.20 / 4.20	3.55 / 3.85	3.25 / 3.71
SEER / SCOP		kWh/kWh	6.4 / 4.2	6.2 / 4.1	6.1 / 4.1
Pdesign	Cooling @ 35°C	kW	9.5	12	13.4
	Heating @ -10°C	kW	9.5	9.5	9.5
Seasonal Energy Label	Cooling / Heating	-	A++ / A+	A++ / A+	-
Annual Energy Consumption	Cooling / Heating	kWh	520 / 3,167	677 / 3,244	1,318 / 3,244
Dehumidification Rate		l/h	2.0	4.2	4.8
ODU Sound Pressure Level	Cooling / Heating	Rated dB(A)	50 / 50	51 / 52	52 / 53
ODU Sound Power Level	Cooling	Rated dB(A)	66	69	69
	Liquid	mm (inch)	09.52 (3/8)	09.52 (3/8)	09.52 (3/8)
Piping Connections	Gas	mm (inch)	015.88 (5/8)	015.88 (5/8)	015.88 (5/8)
	Connections Method	-	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min ~ Max °C	-20 ~ 52	-20 ~ 52	-20 ~ 52
	Heating	Min ~ Max °C	-25 ~ 18	-25 ~ 18	-25 ~ 18

INDOOR **UM36FH N30** **UM42FH N30** **UM48FH N30**

Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)	H / M / L	W	242 / 159 / 124	242 / 159 / 124
Air Flow Rate	H / M / L	m³/min	40 / 34 / 28	40 / 34 / 28
Dimensions	Body	W x H x D	1,250 x 360 x 700	1,250 x 360 x 700
Weight	Body	kg	44.3	44.3
Sound Pressure Level	Cooling	H / M / L	39 / 38 / 36	39 / 38 / 36
Sound Power Level	Cooling	Max	dB(A)	65
Piping Connections	Drain (Natural Drainage) O.D. / I.D.	mm	Ø25.4 / 19.4	Ø25.4 / 19.4
	Drain (Using Drain Pump) O.D. / I.D.	mm	Ø32.0 / 26.0	Ø32.0 / 26.0

OUTDOOR **UUID3 U30**

Power Supply	Ø, V, Hz	3, 380-415, 50		
Circuit Breaker	Min	A	20	
Power Supply Cable (Included Earth)	No x mm²		5C x 2.5	
Dimensions	Net	W x H x D	mm	950 x 1,380 x 330
Weight	Net	kg		85.0
Compressor	Type	-	Inverter Scroll	
	Type	-	R32	
Refrigerant	GWP (Global Warming Potential)	-	675	
	Precharged Amount	kg		3.0
	t-CO₂eq	-		2.025

CEILING CONCEALED DUCT



STANDARD INVERTER (R32)

LOW STATIC PRESSURE

- CL09F / CL12F / CL18F / CL24F



LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification : www.eurovent-certification.com

UUA1 ULO UUB1 U20 UUC1 U40



COMBINATION		09	12	18	24
Capacity		Cooling Min ~ Rated ~ Max kW	1.5 / 2.5 / 3.2	1.5 / 3.4 / 4.7	2.0 / 5.0 / 5.8
		Heating Min ~ Rated ~ Max kW	1.8 / 3.2 / 4.0	1.8 / 4.0 / 4.9	2.3 / 5.8 / 6.7
Power Input (Set)		Cooling Min ~ Rated ~ Max kW	0.30 / 0.67 / 0.93	0.33 / 1.05 / 1.84	0.3 / 1.35 / 1.89
		Heating Min ~ Rated ~ Max kW	0.38 / 0.75 / 1.63	0.33 / 1.08 / 1.63	0.4 / 1.77 / 2.48
Running Current		Cooling Rated A	3.0	4.7	7.5
		Heating Rated A	3.3	4.8	8.3
EER / COP		kWh/kWh	3.80 / 4.30	3.23 / 3.71	3.71 / 3.28
SEER / SCOP		kWh/kWh	6.1 / 4.0	5.6 / 3.8	6.1 / 3.9
Pdesign		Cooling @ 35°C kW	2.5	3.4	5
		Heating @ -10°C kW	2.9	2.9	4.1
Seasonal Energy Label		Cooling / Heating	-	A++ / A+	A+ / A
Annual Energy Consumption		Cooling / Heating kWh	143 / 1,015	213 / 1,068	287 / 1,472
Dehumidification Rate		I/h	0.2	0.8	1.6
ODU Sound Pressure Level	Cooling / Heating	dB(A)	49 / 52	49 / 52	47 / 52
ODU Sound Power Level	Cooling	dB(A)	65	65	63
	Liquid	mm (inch)	06.35 (1/4)	06.35 (1/4)	06.35 (1/4)
Piping Connections	Gas	mm (inch)	09.52 (3/8)	09.52 (3/8)	012.7 (1/2)
	Connections Method	-	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min ~ Max °C	-15 ~ 50	-15 ~ 50	-15 ~ 50
	Heating	Min ~ Max °C	-20 ~ 18	-20 ~ 18	-20 ~ 18
INDOOR		CL09F N50	CL12F N50	CL18F N60	CL24F N30
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)	H / M / L	W	21 / 15 / 13	21 / 15 / 13	100 / 90 / 80
Air Flow Rate	H / M / L	m³/min	11.5 / 9.5 / 8	11.5 / 9.5 / 8	15 / 12 / 10
Dimensions	Body	W x H x D mm	900 x 190 x 460	900 x 190 x 460	1,100 x 190 x 460
Weight	Body	kg	18.0	18.0	20.9
Sound Pressure Level	Cooling	H / M / L	35 / 30 / 27	35 / 30 / 27	34 / 31 / 29
Sound Power Level	Cooling	Max	dB(A)	55	55
Piping Connections	Drain	O.D. / I.D.	mm	Ø32.0 / 26.0	Ø32.0 / 26.0
OUTDOOR		UUA1 ULO	UUB1 U20	UUC1 U40	
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	
Circuit Breaker	Min	A	15	20	25
Power Supply Cable (Included Earth)	No x mm²		3C x 1.5	3C x 2.5	3C x 2.5
Dimensions	Net	W x H x D	mm	770 x 545 x 288	870 x 650 x 330
Weight	Net	kg	33.3	44.5	57.7
Compressor	Type	-	Twin Rotary	Twin Rotary	Twin Rotary
	Type	-	R32	R32	R32
Refrigerant	GWP (Global Warming Potential)	-	675	675	675
	Precharged Amount	kg	1.0	1.2	1.9
	t-CO₂eq	-	0.675	0.81	1.283
	Additional Charge (After 7.5m)	g/m	20	20	40
Fan	Air Flow Rate	Rated	m³/min x No.	28 x 1	50 x 1
Total Piping Length	Min / Max	m	5 / 30	5 / 30	5 / 50
Piping Elevation	IDU - ODU	Max	m	30	30

CEILING CONCEALED DUCT



STANDARD INVERTER (R32)

MID STATIC PRESSURE

- CM18F / CM24F / UM30F

UUB1 U20 UUC1 U40



LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification : www.eurovent-certification.com

COMBINATION		18	24	30
Capacity	Cooling Min ~ Rated ~ Max kW	2.0 / 5.0 / 5.8	2.7 / 6.8 / 8.0	3.1 / 7.8 / 9.0
	Heating Min ~ Rated ~ Max kW	2.3 / 5.8 / 6.7	3.0 / 7.5 / 9.0	3.6 / 9.0 / 10.1
Power Input (Set)	Cooling Min ~ Rated ~ Max kW	0.30 / 1.33 / 1.86	0.40 / 1.95 / 2.69	0.40 / 2.23 / 3.03
	Heating Min ~ Rated ~ Max kW	0.40 / 1.76 / 2.46	0.50 / 2.27 / 3.29	0.50 / 2.64 / 3.33
Running Current	Cooling Rated A	7.4	8.7	9.9
	Heating Rated A	8.3	10.1	11.7
EER / COP	kWh/kWh	3.75 / 3.30	3.49 / 3.31	3.50 / 3.41
SEER / SCOP	kWh/kWh	6.4 / 4.1	6.6 / 3.9	6.1 / 4.0
Pdesign	Cooling @ 35°C kW	5	6.8	7.8
	Heating @ -10°C kW	4.1	5.4	5.4
Seasonal Energy Label	Cooling / Heating	-	A++ / A+	A++ / A+
Annual Energy Consumption	Cooling / Heating kWh	273 / 1,400	361 / 1,938	448 / 1,890
Dehumidification Rate	I/h	1.2	2.6	2.4
ODU Sound Pressure Level	Cooling / Heating	dB(A)	47 / 52	48 / 52
ODU Sound Power Level	Cooling	dB(A)	63	65
	Liquid	mm (inch)	06.35 (1/4)	09.52 (3/8)
Piping Connections	Gas	mm (inch)	012.7 (1/2)	015.88 (5/8)
	Connections Method	-	Flared	Flared
Operation Range (Outdoor)	Cooling	Min ~ Max °C	-15 ~ 50	-20 ~ 50
	Heating	Min ~ Max °C	-20 ~ 18	-20 ~ 18
INDOOR		CM18F N10	CM24F N10	UM30F N10
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)	H / M / L	W	150 / 130 / 110	180 / 150 / 130
Air Flow Rate	H / M / L	m³/min	16.5 / 14.5 / 13	18 / 16.5 / 14.5
Dimensions	Body	W x H x D	mm	900 x 270 x 700
Weight	Body	kg	24.6	24.6
Sound Pressure Level	Cooling	H / M / L	34 / 32 / 30	35 / 34 / 32
Sound Power Level	Cooling	Max	dB(A)	59
Piping Connections	Drain (Natural Drainage) O.D. / I.D.	mm	Ø25.4 / 19.4	Ø25.4 / 19.4
	Drain (Using Drain Pump) O.D. / I.D.	mm	Ø32.0 / 26.0	Ø32.0 / 26.0
OUTDOOR		UUB1 U20	UUC1 U40	
Power Supply	Ø, V, Hz	1, 220-240, 50		1, 220-240, 50
Circuit Breaker	Min	A	20	25
Power Supply Cable (Included Earth)	No x mm²		3C x 2.5	
Dimensions	Net	W x H x D	mm	870 x 650 x 330
Weight	Net	kg	44.5	57.7
Compressor	Type	-	Twin Rotary	Twin Rotary
	Type	-	R32	R32
Refrigerant	GWP (Global Warming Potential)	-	675	675
	Precharged Amount	kg	1.2	1.9
	t-CO₂eq	-	0.81	1.283
	Additional Charge (After 7.5m)	g/m	20	40
Fan	Air Flow Rate	Rated	m³/min x No.	50 x 1
Total Piping Length	Min / Max	m	5 / 30	5 / 50
Piping Elevation	IDU - ODU	Max	m	30

CEILING CONCEALED DUCT



STANDARD INVERTER (R32)

MID STATIC PRESSURE

- UM36F / UM42F / UM48F / UM60F



LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification : www.eurovent-certification.com

UUID1 U30



COMBINATION			36	42	48	60
Capacity	Cooling	Min ~ Rated ~ Max kW	3.8 / 9.5 / 12.5	4.8 / 12.0 / 14.0	5.4 / 13.4 / 15.7	5.8 / 14.6 / 15.8
	Heating	Min ~ Rated ~ Max kW	4.3 / 10.8 / 13.4	5.4 / 13.5 / 15.8	6.2 / 15.5 / 17.5	6.7 / 16.8 / 18.1
Power Input (Set)	Cooling	Min ~ Rated ~ Max kW	0.50 / 2.50 / 3.80	0.70 / 3.48 / 4.52	0.90 / 4.32 / 5.62	1.00 / 4.95 / 5.54
	Heating	Min ~ Rated ~ Max kW	0.60 / 2.77 / 3.77	0.80 / 3.74 / 4.86	0.90 / 4.31 / 5.26	0.90 / 4.60 / 5.29
Running Current	Cooling	Rated A	11.1	15.3	19.0	21.6
	Heating	Rated A	12.6	16.4	18.4	20.4
EER / COP		kWh/kWh	3.80 / 3.90	3.45 / 3.61	3.10 / 3.60	2.95 / 3.65
SEER / SCOP		kWh/kWh	5.80 / 3.90	5.60 / 3.90	5.80 / 4.00	5.60 / 4.00
Pdesign	Cooling @ 35°C	kW	9.5	12.0	13.4	14.6
	Heating @ -10°C	kW	9.5	9.5	9.5	9.5
Seasonal Energy Label	Cooling / Heating	-	A+ / A	A+ / A	- / -	- / -
Annual Energy Consumption	Cooling / Heating	kWh	573 / 3,410	750 / 3,410	1,386 / 3,325	1,564 / 3,325
Dehumidification Rate		l/h	2.9	4.4	4.8	4.7
ODU Sound Pressure Level	Cooling / Heating	Rated dB(A)	50 / 50	51 / 52	52 / 53	54 / 54
ODU Sound Power Level	Cooling	Rated dB(A)	66	69	71	
	Liquid	mm (inch)	09.52 (3/8)	09.52 (3/8)	09.52 (3/8)	
Piping Connections	Gas	mm (inch)	015.88 (5/8)	015.88 (5/8)	015.88 (5/8)	
	Connections Method	-	Flared	Flared	Flared	
Operation Range (Outdoor)	Cooling	Min ~ Max °C	-20 ~ 52	-20 ~ 52	-20 ~ 52	
	Heating	Min ~ Max °C	-25 ~ 18	-25 ~ 18	-25 ~ 18	
INDOOR			UM36F N20	UM42F N20	UM48F N30	UM60F N30
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)	H / M / L	W	183 / 134 / 101	266 / 200 / 145	242 / 159 / 124	342 / 287 / 242
Air Flow Rate	H / M / L	m³/min	32 / 28 / 24	38 / 33 / 28	40 / 34 / 28	50 / 45 / 40
Dimensions	Body	W x H x D mm	1,250 x 270 x 700	1,250 x 270 x 700	1,250 x 360 x 700	1,250 x 360 x 700
Weight	Body	kg	38.5	38.5	43.5	43.5
Sound Pressure Level	Cooling	H / M / L dB(A)	36 / 34 / 33	38 / 36 / 34	39 / 38 / 36	42 / 40 / 39
Sound Power Level	Cooling	Max dB(A)	60	62	65	66
Piping Connections	Drain (Natural Drainage) O.D. / I.D. mm		025.4 / 19.4	025.4 / 19.4	025.4 / 19.4	025.4 / 19.4
	Drain (Using Drain Pump) O.D. / I.D. mm		032.0 / 26.0	032.0 / 26.0	032.0 / 26.0	032.0 / 26.0
OUTDOOR			UUID1 U30			
Power Supply		Ø, V, Hz	1, 220-240, 50			
Circuit Breaker	Min	A	40			
Power Supply Cable (Included Earth)		No x mm²	3C x 6.0			
Dimensions	Net	W x H x D mm	950 x 1,380 x 330			
Weight	Net	kg	85			
Compressor	Type	-	Inverter Scroll			
	Type	-	R32			
Refrigerant	GWP (Global Warming Potential)	-	675			
	Precharged Amount	kg	3.0			
	t-CO₂eq	-	2.025			
	Additional Charge (After 7.5m)	g/m	40			
Fan	Air Flow Rate	Rated m³/min x No.	55 x 2			
Total Piping Length	Min / Max	m	5 / 85			
Piping Elevation	IDU - ODU	m	30			

CEILING CONCEALED DUCT



STANDARD INVERTER (R32)

MID STATIC PRESSURE

- UM 36F / UM42F / UM48F / UM60F



LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification : www.eurovent-certification.com

UUID3 U30



COMBINATION			36	42	48	60
Capacity	Cooling	Min ~ Rated ~ Max kW	3.8 / 9.5 / 12.5	4.8 / 12.0 / 14.0	5.4 / 13.4 / 15.7	5.8 / 14.6 / 15.8
	Heating	Min ~ Rated ~ Max kW	4.3 / 10.8 / 13.4	5.4 / 13.5 / 15.8	6.2 / 15.5 / 17.5	6.7 / 16.8 / 18.1
Power Input (Set)	Cooling	Min ~ Rated ~ Max kW	0.50 / 2.50 / 3.80	0.70 / 3.48 / 4.52	0.90 / 4.32 / 5.62	1.00 / 4.95 / 5.54
	Heating	Min ~ Rated ~ Max kW	0.60 / 2.77 / 3.77	0.80 / 3.74 / 4.86	0.90 / 4.31 / 5.26	0.90 / 4.60 / 5.29
Running Current	Cooling	Rated A	4.0	5.5	6.8	7.7
	Heating	Rated A	4.5	5.9	6.5	7.2
EER / COP		kWh/kWh	3.80 / 3.90	3.45 / 3.61	3.10 / 3.60	2.95 / 3.65
SEER / SCOP		kWh/kWh	5.8 / 3.9	5.6 / 3.9	5.8 / 4.0	5.6 / 4.0
Pdesign	Cooling @ 35°C	kW	9.5	12	13.4	14.6
	Heating @ -10°C	kW	9.5	9.5	9.5	9.5
Seasonal Energy Label	Cooling / Heating	-	A+ / A	A+ / A	- / -	- / -
Annual Energy Consumption	Cooling / Heating	kWh	573 / 3,410	750 / 3,410	1,386 / 3,325	1,564 / 3,325
Dehumidification Rate		l/h	2.9	4.4	4.8	4.7
ODU Sound Pressure Level	Cooling / Heating	Rated dB(A)	50 / 50	51 / 52	52 / 53	54 / 54
ODU Sound Power Level	Cooling	Rated dB(A)	66	69	71	
	Liquid	mm (inch)	09.52 (3/8)	09.52 (3/8)	09.52 (3/8)	09.52 (3/8)
Piping Connections	Gas	mm (inch)	015.88 (5/8)	015.88 (5/8)	015.88 (5/8)	015.88 (5/8)
	Connections Method	-	Flared	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min ~ Max °C	-20 ~ 52	-20 ~ 52	-20 ~ 52	-20 ~ 52
	Heating	Min ~ Max °C	-25 ~ 18	-25 ~ 18	-25 ~ 18	-25 ~ 18
INDOOR			UM36F N20	UM42F N20	UM48F N30	UM60F N30
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)	H / M / L	W	183 / 134 / 101	266 / 200 / 145	242 / 159 / 124	342 / 287 / 242
Air Flow Rate	H / M / L	m³/min	32 / 28 / 24	38 / 33 / 28	40 / 34 / 28	50 / 45 / 40
Dimensions	Body	W x H x D mm	1,250 x 270 x 700	1,250 x 270 x 700	1,250 x 360 x 700	1,250 x 360 x 700
Weight	Body	kg	38.5	38.5	43.5	43.5
Sound Pressure Level	Cooling	H / M / L dB(A)	36 / 34 / 33	38 / 36 / 34	39 / 38 / 36	42 / 40 / 39
Sound Power Level	Cooling	Max dB(A)	60	62	65	66
Piping Connections	Drain (Natural Drainage) O.D. / I.D. mm		025.4 / 19.4	025.4 / 19.4	025.4 / 19.4	025.4 / 19.4
	Drain (Using Drain Pump) O.D. / I.D. mm		032.0 / 26.0	032.0 / 26.0	032.0 / 26.0	032.0 / 26.0
OUTDOOR			UUID1 U30			
Power Supply	</td					

CEILING CONCEALED DUCT



COMPACT INVERTER (R32)

LOW STATIC PRESSURE

- CL18F / CL24F



LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification : www.eurovent-certification.com

UUA1 ULO UUB1 U20



COMBINATION			18	24
Capacity	Cooling	Min ~ Rated ~ Max kW	1.8 / 4.7 / 5.1	2.7 / 6.8 / 7.5
	Heating	Min ~ Rated ~ Max kW	2.1 / 5.2 / 5.7	3.0 / 7.5 / 8.6
Power Input (Set)	Cooling	Min ~ Rated ~ Max kW	0.34 / 1.62 / 1.99	0.40 / 2.12 / 2.54
	Heating	Min ~ Rated ~ Max kW	0.30 / 1.53 / 1.99	0.50 / 2.41 / 3.13
Running Current	Cooling	Rated A	7.2	9.3
	Heating	Rated A	6.8	10.5
EER / COP		kWh/kWh	2.90 / 3.40	3.21 / 3.11
SEER / SCOP		kWh/kWh	5.1 / 3.8	6.0 / 4.1
Pdesign	Cooling @ 35°C	kW	4.7	6.8
	Heating @ -10°C	kW	2.7	4.2
Seasonal Energy Label	Cooling / Heating	-	A / A	A+ / A+
Annual Energy Consumption	Cooling / Heating	kWh	323 / 995	397 / 1,434
Dehumidification Rate		l/h	1.5	2.4
ODU Sound Pressure Level	Cooling / Heating	Rated dB(A)	49 / 52	48 / 53
ODU Sound Power Level	Cooling	Rated dB(A)	65	65
	Liquid	mm (inch)	Ø6.35 (1/4)	Ø9.52 (3/8)
Piping Connections	Gas	mm (inch)	Ø12.7 (1/2)	Ø15.88 (5/8)
	Connections Method	-	Flared	Flared
Operation Range (Outdoor)	Cooling	Min ~ Max °C	-10 ~ 50	-10 ~ 48
	Heating	Min ~ Max °C	-10 ~ 18	-15 ~ 18
INDOOR			CL18F N60	CL24F N30
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)	H / M / L	W	100 / 90 / 80	150 / 130 / 110
Air Flow Rate	H / M / L	m³/min	15 / 12 / 10	20 / 16 / 12
Dimensions	Body	W x H x D mm	1,100 x 190 x 460	1,100 x 190 x 700
Weight	Body	kg	20.9	26
Sound Pressure Level	Cooling	H / M / L	34 / 31 / 29	39 / 35 / 32
Sound Power Level	Cooling	Max	dB(A)	56
Piping Connections	Drain	O.D. / I.D.	mm	Ø32.0 / 26.0
OUTDOOR			UUA1 ULO	UUB1 U20
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Circuit Breaker	Min	A	15	20
Power Supply Cable (Included Earth)	No x mm²		3C x 1.5	3C x 2.5
Dimensions	Net	W x H x D mm	770 x 545 x 288	870 x 650 x 330
Weight	Net	kg	33.3	44.5
Compressor	Type	-	Twin Rotary	Twin Rotary
	Type	-	R32	R32
Refrigerant	GWP (Global Warming Potential)	-	675	675
	Precharged Amount	kg	1.0	1.2
	t-CO₂eq	-	0.675	0.81
	Additional Charge (After 7.5m)	g/m	20	40
Fan	Air Flow Rate	Rated	m³/min x No.	28 x 1
Total Piping Length		Min / Max	m	5 / 30
Piping Elevation	IDU - ODU	Max	m	30

CEILING CONCEALED DUCT



COMPACT INVERTER (R32)

MID STATIC PRESSURE

- CM18F / CM24F / UM30F / UM36F

UUA1 ULO UUB1 U20

UUC1 U40



LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification : www.eurovent-certification.com



COMBINATION			18	24	30	36
Capacity	Cooling	Min ~ Rated ~ Max kW	1.8 / 5.0 / 5.6	2.7 / 6.8 / 7.5	3.0 / 7.5 / 8.3	3.8 / 9.5 / 10.5
	Heating	Min ~ Rated ~ Max kW	2.2 / 5.5 / 6.7	3.0 / 7.4 / 8.5	3.2 / 8.0 / 8.8	4.3 / 10.8 / 11.5
Power Input (Set)	Cooling	Min ~ Rated ~ Max kW	0.35 / 1.67 / 1.92	0.50 / 2.34 / 2.81	0.50 / 2.57 / 3.08	0.60 / 3.16 / 3.86
	Heating	Min ~ Rated ~ Max kW	0.32 / 1.58 / 1.77	0.40 / 2.17 / 2.82	0.50 / 2.25 / 2.93	0.60 / 3.03 / 3.48
Running Current	Cooling	Rated A	7.4	10.3	11.0	14.0
	Heating	Rated A	7.0	9.7	9.7	13.4
EER / COP		kWh/kWh	3.00 / 3.50	2.91 / 3.41	2.92 / 3.56	3.01 / 3.57
SEER / SCOP		kWh/kWh	6.1 / 3.8	5.8 / 4.1	5.6 / 3.9	5.9 / 4.0
Pdesign	Cooling @ 35°C	kW	5	6.8	7.5	9.5
	Heating @ -10°C	kW	2.8	4.1	4.3	5.5
Seasonal Energy Label	Cooling / Heating	-	A++ / A	A+ / A+	A+ / A	A+ / A+
Annual Energy Consumption	Cooling / Heating	kWh	287 / 1,032	410 / 1,400	469 / 1,544	564 / 1,924
Dehumidification Rate		l/h	1.2	2.5	2.6	3.2
ODU Sound Pressure Level	Cooling / Heating	Rated dB(A)	49 / 52	48 / 53	50 / 54	54 / 56
ODU Sound Power Level	Cooling	Rated dB(A)	65	65	67	70
	Liquid	mm (inch)	Ø6.35 (1/4)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
Piping Connections	Gas	mm (inch)	Ø12.7 (1/2)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Connections Method	-	Flared	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min ~ Max °C	-10 ~ 50	-10 ~ 48	-10 ~ 48	-20 ~ 50
	Heating	Min ~ Max °C	-10 ~ 18	-15 ~ 18	-15 ~ 18	-15 ~ 18
INDOOR			CM18F N10	CM24F N10	UM30F N10	UM36F N20
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)	H / M / L	W	150 / 130 / 110	180 / 150 / 130	220 / 200 / 180	183 / 134 / 101
Air Flow Rate	H / M / L	m³/min	16.5 / 14.5 / 13	18 / 16.5 / 14.5	22 / 20 / 18	32 / 28 / 24
Dimensions	Body	W x H x D mm	900 x 270 x 700	900 x 270 x 700	1,250 x 270 x 700	1,250 x 270 x 700
Weight	Body	kg	24.6	24.6	26.2	38.5
Sound Pressure Level	Cooling	H / M / L	34 / 32 / 30	35 / 34 / 32	37 / 35 / 34	36 / 34 / 33
Sound Power Level	Cooling	Max	dB(A)	59	60	60
Piping Connections	Drain(Natural Drainage)	O.D. / I.D.	mm	Ø25.4 / 19.4	Ø25.4 / 19.4	Ø25.4 / 19.4
	Drain(Using Drain Pump)	O.D. / I.D.	mm	Ø32.0 / 26.0	Ø32.0 / 26.0	Ø32.0 / 26.0
OUTDOOR			UUA1 ULO	UUB1 U20	UUC1 U40	
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Circuit Breaker	Min	A	15	20	25	
Power Supply Cable (Included Earth)	No x mm²		3C x 1.5	3C x 2.5	3C x 2.5	
Dimensions	Net	W x H x D mm	770 x 545 x 288	870 x 650 x 330	950 x 834 x 330	
Weight	Net	kg	33.3	44.5	57.7	
Compressor	Type	-	Twin Rotary	Twin Rotary	Twin Rotary	
	Type	-	R32	R32	R32	
Refrigerant	GWP (Global Warming Potential)	-	675	675	675	
	Precharged Amount	kg	1	1.2	1.9	
	t-CO₂eq	-	0.675	0.81	1.283	
	Additional Charge (After 7.5m)	g/m	20	40	40	
Fan	Air Flow Rate	Rated	m³/min x No.	28 x 1	50 x 1	58 x 1
Total Piping Length		Min / Max	m	5 / 30	5 / 35	5 / 50
Piping Elevation	IDU - ODU	Max	m	30	30	30

CEILING CONCEALED DUCT



STANDARD INVERTER (R410A)

HIGH STATIC PRESSURE

- UB70 / UB85



LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification
www.eurovent-certification.com

UU70W UU85W



INDOOR			UB70 N94	UB85 N94
Capacity	Cooling	Min / Nom / Max kW	7.6 / 19.0 / 20.9	9.2 / 23.0 / 25.3
	Heating	Min / Nom / Max kW	9.0 / 22.4 / 24.6	10.8 / 27.0 / 29.7
Low Temperature Capacity	Heating -7°C	Max kW	18.0	24.0
Power Input (Set)	Cooling	Nom kW	6.69	8.19
	Heating	Nom kW	6.4	8.31
Power Input (Indoor)	Min / Max (Nom ESP) W		550 / 760	610 / 920
Running Current	Cooling / Heating	Nom A	11.5 / 10.7	13.5 / 13.6
Power Supply	Ø, V, Hz		1, 220-240, 50	1, 220-240, 50
EER			2.84	2.81
COP			3.50	3.25
SEER			4.60	4.80
SCOP			3.53	3.51
Pdesign (@ -10°C)		kW	13.4	18.5
Seasonal Energy Label	Cooling / Heating		-	-
Annual Energy Consumption	Cooling / Heating	kWh	-	-
	Liquid	mm (inch)	Ø9.52 (3/8)	Ø12.7 (1/2)
Piping Connection	Gas	mm (inch)	Ø25.4 (1/1)	Ø22.2 (7/8)
	Drain	O.D. / I.D. mm	32 / 25	32 / 25
Air Flow Rate	High / Medium / Low	m³/min	70.0 / 65.0 / 60.0	80.0 / 72.0 / 64.0
Sound Pressure	Cooling	High / Medium / Low dB(A)	43 / 41 / 40	43 / 41 / 40
Sound Power	Cooling	Max dB(A)	73	75
Dehumidification Rate		I/h	1.81 (4.2)	5.14 (11.9)
Dimensions	Body	W x H x D mm	1,563 x 460 x 688	1,563 x 460 x 688
Net Weight	Body	kg	90.0	90.0
External Static Pressure	Min / Max	mmAq(Pa)	6 / 25 (60 / 250)	6 / 25 (60 / 250)
OUTDOOR			UU70W U34	UU85W U74
Compressor	Type		Hermetically Sealed Scroll	Hermetically Sealed Scroll
Airflow Rate	Nom	m³/min	110	190
Sound Pressure	Cooling	Nom dB(A)	55	59
	Heating	Nom dB(A)	58	60
Sound Power	Cooling	Max dB(A)	75	75
Dimensions	W x H x D	mm	950 x 1,380 x 330	1,090 x 1,625 x 380
Net Weight	kg		110	144.0
	Type		R410A	R410A
Refrigerant	Charge	g	5,200	5,500
	Additional Charge	g/m	70	70
	GWP	-	2087.5	2087.5
	TCO ₂ eq	-	10.9	11.5
Operation Range (Outdoor)	Cooling	Min / Max °C DB	-20 / 48	-20 / 48
	Heating	Min / Max °C WB	-18 / 18	-18 / 18
Power Supply	Ø, V, Hz		3, 380-415, 50	3, 380-415, 50
Power Supply Cable	No. x mm²		5C x 2.5	5C x 2.5
Transmission Cable	No. x mm²		4C x 1.0	4C x 1.0
Circuit Breaker	A		30	30
Piping Length Total	Min / Max m		5 / 75	5 / 75
Piping Elevation Difference	IDU - ODU Max m		30	30
Piping Connection	Liquid mm (inch)		Ø9.53 (3/8)	Ø12.7 (1.2)
	Gas mm (inch)		Ø25.4 (1/1)	Ø22.2 (7/8)

Note :

1. Due to our policy of innovation some specifications may be changed without notification.
2. Performances are based on the following conditions (It is accordance with EN14511)
 - Cooling : Indoor Ambient Temp 27°CDB / 19°CWB, Outdoor Ambient Temp 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp 20°CDB / 15°CWB, Outdoor Ambient Temp 7°CDB / 6°CWB
 - Interconnected Pipe is standard length and difference of Elevation (Outdoor ~ Indoor Unit) is 0m.
3. Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation.
4. This product contains fluorinated greenhouse gases. (R410A)

CEILING SUSPENDED



CEILING SUSPENDED

Differentiated Design

Modern elegance design with V-shape and black vane is appropriate for any commercial space. It received iF Design Award.




Powerful Cooling & Heating

High ceiling mode provides powerful cooling and heating up to 4.2m in height from floor, 15m away from ceiling.




With enlarged outlet space, optimized the Air flow Path and improved Heat Exchanger's performance

- **Outlet Space**

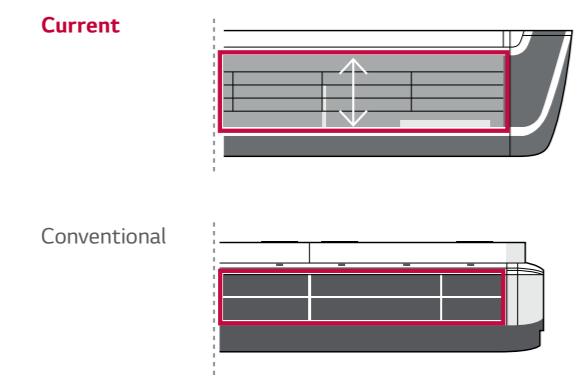

115% ENLARGED

- **Optimized the Air flow Path**

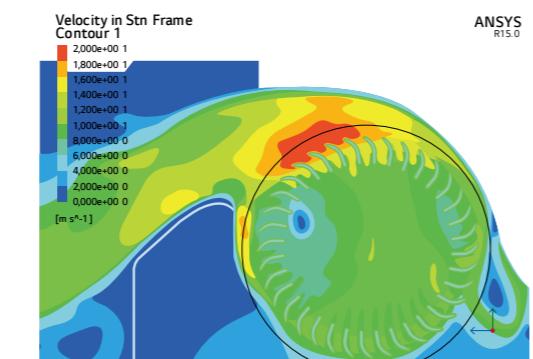

105% IMPROVED

CEILING SUSPENDED

One Touch & 2 Piece Filter


Easy in / out filter structure as well as a simplified two-piece filter, which slides out for easy cleaning and maintenance.



One Touch Filter

Two Thermistors Control


Users can purchase a wired remote controller that includes a second thermistor, allowing for temperature checks from multiple locations.

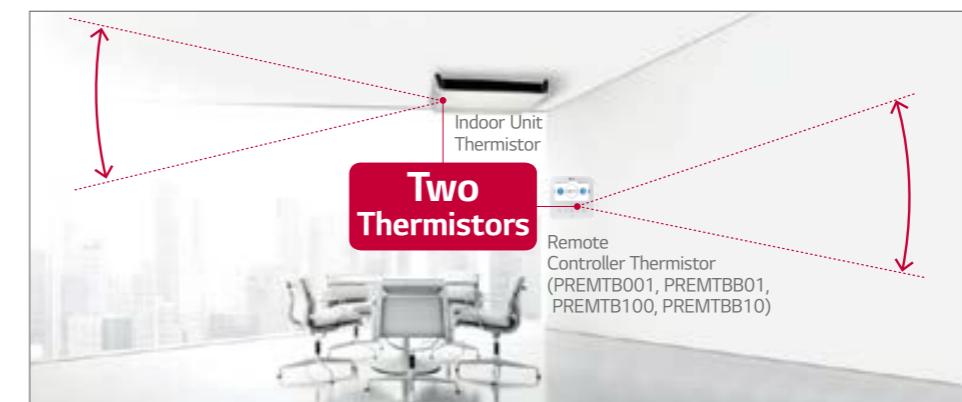

Two Thermistors
Indoor Unit Thermistor
Remote Controller Thermistor (PREMTB001, PREMTBB01, PREMTB100, PREMTBB10)

Easy installation

Installation speed and ease is improved by reducing the total number of screws used and placing the screws on the easily accessible front panel.

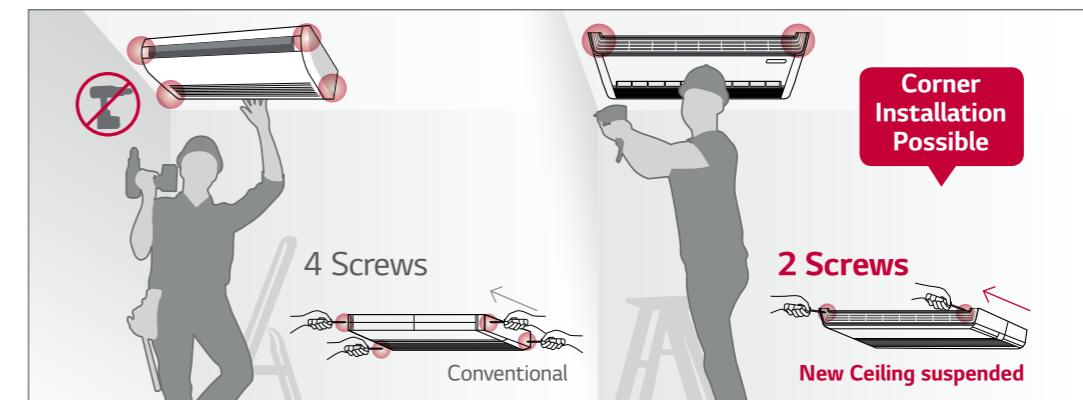

CEILING SUSPENDED



H-INVERTER (R32)

UV18FH / UV24FH / UV30FH



LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification
www.eurovent-certification.com

UUB1 U20 UUC1 U40



	COMBINATION			18	24	30
Capacity	Cooling	Min - Rated - Max	kW	2.0 / 5.0 / 6.0	2.7 / 6.8 / 8.3	3.2 / 8.0 / 9.5
	Heating	Min - Rated - Max	kW	2.3 / 5.8 / 7.0	3.0 / 7.5 / 9.4	3.6 / 8.9 / 10.6
Power Input (Set)	Cooling	Min - Rated - Max	kW	0.30 / 1.28 / 1.73	0.40 / 1.80 / 2.50	0.50 / 2.35 / 3.13
	Heating	Min - Rated - Max	kW	0.30 / 1.56 / 2.13	0.40 / 1.82 / 2.62	0.50 / 2.39 / 3.27
Running Current	Cooling	Rated	A	7.3	8	10.4
	Heating	Rated	A	8	8.1	10.6
EER / COP		kWh/kWh		3.90 / 3.71	3.77 / 4.11	3.41 / 3.72
SEER / SCOP		kWh/kWh		7.6 / 4.4	7.9 / 4.6	7.2 / 4.6
Pdesign	Cooling @ 35°C	kW		5	6.8	8
	Heating @ -10°C	kW		4.3	5.4	5.4
Seasonal Energy Label	Cooling / Heating	-		A++ / A+	A++ / A++	A++ / A++
Annual Energy Consumption	Cooling / Heating	kWh		230 / 1,368	301 / 1,644	389 / 1,644
Dehumidification Rate		I/h		1.9	2.0	2.8
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	47 / 52	48 / 52	50 / 52
ODU Sound Power Level	Cooling	Rated	dB(A)	63	65	68
	Liquid	mm (inch)		06.35 (1/4)	09.52 (3/8)	09.52 (3/8)
Piping Connections	Gas	mm (inch)		012.7 (1/2)	015.88 (5/8)	015.88 (5/8)
	Connections Method	-		Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max	°C	-15 - 50	-20 - 50	-20 - 50
	Heating	Min - Max	°C	-20 - 18	-20 - 18	-20 - 18
INDOOR			UV18FH N10	UV24FH N20	UV30FH N20	
Power Supply	Ø, V, Hz		1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	
Power Input (IDU)	H / M / L	W	17 / 15 / 13	35 / 32 / 27	35 / 32 / 27	
Air Flow Rate	H / M / L	m³ / min	12.5 / 11 / 10	23 / 21 / 19	23 / 21 / 19	
Dimensions	Body	W x H x D	mm	1,200 x 235 x 690	1,600 x 235 x 690	1,600 x 235 x 690
Weight	Body	kg		28.7	37.4	37.4
Sound Pressure Level	Cooling	H / M / L	dB (A)	41 / 39 / 38	43 / 42 / 40	43 / 42 / 40
Sound Power Level	Cooling	Max	dB (A)	55	60	60
Piping Connections	Drain(Natural Drainage) O.D. / I.D.	mm		025.0 / 20.5	025.0 / 20.5	025.0 / 20.5
	Drain(Using Drain Pump) O.D. / I.D.	mm		032.0 / 26.0	032.0 / 26.0	032.0 / 26.0
OUTDOOR			UUB1 U20	UUC1 U40		
Power Supply	Ø, V, Hz		1, 220-240, 50	1, 220-240, 50		
Circuit Breaker	Min	A	20	25		
Power Supply Cable (Included Earth)	No x mm³		3C x 2.5	3C x 2.5		
Dimensions	Net	W x H x D	mm	870 x 650 x 330	950 x 834 x 330	
Weight	Net	kg		44.5	57.7	
Compressor	Type	-		Twin Rotary	Twin Rotary	
	Type	-		R32	R32	
Refrigerant	GWP (Global Warming Potential)	-		675	675	
	Precharged Amount	kg		1.2	1.9	
	t-CO₂eq	-		0.81	1.283	
	Additional Charge (After 7.5m)	g / m		20	40	
Fan	Air Flow Rate	Rated	m³ / min x No.	50 x 1	58 x 1	
Total Piping Length	Min / Max	m		5 / 30	5 / 50	
Piping Elevation	IDU - ODU	Max	m	30	30	

- Note :
1. Due to our policy of innovation some specifications may be changed without notification.
 2. Performances are based on the following conditions (It is accordance with EN14511)
 - Cooling : Indoor Ambient Temp 27°CDB / 19°CWB, Outdoor Ambient Temp 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp 20°CDB / 15°CWB, Outdoor Ambient Temp 7°CDB / 6°CWB
 - Interconnected Pipe is standard length and difference of Elevation (Outdoor ~ Indoor Unit) is 0m.
 3. Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation.
 4. This product contains fluorinated greenhouse gases. (R32)

CEILING SUSPENDED



H-INVERTER (R32)

UV36FH / UV42FH



LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification
www.eurovent-certification.com

	COMBINATION			36	42
Capacity	Cooling	Min - Rated - Max	kW	3.8 - 9.5 - 12.8	4.8 - 12.1 - 14.5
	Heating	Min - Rated - Max	kW	4.3 - 10.8 - 13.7	5.4 - 13.5 - 16.2
Power Input (Set)	Cooling	Min - Rated - Max	kW	0.5 - 2.50 - 3.75	0.7 - 3.64 - 4.91
	Heating	Min - Rated - Max	kW	0.5 - 2.54 - 3.56	0.8 - 3.75 - 4.88
Running Current	Cooling	Rated	A	11.1	16
	Heating	Rated	A	11.4	16.5
EER / COP		kWh/kWh		3.80 / 4.25	3.32 / 3.60
SEER / SCOP		kWh/kWh		6.70 / 4.30	6.60 / 4.30
Pdesign	Cooling @ 35°C	kW		9.5	12.1
	Heating @ -10°C	kW		9.5	9.5
Seasonal Energy Label	Cooling / Heating	-		A++ / A+	- / -
Annual Energy Consumption	Cooling / Heating	kWh		496 / 3,093	1,100 / 3,093
Dehumidification Rate		I/h		3.6	5.52
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	50 / 50	51 / 52
ODU Sound Power Level	Cooling	Rated	dB(A)	66	69
	Liquid	mm (inch)		09.52 (3/8)	09.52 (3/8)
Piping Connections	Gas	mm (inch)		015.88 (5/8)	015.88 (5/8)
	Connections Method	-		Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max	°C	-20 - 52	-20 - 52
	Heating	Min - Max	°C	-25 - 18	-25 - 18
INDOOR			UV36FH N20	UV42FH N20	
Power Supply	Ø, V, Hz		1, 220-240, 50	1, 220-240, 50	
Power Input (IDU)	H / M / L	W	59 / 40 / 28	59 / 40 / 28	
Air Flow Rate	H / M / L	m³/min	30 / 25 / 20	30 / 25 / 20	
Dimensions	Body	W x H x D	mm	1,600 x 235 x 690	1,600 x 235 x 690
Weight	Body	kg		37.4	37.4
Sound Pressure Level	Cooling	H / M / L	dB (A)	48 / 44 / 40	48 / 44 / 40
Sound Power Level	Cooling	Max	dB (A)	62	62
Piping Connections	Drain(Natural Drainage) O.D. / I.D.	mm		025.0 / 20.5	025.0 / 20.5
	Drain(Using Drain Pump) O.D. / I.D.	mm		032.0 / 26.0	032.0 / 26.0
OUTDOOR			UUD1 U30		
Power Supply	Ø, V, Hz		1, 220-240, 50		
Circuit Breaker	Min	A	40		
Power Supply Cable (Included Earth)	No x mm³		3C x 6.0		
Dimensions	Net	W x H x D	mm	950 x 1,380 x 330	
Weight	Net	kg		85	
Compressor	Type	-		Inverter Scroll	
	Type	-		R32	
Refrigerant	GWP (Global Warming Potential)	-		675	
	Precharged Amount	kg		3.0	
	t-CO₂eq	-		2.025	
	Additional Charge (After 7.5m)	g/m		40	
Fan	Air Flow Rate	Rated	m³/min x No.	55 x 2	
Total Piping Length	Min / Max	m		5 / 85	
Piping Elevation	IDU - ODU	Max	m	30	

- Note :
1. Due to our policy of innovation some specifications may be changed without notification.
 2. Performances are based on the following conditions (It is accordance with EN14511)
 - Cooling : Indoor Ambient Temp 27°CDB / 19°CWB, Outdoor Ambient Temp 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp 20°CDB / 15°CWB, Outdoor Ambient Temp 7°CDB / 6°CWB
 - Interconnected Pipe is standard length and difference of Elevation (Outdoor ~ Indoor Unit) is 0m.
 3. Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation.
 4. This product contains fluorinated greenhouse gases. (R32)

CEILING SUSPENDED



H-INVERTER (R32)

UV36FH / UV42FH



LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification
: www.eurovent-certification.com

UUD3 U30



COMBINATION			36	42
Capacity	Cooling	Min - Rated - Max	kW	3.8 / 9.5 / 12.8
	Heating	Min - Rated - Max	kW	4.3 / 10.8 / 13.7
Power Input (Set)	Cooling	Min - Rated - Max	kW	0.50 / 2.50 / 3.75
	Heating	Min - Rated - Max	kW	0.50 / 2.54 / 3.56
Running Current	Cooling	Rated	A	4.0
	Heating	Rated	A	4.1
EER / COP		kWh/kWh		3.80 / 4.25
SEER / SCOP		kWh/kWh		6.7 / 4.3
Pdesign	Cooling @ 35°C	kW		9.5
	Heating @ -10°C	kW		9.5
Seasonal Energy Label	Cooling / Heating	-		A++ / A+
Annual Energy Consumption	Cooling / Heating	kWh		496 / 3,093
Dehumidification Rate		I/h		3.6
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	50 / 50
ODU Sound Power Level	Cooling	Rated	dB(A)	66
	Liquid		mm (inch)	Ø9.52 (3/8)
Piping Connections	Gas		mm (inch)	Ø15.88 (5/8)
	Connections Method	-		Flared
Operation Range (Outdoor)	Cooling	Min - Max	°C	-20 - 52
	Heating	Min - Max	°C	-25 - 18
INDOOR			UV36FH N20	UV42FH N20
Power Supply		Ø, V, Hz		1,220-240, 50
Power Input (IDU)	H / M / L	W		59 / 40 / 28
Air Flow Rate	H / M / L	m³/min		30 / 25 / 20
Dimensions	Body	W x H x D	mm	1,600 x 235 x 690
Weight	Body	kg		37.4
Sound Pressure Level	Cooling	H / M / L	dB (A)	48 / 44 / 40
Sound Power Level	Cooling	Max	dB (A)	62
Piping Connections	Drain(Natural Drainage) O.D. / I.D.	mm		Ø25.0 / 20.5
	Drain(Using Drain Pump) O.D. / I.D.	mm		Ø32.0 / 26.0
OUTDOOR			UUD3 U30	
Power Supply		Ø, V, Hz		3, 380-415, 50
Circuit Breaker	Min	A		20
Power Supply Cable (Included Earth)		No x mm³		5C x 2.5
Dimensions	Net	W x H x D	mm	950 x 1,380 x 330
Weight	Net	kg		85
Compressor	Type	-		Inverter Scroll
	Type	-		R32
Refrigerant	GWP (Global Warming Potential)	-		675
	Precharged Amount	kg		3.0
	t-CO₂eq	-		2.025
	Additional Charge (After 7.5m)	g/m		40
Fan	Air Flow Rate	Rated	m³/min x No.	55 x 2
Total Piping Length		Min / Max	m	5 / 85
Piping Elevation	IDU - ODU	Max	m	30

- Note :
1. Due to our policy of innovation some specifications may be changed without notification.
 2. Performances are based on the following conditions (It is accordance with EN14511)
 - Cooling : Indoor Ambient Temp 27°CDB / 19°CWB, Outdoor Ambient Temp 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp 20°CDB / 15°CWB, Outdoor Ambient Temp 7°CDB / 6°CWB
 - Interconnected Pipe is standard length and difference of Elevation (Outdoor ~ Indoor Unit) is 0m.
 3. Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation
 4. This product contains fluorinated greenhouse gases (R32)

CEILING SUSPENDED



STANDARD INVERTER (R32)

UV18F / UV24F / UV30F



LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification
: www.eurovent-certification.com

UUB1 U20 UUC1 U40



COMBINATION			18	24	30
Capacity	Cooling	Min - Rated - Max	kW	2.0 / 5.0 / 5.8	2.7 / 6.7 / 8.0
	Heating	Min - Rated - Max	kW	2.3 / 5.8 / 6.7	3.0 / 7.5 / 9.0
Power Input (Set)	Cooling	Min - Rated - Max	kW	0.30 / 1.33 / 1.86	0.40 / 1.99 / 2.69
	Heating	Min - Rated - Max	kW	0.40 / 1.76 / 2.46	0.40 / 2.2 / 3.08
Running Current	Cooling	Rated	A	7.5	8.8
	Heating	Rated	A	8.3	9.8
EER / COP		kWh/kWh		3.75 / 3.29	3.37 / 3.41
SEER / SCOP		kWh/kWh		6.6 / 4.3	7.2 / 4.2
Pdesign	Cooling @ 35°C	kW		5	6.7
	Heating @ -10°C	kW		4.2	4.9
Seasonal Energy Label	Cooling / Heating	-		A++ / A+	A++ / A+
Annual Energy Consumption	Cooling / Heating	kWh		265 / 1,368	326 / 1,633
Dehumidification Rate		I/h		1.8	2.7
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	47 / 52	48 / 52
ODU Sound Power Level	Cooling	Rated	dB(A)	63	65
	Liquid		mm (inch)	Ø6.35 (1/4)	Ø9.52 (3/8)
Piping Connections	Gas		mm (inch)	Ø12.7 (1/2)	Ø15.88 (5/8)
	Connections Method	-		Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max	°C	-15 - 50	-20 - 50
	Heating	Min - Max	°C	-20 - 18	-20 - 18
INDOOR			UV18F N10	UV24F N10	UV30F N10
Power Supply		Ø, V, Hz		1,220-240, 50	1,220-240, 50
Power Input (IDU)	H / M / L	W		17 / 15 / 13	33 / 26 / 19
Air Flow Rate	H / M / L	m³/min		13 / 12 / 11	16 / 15 / 14
Dimensions	Body	W x H x D	mm	1,200 x 235 x 690	1,200 x 235 x 690
Weight	Body	kg		27.3	28
Sound Pressure Level	Cooling	H / M / L	dB(A)	42 / 40 / 39	46 / 45 / 43
Sound Power Level	Cooling	Max	dB(A)	55	61
Piping Connections	Drain(Natural Drainage) O.D. / I.D.	mm		Ø25.0 / 20.5	Ø25.0 / 20.5
	Drain(Using Drain Pump) O.D. / I.D.	mm		Ø32.0 / 26.0	Ø32.0 / 26.0
OUTDOOR			UUB1 U20	UUC1 U40	
Power Supply		Ø, V, Hz		1,220-240, 50	1,220-240, 50
Circuit Breaker	Min	A		20	25
Power Supply Cable (Included Earth)		No x mm³		3C x 2.5	3C x 2.5
Dimensions	Net	W x H x D	mm	870 x 650 x 330	950 x 834 x 330
Weight	Net	kg		44.5	57.7
Compressor	Type	-		Twin Rotary	Twin Rotary
	Type	-		R32	R32
Refrigerant	GWP (Global Warming Potential)	-		675	675
	Precharged Amount	kg		1.2	1.9
	t-CO₂eq	-		0.81	1.283
	Additional Charge (After 7.5m)	g/m		20	40
Fan	Air Flow Rate	Rated	m³/min x No.	50 x 1	58 x 1
Total Piping Length		Min / Max	m	5 / 30	5 / 50
Piping Elevation	IDU - ODU	Max	m	30	30

- Note :
1. Due to our policy of innovation some specifications may be changed without notification.
 2. Performances are based on the following conditions (It is accordance with EN14511)
 - Cooling : Indoor Ambient Temp 27°CDB / 19°CWB, Outdoor Ambient Temp 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp 20°CDB / 15°CWB, Outdoor Ambient Temp 7°CDB / 6°CWB
 - Interconnected Pipe is standard length and difference of Elevation (Outdoor ~ Indoor Unit) is 0m.
 3. Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation
 4. This product contains fluorinated greenhouse gases (R32)

CEILING SUSPENDED UNIT



STANDARD INVERTER (R32)

UV36F / UV42F / UV48F / UV60F



LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification : www.eurovent-certification.com

UUID1 U30



COMBINATION		36	42	48	60
Capacity	Cooling	Min - Rated - Max kW	3.8 - 9.5 - 12.5	4.8 - 12.1 - 14.2	5.4 - 13.4 - 15.7
	Heating	Min - Rated - Max kW	4.3 - 10.8 - 13.4	5.4 - 13.5 - 15.8	6.2 - 15.5 - 17.5
Power Input (Set)	Cooling	Min - Rated - Max kW	0.50 - 2.65 - 4.03	0.80 - 3.90 - 5.07	0.90 - 4.50 - 5.85
	Heating	Min - Rated - Max kW	0.50 - 2.60 - 3.54	0.80 - 3.75 - 4.88	1.10 - 5.33 - 5.97
Running Current	Cooling	Rated A	11.7	17.0	19.7
	Heating	Rated A	11.4	16.5	20.6
EER / COP		kWh/kWh	3.59 / 4.15	3.10 / 3.60	2.98 / 3.25
SEER / SCOP		kWh/kWh	6.3 / 4.1	6.3 / 4.1	5.9 / 4.1
Pdesign	Cooling @ 35°C	kW	9.5	12.1	13.4
	Heating @ -10°C	kW	9.5	9.5	9.5
Seasonal Energy Label	Cooling / Heating	-	A++ / A+	- / -	- / -
Annual Energy Consumption	Cooling / Heating	kWh	528 / 3,244	1,152 / 3,244	1,363 / 3,244
Dehumidification Rate		l/h	3.6	5.5	6.3
ODU Sound Pressure Level	Cooling / Heating	dB(A)	50 / 50	51 / 52	52 / 53
ODU Sound Power Level	Cooling	dB(A)	66	69	71
	Liquid	mm (inch)	09.52 (3/8)	09.52 (3/8)	09.52 (3/8)
Piping Connections	Gas	mm (inch)	015.88 (5/8)	015.88 (5/8)	015.88 (5/8)
	Connections Method	-	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling Min - Max °C		-20 - 52	-20 - 52	-20 - 52
	Heating Min - Max °C		-25 - 18	-25 - 18	-25 - 18
INDOOR		UV36F N20	UV42F N20	UV48F N20	UV60F N20
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)	H / M / L	W	50 / 35 / 28	50 / 40 / 28	59 / 40 / 28
Air Flow Rate	H / M / L	m³/min	28 / 24 / 20	28 / 24 / 20	30 / 25 / 20
Dimensions	Body	W x H x D mm	1,600 x 235 x 690	1,600 x 235 x 690	1,600 x 235 x 690
Weight	Body	kg	36.7	36.7	36.7
Sound Pressure Level	Cooling	H / M / L	46 / 43 / 40	46 / 43 / 40	48 / 44 / 40
Sound Power Level	Cooling	Max dB(A)	62	62	63
Piping Connections	Drain(Natural Drainage) O.D. / I.D.	mm	025.0 / 20.5	025.0 / 20.5	025.0 / 20.5
	Drain(Using Drain Pump) O.D. / I.D.	mm	032.0 / 26.0	032.0 / 26.0	032.0 / 26.0
OUTDOOR		UUID1 U30			
Power Supply	Ø, V, Hz		1, 220-240, 50		
Circuit Breaker	Min	A	40		
Power Supply Cable (Included Earth)	No x mm²		3C x 6.0		
Dimensions	Net	W x H x D mm		950 x 1,380 x 330	
Weight	Net	kg		85	
Compressor	Type	-		Inverter Scroll	
	Type	-		R32	
	GWP (Global Warming Potential)	-		675	
Refrigerant	Precharged Amount	kg		3.0	
	t-CO₂eq	-		2.025	
	Additional Charge (After 7.5m)	g/m		40	
Fan	Air Flow Rate	Rated m³/min x No.		55 x 2	
Total Piping Length	Min / Max m			5 / 85	
Piping Elevation	IDU - ODU	Max m		30	

- Note :
1. Due to our policy of innovation some specifications may be changed without notification.
 2. Performances are based on the following conditions (It is accordance with EN14511)
 - Cooling : Indoor Ambient Temp 27°CDB / 19°CWB, Outdoor Ambient Temp 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp 20°CDB / 15°CWB, Outdoor Ambient Temp 7°CDB / 6°CWB
 - Interconnected Pipe is standard length and difference of Elevation (Outdoor ~ Indoor Unit) is 0m.
 3. Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation
 4. This product contains fluorinated greenhouse gases (R32)

CEILING SUSPENDED UNIT



STANDARD INVERTER (R32)

UV36F / UV42F / UV48F / UV60F



LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification : www.eurovent-certification.com

COMBINATION		36	42	48	60
Capacity	Cooling	Min - Rated - Max kW	3.8 - 9.5 - 12.5	4.8 - 12.1 - 14.2	5.4 - 13.4 - 15.7
	Heating	Min - Rated - Max kW	4.3 - 10.8 - 13.4	5.4 - 13.5 - 15.8	6.2 - 15.5 - 17.5
Power Input (Set)	Cooling	Min - Rated - Max kW	0.50 - 2.65 - 4.03	0.80 - 3.90 - 5.07	0.90 - 4.50 - 5.85
	Heating	Min - Rated - Max kW	0.50 - 2.60 - 3.54	0.80 - 3.75 - 4.88	1.10 - 5.33 - 5.97
Running Current	Cooling	Rated A	11.7	17.0	19.7
	Heating	Rated A	11.4	16.5	20.6
EER / COP		kWh/kWh	3.59 / 4.15	3.10 / 3.60	2.98 / 3.25
SEER / SCOP		kWh/kWh	6.3 / 4.1	6.3 / 4.1	5.9 / 4.1
Pdesign	Cooling @ 35°C	kW	9.5	12.1	13.4
	Heating @ -10°C	kW	9.5	9.5	9.5
Seasonal Energy Label	Cooling / Heating	-	A++ / A+	- / -	- / -
Annual Energy Consumption	Cooling / Heating	kWh	528 / 3,244	1,152 / 3,244	1,363 / 3,244
Dehumidification Rate		l/h	3.6	5.5	6.3
ODU Sound Pressure Level	Cooling / Heating	dB(A)	50 / 50	51 / 52	52 / 53
ODU Sound Power Level	Cooling	dB(A)	66	69	71
	Liquid	mm (inch)	09.52 (3/8)	09.52 (3/8)	09.52 (3/8)
Piping Connections	Gas	mm (inch)	015.88 (5/8)	015.88 (5/8)	015.88 (5/8)
	Connections Method	-	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling Min - Max °C		-20 - 52	-20 - 52	-20 - 52
	Heating Min - Max °C		-25 - 18	-25 - 18	-25 - 18
INDOOR		UV36F N20	UV42F N20	UV48F N20	UV60F N20
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)	H / M / L	W	50 / 35 / 28	50 / 40 / 28	59 / 40 / 28
Air Flow Rate	H / M / L	m³/min	28 / 24 / 20	28 / 24 / 20	30 / 25 / 20
Dimensions	Body	W x H x D mm	1,600 x 235 x 690	1,600 x 235 x 690	1,600 x 235 x 690
Weight	Body	kg	36.7	36.7	36.7
Sound Pressure Level	Cooling	H / M / L	46 / 43 / 40	46 / 43 / 40	48 / 44 / 40
Sound Power Level	Cooling	Max dB(A)	62	62	63
Piping Connections	Drain(Natural Drainage) O.D. / I.D.	mm	025.0 / 20.5	025.0 / 20.5	025.0 / 20.5
	Drain(Using Drain Pump) O.D. / I.D.	mm	032.0 / 26.0	032.0 / 26.0	032.0 / 26.0
OUTDOOR		UUID1 U30			
Power Supply	Ø, V, Hz		1, 220-240, 50		
Circuit Breaker	Min	A	40		
Power Supply Cable (Included Earth)	No x mm²		3C x 6.0		
Dimensions	Net	W x H x D mm		950 x 1,380 x 330	
Weight	Net	kg		85	
Compressor	Type	-		Inverter Scroll	
	Type	-		R32	
	GWP (Global Warming Potential)	-		675	
Refrigerant	Precharged Amount	kg		3.0	
	t-CO₂eq	-		2.025	
	Additional Charge (After 7.5m)	g/m		40	
Fan	Air Flow Rate	Rated m³/min x No.		55 x 2	
Total Piping Length	Min / Max m			5 / 85	
Piping Elevation	IDU - ODU	Max m		30	

- Note :
1. Due to our policy of innovation some specifications may be changed without notification.
 2. Performances are based on the following conditions (It is accordance with EN14511)
 - Cooling : Indoor Ambient Temp 27°CDB / 19°CWB, Outdoor Ambient Temp 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp 20°CDB / 15°CWB, Outdoor Ambient Temp 7°CDB / 6°CWB
 - Interconnected Pipe is standard length and difference of Elevation (Outdoor ~ Indoor Unit) is 0m.
 3. Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation
 4. This product contains fluorinated greenhouse gases (R32)

CEILING SUSPENDED UNIT



COMPACT INVERTER (R32)

UV18F / UV24F / UV30F / UV36F



LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification
: www.eurovent-certification.com

UUA1 ULO UUB1 U20 UUC1 U40



COMBINATION		18	24	30	36
Capacity					
Cooling	Min - Rated - Max kW	1.8 / 5.0 / 5.5	2.7 / 6.8 / 7.5	3.0 / 7.5 / 8.3	3.8 / 9.5 / 10.5
Heating	Min - Rated - Max kW	2.2 / 5.3 / 5.8	2.9 / 7.3 / 8.4	3.2 / 8.0 / 8.8	4.1 / 10.3 / 11.5
Power Input (Set)					
Cooling	Min - Rated - Max kW	0.32 / 1.62 / 1.93	0.40 / 2.06 / 2.47	0.50 / 2.42 / 2.90	0.70 / 3.28 / 3.87
Heating	Min - Rated - Max kW	0.30 / 1.44 / 1.86	0.40 / 2.23 / 2.90	0.50 / 2.48 / 3.22	0.60 / 2.78 / 3.45
Running Current					
Cooling	Rated A	7.2	9.0	10.6	14.6
Heating	Rated A	6.4	9.7	10.8	12.3
EER / COP	kWh/kWh	3.10 / 3.70	3.30 / 3.28	3.10 / 3.23	2.90 / 3.70
SEER / SCOP	kWh/kWh	6.6 / 4.6	6.6 / 4.2	6.6 / 4.3	6.1 / 4.2
Pdesign	Cooling @ 35°C kW	5	6.8	7.5	9.5
	Heating @ -10°C kW	2.9	4.3	4.4	5.5
Seasonal Energy Label	Cooling / Heating	-	A++ / A++	A++ / A+	A++ / A+
Annual Energy Consumption	Cooling / Heating kWh	265 / 883	361 / 1,433	398 / 1,433	545 / 1,833
Dehumidification Rate	I/h	1.7	2.4	2.8	3.6
ODU Sound Pressure Level	Cooling / Heating Rated dB(A)	49 / 52	48 / 53	50 / 54	54 / 56
ODU Sound Power Level	Cooling dB(A)	65	65	67	70
Piping Connections	Liquid mm (inch)	Ø6.35 (1/4)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas mm (inch)	Ø12.7 (1/2)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
Operation Range (Outdoor)	Connections Method	-	Flared	Flared	Flared
	Cooling Min - Max °C	-10 - 50	-10 - 48	-10 - 48	-20 - 50
	Heating Min - Max °C	-10 - 18	-15 - 18	-15 - 18	-15 - 18
INDOOR		UV18F N10	UV24F N10	UV30F N10	UV36F N20
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)	H / M / L W	17 / 15 / 13	33 / 26 / 19	47 / 40 / 33	50 / 35 / 28
Air Flow Rate	H / M / L m³ / min	13 / 12 / 11	16 / 15 / 14	19 / 17.5 / 16	28 / 24 / 20
Dimensions	Body W x H x D mm	1,200 x 235 x 690	1,200 x 235 x 690	1,200 x 235 x 690	1,600 x 235 x 690
Weight	Body kg	27.3	28	28	36.7
Sound Pressure Level	Cooling H / M / L dB(A)	42 / 40 / 39	46 / 45 / 43	46 / 44 / 43	46 / 43 / 40
Sound Power Level	Cooling Max dB(A)	55	61	62	62
Piping Connections	Drain(Natural Drainage) O.D. / I.D. mm	Ø25.0 / 20.5	Ø25.0 / 20.5	Ø25.0 / 20.5	Ø25.0 / 20.5
	Drain(Using Drain Pump) O.D. / I.D. mm	Ø32.0 / 26.0	Ø32.0 / 26.0	Ø32.0 / 26.0	Ø32.0 / 26.0
OUTDOOR		UUA1 ULO	UUB1 U20	UUC1 U40	
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	
Circuit Breaker	Min A	15	20	25	
Power Supply Cable (Included Earth)	No x mm³	3C x 1.5	3C x 2.5	3C x 2.5	
Dimensions	Net W x H x D mm	770 x 545 x 288	870 x 650 x 330	950 x 834 x 330	
Weight	Net kg	33.3	44.5	57.7	
Compressor	Type	Twin Rotary	Twin Rotary	Twin Rotary	
	Type	R32	R32	R32	
Refrigerant	GWP (Global Warming Potential)	675	675	675	
	Precharged Amount kg	1.0	1.2	1.9	
	t-CO ₂ eq	0.675	0.81	1.283	
	Additional Charge (After 7.5m) g/m	20	40	40	
Fan	Air Flow Rate Rated m³/min x No.	28 x 1	50 x 1	58 x 1	
Total Piping Length	Min / Max m	5 / 30	5 / 35	5 / 50	
Piping Elevation	IDU - ODU Max m	30	30	30	

Note :


1. Due to our policy of innovation some specifications may be changed without notification.
2. Performances are based on the following conditions (It is accordance with EN14511)
 - Cooling : Indoor Ambient Temp 27°CDB / 19°CWB, Outdoor Ambient Temp 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp 20°CDB / 15°CWB, Outdoor Ambient Temp 7°CDB / 6°CWB
 - Interconnected Pipe is standard length and difference of Elevation (Outdoor ~ Indoor Unit) is 0m.
3. Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation.
4. This product contains fluorinated greenhouse gases. (R32)



CONSOLE


Optimized Air Flow for Cooling & Heating

During cooling operation, the vane adjusts upwards to direct air flow toward the ceiling. During heating operation, the van directs the air flow toward the floor to balance out the room temperature. A wireless controller is included with the indoor console unit.

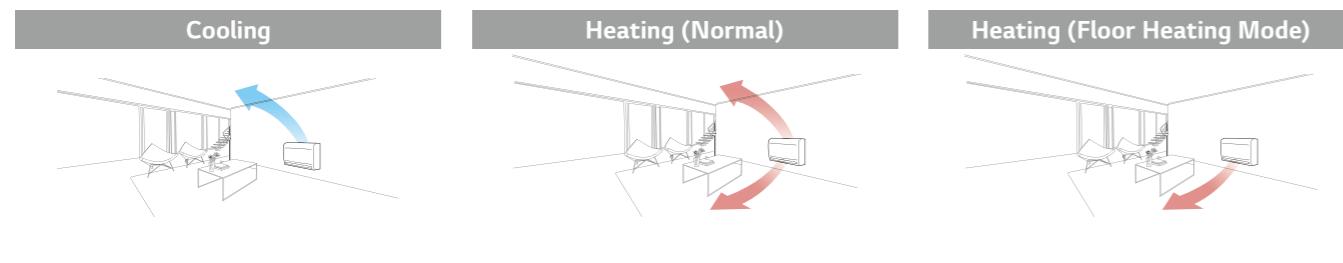

Quick Floor Heating


Console air conditioners portray high speed and powerful performance. Using the floor heating mode, console air conditioners provide floor heating at a faster pace in order to reach desired temperature more quickly.

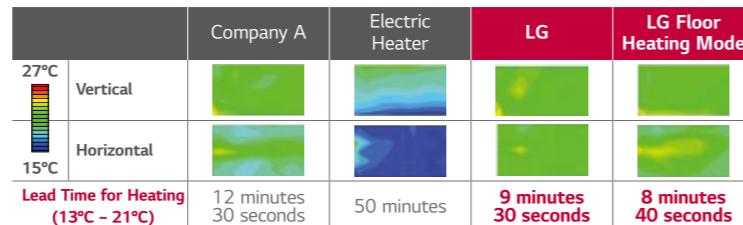

(Test Condition : Target Temp 23°C, Indoor Room : 13°C~, Outdoor Room : 7°C)


5-Step Vane Control

There are 5 different stages to control air flow direction.

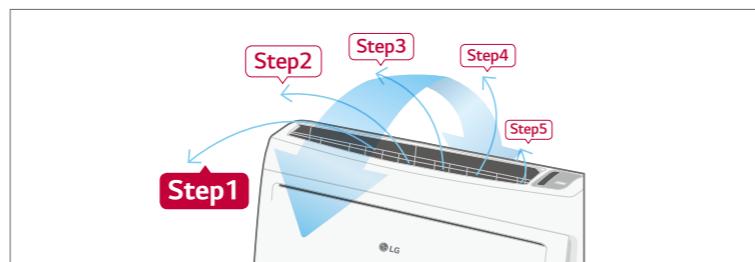


Easy Installation and Service

6 Different Ways to Install Piping

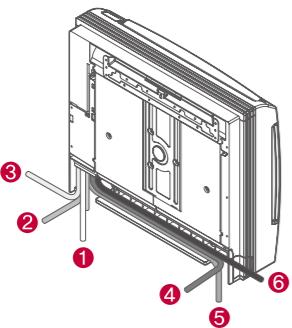

Easy Slide-type PCB

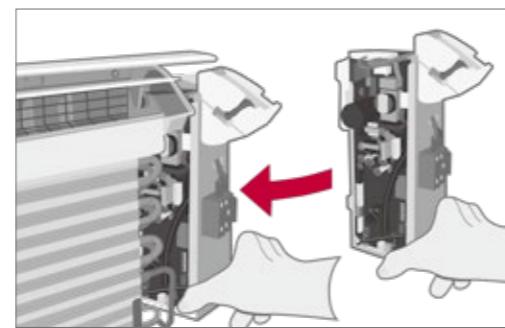

CONSOLE



STANDARD INVERTER (R32)

UQ09F
UQ12F
UQ18F



LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification
www.eurovent-certification.com

UUA1 ULO UUB1 U20



COMBINATION	9	12	18
Capacity	Cooling Min ~ Rated ~ Max kW 1.5 / 2.6 / 3.4 Heating Min ~ Rated ~ Max kW 1.6 / 3.1 / 3.9		
Power Input (Set)	Cooling Min ~ Rated ~ Max kW 0.30 / 0.65 / 0.91 Heating Min ~ Rated ~ Max kW 0.30 / 0.74 / 1.08	0.30 / 1.00 / 1.46 0.30 / 1.05 / 1.58	0.40 / 1.75 / 2.45 0.30 / 1.56 / 2.11
Running Current	Cooling Rated A 2.9 Heating Rated A 3.3	4.4 4.7	8.3 8.0
EER / COP		kWh/kWh 4.00 / 4.20 kWh/kWh 6.5 / 4.0	3.50 / 3.80 6.4 / 4.0
SEER / SCOP			2.85 / 3.14 5.8 / 3.8
Pdesign	Cooling @ 35°C kW 2.6 Heating @ -10°C kW 2.8	3.5 3	5 3.8
Seasonal Energy Label	Cooling / Heating - A++ / A+	A++ / A+	A+ / A
Annual Energy Consumption	Cooling / Heating kWh 140 / 980	191 / 1,050	302 / 1,396
Dehumidification Rate	I/h 0.7	1.3	2.4
ODU Sound Pressure Level	Cooling / Heating Rated dB(A) 49 / 52	49 / 52	47 / 52
ODU Sound Power Level	Cooling Rated dB(A) 65	65	63
Piping Connections	Liquid mm (inch) 06.35 (1/4) Gas mm (inch) 09.52 (3/8)	06.35 (1/4) 09.52 (3/8)	06.35 (1/4) 012.7 (1/2)
Connections Method	- Flared	Flared	Flared
Operation Range (Outdoor)	Cooling Min ~ Max °C -15 ~ 50 Heating Min ~ Max °C -20 ~ 18	-15 ~ 50 -20 ~ 18	-15 ~ 50 -20 ~ 18
INDOOR	UQ09F NAO	UQ12F NAO	UQ18F NAO
Power Supply	Ø, V, Hz 1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)	H / M / L W 37 / 30 / 25	37 / 30 / 25	44 / 39 / 35
Air Flow Rate	H / M / L m³/min 8.5 / 6.7 / 5.0	8.5 / 6.7 / 5.0	10.1 / 8.6 / 7.2
Dimensions	Body W x H x D mm 700 x 600 x 210	700 x 600 x 210	700 x 600 x 210
Weight	Body kg 16.3	16.3	16.3
Sound Pressure Level	Cooling H / M / L dB(A) 38 / 32 / 27	38 / 32 / 27	44 / 39 / 35
Sound Power Level	Cooling Max dB(A) 59	59	60
Piping Connections	Drain O.D. / I.D. mm 016.7 / 12.2	016.7 / 12.2	016.7 / 12.2
OUTDOOR	UUA1 ULO	UUB1 U20	
Power Supply	Ø, V, Hz 1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Circuit Breaker	Min A 15	15	20
Power Supply Cable (Included Earth)	No x mm³ 3C x 1.5	3C x 1.5	3C x 2.5
Dimensions	Net W x H x D mm 770 x 545 x 288	770 x 545 x 288	870 x 650 x 330
Weight	Net kg 33.3	33.3	44.5
Compressor	Type - Twin Rotary	Twin Rotary	Twin Rotary
	Type - R32	R32	R32
GWP (Global Warming Potential)	- 675	675	675
Refrigerant	Precharged Amount kg 1.0	1.0	1.2
	t-CO ₂ eq - 0.675	0.675	0.81
	Additional Charge (After 7.5m) g/m 20	20	20
Fan	Air Flow Rate Rated m³/min x No. 28 x 1	28 x 1	50 x 1
Total Piping Length	Min / Max m 5 / 30	5 / 30	5 / 30
Piping Elevation	IDU - ODU Max m 30	30	30

Note :

- Due to our policy of innovation some specifications may be changed without notification.
- Performances are based on the following conditions (It is accordance with EN14511)
 - Cooling : Indoor Ambient Temp 27°CDB / 19°CWB, Outdoor Ambient Temp 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp 20°CDB / 15°CWB, Outdoor Ambient Temp 7°CDB / 6°CWB
 - Interconnected Pipe is standard length and difference of Elevation (Outdoor ~ Indoor Unit) is 0m.
- Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation.
- This product contains fluorinated greenhouse gases. (R32)

FLOOR STANDING



SINGLE SPLIT KEY FEATURES

FLOOR STANDING

Stylish Design


The new LG floor standing air conditioner which is Red Dot design award winner 2013, is ideal for modern interiors in your home or office.



reddot design award
winner 2013


Quick Response

Offering powerful cooling, the commercial air conditioning system can reach a set temperature in a shorter period of time. Meanwhile, the Power Heating function provides the optimal airflow angle, guaranteeing a faster heating performance.

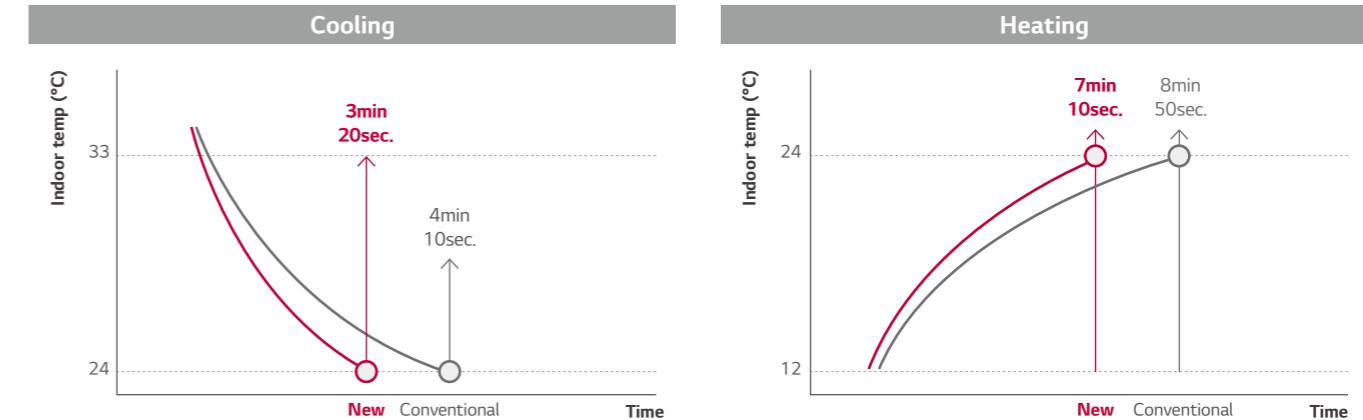

Powerful Air Flow

The new LG floor standing air conditioner is efficient for using in large areas due to its powerful cooling and heating operation. The powerful air speed and volume means the air flow can reach up to 20m away from the air conditioner.

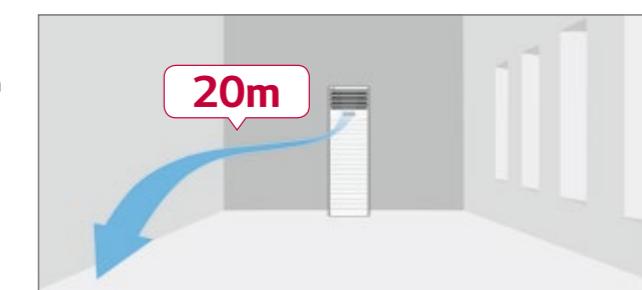

FLOOR STANDING

STANDARD INVERTER (R410A)

UP48 / UP49



LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification
www.eurovent-certification.com



UU48W U32 UU49W U32



INDOOR			UP48 NT2	UP49 NT2
Capacity	Cooling	Min / Nom / Max	kW	6.0 / 13.4 / 15.2
	Heating	Min / Nom / Max	kW	6.0 / 15.5 / 17.1
Low Temperature Capacity	Heating -7°C	Max	kW	16.0
	Cooling	Nom	kW	4.2
Power Input (Set)	Heating	Nom	kW	4.5
Power Input (Indoor)	Nom	W		200
Running Current	Cooling / Heating	Nom	A	18.1 / 19.5
Power Supply		Ø, V, Hz		5.76 / 6.20
EER				1, 220-240, 50
COP				3.21
SEER				3.41
SCOP				5.05
Pdesign (@ -10°C)		kW		3.51
Seasonal Energy Label	Cooling / Heating			11.5
Annual Energy Consumption	Cooling / Heating	kWh		11.5
Liquid		mm (inch)		0.952 (3/8)
Piping Connection	Gas	mm (inch)		0.1588 (5/8)
Drain	O.D. / I.D.	mm		32 / 25
Air Flow Rate	High / Medium / Low	m³/min		31 / 27 / 23
Sound Pressure	High / Medium / Low	dB(A)		31 / 27 / 23
Sound Power	Cooling	Max	dB(A)	52 / 49 / 45
Dehumidification Rate		l/h		65
Dimensions	Body	W x H x D	mm	590 x 1,840 x 460
Net Weight	Body	kg		590 x 1,840 x 460
OUTDOOR			UU48W U32	UU49W U32
Compressor	Type		Twin Rotary	Twin Rotary
Airflow Rate	Nom	m³/min		110
Sound Pressure	Cooling	Nom	dB(A)	52
	Heating	Nom	dB(A)	54
Sound Power	Cooling	Max	dB(A)	72
Dimensions	W x H x D	mm		68
Net Weight	kg		950 x 1,380 x 330	950 x 1,380 x 330
Type		R410A		R410A
Refrigerant	Charge	g		3,400
	Additional Charge	g/m		40
GWP	-		2087.5	2087.5
TCO2eq	-		7.1	7.1
Operation Range (Outdoor)	Cooling	Min / Max	°C DB	-15 / 48
	Heating	Min / Max	°C WB	-18 / 18
Power Supply	Ø, V, Hz		1, 220-240, 50	3, 380-415, 50
Power Supply Cable	No. x mm²		3C x 5.0	5C x 5.0
Transmission Cable	No. x mm²		4C x 0.75	4C x 0.75
Circuit Breaker	A		40	20
Piping Length Total	Min / Max	m	5 / 75	5 / 75
Piping Elevation Difference	IDU - ODU	Max	m	30
Piping Connection	Liquid	mm (inch)		0.952 (3/8)
	Gas	mm (inch)		0.1588 (5/8)

Note :

1. Due to our policy of innovation some specifications may be changed without notification.
2. Performances are based on the following conditions (It is accordance with EN14511)
 - Cooling : Indoor Ambient Temp 27°CDB / 19°CWB, Outdoor Ambient Temp 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp 20°CDB / 15°CWB, Outdoor Ambient Temp 7°CDB / 6°CWB
 - Interconnected Pipe is standard length and difference of Elevation (Outdoor ~ Indoor Unit) is 0m.
3. Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation.
4. This product contains fluorinated greenhouse gases. (R410A)


WALL MOUNTED UNIT



WALL MOUNTED

Wide Operational Range


Ideal and comprehensive solution for server rooms, machine rooms and kitchens.

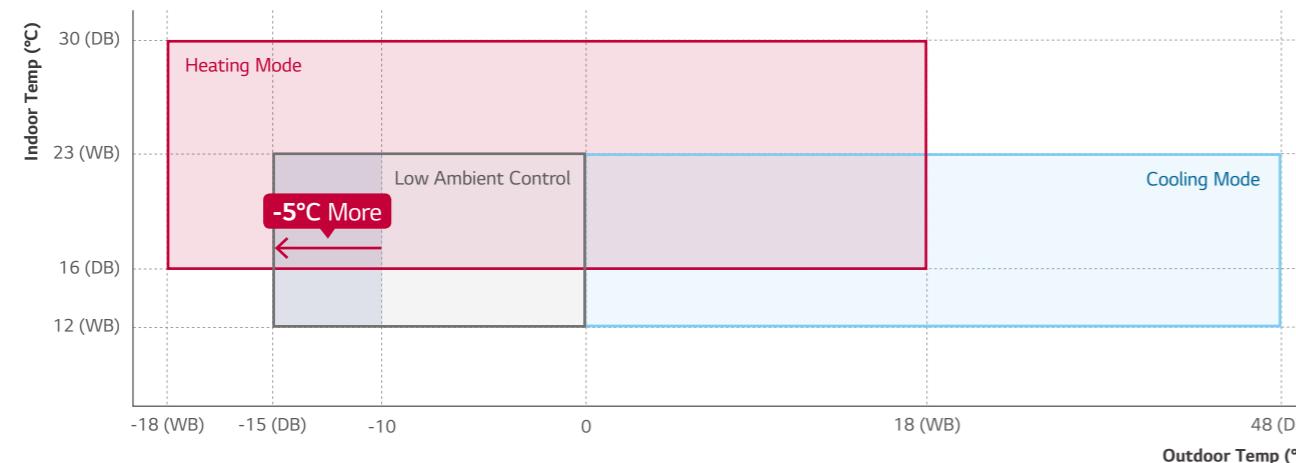

Easy Installation


Detachable Bottom Cover

The bottom cover is detachable when needed, making installation easier. Disassembly or additional support of the unit is unnecessary. Installation can be completed by one individual with LG's patented support tool.

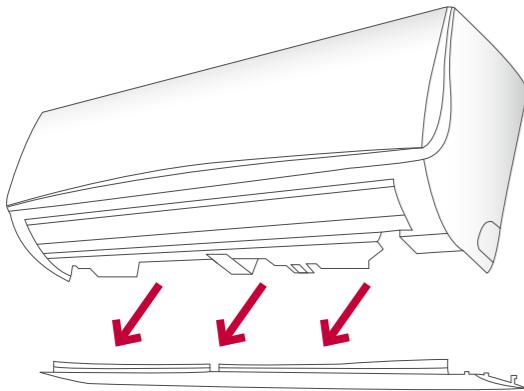

Installation Support Clip

A support clip creates adequate space between the wall and the unit for easier installation.

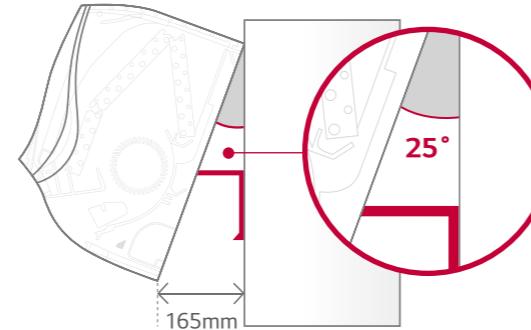


WALL MOUNTED

High Energy Efficiency

New wall mounted units provide good seasonal energy efficiency connected with Standard Inverter outdoor units.


	8.0kW	9.5kW
SEER	7.0 (A++)	6.1 (A++)
SCOP	4.3 (A+)	3.85 (A+)

Powerful Cooling & Heating

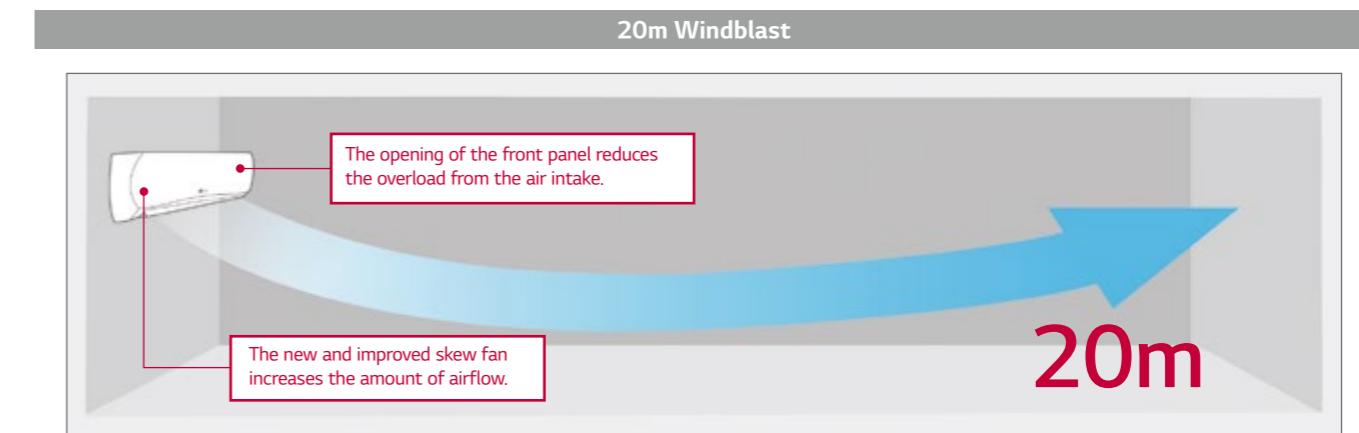

Optimized Airflow

Direction of horizontal vane can be adjusted from step 1 to step 6 with full auto swing. This function can cool and heat specific areas much faster.

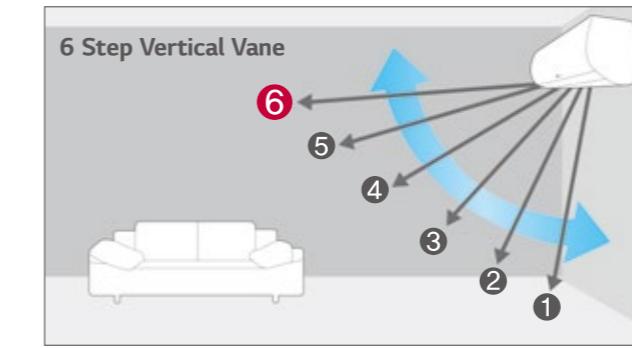

Quick Cooling & Heating

Jet cooling and heating disperses air evenly at high speed to secure an optimally cooled or heated room in just 3 minutes.



WALL MOUNTED



STANDARD INVERTER (R32)

US30F / US36F



LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification
: www.eurovent-certification.com

UUC1 U40 UUD1 U30 UUD3 U30



	COMBINATION			30	36	36
Capacity	Cooling	Min ~ Rated ~ Max	kW	3.2 / 8.0 / 9.0	3.8 / 9.5 / 12.5	3.8 / 9.5 / 12.5
	Heating	Min ~ Rated ~ Max	kW	3.6 / 9.0 / 10.0	4.3 / 10.8 / 13.4	4.3 / 10.8 / 13.4
Power Input (Set)	Cooling	Min ~ Rated ~ Max	kW	0.50 / 2.28 / 3.17	0.30 / 2.57 / 3.91	0.30 / 2.57 / 3.91
	Heating	Min ~ Rated ~ Max	kW	0.50 / 2.5 / 3.20	0.50 / 2.77 / 3.77	0.50 / 2.77 / 3.77
Running Current	Cooling	Rated	A	10.1	11.4	4.1
	Heating	Rated	A	11.1	12.2	4.4
EER / COP		kWh/kWh		3.51 / 3.60	3.70 / 3.90	3.70 / 3.90
SEER / SCOP		kWh/kWh		7.0 / 4.3	6.10 / 3.85	6.10 / 3.85
Pdesign	Cooling @ 35°C	kW		8	9.5	9.5
	Heating @ -10°C	kW		5.4	8.7	8.7
Seasonal Energy Label	Cooling / Heating	-		A++ / A+	A++ / A	A++ / A
Annual Energy Consumption	Cooling / Heating	kWh		400 / 1,758	545 / 3,164	545 / 3,164
Dehumidification Rate		l/h		2.9	3.8	3.8
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	50 / 52	50 / 50	50 / 50
ODU Sound Power Level	Cooling	Rated	dB(A)	68	66	66
	Liquid	mm (inch)		Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
Piping Connections	Gas	mm (inch)		Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Connections Method	-		Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min ~ Max	°C	-20 ~ 50	-20 ~ 52	-20 ~ 52
	Heating	Min ~ Max	°C	-20 ~ 18	-25 ~ 18	-25 ~ 18

INDOOR

	US30F NRO	US36F NRO	US36F NRO
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)	H / M / L	W	47 / 42 / 36
Air Flow Rate	H / M / L	m³/min	21 / 17 / 13
Dimensions	Body	W x H x D	mm
Weight	Body	kg	18.3
Sound Pressure Level	Cooling	H / M / L	dB(A)
	Sound Power Level	Cooling	Max
Piping Connections	Drain	O.D. / I.D.	mm

OUTDOOR

	UUC1 U40	UUD1 U30	UUD3 U30
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Circuit Breaker	Min	A	25
Power Supply Cable (Included Earth)	No x mm²	3C x 2.5	3C x 6.0
Dimensions	Net	W x H x D	mm
Weight	Net	kg	57.7
Compressor	Type	-	Twin Rotary
	Type	-	R32
Refrigerant	GWP (Global Warming Potential)	-	675
	Precharged Amount	kg	1.9
	t-CO ₂ eq	-	1.283
	Additional Charge (After 7.5m)	g/m	40
Fan	Air Flow Rate	Rated	m³/min x No.
	Total Piping Length	Min / Max	m
Piping Elevation	IDU - ODU	Max	m

Note :

1. Due to our policy of innovation some specifications may be changed without notification.
2. Performances are based on the following conditions (It is accordance with EN14511)
 - Cooling : Indoor Ambient Temp 27°CDB / 19°CWB, Outdoor Ambient Temp 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp 20°CDB / 15°CWB, Outdoor Ambient Temp 7°CDB / 6°CWB
 - Interconnected Pipe is standard length and difference of Elevation (Outdoor ~ Indoor Unit) is 0m.
3. Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation.
4. This product contains fluorinated greenhouse gases. (R32)

WALL MOUNTED



COMPACT INVERTER (R32)

US30F / US36F



LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification
: www.eurovent-certification.com

UUB1 U20 UUC1 U40



	COMBINATION			30	36
Capacity	Cooling	Min ~ Rated ~ Max	kW	3.0 / 7.5 / 8.3	3.8 / 9.5 / 10.6
	Heating	Min ~ Rated ~ Max	kW	3.1 / 7.7 / 8.5	4.3 / 10.8 / 11.5
Power Input (Set)	Cooling	Min ~ Rated ~ Max	kW	0.50 / 2.31 / 2.77	0.60 / 3.06 / 3.67
	Heating	Min ~ Rated ~ Max	kW	0.40 / 2.14 / 2.78	0.60 / 3.0 / 3.72
Running Current	Cooling	Rated	A	10.1	13.6
	Heating	Rated	A	9.3	13.3
EER / COP		kWh/kWh		3.25 / 3.60	3.10 / 3.60
SEER / SCOP		kWh/kWh		6.8 / 4.1	6.4 / 4.1
Pdesign	Cooling @ 35°C	kW		7.5	9.5
	Heating @ -10°C	kW		4.3	5.8
Seasonal Energy Label	Cooling / Heating	-		A++ / A+	A++ / A+
Annual Energy Consumption	Cooling / Heating	kWh		386 / 1,468	520 / 1,980
Dehumidification Rate		l/h		3.0	3.5
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	50 / 54	54 / 56
ODU Sound Power Level	Cooling	Rated	dB(A)	67	70
	Liquid	mm (inch)		Ø9.52 (3/8)	Ø9.52 (3/8)
Piping Connections	Gas	mm (inch)		Ø15.88 (5/8)	Ø15.88 (5/8)
	Connections Method	-		Flared	Flared
Operation Range (Outdoor)	Cooling	Min ~ Max	°C	-10 ~ 48	-20 ~ 50
	Heating	Min ~ Max	°C	-15 ~ 18	-15 ~ 18

	INDOOR	US30F NRO	US36F NRO
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)	H / M / L	W	47 / 42 / 36
Air Flow Rate	H / M / L	m³/min	21 / 17 / 13
Dimensions	Body	W x H x D	mm
Weight	Body	kg	18.3
Sound Pressure Level	Cooling	H / M / L	dB(A)
	Sound Power Level	Cooling	Max
Piping Connections	Drain	O.D. / I.D.	mm

	OUTDOOR	UUB1 U20	UUC1 U40
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Circuit Breaker	Min	A	20
Power Supply Cable (Included Earth)	No x mm²	3C x 2.5	3C x 2.5
Dimensions	Net	W x H x D	mm
Weight	Net	kg	44.5
Compressor	Type	-	Twin Rotary
	Type	-	R32
Refrigerant	GWP (Global Warming Potential)	-	675
	Precharged Amount	kg	1.2
	t-CO ₂ eq	-	0.81
	Additional Charge (After 7.5m)	g/m	40
Fan	Air Flow Rate	Rated	m³/min x No.
	Total Piping Length	Min / Max	m
Piping Elevation	IDU - ODU	Max	m

Note :

1. Due to our policy of innovation some specifications may be changed without notification.
2. Performances are based on the following conditions (It is accordance with EN14511)
 - Cooling : Indoor Ambient Temp 27°CDB / 19°CWB, Outdoor Ambient Temp 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp 20°CDB / 15°CWB, Outdoor Ambient Temp 7°CDB / 6°CWB
 - Interconnected Pipe is standard length and difference of Elevation (Outdoor ~ Indoor Unit) is 0m.
3. Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation.
4. This product contains fluorinated greenhouse gases. (R32)

AHU SOLUTION



SINGLE SPLIT KEY FEATURES


AHU COMBINATION

Air Handling Applications

Economically feasible solution for pair application with air handling units.


Return/Room Air Temperature Control

• Temp Sensors
 • Comm. Line
 • Central Comm. Line to ODU
 • Ref. Pipe
T_E = Evaporator Temperature (Liquid Pipe / Gas Pipe)
T_R = Return Air Temperature
T_{ROOM} = Room Air Temperature

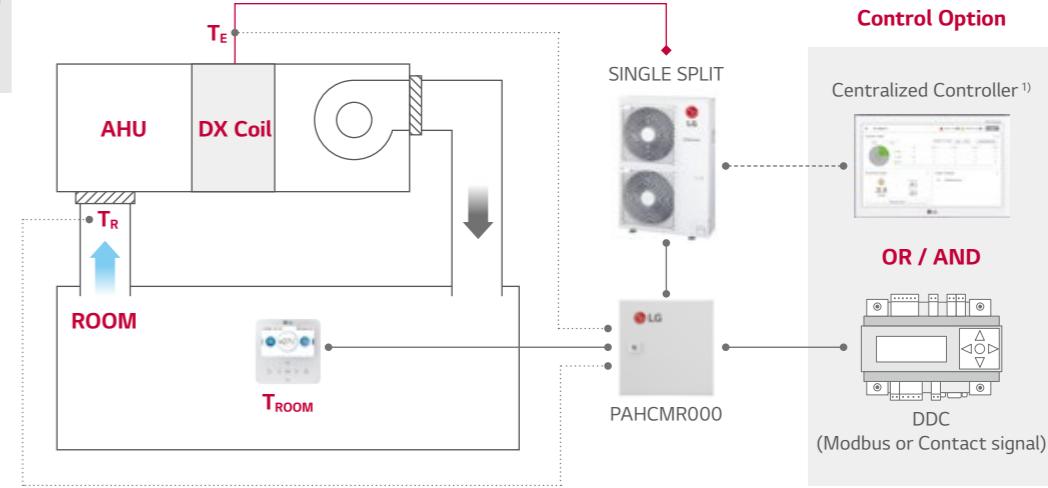

Discharge Air Temperature Control

• Temp Sensors
 • Comm. Line
 • Central Comm. Line to ODU
 • Ref. Pipe
T_E = Evaporator Temperature (Liquid Pipe / Gas Pipe)
T_D = Discharge Air Temperature
T_{ROOM} = Room Air Temperature

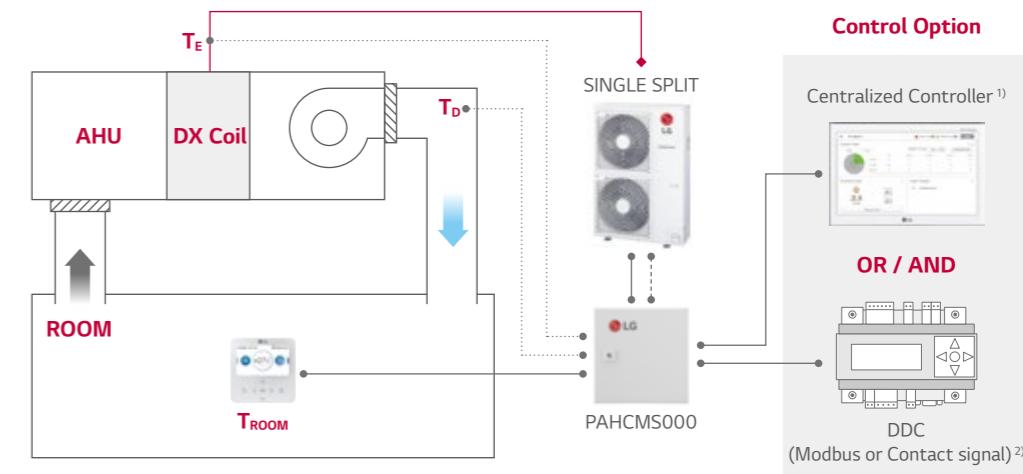

1) PI485(PMNFP14A1) is required for using centralized controller.


2) In case of applying DDC with contact signal, discharge air temperature should be measured and controlled by DDC.

3) For more detail, please refer to the PDB of AHU Communication Kit.

AHU COMBINATION

COMMUNICATION KIT

PAHCMR000
PAHCMS000

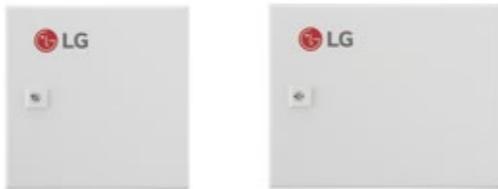

Specifications

MODEL	COMBINATION		DESCRIPTION	DIMENSIONS (mm)		
	OUTDOOR UNIT	CENTRALIZED CONTROLLER		W	H	D
PAHCMR000	Single Split	.	Return / Room air temperature control by DDC or LG individual / centralized controller	300	300	155
PAHCMS000	Single Split	.	Discharge air temperature control by DDC or LG individual / centralized controller	380	300	155

Function list for Communication kit

	PAHCMR000	PAHCMS000	NOTE
Comm. Kit Operation	On / Off	On / Off	
Operation Mode ¹⁾	Cooling / Heating	Cooling / Heating	
Return (room) Air Temperature	16~30°C	-	
Control			Available in case of using DDC with Modbus or LG Control system
Discharge Air Temperature ²⁾	-	16~30°C	
Fan Speed ³⁾	Low / Middle / High	Low / Middle / High	It may not be possible depending on the particular condition
Forced Thermal On / Off	On / Off	-	Available in case of using DDC with contact signal
Capacity Control	-	-	Available in case of using DDC with Modbus or contact signal
Comm. Kit Operation	On / Off	On / Off	
Operation Mode ¹⁾	Cooling / Heating	Cooling / Heating	Available in case of using DDC with Modbus or LG Control system
Monitor			
Fan Speed	Low / Middle / High	Low / Middle / High	
Error Alarm	.	.	
Compressor On / Off	On / Off	On / Off	Available in case of using DDC with Modbus or LG individual controller PAHCMR000 doesn't provide this in case of using DDC with contact signal

1) Available operation mode can be varied depending on the setting of AHU Communication Kit.

2) This range may differ depending on the type of controller.

3) To control and monitor the fan speed, DO ports for the fan speed status have to be connected with the fan unit.

* Some of functions may not be possible depending on the setting of AHU Communication Kit. For more details of condition, please refer to the product data book.

Combination Table

	R32				R410A	
Model Name	UUA1 U00	UUB1 U20	UUC1 U40	UUD1 U30 UUD3 U30	UU70W U34	UU85W U74
Capacity Index	kBtu/h	9~18	18~30	24~36	36~60	70
Range	kW	2.5~5.0	5.0~8.0	6.8~10.0	10.0~14.6	20.0
PAHCMR000	X	0	0	0	0	0
PAHCMS000	X	0	0	0	0	0

ACCESSORIES



LG WI-FI MODEM

Users can control air conditioners using Android or iOS-enabled smartphones.



PWFMD200

Features

- Access LG air conditioner anytime and from anywhere with Wi-Fi equipped device.
- LG's exclusive Home Appliances control app (ThinQ) is available.
- Simple operation for various functions.
 - On / Off
 - Operation Mode
 - Fan Speed
 - Energy Monitoring¹⁾
 - Current / Set Temperature
 - Vane Control²⁾
 - Filter Management
 - Reservation (Sleep, Weekly On / Off)
 - Error check

MODEL NAME	PWFMD200
Size (W x H x D, mm)	48 x 68 x 14
Interfaceable Products	Single Indoor unit ³⁾
Connection Type	Indoor unit 1:1
Communication Frequency	2.4 GHz
Wireless Standards	IEEE 802.11b/g/n
Mobile Application	LG ThinQ (Android v4.1(Jellybean) or higher, iPhone iOS 9.0 or higher)
Optional Extension Cable	PWYREW000 (10m extension)

※ Functionality may be different according to each IDU model.

※ User interface of application shall be revised for its design and contents improvement.

※ Application is optimized for smartphone use, so it may not be well functioning with tablet devices.


1) LG Centralized controller and PDI installation is required for this function.

2) Vane Control may not be possible according to the type of Indoor unit.

3) For the compatibility with Indoor unit, please contact regional office.



Overview

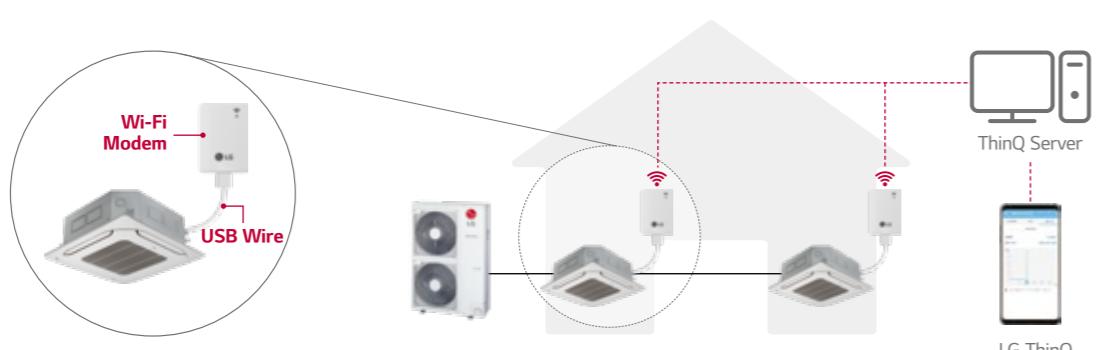

※ Search "LG ThinQ" on Google market or Appstore then download the app.
※ Internet service with Wi-Fi connection has to be available.

ACCESSORIES

Standard Wired Remote Controller

Standard III



PREMTB100

Standard II



PREMTBB10



PREMTB001

MODEL NAME	PREMTB100 PREMTBB10	PREMTB001 PREMTBB01
Operation Mode	On / Off, Fan Speed Control, Temperature Setting	
Mode Change	Cooling / Heating / Auto / Dehumidification / Fan	
Auto Swing / Vane Control	•	•
Reservation	Simple / Sleep / On, Off / Weekly / Holiday	
Time Display	•	•
Electrical Failure Compensation	•	•
Child Lock	•	•
Operation Status LED	•	•
Indoor Temperature Display	•	•
Wireless Remote Controller Receiver	-	•
Size (W x H x D, mm)	120 x 120 x 16	120 x 121 x 16
Backlight	•	•


※ Refer to each model PDB for applicable models.

Remote Controller



PQWRHQ0FDB

PI 485

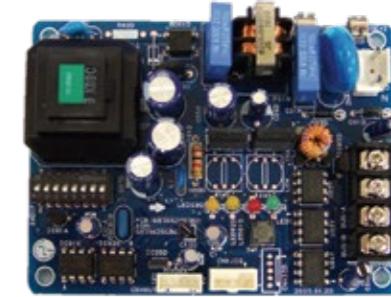

PMNFP14A1

Power : Single phase AC 220V 50/60Hz

Max no of the indoor units that can be connected : 64 UNITS

Model applied : RAC / Multi / Single / Therma V

※ Refer to each product PDB for applicable models.

Dry Contact



PDRCB000



PDRCB400



PDRCB300



PDRCB500

MODEL NAME	PDRCB000	PDRCB400	PDRCB300/320 ¹⁾	PDRCB500
Contact Point	1 Control Point	2 Control Point	8 Control Point	Modbus RTU
Power Input	AC 220V from outside power source	DC 5V & 12V from indoor unit PCB	DC 5V & 12V from indoor unit PCB	DC 5V & 12V from indoor unit PDB
Voltage / Non Voltage Input	-	•	•	-
On / Off Control	•	•	•	•
Lock / Unlock	•	•	•	-
Fan Speed Setting	-	-	•	•
Thermo Off	-	•	•	-
Energy Saving	-	•	-	-
Temperature Setting	-	•	•	•
Error Monitoring	•	•	•	•
Operation Monitoring	•	•	•	•

※ Refer to each product PDB for applicable models.

1) Available April 2020. Can use a universal input port with PDRCB320 model.


CEILING CASSETTE

H-INVERTER (R32)

UT09FH NQ0 / UT12FH NQ0

(Unit : mm)

	Part Name
1	Gas Pipe Connection
2	Liquid Pipe Connection
3	Drain Pipe Connection
4	Power and Communication Cable Routing Hole
5	Wired Remote Controller Wire Routing Hole
6	Air Inlet
7	Air Outlet
8	Decoration Panel (Accessory)
9	Decoration Corner Cover
10	Decoration Coner Display Cover
11	Flexible Drain Hose
12	Fresh air Intake Hole

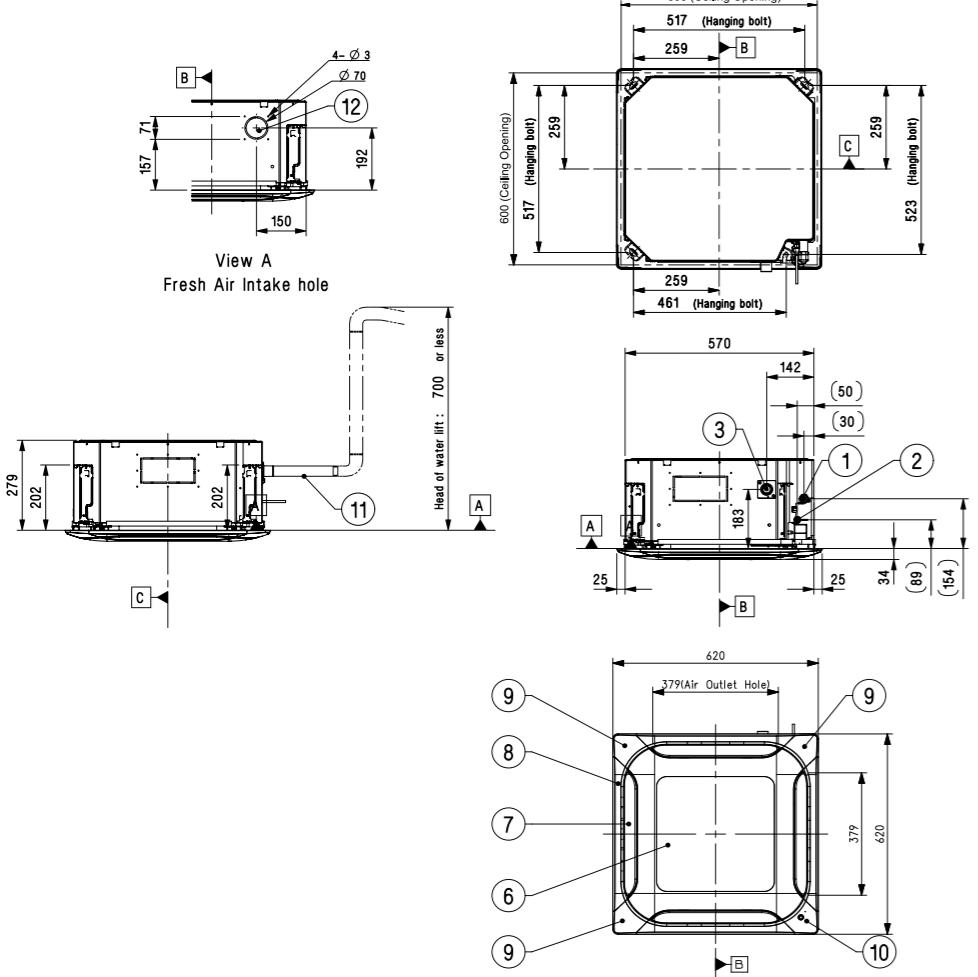


CEILING CASSETTE

H-INVERTER (R32)

UT18FH NBO

(Unit : mm)

	Part Name
1	Gas Pipe Connection
2	Liquid Pipe Connection
3	Drain Pipe Connection
4	Power and Communication Cable Routing Hole
5	Wired Remote Controller Wire Routing Hole
6	Air Inlet
7	Air Outlet
8	Decoration Panel (Accessory)
9	Decoration Corner Cover
10	Flexible Drain Hose
11	Fresh air Intake Hole

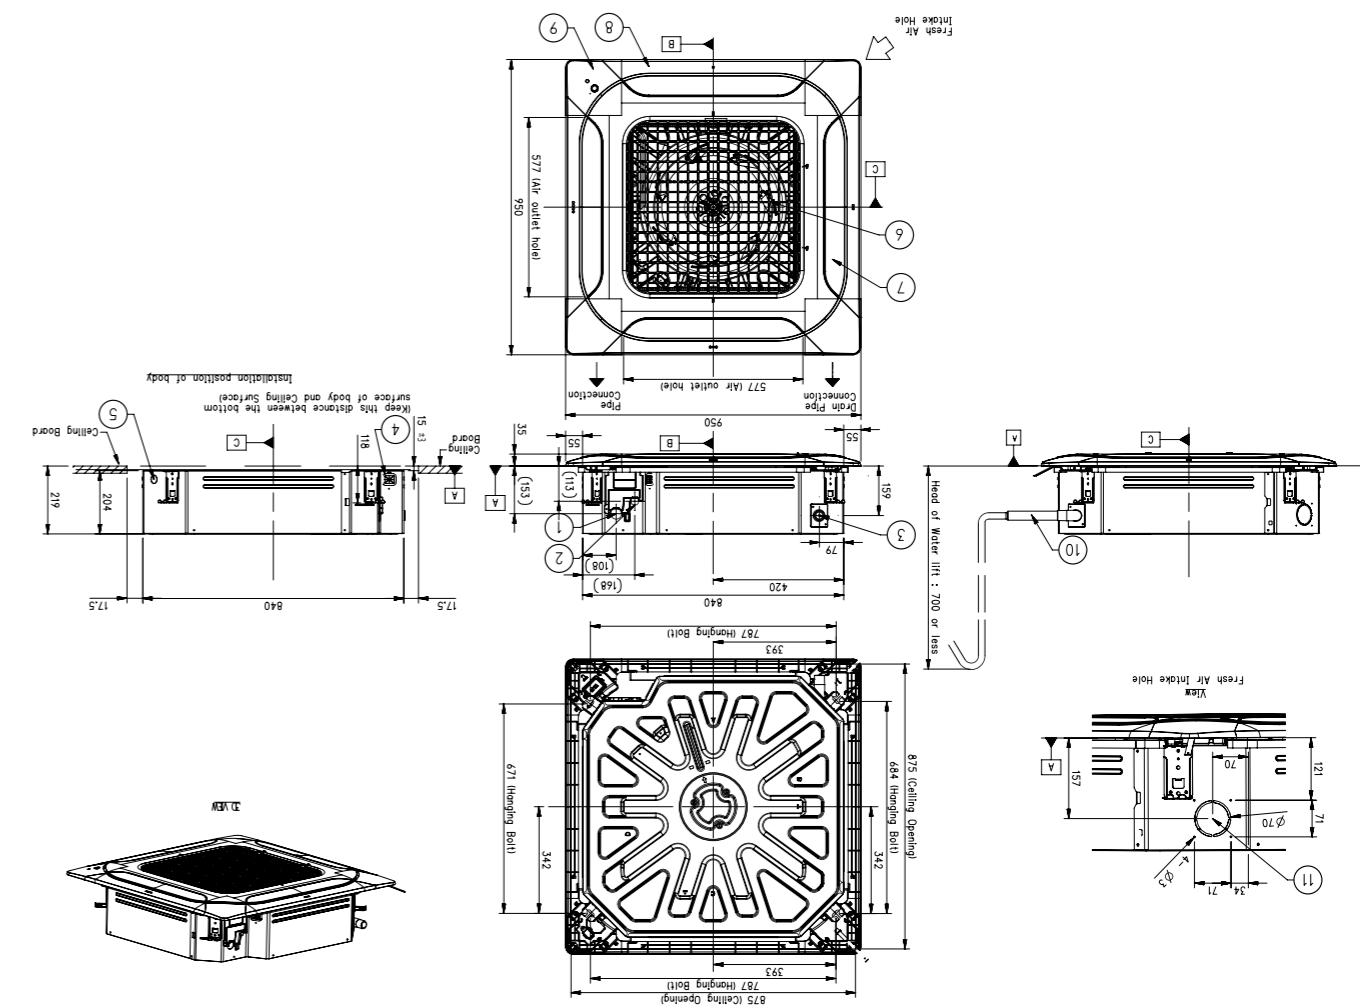


CEILING CASSETTE

H-INVERTER (R32)

**UT24FH NAO / UT30FH NAO / UT36FH NAO / UT42FH NAO
UT48FH NAO / UT60FH NAO**

(Unit : mm)

	Part Name
1	Gas Pipe Connection
2	Liquid Pipe Connection
3	Drain Pipe Connection
4	Power and Communication Cable Routing hole
5	Wired Remote Controller Wire Routing Hole
6	Air Inlet
7	Air Outlet
8	Decoration Panel (Accessory)
9	Decoration Corner Cover
10	Flexible Drain Hose
11	Fresh Air Intake Hole

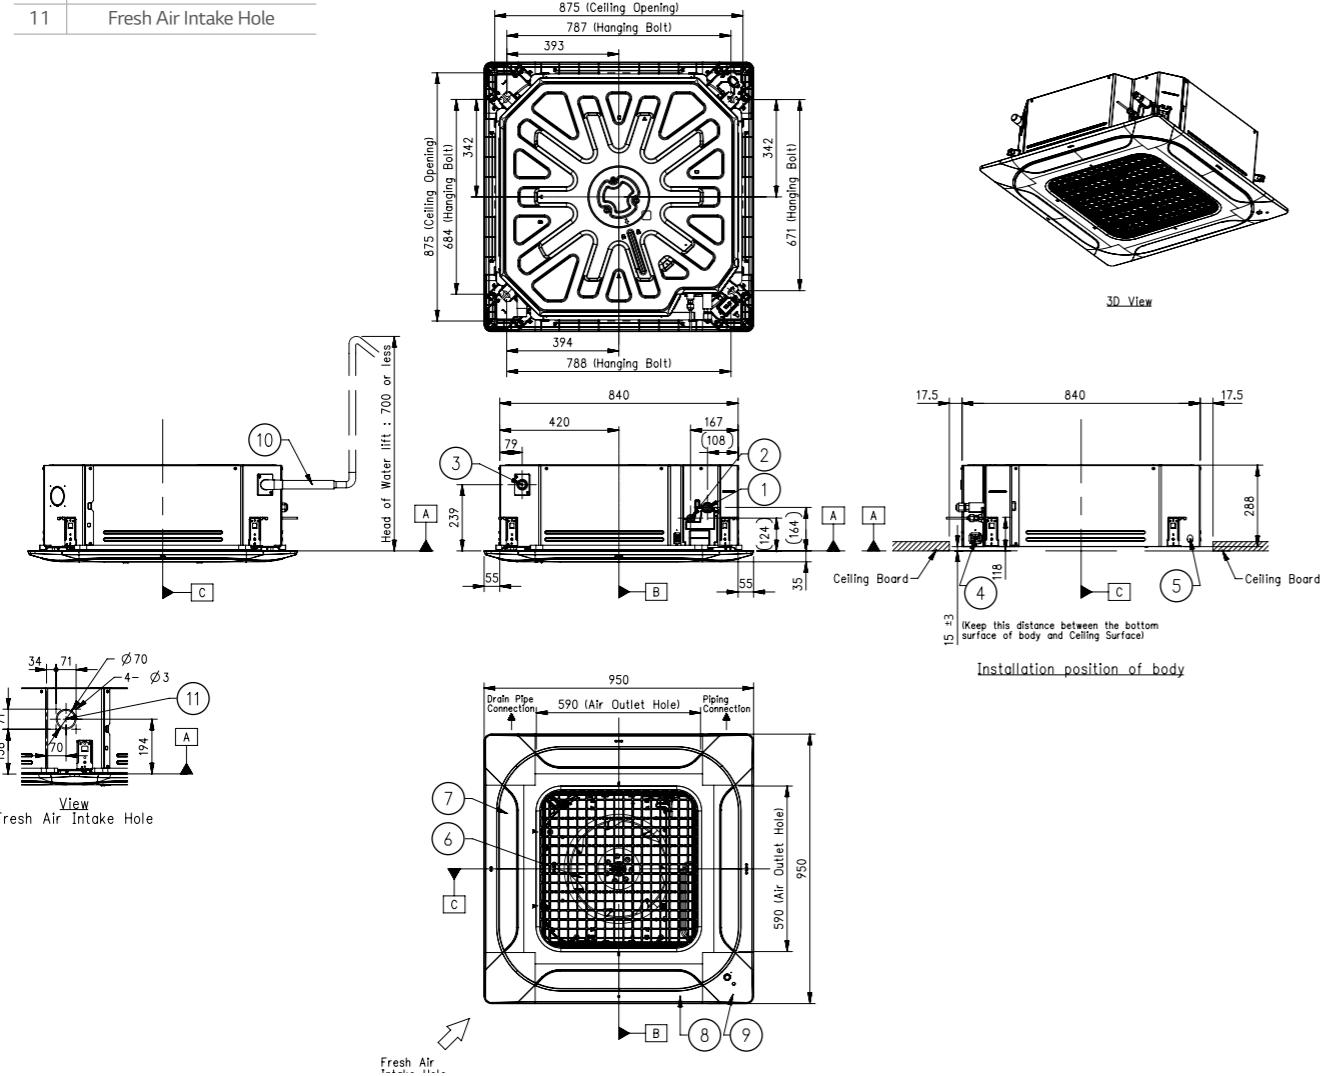


CEILING CASSETTE

STANDARD INVERTER (R32)

CT09F NRO / CT12F NRO

(Unit : mm)

	Part Name
1	Gas Pipe Connection
2	Liquid Pipe Connection
3	Drain Pipe Connection
4	Power and Communication Cable Routing Hole
5	Wired Remote Controller Wire Routing Hole
6	Air Inlet
7	Air Outlet
8	Decoration Panel (Accessory)
9	Decoration Corner Cover
10	Decoration Corner Display Cover
11	Flexible Drain Hose
12	Fresh Air Intake Hole

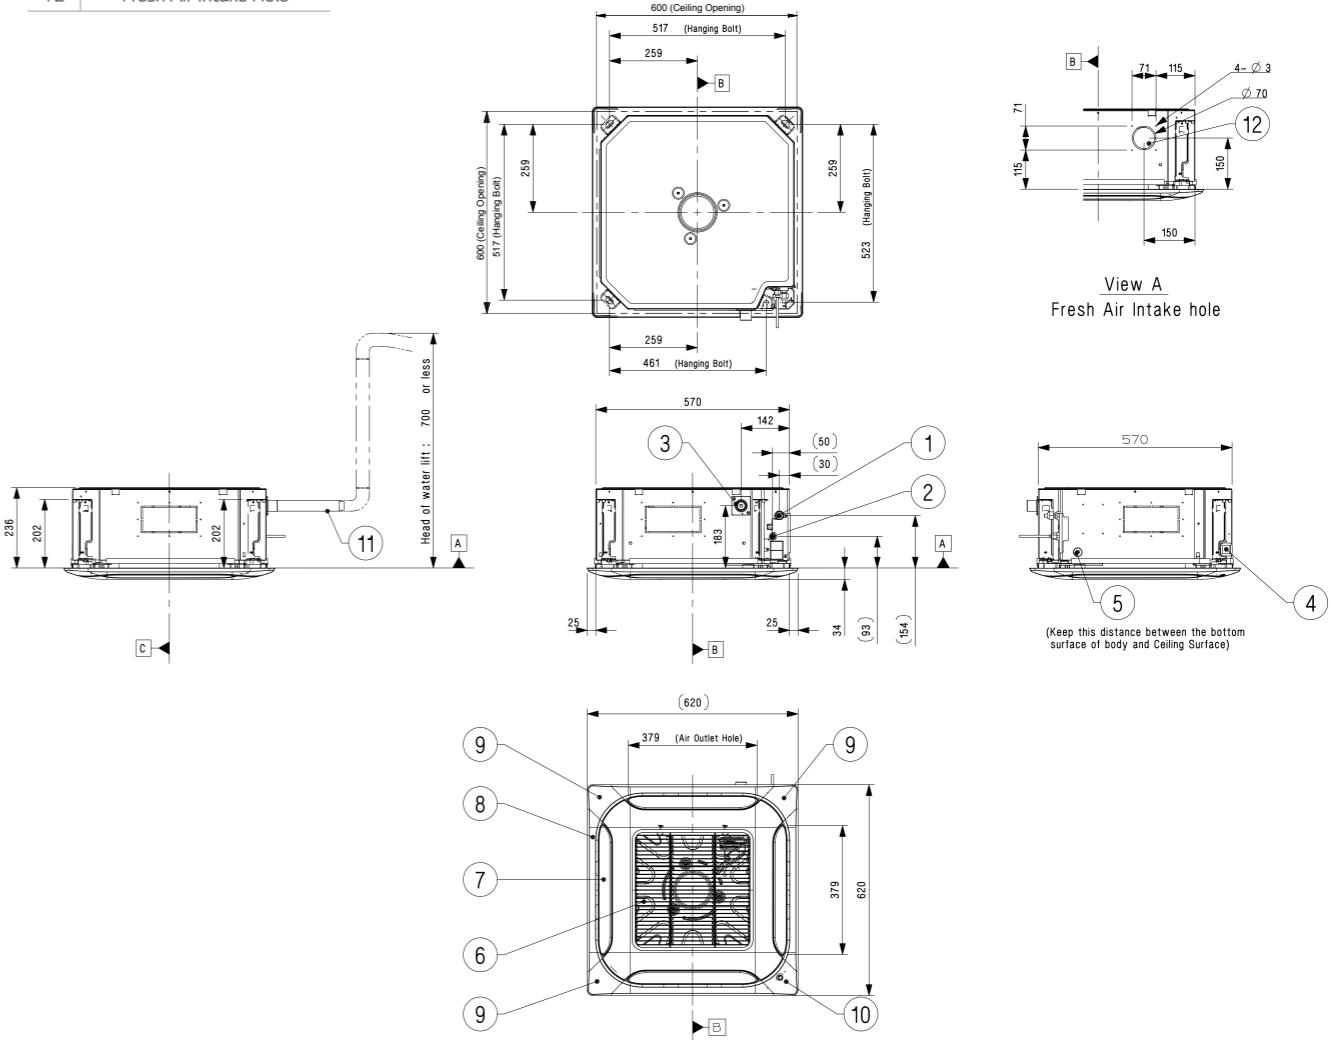


CEILING CASSETTE

STANDARD / COMPACT INVERTER (R32)

CT18F NQ0

(Unit : mm)

	Part Name
1	Gas Pipe Connection
2	Liquid Pipe Connection
3	Drain Pipe Connection
4	Power and Communication cable routing hole
5	Wired Remote Controller Wire Routing Hole
6	Air Inlet
7	Air Outlet
8	Decoration Panel (Accessory)
9	Decoration Corner Cover
10	Decoration Coner Display Cover
11	Flexible Drain Hose
12	Fresh Air Intake Hole

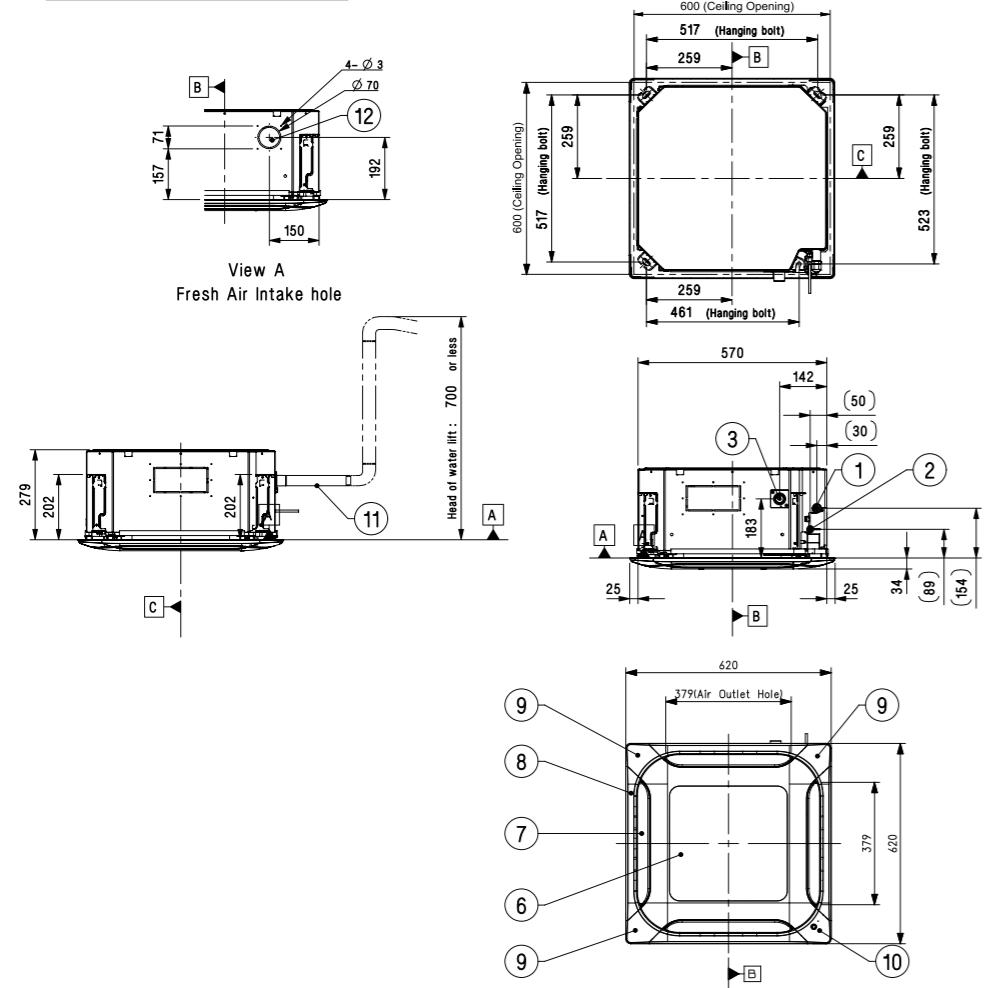


CEILING CASSETTE

STANDARD / COMPACT INVERTER (R32)

CT24F NBO / UT30F NBO

(Unit : mm)

	Part Name
1	Gas Pipe Connection
2	Liquid Pipe Connection
3	Drain Pipe Connection
4	Power and Communication Cable Routing Hole
5	Wired Remote Controller Wire Routing Hole
6	Air Inlet
7	Air Outlet
8	Decoration Panel (Accessory)
9	Decoration Corner Cover
10	Flexible Drain Hose
11	Fresh Air Intake Hole

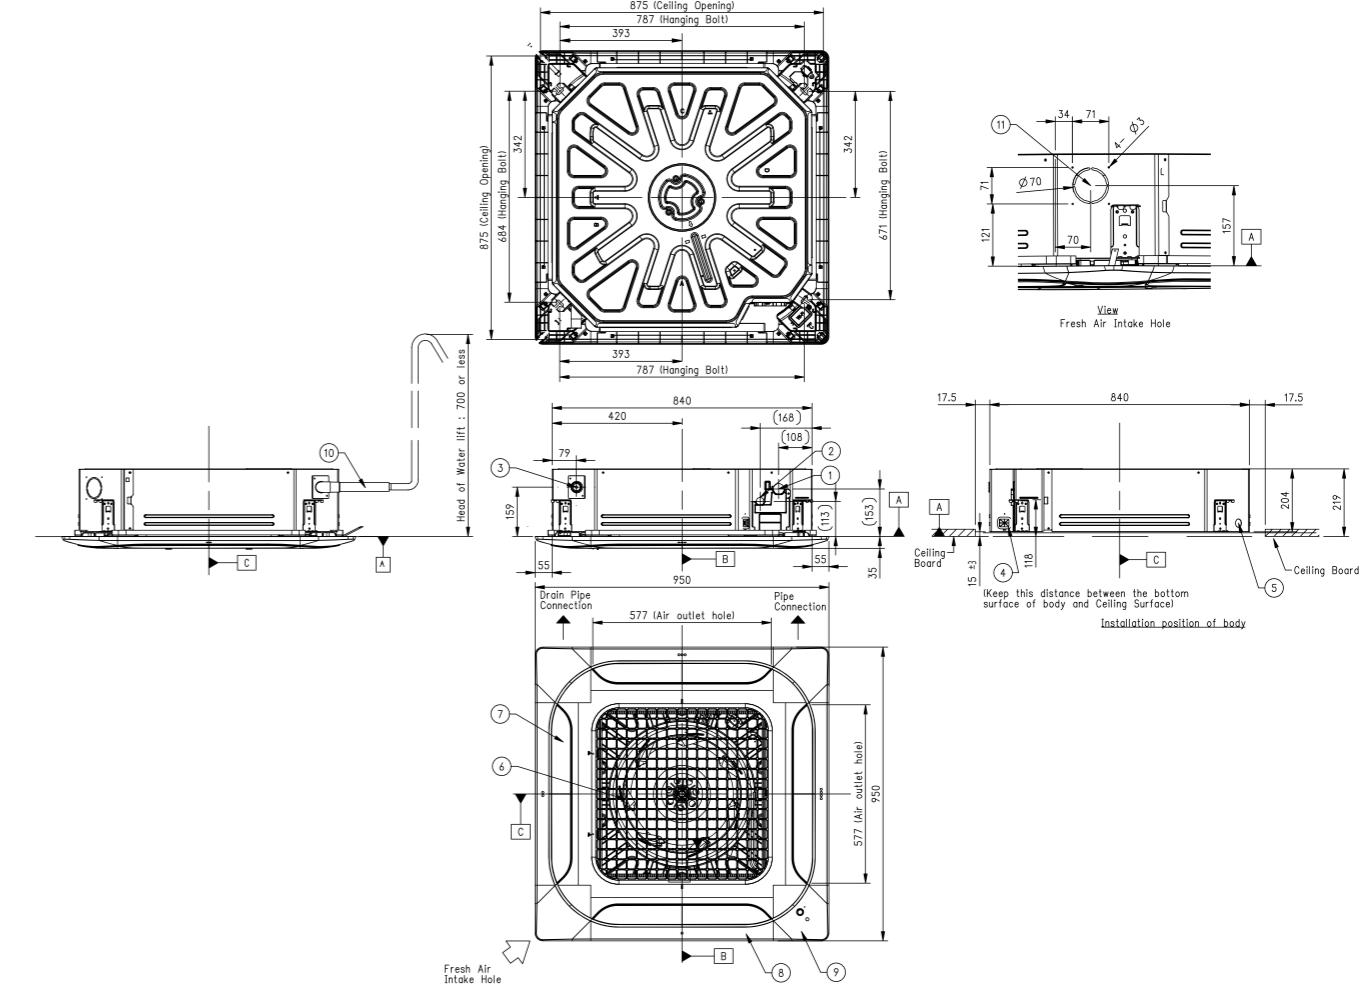


CEILING CASSETTE

STANDARD / COMPACT INVERTER (R32)

UT36F NAO

(Unit : mm)

	Part Name
1	Gas Pipe Connection
2	Liquid Pipe Connection
3	Drain Pipe Connection
4	Power and Communication Cable Routing Hole
5	Wired Remote Controller Wire Routing Hole
6	Air Inlet
7	Air Outlet
8	Decoration Panel (Accessory)
9	Decoration Corner Cover
10	Flexible Drain Hose
11	Fresh Air Intake Hole

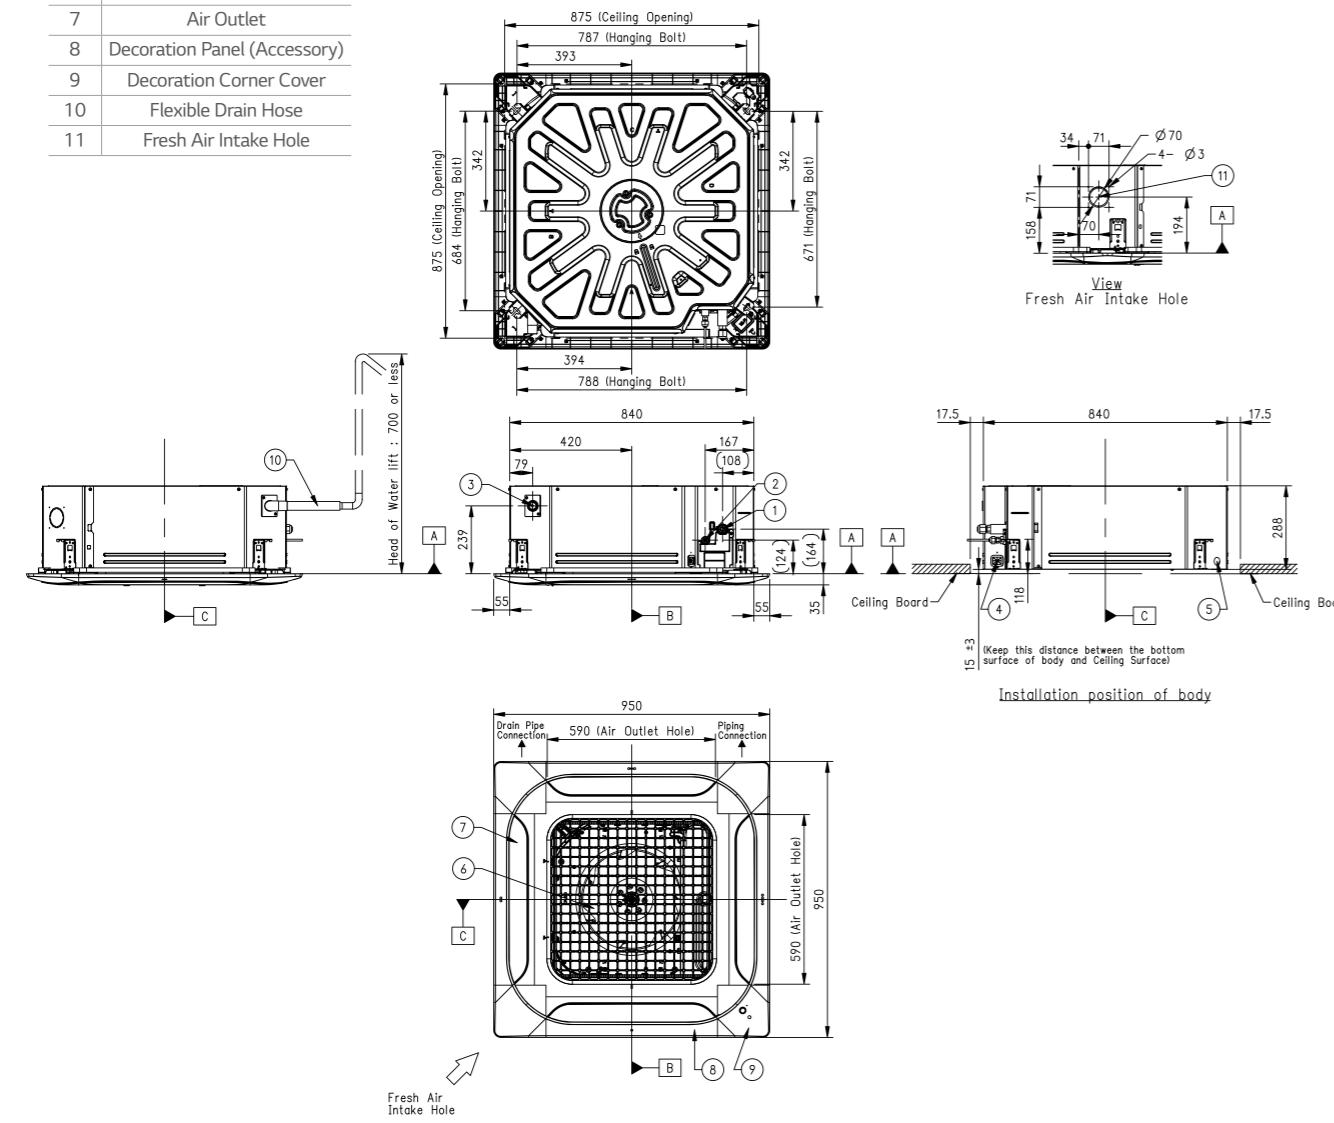


CEILING CASSETTE

STANDARD INVERTER (R32)

UT42F NAO / UT48F NAO / UT60F NAO

(Unit : mm)

	Part Name
1	Gas Pipe Connection
2	Liquid Pipe Connection
3	Drain Pipe Connection
4	Power and Communication Cable Routing Hole
5	Wired Remote Controller Wire Routing Hole
6	Air Inlet
7	Air Outlet
8	Decoration Panel (Accessory)
9	Decoration Corner Cover
10	Flexible Drain Hose
11	Fresh Air Intake Hole

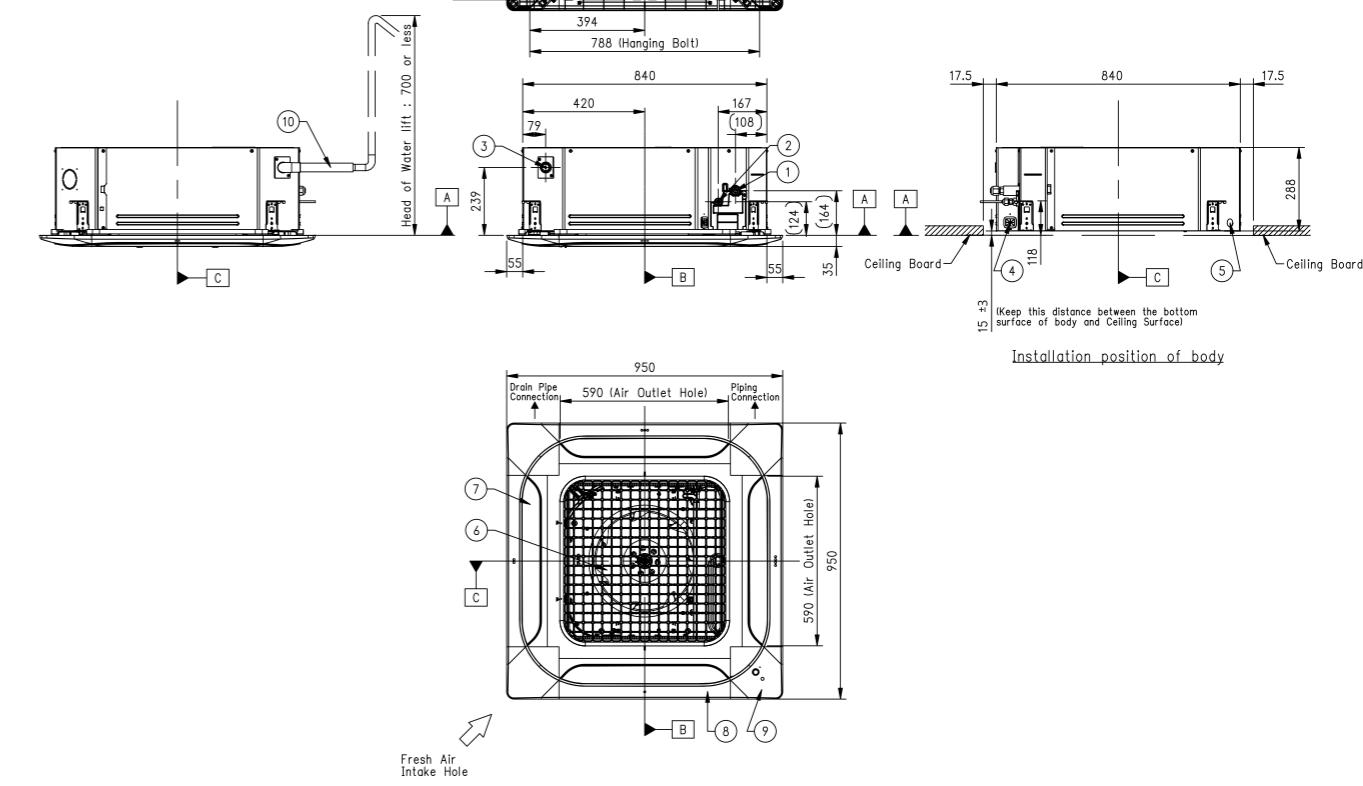


CEILING CONCEALED DUCT

H-INVERTER (R32) / MID STATIC


UM12FH N10 / UM18FH N10

(Unit : mm)


Part Name
1 Gas Pipe Connection
2 Liquid Pipe Connection
3 Drain Pipe Connection
4 Power and Communication Cable Routing Hole
5 Remote Controller Cable Hole
6 Air Inlet
7 Air Outlet
8 Air Filters
9 Control Cover

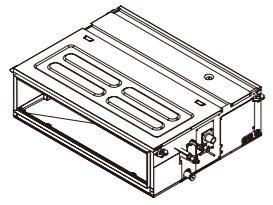

3D View

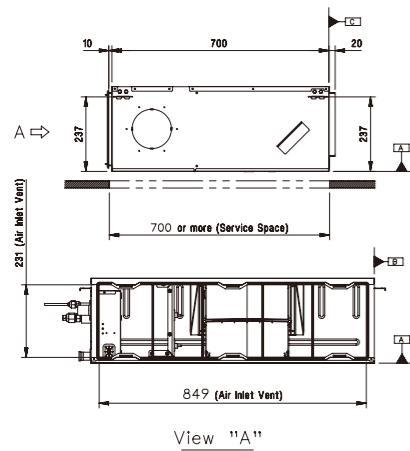

View "A"

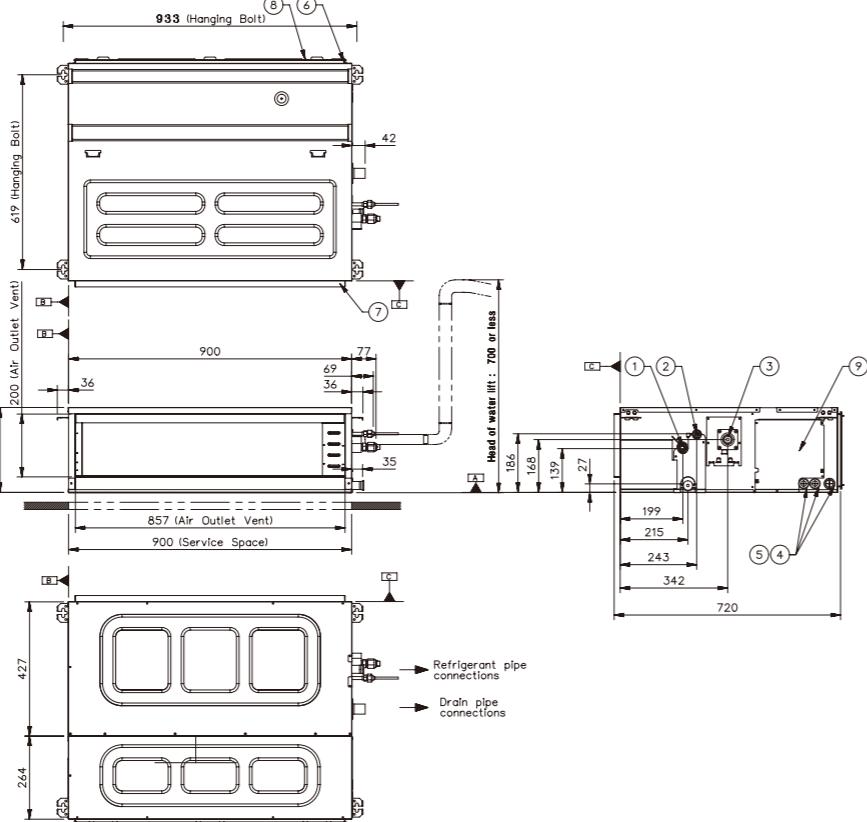


CEILING CONCEALED DUCT

H-INVERTER (R32) / MID STATIC



UM24FH N20 / UM30FH N20

(Unit : mm)


Part Name
1 Gas Pipe Connection
2 Liquid Pipe Connection
3 Drain Pipe Connection
4 Power and Communication Cable Hole
5 Remote Controller Cable hole
6 Air Inlet
7 Air Outlet
8 Air Filters
9 Control Cover

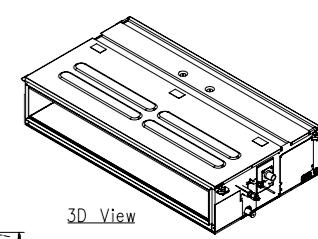

3D View

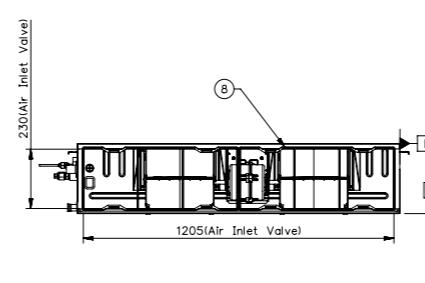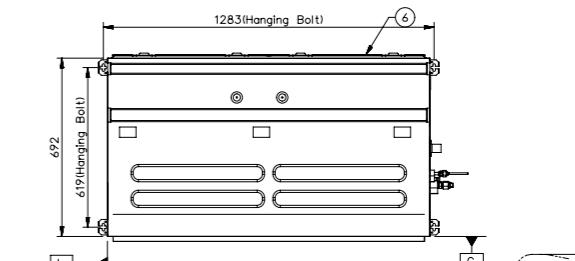

View "A"

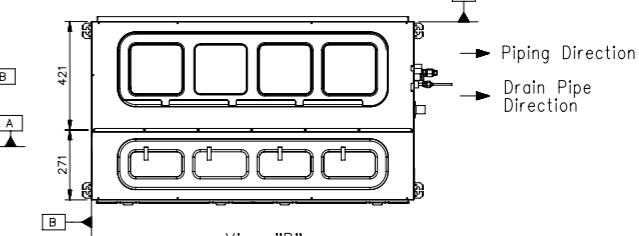

View "B"


CEILING CONCEALED DUCT

H-INVERTER (R32) / MID STATIC

UM36FH N30 / UM42FH N30 / UM48FH N30

(Unit : mm)

Part Name	
1	Gas Pipe Connection
2	Liquid Pipe Connection
3	Drain Pipe Connection
4	Power and Communication Cable Hole
5	Remote Controller Cable Hole
6	Air Inlet
7	Air Outlet
8	Air Filters
9	Control Cover

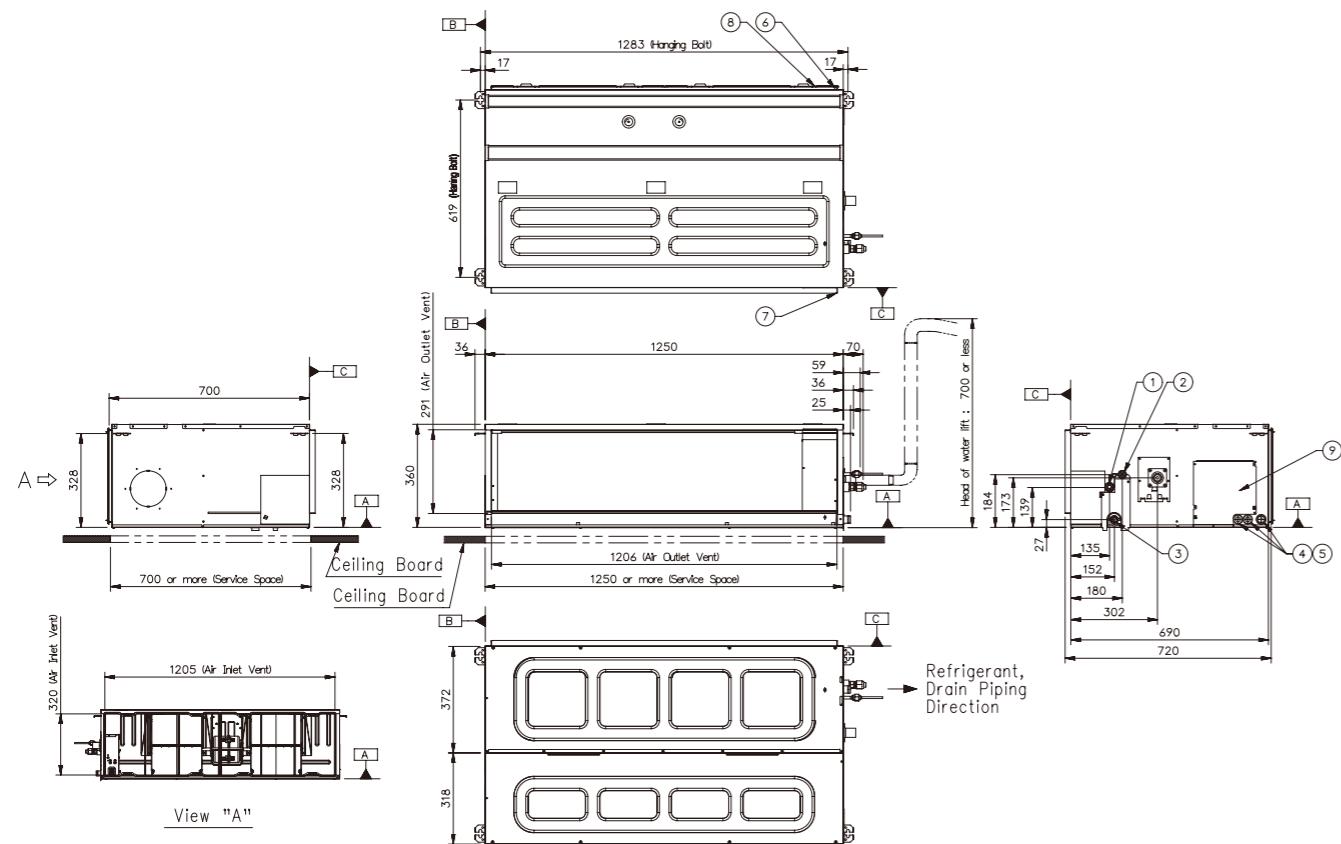


CEILING CONCEALED DUCT

H-INVERTER (R32) / LOW STATIC

UL12FH N50

(Unit : mm)

Part Name	
1	Liquid Pipe Connection
2	Gas Pipe Connection
3	Drain Pipe Connection
4	Power supply Connection
5	Air Discharge
6	Air Suction

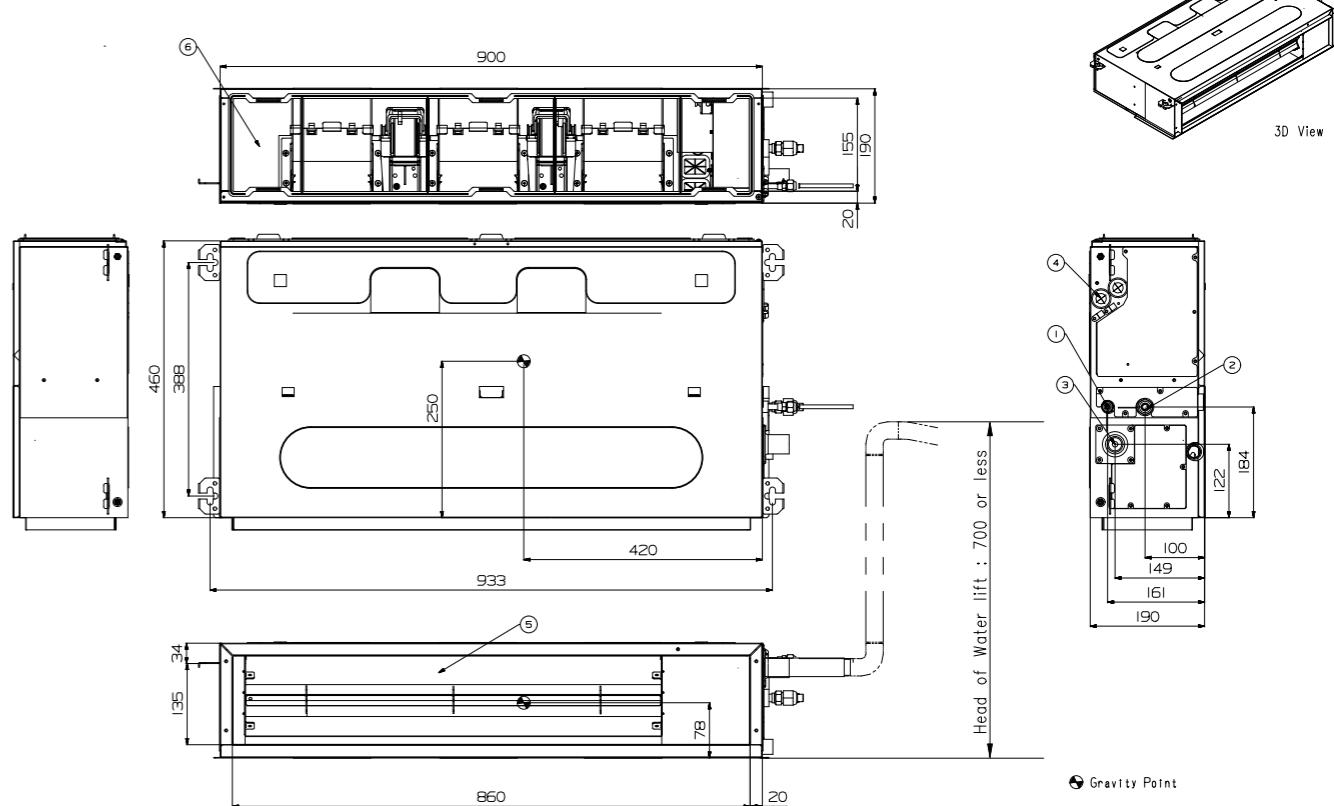




CEILING CONCEALED DUCT

H-INVERTER (R32) / LOW STATIC

UL18FH N30

(Unit : mm)

	Part Name
1	Liquid Pipe Connection
2	Gas Pipe Connection
3	Drain Pipe Connection
4	Power Supply Connection
5	Air Discharge
6	Air Suction

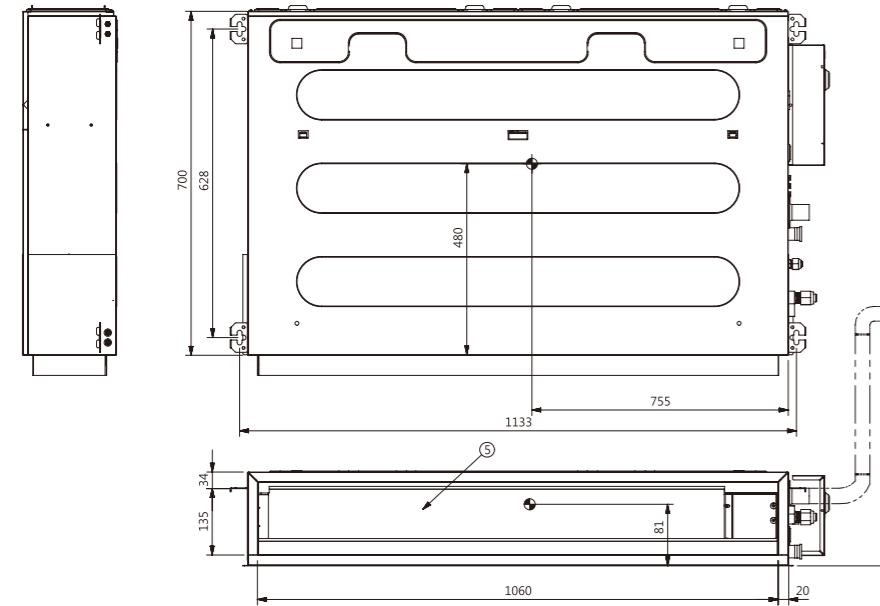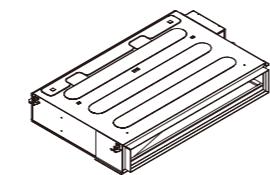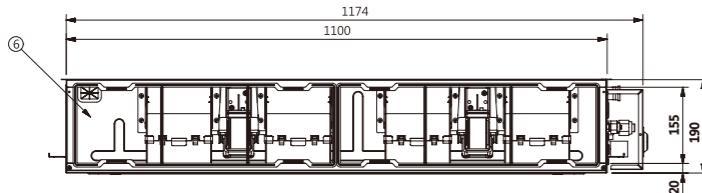

Gravity point


CEILING CONCEALED DUCT

STANDARD / COMPACT INVERTER (R32) / MID STATIC

CM18F N10 / CM24F N10 / UM30F N10

(Unit : mm)


	Part Name
1	Gas Pipe Connection
2	Liquid Pipe Connection
3	Drain Pipe Connection
4	Power and Communication Cable Hole
5	Remote Controller Cable Hole
6	Air Inlet
7	Air Outlet
8	Air Filters
9	Control Cover

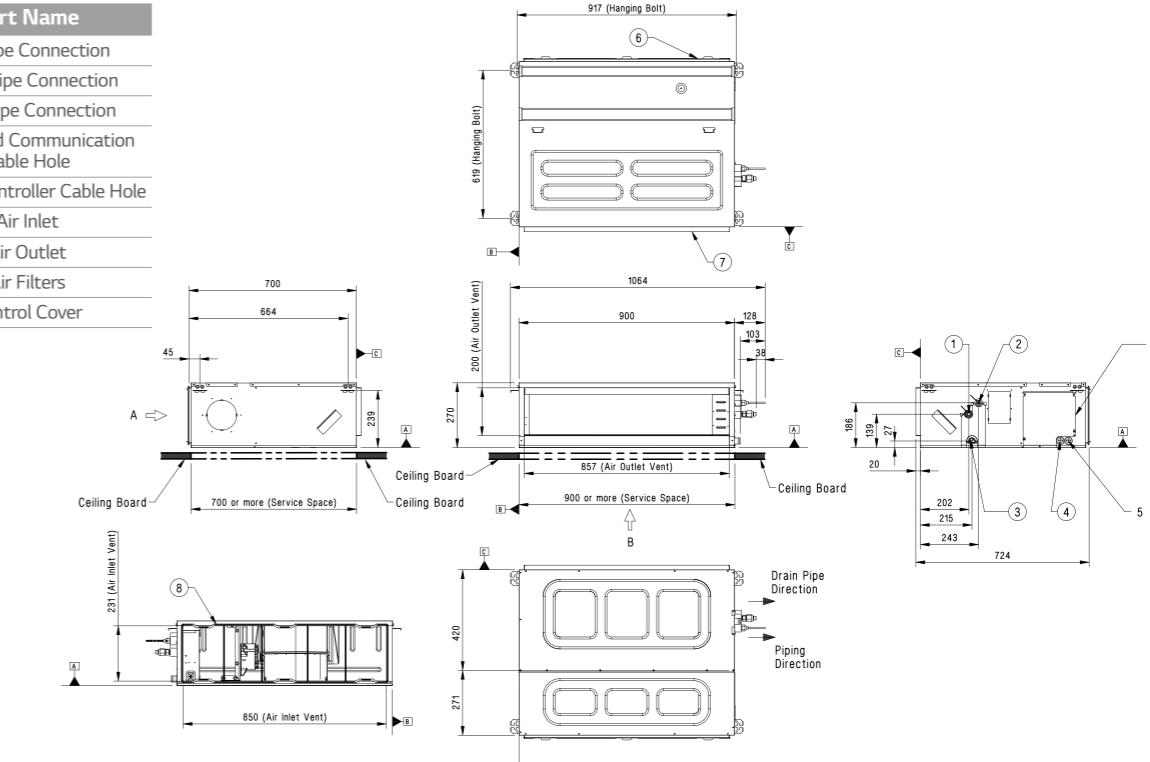

UM36F N20

(Unit : mm)

	Part Name
1	Gas Pipe Connection
2	Liquid Pipe Connection
3	Drain Pipe Connection
4	Power and Communication Cable Hole
5	Remote Controller Cable Hole
6	Air Inlet
7	Air Outlet
8	Air Filters
9	Control Cover

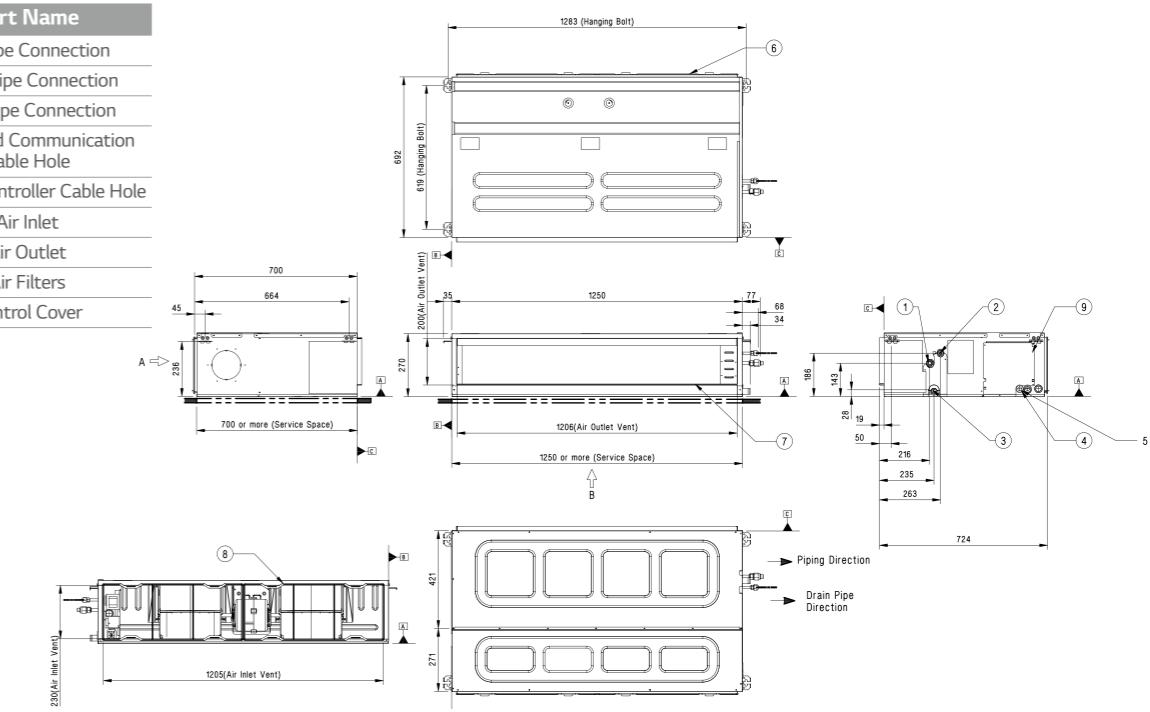


CEILING CONCEALED DUCT

STANDARD INVERTER (R32) / MID STATIC

UM42F N20

(Unit : mm)

Part Name
1 Gas Pipe Connection
2 Liquid Pipe Connection
3 Drain Pipe Connection
4 Power and Communication Cable Hole
5 Remote Controller Cable Hole
6 Air Inlet
7 Air Outlet
8 Air Filters
9 Control Cover

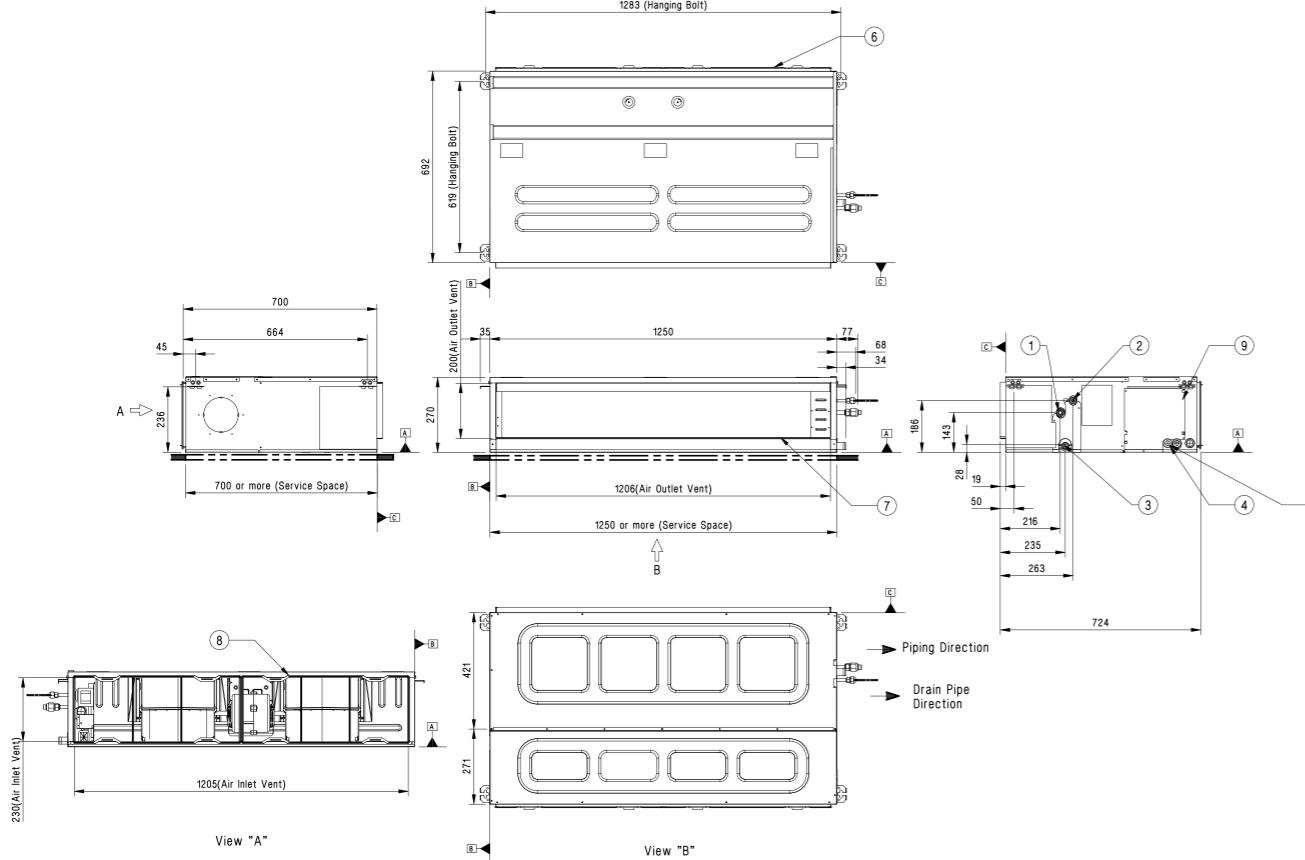


CEILING CONCEALED DUCT

STANDARD INVERTER (R32) / MID STATIC

UM48F N30 / UM60F N30

(Unit : mm)

Part Name
1 Gas Pipe Connection
2 Liquid Pipe Connection
3 Drain Pipe Connection
4 Power and Communication Cable Hole
5 Remote Controller Cable Hole
6 Air Inlet
7 Air Outlet
8 Air Filters
9 Control Cover

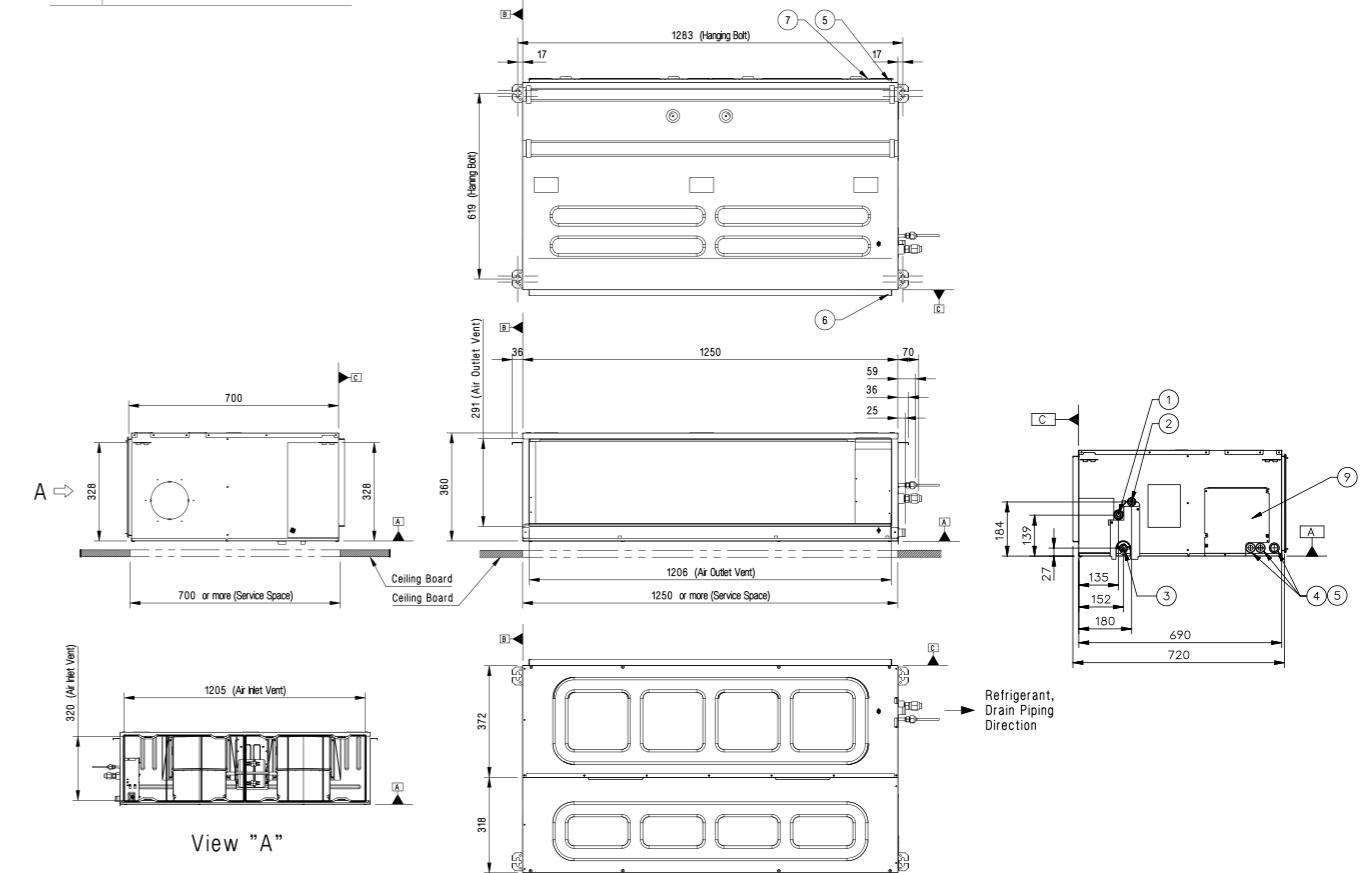


CEILING CONCEALED DUCT

STANDARD INVERTER (R32) / LOW STATIC

CL09F N50 / CL12F N50

(Unit : mm)

Part Name	
1	Liquid Pipe Connection
2	Gas Pipe Connection
3	Drain Pipe Connection
4	Power Supply Connection
5	Air Discharge
6	Air Suction

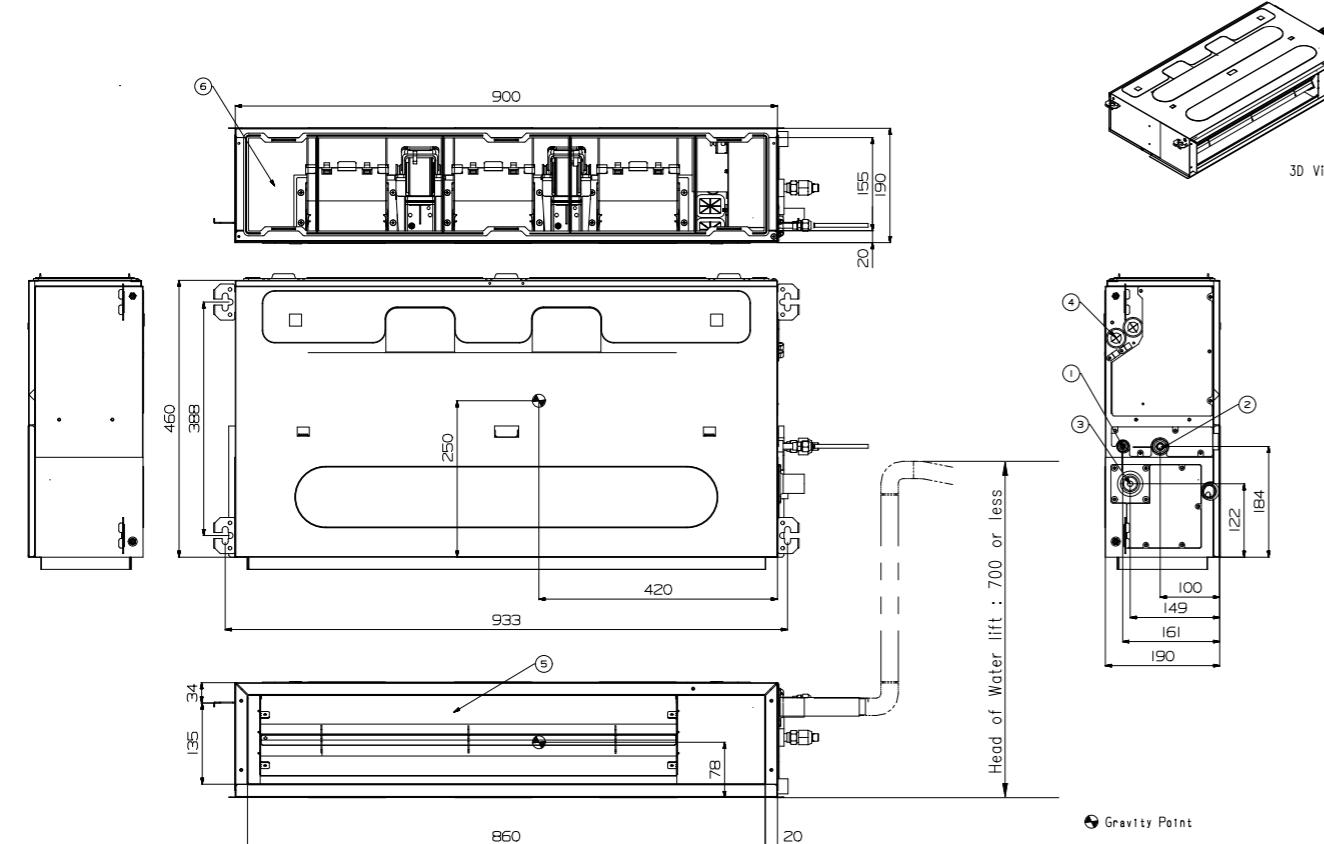


CEILING CONCEALED DUCT

STANDARD / COMPACT INVERTER (R32) / LOW STATIC

CL18F N60

(Unit : mm)

Part Name	
1	Liquid Pipe Connection
2	Gas Pipe Connection
3	Drain Pipe Connection
4	Power Supply Connection
5	Air Discharge
6	Air Suction

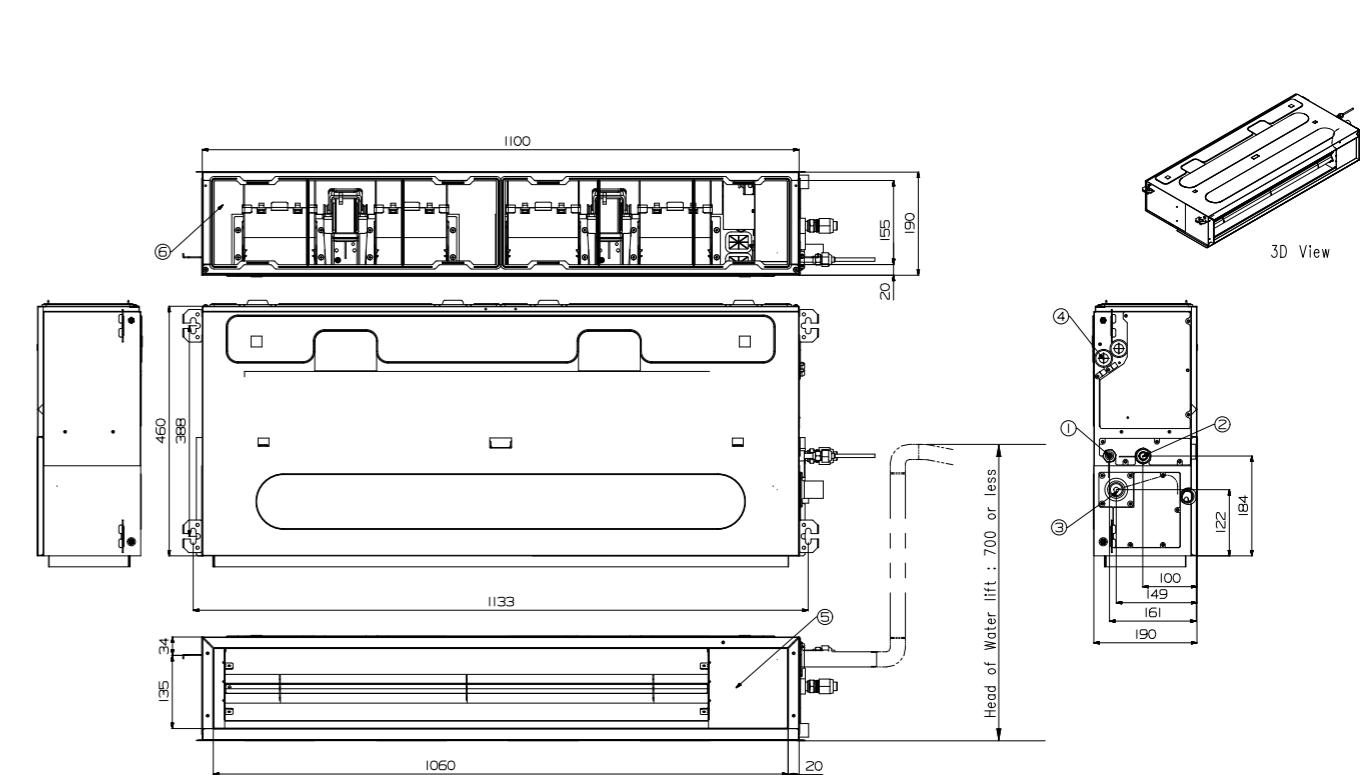


CEILING CONCEALED DUCT

STANDARD / COMPACT INVERTER (R32) / LOW STATIC

CL24F N30

(Unit : mm)

	Part Name
1	Liquid Pipe Connection
2	Gas Pipe Connection
3	Drain Pipe Connection
4	Power Supply Connection
5	Air Discharge
6	Air Suction

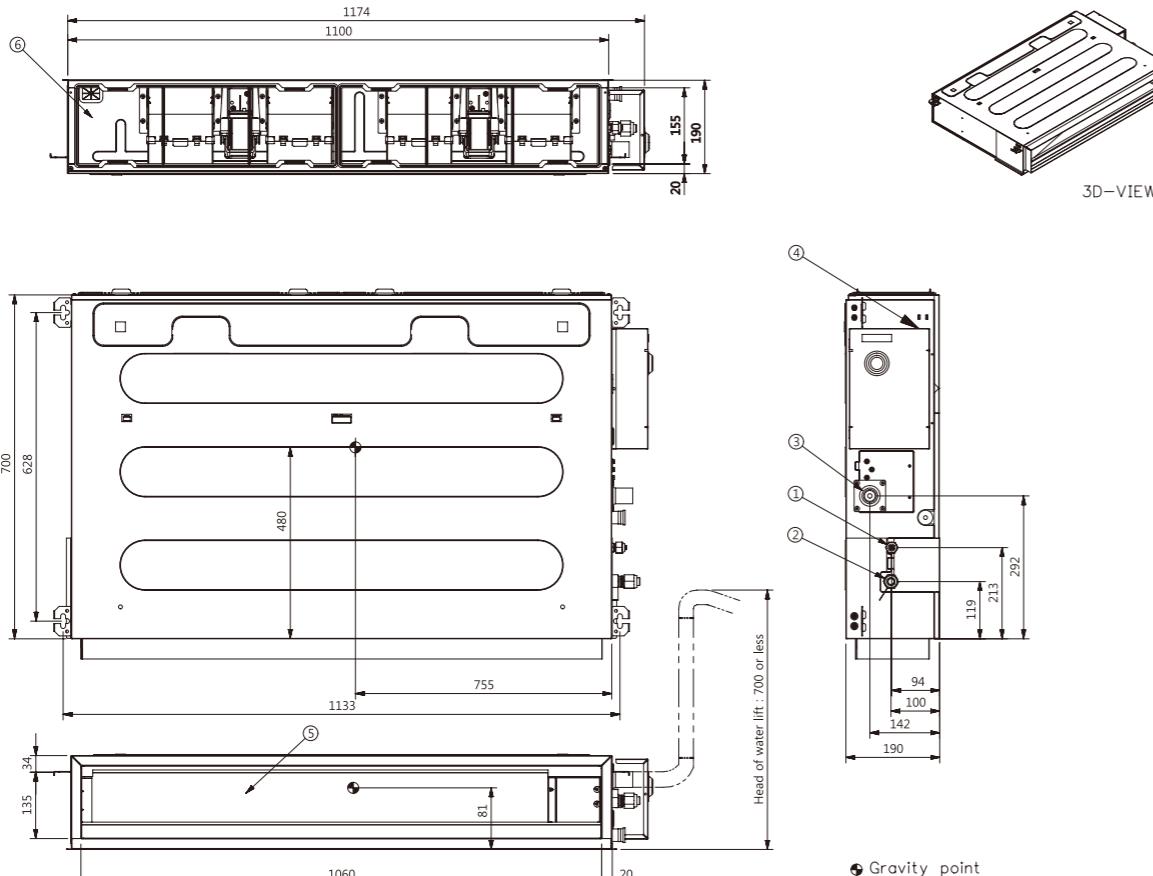


CEILING CONCEALED DUCT

STANDARD INVERTER (R410A) / HIGH STATIC

UB70 N94 / UB85 N94

(Unit : mm)

	Part Name
1	Air Suction Flange
2	Air Discharge Flange
3	Control Box
4	Gas Piping Connection
5	Liquid Pipe Connection
6	Drain Pipe Connection
7	Drain Pump (Option)

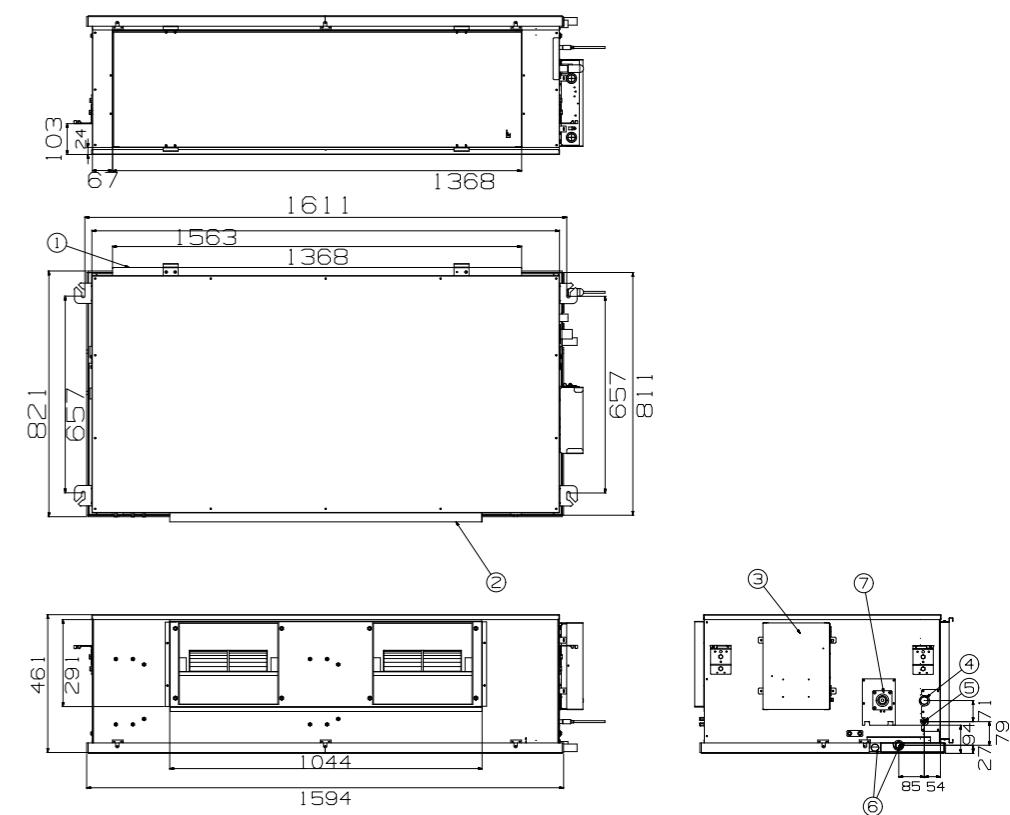


CEILING SUSPENDED

H-INVERTER (R32)

UV18FH N10

(Unit : mm)

	Part Name
1	Air Inlet
2	Air Outlet
3	Remote Controller Signal Receiver
4	Drain Hose Routing Hole
5	Refrigerant Pipe and Routing Hole
6	Gas Pipe Connection
7	Liquid Pipe Connection

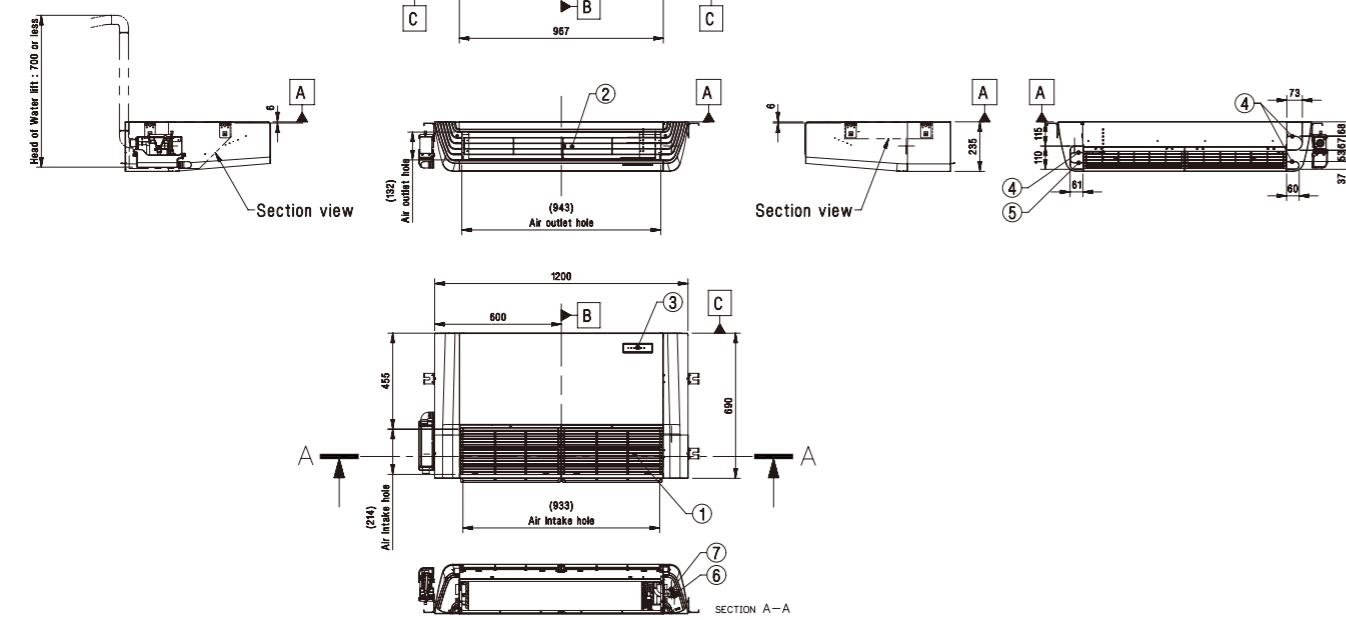


CEILING SUSPENDED

H-INVERTER (R32)

UV24FH N20 / UV30FH N20 / UV36FH N20 / UV42FH N20

(Unit : mm)

	Part Name
1	Air Inlet
2	Air Outlet
3	Remote Controller Signal Receiver
4	Drain Hose Routing Hole
5	Refrigerant Pipe and Routing Hole
6	Gas Pipe Connection
7	Liquid Pipe Connection

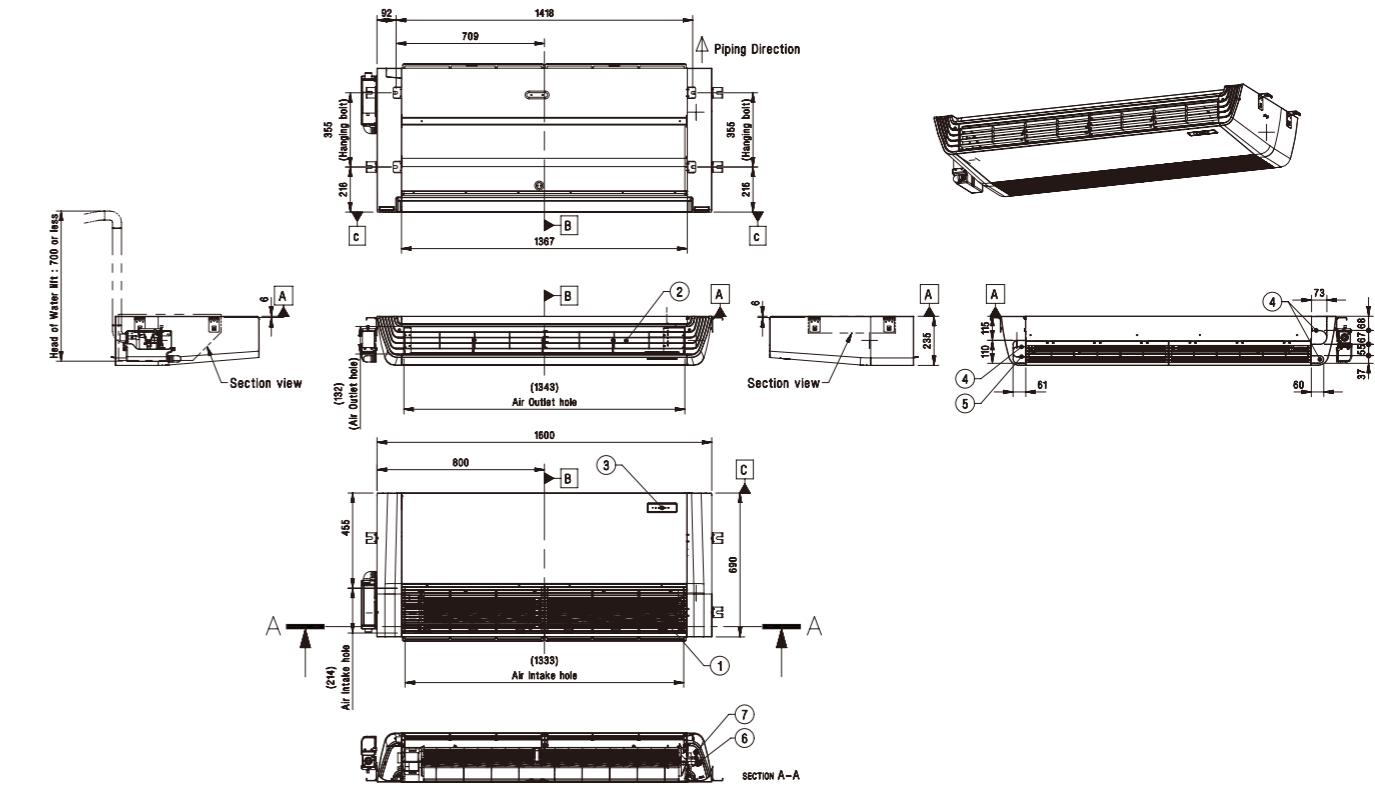


CEILING SUSPENDED

STANDARD / COMPACT INVERTER (R32)

UV18F N10 / UV24F N10 / UV30F N10

(Unit : mm)

Part Name	
1	Air Inlet
2	Air Outlet
3	Remote Controller Signal Receiver
4	Drain Hose Routing Hole
5	Refrigerant Pipe and Cable Routing Hole
6	Gas Pipe Connection
7	Liquid Pipe Connection

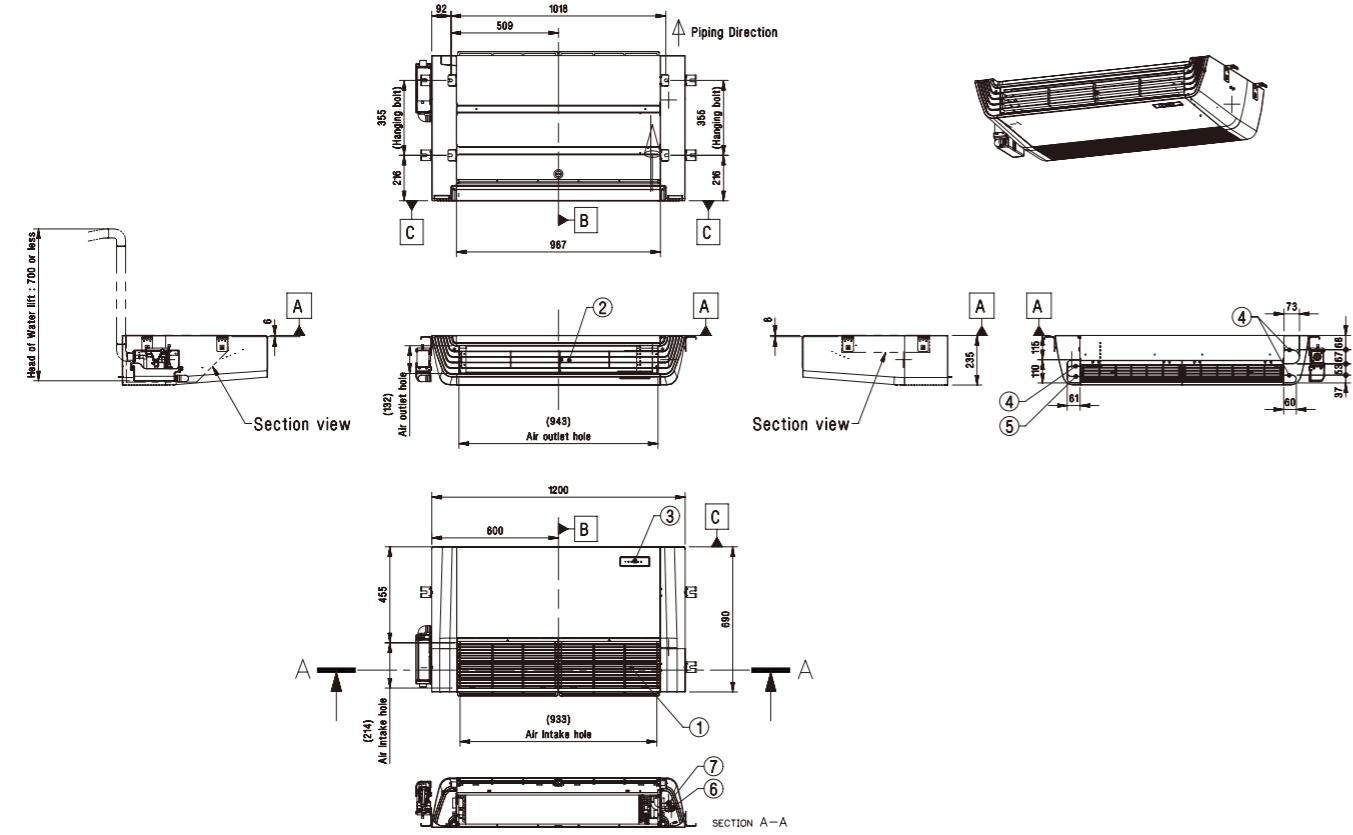


CEILING SUSPENDED

STANDARD INVERTER (R32)

UV36F N20 / UV42F N20 / UV48F N20 / UV60F N20

(Unit : mm)

Part Name	
1	Air Inlet
2	Air Outlet
3	Remote Controller Signal Receiver
4	Drain Hose Routing Hole
5	Refrigerant Pipe and Cable Routing Hole
6	Gas Pipe Connection
7	Liquid Pipe Connection

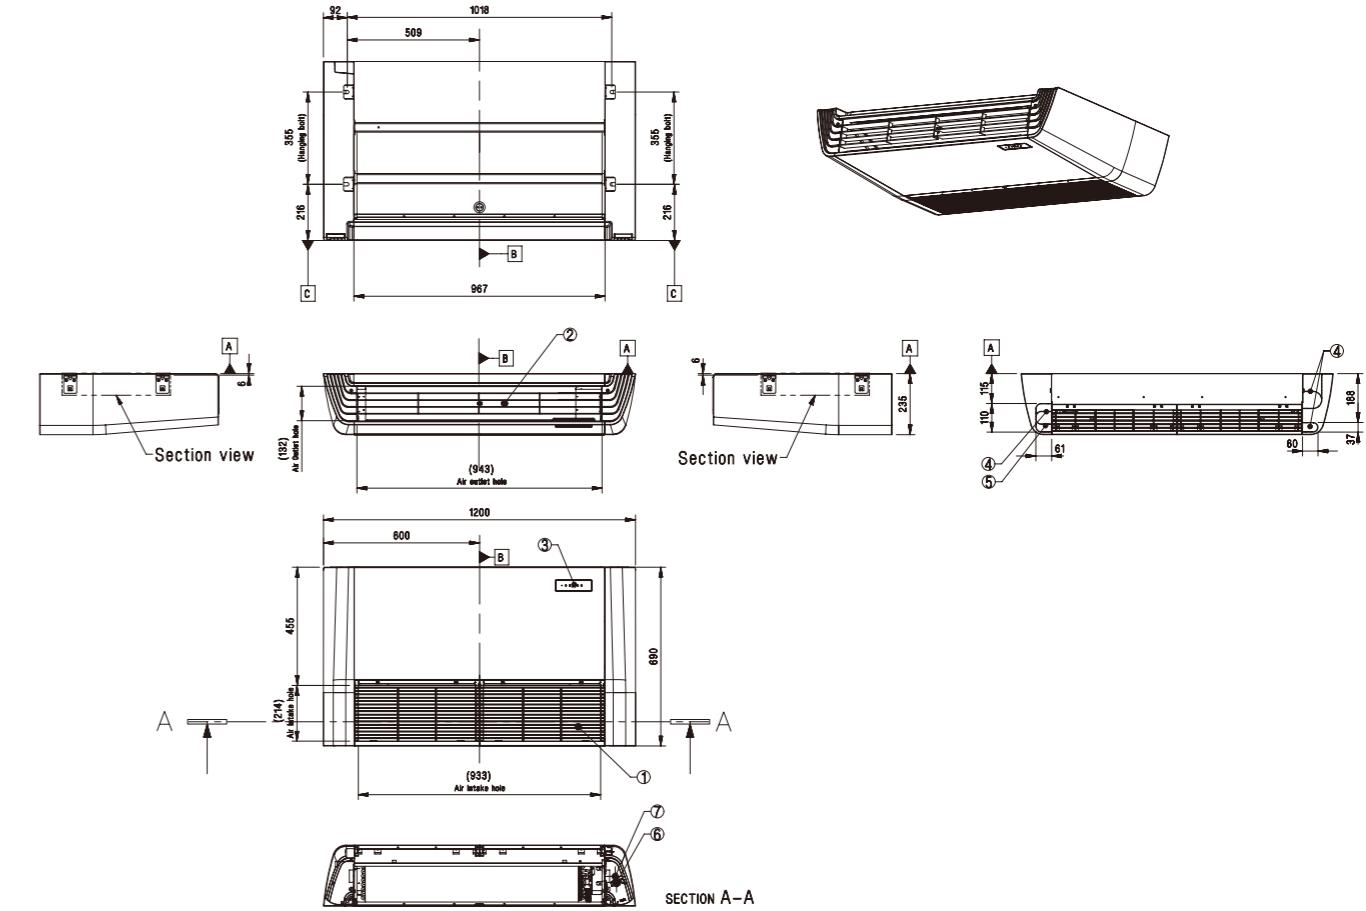


CONSOLE

STANDARD INVERTER (R32)

UQ09 NA0 / UQ12 NA0 / UQ18 NA0

(Unit : mm)

	Part Name
1	Air Suction Grille
2	Remote Controller Signal Receiver
3	Air Discharge Grille
4	Gas Pipe Connection
5	Liquid Pipe Connection
6	Drain Hose Connection
7	Refrigerant / Drain Pipe & Cable Routing Hole
8	Installation Plate
9	Terminal Block for Power Supply & Communication

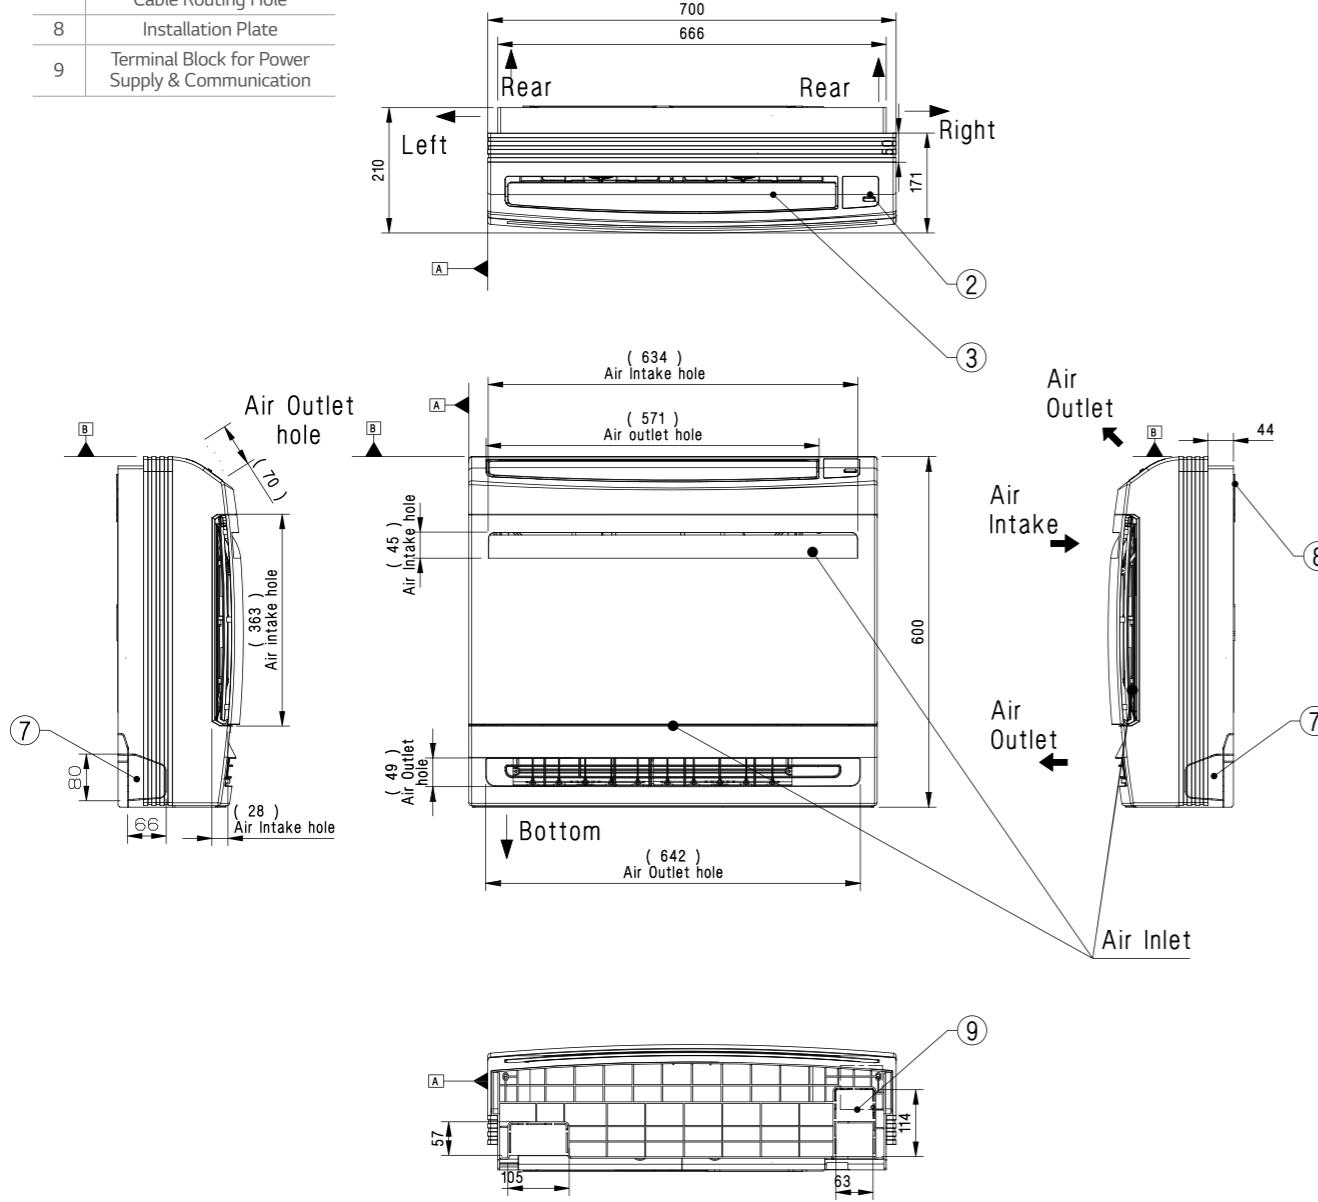
**WALL MOUNTED**

STANDARD / COMPACT INVERTER (R32)

US30F NRO / US36F NRO

(Unit : mm)

	Part Name
1	Refrigerant / Drain Pipe and Cable Routing Hole
2	Installation Plate
3	Drain Hose Connection
4	Terminal Block for Power Supply & Communication
5	Display & Remote Controller Signal Receiver
6	Decoration Cover

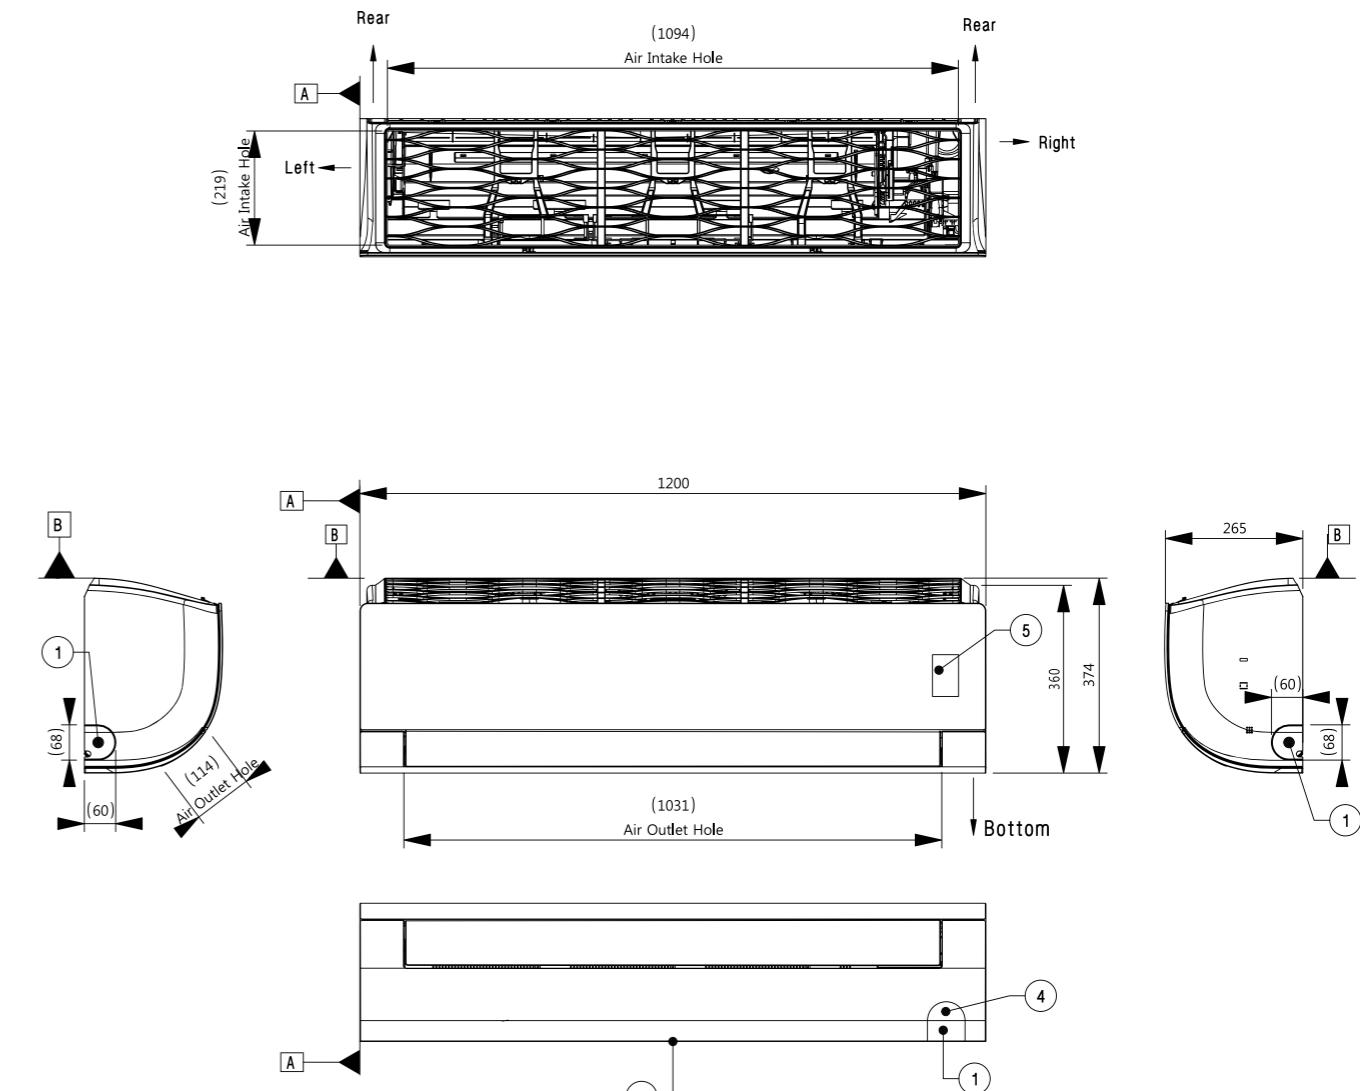


FLOOR STANDING

STANDARD INVERTER (R410A)

UP48 NT2

(Unit : mm)

	Part Name
1	Front Air Discharge Grille
2	Display & Single Receiver
3	Air Suction Grille

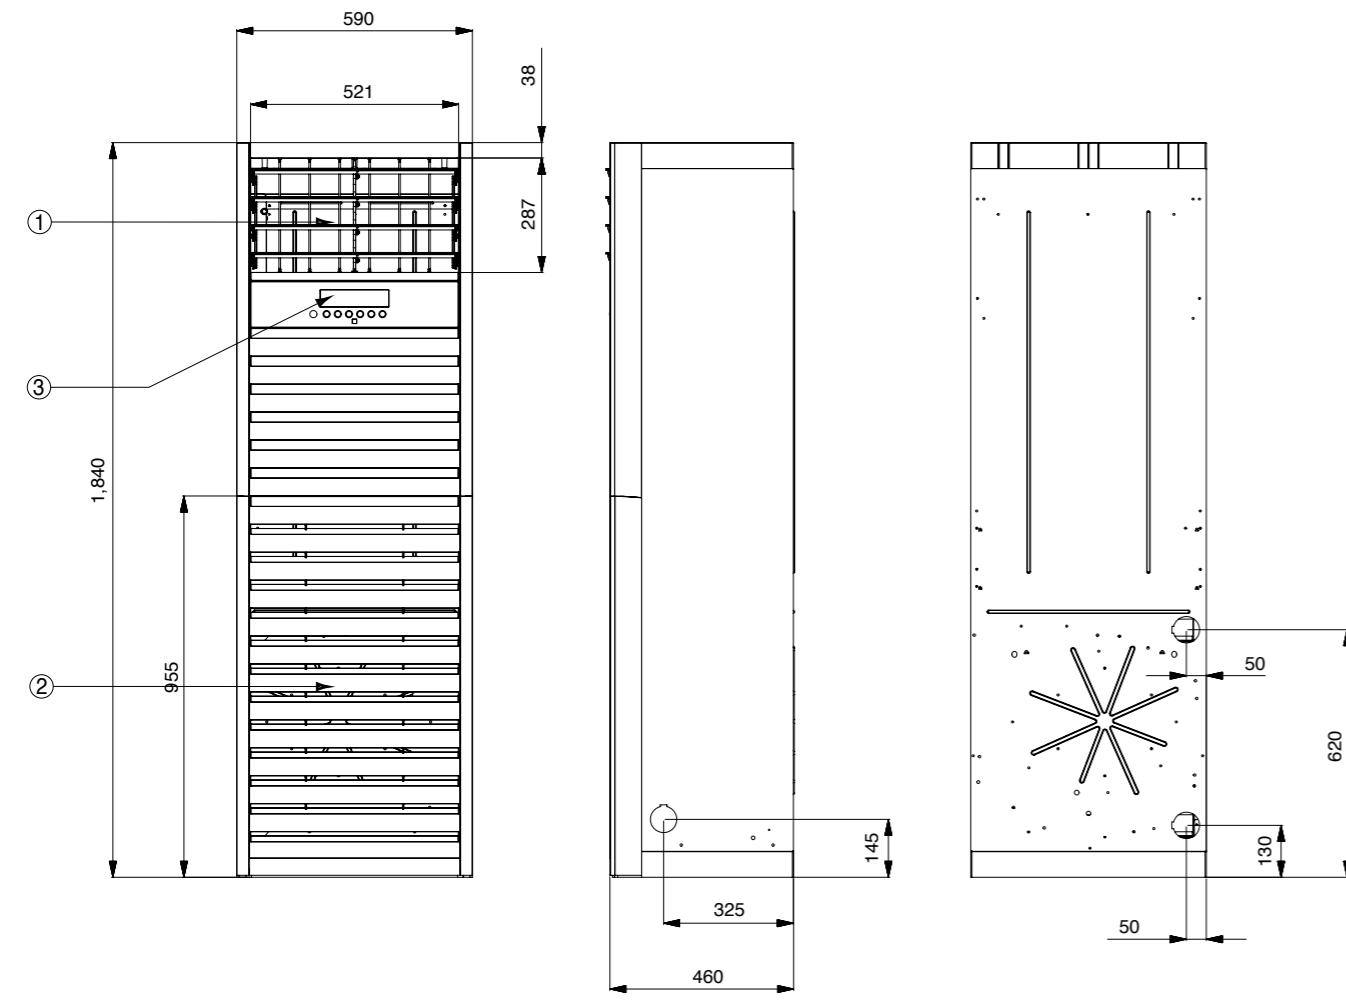


UNIVERSAL OUTDOOR

HIGH / STANDARD / COMPACT INVERTER (R32)

UUA1 ULO

(Unit : mm)

	Part Name
1	Air Outlet
2	Control Cover & SVC Valve Cover
3	Power and Communication Cable Connection
4	Gas Pipe Connection
5	Liquid Pipe Connection
6	Power and Communication Cable Routing hole
7	Refrigerant Pipe Routing Hole
8	Handle
9	Intake Air Temperature Sensor Cover

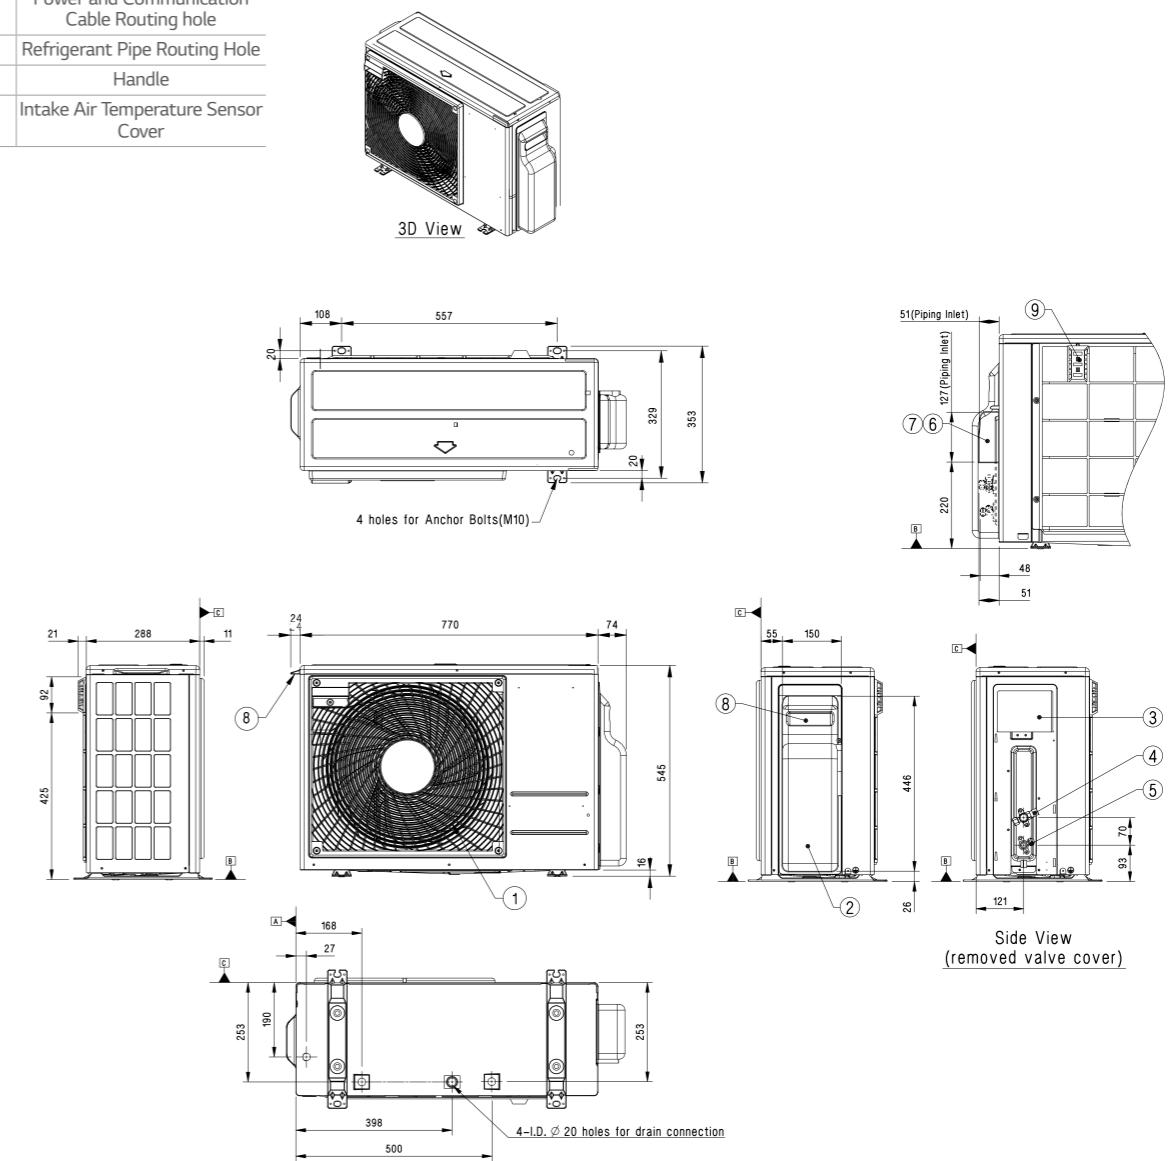


UNIVERSAL OUTDOOR

HIGH / STANDARD / COMPACT INVERTER (R32)


UUB1 U20

(Unit : mm)





Part Name	
1	Air Outlet
2	Control Cover & SVC Valve Cover
3	Power and Communication Cable Connection
4	Gas Pipe Connection
5	Liquid Pipe Connection
6	Handle
7	Intake Air Temperature Sensor Cover

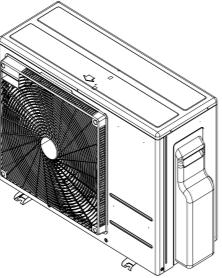


3D View

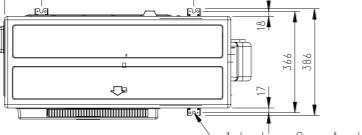

4 holes for Anchor Bolts(M10)

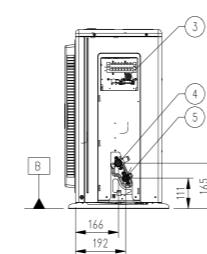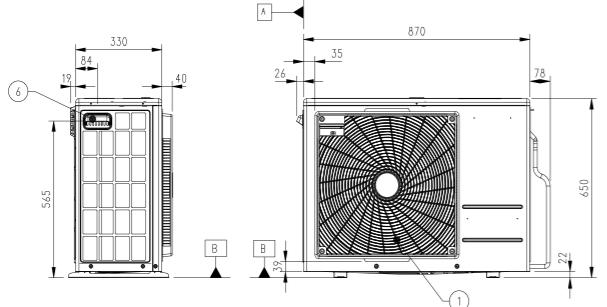

Side View
(removed valve cover)

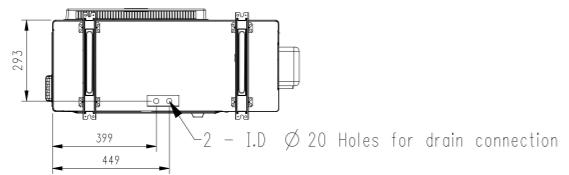


UNIVERSAL OUTDOOR

HIGH / STANDARD / COMPACT INVERTER (R32)


UUC1 U40

(Unit : mm)



Part Name	
1	Air Outlet
2	Power and Communication Cable Hole
3	Gas Pipe Connection
4	Liquid Pipe Connection
5	Handle
6	Pipe Routing Hole (Front)
7	Pipe Routing Hole (Side)
8	Pipe Routing Hole (Back)




3D View

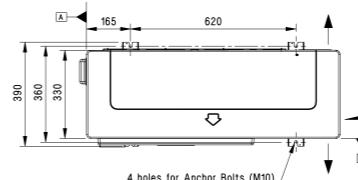

4 holes for Anchor Bolt

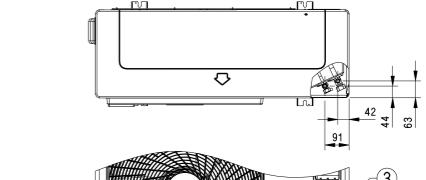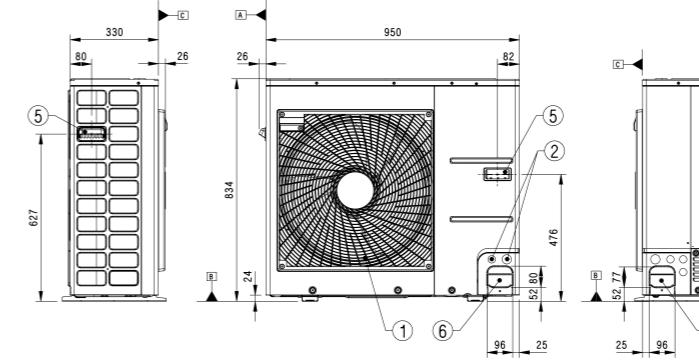

Piping connection port

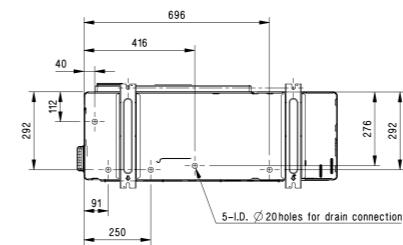


UNIVERSAL OUTDOOR

STANDARD INVERTER (R32)


UUD1 U30 / UUD3 U30

(Unit : mm)



Part Name	
1	Air Outlet
2	Power and Communication Cable Hole
3	Gas Pipe Connection
4	Liquid Pipe Connection
5	Handle
6	Pipe Routing Hole (Front)
7	Pipe Routing Hole (Side)
8	Pipe Routing Hole (Back)




3D View

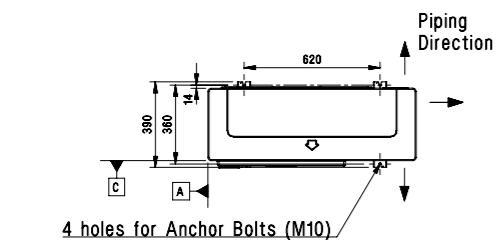


4 holes for Anchor Bolts (M10)

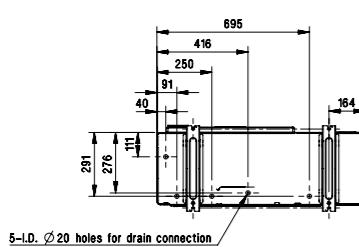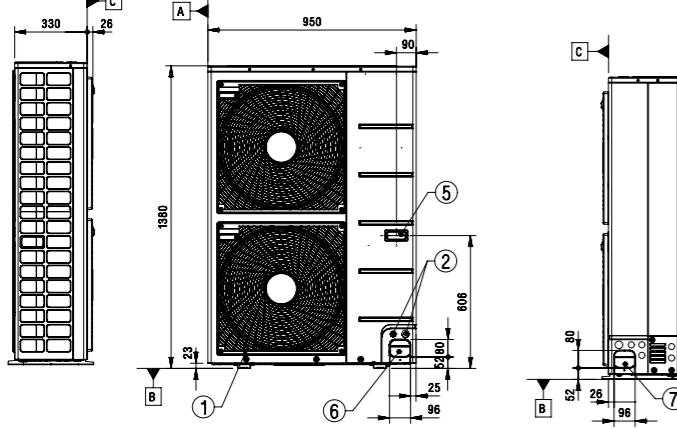

5-I.D. Ø 20 holes for drain connection

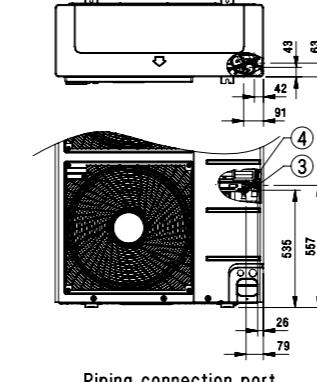

Piping connection port

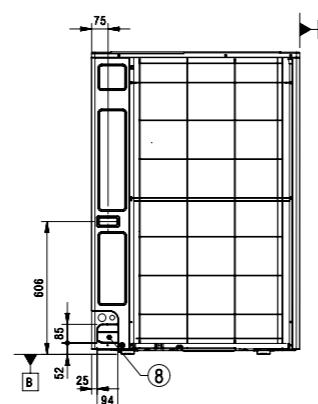

Piping connection port


UNIVERSAL OUTDOOR

STANDARD INVERTER (R410A)


UU48WR U30 / UU49WR U30

(Unit : mm)


Part Name	
1	Air Outlet
2	Power and Communication Cable Hole
3	Gas Pipe Connection
4	Liquid Pipe Connection
5	Handle
6	Pipe Routing Hole (front)
7	Pipe Routing Hole (side)
8	Pipe Routing Hole (back)

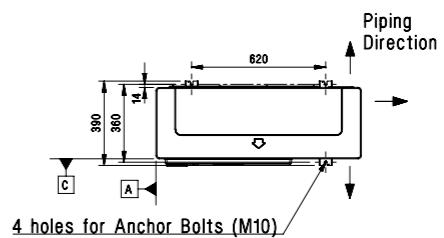


4 holes for Anchor Bolts (M10)

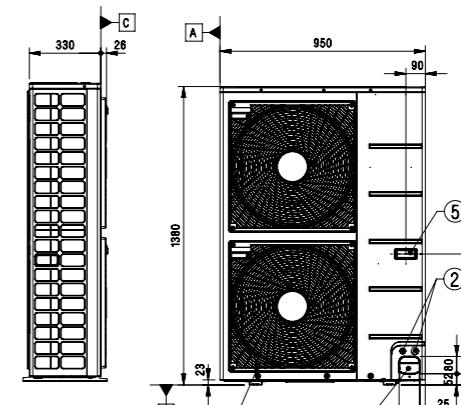


Piping connection port

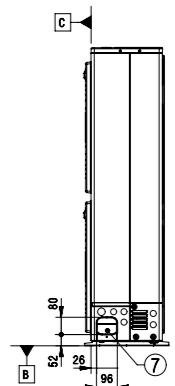


Piping connection port

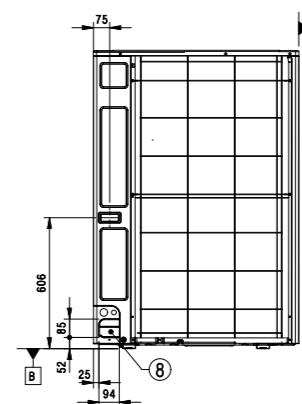

Piping connection port

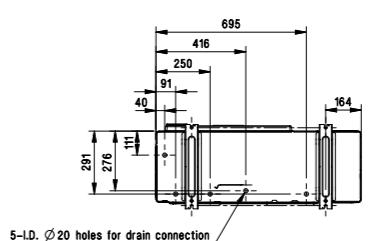

5-I.D. Ø 20 holes for drain connection



3D View



UNIVERSAL OUTDOOR

STANDARD INVERTER (R410A)

UU70W U34

(Unit : mm)

	Part Name
1	Air Discharge Grille
2	Gas Pipe Connection
3	Liquid Pipe Connection
4	Power & Transmission Connection

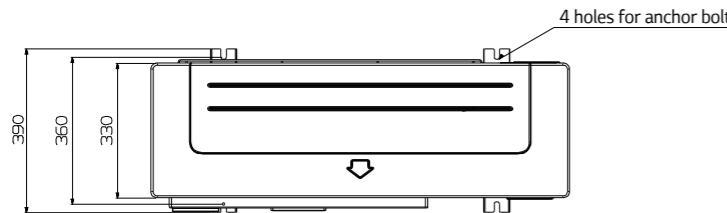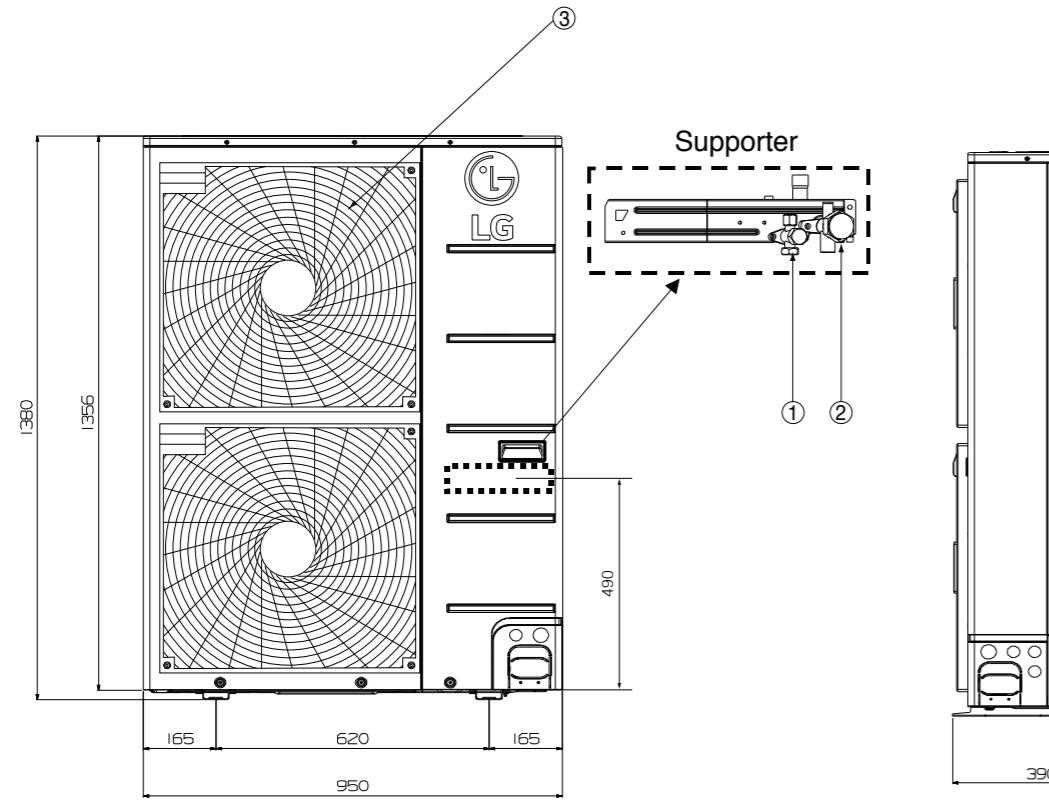

UNIVERSAL OUTDOOR

STANDARD INVERTER (R410A)

UU85W U74

(Unit : mm)

	Part Name
1	Gas Piping Connection
2	Liquid Piping Connection
3	Air Inlet
4	Air Outlet
5	Drain Hole
6	Power and Communication Cable Hole
7	Power and Communication Cable Hole
8	Power and Communication Cable Hole

